

LAMPIRAN

Datasheet KC7783R PIR Module

KC7783R PIR Module Low Cost version

This is a low cost version for PIR module series from COMedia Ltd. It is designed for cost sensitive consumer product. Except the IC package format, all the mechanical and electrical spec is same as KC7783.

Features:

- IC soft package by dice banding technique
- Small size: 25 x 35mm
- Ball lens is included as standard configuration
- 3 leads flat cable for easy connection
- 4 mounting holes on board
- High Sensitivity
- High immunity to RFI
- Power up delay to prevent from false triggering
- Output High for direct connect to control panel



Specification




	Min	Typ	Max	Unit
Operation Voltage	4.7	5	12	V
Standby Current (no load)		300		μA
Output Pulse Width	0.5			Sec
Output High Voltage		5		V
Detection Range		5		M
Operation Temperature	-20	25	50	°C
Humidity Range			95	%

Note: 1. All other features and specification, please refer to KC778B
2. Minimum output pulse width can be customer specified.

Standard Configuration

PIR controller	KC778B in dice form
PIR Sensor	RE200B by NICHIA
Lens	Ball lens of 60° detection angle
Connector	3 leads flat cable, Power, GND, O/P

Mechanical Dimension

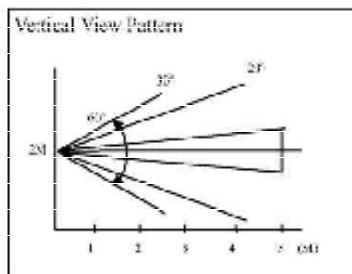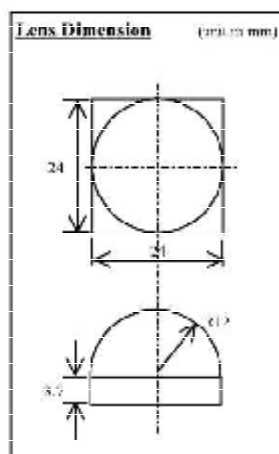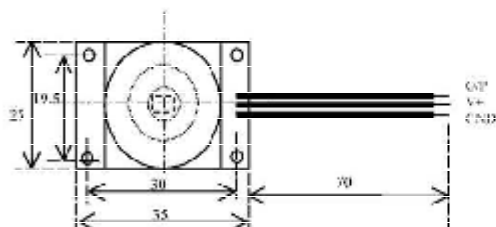

Application Note:

1. The PIR sensor is sensitive to the temperature change and therefore to prevent from operating the module in rapid environmental temperature changes, strong shock or vibration. Don't expose to the direct sun light or headlights of automobile. Don't expose to direct wind from heater or air conditioner.
2. This module is designed for indoor use. If using in outdoor, make sure to apply suitable supplemental optical film and drop-proof, anti-dew construction.
3. Detection range might be varied in different environmental temperature condition.

Datasheet C7805



www.fairchildsemi.com

KA78XX/KA78XXA

3-Terminal 1A Positive Voltage Regulator

Features

- Output Current up to 1A
- Output Voltages of 5, 6, 8, 9, 10, 12, 15, 18, 24V
- Thermal Overload Protection
- Short Circuit Protection
- Output Transistor Safe Operating Area Protection

Description

The KA78XX/KA78XXA series of three-terminal positive regulators are available in the TO-220/D-PAK package and with several fixed output voltages, making them useful in a wide range of applications. Each type employs internal current limiting, thermal shut down and safe operating area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

TO-220




D-PAK



1. Input 2. GND 3. Output

Internal Block Diagram

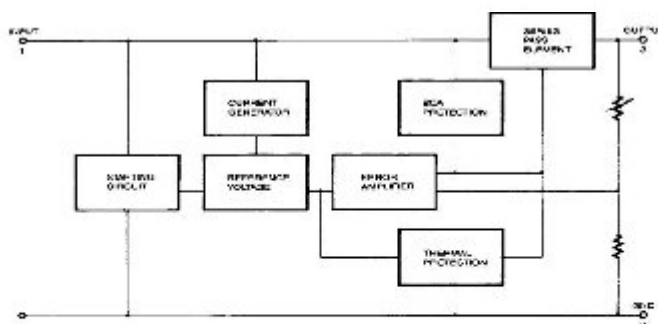

Rev. 1.0.0

KA78XX/KA78XXA

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input Voltage (for $V_O = 5V$ to $18V$)	V	35	V
(for $V_O = 24V$)	V	40	V
Thermal Resistance Junction-Cases (TO-220)	$R_{\theta JC}$	5	$^{\circ}C/W$
Thermal Resistance Junction-Air (TO-220)	$R_{\theta JA}$	55	$^{\circ}C/W$
Operating Temperature Range (KA78XX/A/R)	T_{OPR}	$0 \sim +125$	$^{\circ}C$
Storage Temperature Range	T_{STG}	$-65 \sim +150$	$^{\circ}C$

Electrical Characteristics (KA7805/KA7805R)(Refer to test circuit, $0^{\circ}C < T_J < 125^{\circ}C$, $I_O = 50mA$, $V_I = 10V$, $C_I = 0.33\mu F$, $C_O = 0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Conditions	KA7805			Unit
			Min.	Typ.	Max.	
Output Voltage	V_O	$T_J = +25^{\circ}C$	4.7	5.0	5.2	V
		$5.0mA < I_O < 1.0A$, $P_O < 15W$ $V_I = 7V$ to $20V$	4.75	5.0	5.25	
Line Regulation (Note1)	ΔV_{reg}	$T_J = +25^{\circ}C$	$V_O = 7V$ to $25V$	4.0	100	mV
			$V_I = 8V$ to $12V$	-	1.6	
Load Regulation (Note1)	ΔV_{load}	$T_J = +25^{\circ}C$	$I_O = 5.0mA$ to $1.5A$	-	5	mV
			$I_O = 250mA$ to $750mA$	-	4	
Quiescent Current	I_Q	$T_J = +25^{\circ}C$	-	5.0	8.0	mA
Quiescent Current Change	ΔI_Q	$I_O = 5mA$ to $1.0A$ $V_I = 7V$ to $25V$	-	0.03	0.5	mA
			-	0.3	1.3	
Output Voltage Drift	$\Delta V_O/\Delta T$	$I_O = 5mA$	-	-0.8	-	mV/ $^{\circ}C$
Output Noise Voltage	V_N	$f = 10Hz$ to $100KHz$, $T_A = +25^{\circ}C$	-	42	-	$\mu V/V_O$
Ripple Rejection	RR	$f = 120Hz$ $V_O = 8V$ to $18V$	62	73	-	dB
Dropout Voltage	V_{Drop}	$I_O = 1A$, $T_J = +25^{\circ}C$	-	2	-	V
Output Resistance	r_O	$f = 1KHz$	-	15	-	m Ω
Short Circuit Current	I_{SC}	$V_I = 35V$, $T_A = +25^{\circ}C$	-	230	-	mA
Peak Current	I_{PK}	$T_J = +25^{\circ}C$	-	2.2	-	A

Note:

1. Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Lampiran ATmega 16

Features

- High-performance, Low-power AVR[®] 8-bit Microcontroller
- Advanced RISC Architecture
 - 131 Powerful Instructions – Most Single-Block Cycle Execution
 - 32 x 8 General Purpose Working Registers
 - Fully Static Operation
 - Up to 16 MIPS Throughput at 16 MHz
 - On-chip 2-cycle Multiplier
- Nonvolatile Program and Data Memories
 - 16K Bytes of In-System Self-Programmable Flash
 - Endurance: 10,000 Write/Erase Cycles
 - Optional Boot Code Section with Independent Lock Bits
 - In-System Programming by On-chip Boot Program
 - True Read-While-Write Operation
 - 512 Bytes EEPROM
 - Endurance: 100,000 Write/Erase Cycles
 - 1K Byte Internal SRAM
 - Programming Lock for Software Security
- JTAG (IEEE Std. 1149.1 Compliant) Interface
 - Boundary-scan Capabilities According to the JTAG Standard
 - Extensive On-chip Debug Support
 - Programming of Flash, EEPROM, Fuses, and Lock Bits through the JTAG Interface
- Peripheral Features
 - Two 8-bit Timer/Counters with Separate Prescalers and Compare Modes
 - One 16-bit Timer/Counter with Separate Prescaler, Compare Mode, and Capture Mode
 - Real Time Counter with Separate Oscillator
 - Four PWM Channels
 - 8-channel, 10-bit ADC
 - 8 Single-ended Channels
 - 7 Differential Channels In QFP Package Only
 - 2 Differential Channels with Programmable Gain at 1x, 10x, or 200x
 - Byte-oriented Two-wire Serial Interface
 - Programmable Serial USART
 - Master/Slave SPI Serial Interface
 - Programmable Watchdog Timer with Separate On-chip Oscillator
 - On-chip Analog Comparator
- Special Microcontroller Features
 - Power-on Reset and Programmable Brown-out Detection
 - Internal Calibrated RC Oscillator
 - External and Internal Interrupt Sources
 - Six Sleep Modes: Idle, ADC Noise Reduction, Power-save, Power-down, Standby and Extended Standby
- I/O and Packages
 - 32 Programmable I/O Lines
 - 48-pin PDIP, 44-pin TQFP, and 44-pin MLF
- Operating Voltages
 - 2.7 - 5.5V for ATmega16L
 - 4.5 - 5.5V for ATmega16
- Speed Grades
 - 0 - 8 MHz for ATmega16L
 - 0 - 16 MHz for ATmega16



8-bit AVR[®]
Microcontroller
with 16K Bytes
In-System
Programmable
Flash

ATmega16
ATmega16L

Preliminary



Rev. 2455E-AVR-10/02





Pin Configurations

Figure 1. Pinouts ATmega16

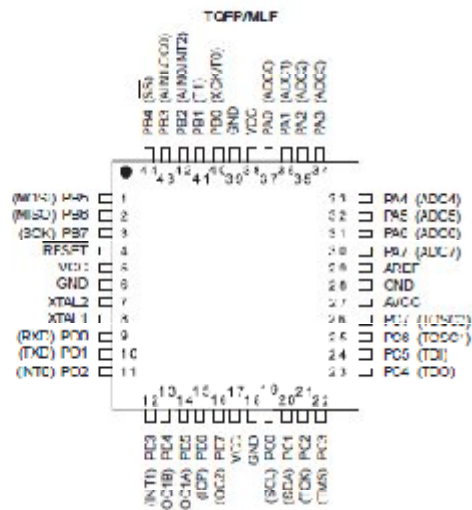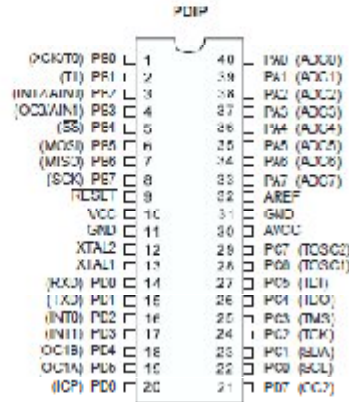

Disclaimer

Typical values contained in this data sheet are based on simulations and characterization of other AVI microcontrollers manufactured on the same process technology. Min and Max values will be available after the device is characterized.


ATmega16(L)

Overview

The ATmega16 is a low-power CMOS 8-bit microcontroller based on the AVR enhanced RISC architecture. By executing powerful instructions in a single clock cycle, the ATmega16 achieves throughput approaching 1 MIPS per MHz, allowing the system designer to optimize power consumption versus processing speed.

Block Diagram

Figure 2. Block Diagram

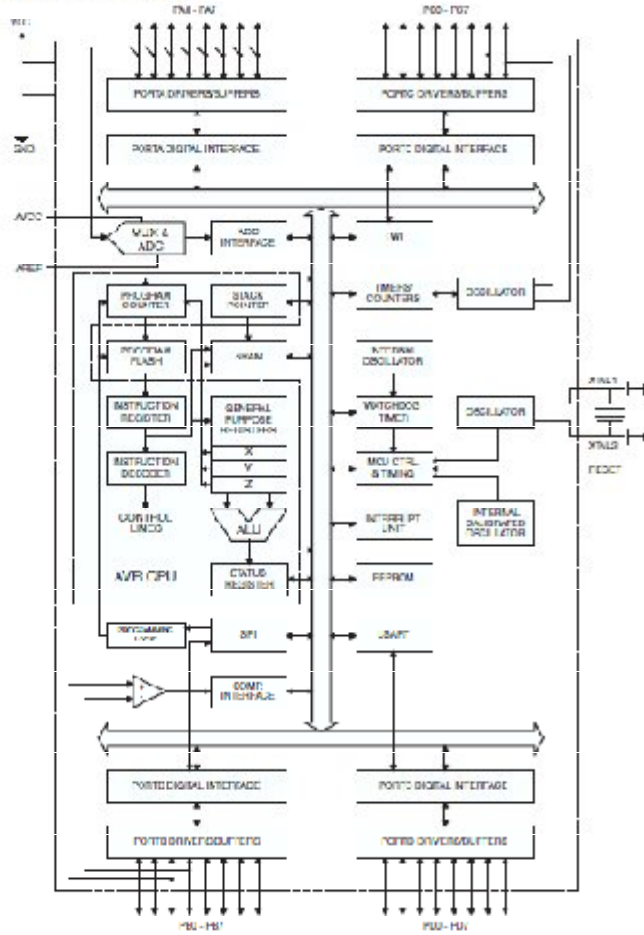

ATmega16(L)

Port B (PB7..PB0)	<p>Port B is an 8-bit bidirectional I/O port with internal pull-up resistors (selected for each bit). The Port B output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port B pins that are externally pulled low will source current if the pull-up resistors are activated. The Port B pins are tri-stated when a reset condition becomes active, even if the clock is not running.</p> <p>Port B also serves the functions of various special features of the ATmega16 as listed on page 55.</p>
Port C (PC7..PC0)	<p>Port C is an 8-bit bidirectional I/O port with internal pull-up resistors (selected for each bit). The Port C output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port C pins that are externally pulled low will source current if the pull-up resistors are activated. The Port C pins are tri-stated when a reset condition becomes active, even if the clock is not running. If the JTAG interface is enabled, the pull-up resistors on pins PC6 (JTAG), PC3 (MISO) and PC2 (JTAG) will be activated even if a reset occurs.</p> <p>Port C also serves the functions of the JTAG interface and other special features of the ATmega16 as listed on page 58.</p>
Port D (PD7..PD0)	<p>Port D is an 8-bit bidirectional I/O port with internal pull-up resistors (selected for each bit). The Port D output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port D pins that are externally pulled low will source current if the pull-up resistors are activated. The Port D pins are tri-stated when a reset condition becomes active, even if the clock is not running.</p> <p>Port D also serves the functions of various special features of the ATmega16 as listed on page 60.</p>
RESET	<p>Reset input. A low level on this pin for longer than the minimum pulse length will generate a reset, even if the clock is not running. The minimum pulse length is given in Table 15 on page 25. Shorter pulses are not guaranteed to generate a reset.</p>
XTAL1	Input to the inverting Oscillator amplifier and input to the internal clock operating circuit.
XTAL2	Output from the inverting Oscillator amplifier.
AVCC	AVCC is the supply voltage pin for Port A and the A/D Converter. It should be externally connected to V_{DD} , even if the ADC is not used. If the ADC is used, it should be connected to V_{DD} through a low-pass filter.
AREF	AREF is the analog reference pin for the A/D Converter.
About Code Examples	<p>This documentation contains simple code examples that briefly show how to use various parts of the device. These code examples assume that the part-specific header file is included before compilation. Be aware that not all C Compiler vendors include bit definitions in the header files and interrupt handling in C is compiler dependent. Please confirm with the C Compiler documentation for more details.</p>

ATmega16(L)

Port B (PB7..PB0)	<p>Port B is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port B output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port B pins that are externally pulled low will source current if the pull-up resistors are activated. The Port B pins are tri-stated when a reset condition becomes active, even if the clock is not running.</p> <p>Port B also serves the functions of various special features of the ATmega16 as listed on page 55.</p>
Port C (PC7..PC0)	<p>Port C is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port C output buffers have asymmetrical drive characteristics with both high sink and source capability. As inputs, Port C pins that are externally pulled low will source current if the pull-up resistors are activated. The Port C pins are tri-stated when a reset condition becomes active, even if the clock is not running. If the JTAG interface is enabled, the pull-up resistors on pins PC5(TDI), PC3(TMS) and PC2(TCK) will be activated even if a reset occurs.</p> <p>Port C also serves the functions of the JTAG interface and other special features of the ATmega16 as listed on page 58.</p>
Port D (PD7..PD0)	<p>Port D is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port D output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port D pins that are externally pulled low will source current if the pull-up resistors are activated. The Port D pins are tri-stated when a reset condition becomes active, even if the clock is not running.</p> <p>Port D also serves the functions of various special features of the ATmega16 as listed on page 60.</p>
RESET	<p>Reset Input. A low level on this pin for longer than the minimum pulse length will generate a reset, even if the clock is not running. The minimum pulse length is given in Table 15 on page 35. Shorter pulses are not guaranteed to generate a reset.</p>
XTAL1	<p>Input to the inverting Oscillator amplifier and input to the internal clock operating circuit.</p>
XTAL2	<p>Output from the inverting Oscillator amplifier.</p>
AVCC	<p>AVCC is the supply voltage pin for Port A and the A/D Converter. It should be externally connected to V_{CC}, even if the ADC is not used. If the ADC is used, it should be connected to V_{CC} through a low-pass filter.</p>
AREF	<p>AREF is the analog reference pin for the A/D Converter.</p>
About Code Examples	<p>This documentation contains simple code examples that briefly show how to use various parts of the device. These code examples assume that the part-specific header file is included before compilation. Be aware that not all C Compiler vendors include bit definitions in the header files and interrupt handling in C is compiler dependent. Please confirm with the C Compiler documentation for more details.</p>

ATmega16(L)

Figure 4. AVR CPU General Purpose Working Registers

	7	0	Addr.	
General Purpose Working Registers	R0		000	
	R1		001	
	R2		002	
	...			
	R12		00D	
	R13		00E	
	R14		00F	
	R15		010	
	R16		011	
	R17		011	
	R26		01A	X-register Low Byte
	R27		01B	X-register High Byte
	R28		01C	Y-register Low Byte
	R29		01D	Y-register High Byte
	R30		01E	Z-register Low Byte
	R31		01F	Z-register High Byte


Most of the instructions operating on the Register File have direct access to all registers, and most of them are single cycle instructions.

As shown in Figure 4, each register is also assigned a data memory address, mapping them directly into the first 32 locations of the user Data Space. Although not being physically implemented as SRAM locations, this memory organization provides great flexibility in access of the registers, as the X, Y, and Z pointer Registers can be set to address any register in the file.

The X-register, Y-register and Z-register

The registers R26..R31 have some added functions to their general purpose usage. These registers are 16-bit address pointers for indirect addressing of the Data Space. The three indirect address registers X, Y, and Z are defined as described in Figure 5.

Figure 5. The X-, Y-, and Z-registers

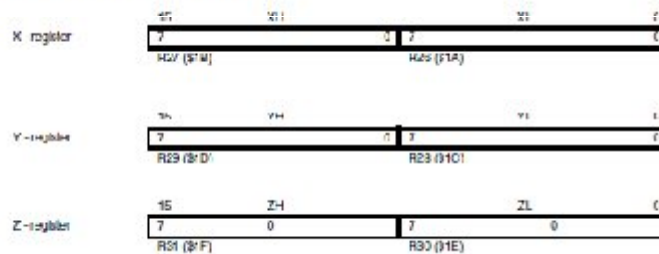

In the different addressing modes these address registers have functions as fixed displacement, automatic increment, and automatic decrement (see the Instruction Set Reference for details).



AVR ATmega16 Memories

In-System Reprogrammable Flash Program Memory

This section describes the different memories in the ATmega16. The AVR architecture has two main memory spaces, the Data Memory and the Program Memory space. In addition, the ATmega16 features an EEPROM Memory for data storage. All three memory spaces are linear and regular.


The ATmega16 contains 16K bytes On-chip In-System Reprogrammable Flash memory for program storage. Since all AVR instructions are 16 or 32 bits wide, the Flash is organized as 8K x 16. For software security, the Flash Program memory space is divided into two sections, Boot Program section and Application Program section.

The Flash memory has an endurance of at least 10,000 write/erase cycles. The ATmega16 Program Counter (PC) is 13 bits wide, thus addressing the 8K program memory locations. The operation of Boot Program section and associated Boot Lock bits for software protection are described in detail in "Boot Loader Support – Read-While-Write Self-Programming" on page 241. "Memory Programming" on page 254 contains a detailed description on Flash data serial downloading using the SPI pins or the JTAG interface.

Constant tables can be allocated within the entire program memory address space (see the LPM – Load Program Memory Instruction Description).

Timing diagrams for instruction fetch and execution are presented in "Instruction Execution Timing" on page 11.

Figure 8. Program Memory Map

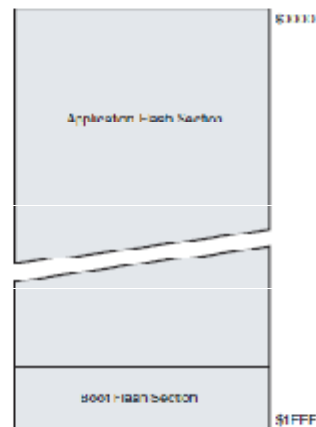

ATmega16(L)

SRAM Data Memory

Figure 9 shows how the ATmega16 SRAM Memory is organized.

The lower 1120 Data Memory locations address the Register file, the I/O Memory, and the internal data SRAM. The first 96 locations address the Register file and I/O Memory, and the next 1024 locations address the internal data SRAM.

The five different addressing modes for the data memory cover: Direct, Indirect with Displacement, Indirect, Indirect with Pre-decrement, and Indirect with Post-increment. In the Register file, registers R20 to R31 feature the indirect addressing pointer registers.


The direct addressing reaches the entire data space.

The Indirect with Displacement mode reaches 63 address locations from the base address given by the Y- or Z-register.

When using register indirect addressing modes with automatic pre-decrement and post-increment, the address registers X, Y, and Z are decremented or incremented.

The 32 general purpose working registers, 64 I/O Registers, and the 1024 bytes of internal data SRAM in the ATmega16 are all accessible through all three addressing modes. The Register file is described in "General Purpose Register File" on page 8.

Figure 9. Data Memory Map

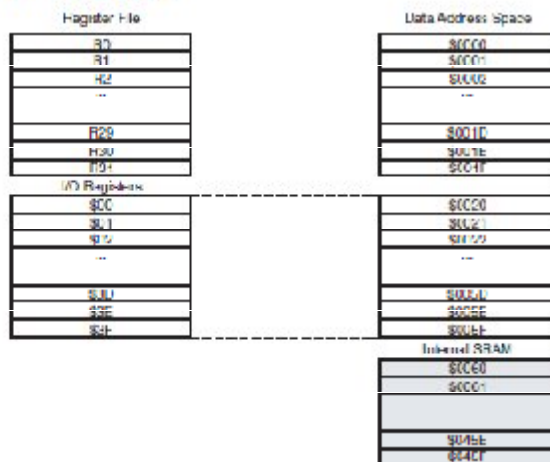

Register Description for I/O Ports

Port A Data Register – PORTA

Bit	7	6	5	4	3	2	1	0	
	PORTA7	PORTA6	PORTA5	PORTA4	PORTA3	PORTA2	PORTA1	PORTA0	PORTA
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	

Port A Data Direction Register – DDRA

Bit	7	6	5	4	3	2	1	0	
	DDRA7	DDRA6	DDRA5	DDRA4	DDRA3	DDRA2	DDRA1	DDRA0	DDRA
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	

Port A Input Pins Address – PINA

Bit	7	6	5	4	3	2	1	0	
	PINA7	PINA6	PINA5	PINA4	PINA3	PINA2	PINA1	PINA0	PINA
Read/Write	R	R	R	R	R	R	R	R	
Initial Value	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	

Port B Data Register – PORTB

Bit	7	6	5	4	3	2	1	0	
	PORTB7	PORTB6	PORTB5	PORTB4	PORTB3	PORTB2	PORTB1	PORTB0	PORTB
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	

Port B Data Direction Register – DDRB

Bit	7	6	5	4	3	2	1	0	
	DDRB7	DDRB6	DDRB5	DDRB4	DDRB3	DDRB2	DDRB1	DDRB0	DDRB
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	

ATmega16(L)

Port B Input Pins Address – PINB

DB	7	6	5	4	3	2	1	0	PINB
Read/Write	R	R	R	R	R	R	R	R	
Initial Value	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	

Port C Data Register – PORTC

HC	7	6	5	4	3	2	1	0	PORTC
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial Value	C	C	C	C	0	3	0	0	

Port C Data Direction Register – DDRC

DC	7	6	5	4	3	2	1	0	DDRC
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial Value	C	C	C	C	0	3	0	0	

Port C Input Pins Address – PINC

DC	7	6	5	4	3	2	1	0	PINC
Read/Write	R	R	R	R	R	R	R	R	
Initial Value	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	

Port D Data Register – PORTD

DC	7	6	5	4	3	2	1	0	PORTD
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial Value	C	C	C	C	0	3	0	0	

Port D Data Direction Register – DDRD

DC	7	6	5	4	3	2	1	0	DDRD
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial Value	C	C	C	C	0	3	0	0	

Port D Input Pins Address – PIND

DC	7	6	5	4	3	2	1	0	PIND
Read/Write	R	R	R	R	R	R	R	R	
Initial Value	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	





External Interrupts

The External Interrupts are triggered by the INT0, INT1, and INT2 pins. Observe that, if enabled, the interrupts will trigger even if the INTU..2 pins are configured as outputs. This feature provides a way of generating a software interrupt. The external Interrupts can be triggered by a falling or rising edge or a low level (INT2 is only an edge triggered interrupt). This is set up as indicated in the specification for the MCU Control Register (MCUCR) and MCU Control and Status Register (MCUCSR). When the external interrupt is enabled and is configured as level triggered (only INT0/INT1), the interrupt will trigger as long as the pin is held low. Note that recognition of falling or rising edge interrupts on INT0 and INT1 requires the presence of an I/O clock, described in "Clock Systems and their Distribution" on page 22. Low level interrupts on INT0/INT1 and the edge interrupt on INT2 are detected asynchronously. This implies that these interrupts can be used for waking the part also from sleep modes other than Idle mode. The I/O clock is halted in all sleep modes except Idle mode.

Note that if a level triggered interrupt is used for wake-up from Power-down mode, the changed level must be held for some time to wake up the MCU. This makes the MCU less sensitive to noise. The changed level is sampled twice by the Watchdog Oscillator clock. The period of the Watchdog Oscillator is 1 μ s (nominal) at 5.0V and 20°C. The frequency of the Watchdog Oscillator is voltage dependent as shown in "Electrical Characteristics" on page 205. The MCU will wake up if the input has the required level during this sampling or if it is held until the end of the start-up time. The start-up time is defined by the SUT fuses as described in "System Clock and Clock Options" on page 22. If the level is sampled twice by the Watchdog Oscillator clock but disappears before the end of the start-up time, the MCU will still wake up, but no interrupt will be generated. The required level must be held long enough for the MCU to complete the wake up to trigger the level interrupt.

MCU Control Register – MCUCR

The MCU Control Register contains control bits for interrupt sense control and general MCU functions.

7	6	5	4	3	2	1	0	
SM2	SC	SM1	SM0	ISC1	ISC0	ISC1	ISC0	MCUCR
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
0	0	0	0	0	0	0	0	

• Bit 3, 2 – ISC1, ISC0: Interrupt Sense Control 1 Bit 1 and Bit 0

The External Interrupt 1 is activated by the external pin INT1 if the SREG I-bit and the corresponding interrupt mask in the GICR are set. The level and edges on the external INT1 pin that activate the interrupt are defined in Table 34. The value on the INT1 pin is sampled before detecting edges. If edge or toggle interrupt is selected, pulses that last longer than one clock period will generate an interrupt. Shorter pulses are not guaranteed to generate an interrupt. If low level interrupt is selected, the low level must be held until the completion of the currently executing instruction to generate an interrupt.

Table 34. Interrupt 1 Sense Control

ISC1	ISC0	Description
0	0	The low level of INT1 generates an interrupt request.
0	1	Any logical change on INT1 generates an interrupt request.
1	0	The falling edge of INT1 generates an interrupt request.
1	1	The rising edge of INT1 generates an interrupt request.

ATmega16(L)

• Bit 1, 0 – ISC1, ISC0: Interrupt Sense Control 0 Bit 1 and Bit 0

The External Interrupt 0 is activated by the external pin INT0 if the SREG I-flag and the corresponding interrupt mask are set. The level and edges on the external INT0 pin that activate the interrupt are defined in Table 35. The value on the INT0 pin is sampled before detecting edges. If edge or toggle interrupt is selected, pulses that last longer than one clock period will generate an interrupt. Shorter pulses are not guaranteed to generate an interrupt. If low level interrupt is selected, the low level must be held until the completion of the currently executing instruction to generate an interrupt.

Table 35. Interrupt 0 Sense Control

ISC1	ISC0	Description
0	0	The low level of INT0 generates an interrupt request.
0	1	Any logical change on INT0 generates an interrupt request.
1	0	The falling edge of INT0 generates an interrupt request.
1	1	The rising edge of INT0 generates an interrupt request.

MCU Control and Status Register – MCUCSR

Bit	7	6	5	4	3	2	1	0	MCUCSR
Read/Write	R/W	R/W	R	R/W	R/W	R/W	R/W	R/W	
Initial Value	0	0	0						See Bit Description

• Bit 5 – ISC2: Interrupt Sense Control 2

The Asynchronous External Interrupt 2 is activated by the external pin INT2 if the SREG I-bit and the corresponding interrupt mask in GICR are set. If ISC2 is written to zero, a falling edge on INT2 activates the interrupt. If ISC2 is written to one, a rising edge on INT2 activates the interrupt. Edges on INT2 are registered asynchronously. Pulses on INT2 wider than the minimum pulse width given in Table 36 will generate an interrupt. Shorter pulses are not guaranteed to generate an interrupt. When changing the ISC2 bit, an interrupt can occur. Therefore, it is recommended to first disable INT2 by clearing its Interrupt Enable bit in the GICR Register. Then, the ISC2 bit can be changed. Finally, the INTF2 interrupt flag should be cleared by writing a logical one to its interrupt flag bit (INTF2) in the GIFR Register before the interrupt is re-enabled.

Table 36. Asynchronous External Interrupt Characteristics

Symbol	Parameter	Condition	Min	Typ	Max	Units
t_{INT}	Minimum pulsewidth for registered cases external interrupt			50		ns

General Interrupt Control Register – GICR

Bit	7	6	5	4	3	2	1	0	GICR
Read/Write	R/W	R/W	R/W	R	R	R	R/W	R/W	
Initial Value	0	0	0	0	0	0	0	0	

• Bit 7 – INT1: External Interrupt Request 1 Enable

When the INT1 bit is set (one) and the I bit in the Status Register (SREG) is set (one), the external pin interrupt is enabled. The Interrupt Sense Control1 bits 1/0 (ISC11 and



ISC00' in the MCU General Control Register (MCUCR) define whether the External Interrupt is activated on rising and/or falling edge of the INT1 pin or level sensed. Activity on the pin will cause an interrupt request even if INT1 is configured as an output. The corresponding interrupt of External Interrupt Request 1 is executed from the INT1 Interrupt Vector.

- **Bit 6 – INT0: External Interrupt Request 0 Enable**

When the INT0 bit is set (one) and the I-bit in the Status Register (SREG) is set (one), the external pin interrupt is enabled. The Interrupt Sense Control0 bit (ISC01 and ISC00' in the MCU General Control Register (MCUCR) define whether the External Interrupt is activated on rising and/or falling edge of the INT0 pin or level sensed. Activity on the pin will cause an interrupt request even if INT0 is configured as an output. The corresponding interrupt of External Interrupt Request 0 is executed from the INT0 interrupt vector.

- **Bit 5 – INT2: External Interrupt Request 2 Enable**

When the INT2 bit is set (one) and the I-bit in the Status Register (SREG) is set (one), the external pin interrupt is enabled. The Interrupt Sense Control2 bit (ISC2) in the MCU Control and Status Register (MCUCSR1) defines whether the External Interrupt is activated on rising or falling edge of the INT2 pin. Activity on the pin will cause an interrupt request even if INT2 is configured as an output. The corresponding interrupt of External Interrupt Request 2 is executed from the INT2 Interrupt Vector.

General Interrupt Flag Register – GIFR

Bit	7	6	5	4	3	2	1	0	Mask
	INT1	INT0	INT2	-	-	-	-	-	
Read/Write	RW	RW	RW	R	R	R	R	R	
Initial Value	0	0	0	0	0	0	0	0	

- **Bit 7 – INTF1: External Interrupt Flag 1**

When an edge or logic change on the INT1 pin triggers an interrupt request, INTF1 becomes set (one). If the I-bit in SREG and the INT1 bit in GIFR are set (one), the MCU will jump to the corresponding Interrupt Vector. The flag is cleared when the interrupt routine is executed. Alternatively, the flag can be cleared by writing a logical one to it. This flag is always cleared when INT1 is configured as a level interrupt.

- **Bit 6 – INTF0: External Interrupt Flag 0**

When an edge or logic change on the INT0 pin triggers an interrupt request, INTF0 becomes set (one). If the I-bit in SREG and the INT0 bit in GIFR are set (one), the MCU will jump to the corresponding interrupt vector. The flag is cleared when the interrupt routine is executed. Alternatively, the flag can be cleared by writing a logical one to it. This flag is always cleared when INT0 is configured as a level interrupt.

- **Bit 5 – INTF2: External Interrupt Flag 2**

When an event on the INT2 pin triggers an interrupt request, INTF2 becomes set (one). If the I-bit in SREG and the INT2 bit in GIFR are set (one), the MCU will jump to the corresponding Interrupt Vector. The flag is cleared when the interrupt routine is executed. Alternatively, the flag can be cleared by writing a logical one to it. Note that when entering some sleep modes with the INT2 interrupt disabled, the input buffer on this pin will be disabled. This may cause a logic change in internal signals which will set the INTF2 flag. See "Digital Input Enable and Sleep Modes" on page E1 for more information.

**Program untuk pengirim pada Sistem Keamanan Menggunakan HP Siemens
C45 dan Sensor PIR Berbasis Mikrokontroler ATmega 16**

```

$regfile = "m16def.dat"
$crystal = 16000000
$baud = 19200
    Config Portc = Output
    Config Porta.0 = Input
    Config Porta.1 = Input
    Config Porta.5 = Output
Porta = &B11011110
Portc = &B00000000
Wait 2

Do
If Pina.0 = 1 Or Pina.1 = 0 Then
Waitms 100
Set Porta.5
Print "AT+CMGS=54"
    Print Chr(26)
    Waitms 100
    'Print "0001000D91265827564687F400000CC22032980D828EC5263408";
    Print
"0001000D91265827752198F300002DD0B23CDC86BFD7617728140211D3A0A49BFC6E
87E5653A48C976BB94E5B6384C0FBB41CDB23C8C06";
    Print Chr(26)
    Portc = 255
    Reset Porta.5
    Wait 2
    Set Porta.5
    Print "AT+CMGS=54"
    Print Chr(26)
    Waitms 100
    'Print "0001000D91265827564687F400000CC22032980D828EC5263408";
    Print
"0001000D91265847574077F200002DD0B23CDC86BFD7617728140211D3A0A49BFC6E
87E5653A48C976BB94E5B6384C0FBB41CDB23C8C06";
    Print Chr(26)
    Reset Porta.5
    Wait 3
End If
Loop
End
                                'end program

```

Program untuk penerima pada Sistem Keamanan Menggunakan HP Siemens C45 dan Sensor PIR Berbasis Mikrokontroler ATmega 16

```

$regfile = "m16def.dat"
$crystal = 12000000
$baud = 19200
    Config Lcdpin = Pin , Db4 = Portb.4 , Db5 = Portb.5 , Db6 = Portb.6 , Db7 =
    Portb.7 , E = Portb.2 , Rs = Portb.0
    Config Lcd = 16 * 2
Dim S As String * 50
Dim Z As String * 16
Dim Da(50) As Byte
Dim Db(16) As Byte
Dim A As Byte
Dim B As Byte
Dim C As Byte
Dim Status As Bit , Status1 As Bit , Status2 As Bit
Config Portc = Output
Config Porta = Input
Porta = &B11111111
Portc = &B11111110

    Do
    Gosub Baca
    If Status = 1 Then
        Status2 = 0
        Cls
        Lcd " Perampokan Di"
        Lowerline
        Lcd "JI Singa No 7 !!!"
        Wait 5
    End If
    If Status1 = 1 Then
        Status2 = 0
        Cls
        Lcd " Perampokan Di"
        Lowerline
        Lcd "Jalan Mawar No 9"
        Wait 5
    End If
    If Status2 = 1 Then
        Cls
        Lcd "Alarm OFF"
        Wait 3
    End If

```

```

If Pina.0 = 0 Then
    Status = 0
    Status1 = 0
    Status2 = 1
    Cls
    Lcd "Alarm Mati"
    Wait 2
End If
Loop
Return

```

```

Baca:
Cls
Lcd "Baca SMS"
Lowerline
Echo Off
Wait 1
Print "ATE0"
Print "AT+CMGR=1"
Print Chr(26)
Waitms 200
    A = Ischarwaiting()
    If A = 1 Then
        Da(1) = Waitkey()
        For B = 2 To 45
            Da(b) = Waitkey()
            If B = 21 Then
                If Da(b) > 60 Then
                    Exit For
                End If
            End If
        Next
    Next
    'Next

    'Z = Right(s , 16)
    ' Cls
    ' For B = 1 To 8
    ' Lcd Da(b)
    'Lcd S
    ' Next
    ' Lowerline
    ' For B = 13 To 21
    ' Lcd Da(b)
    'Lcd S
    ' Next
    ' Wait 3

```



```


'Cls
'For B = 28 To 36
'Lcd Da(b)
' Lcd S
'Next
'Lowerline
' For B = 37 To 45
' Lcd Da(b)
' Lcd S
' Next
' Wait 5
    If Da(28) = 52 And Da(29) = 54 Then
        Cls
        Lcd " Alarm Rumah 2"
        Lowerline
        Lcd "Jl Singa No 7 !! "
    Portc.0 = 1
    Wait 2
    Portc.0 = 0
    Status = 1
        Elseif Da(28) = 49 And Da(29) = 54 Then
            Cls
            Lcd " Alarm Rumah 1 "
            Lowerline
            Lcd "Jl Mawar No 9 !! "
        Portc.0= 1
        Wait 2
        Portc.0 = 0
        Status1 = 1
        Status2 = 1
        Wait 1
    For B = 1 To 45
    Da(b) = 0
    Next
    Return
        End If
        End If

        Wait 1
        Cls
        Lcd "hapus SMS"
        Lowerline
        Print "AT+CMGD=1"
    Print Chr(26)
    Wait 1
    Print "AT+CMGD=2"
    Print Chr(26)



```

```
Wait 1
  Print "AT+CMGD=3"
  Print Chr(26)
Wait 1
'Loop
'End If
  For B = 1 To 45
Da(b) = 0
Next
Return

End                                'end program
```

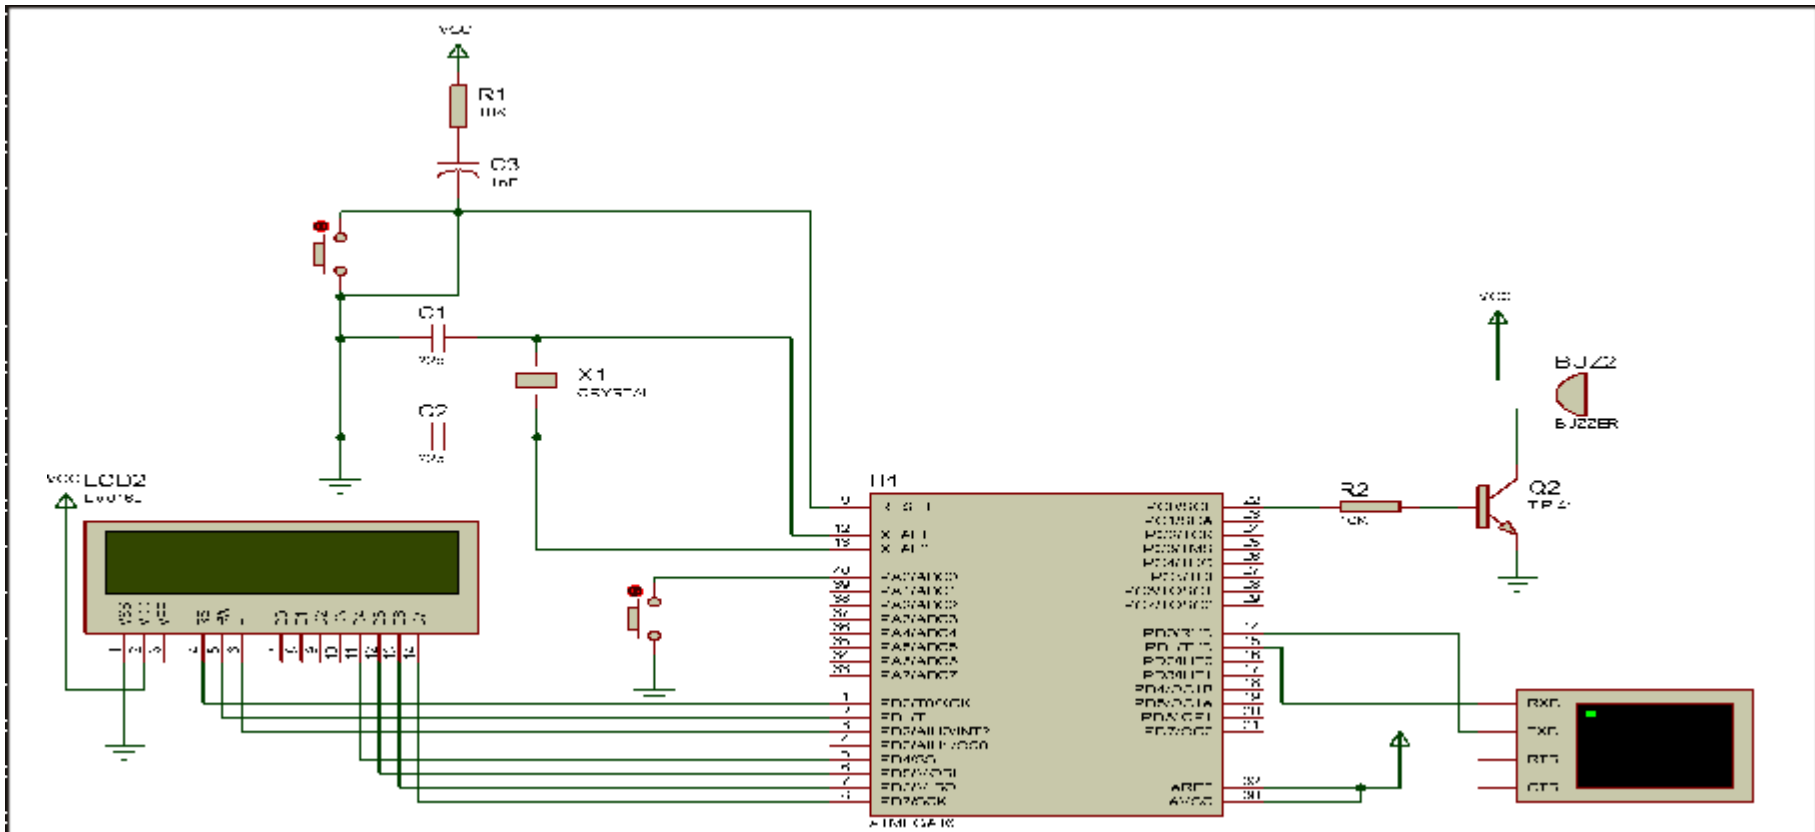

RANGKAIAN PENERIMA			KETERANGAN	
FT UNY	SKALA : -	DIG: KURNIAWAN	A4	No.1
	DIP. ADI	DIST. ADI		

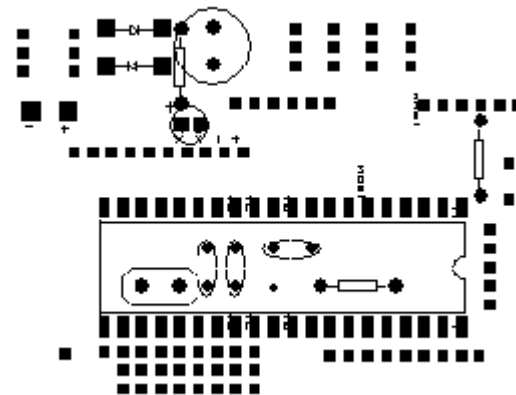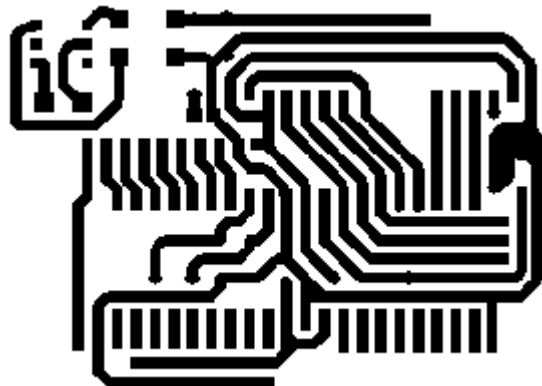

LAYOUT DAN PCB RANGKAIAN			KETERANGAN	
			A4	No.3
FT UNY	SKALA : -	DIG: KURNIAWAN	NIM. 09507131026	
	DIP. ADI	DIST. ADI		

**Panduan Pengoperasian Prototipe Sistem Keamanan Terkoneksi Dengan Pos
Keamanan Menggunakan Sensor PIR dan HP Siemens C45 Berbasis
Mikrokontroler ATmega16**

1. Tekan saklar Power yang ada di bagian tutup pada alat ke posisi ON. Jika sudah ON maka led indikator akan hidup berwarna biru. Sedangkan untuk yang di penerima saat sudah ON display akan menampilkan tulisan pembuka yaitu Baca SMS dan ALARM OFF.
2. Tombol panic pada pengirim berfungsi untuk mengirim pesan saat keadaan panic, pengoperasiannya mudah, yaitu tinggal menekan tombol yang ada di bagian penutup pada alat.
3. Sedangkan tombol hapus sms pada penerima di gunakan untuk menghapus pesan di LCD, pengoperasiannya sama yaitu, setelah pesan dibaca, jika ingin menghapus tampilan di