

TECHNIQUES FOR SIGNAL TO NOISE  
RATIO ADAPTATION IN INFRARED  
OPTICAL WIRELESS FOR OPTIMISATION  
OF RECEIVER PERFORMANCE

MOHAMMAD FAIZ LIEW BIN ABDULLAH

THE UNIVERSITY OF  
WARWICK

PERPUSTAKAAN UTHM



\*3000002103621\*

102946



**TECHNIQUES FOR SIGNAL TO NOISE RATIO ADAPTATION IN  
INFARED OPTICAL WIRELESS FOR OPTIMISATION OF  
RECEIVER PERFORMANCE**

**MOHAMMAD FAIZ LIEW ABDULLAH**

**A thesis submitted in partial fulfilment of the requirements for the degree  
of Doctor of Philosophy**

**The University Of Warwick  
Division of Electrical & Electronic Engineering,  
School Of Engineering,  
December 2006**

<b>CONTENTS</b>		<b>Pages</b>
TITLE PAGE		i
TABLE OF CONTENTS		ii
LIST OF TABLES		vi
LIST OF FIGURES		vii
GLOSSARY		xiv
ACKNOWLEDGEMENTS		xv
DECLARATION		xvi
ABSTRACT		xvii
1	Introduction .....	1
1.1	Overview .....	1
1.2	The wireless infrared medium – advantages and drawbacks.....	6
1.3	Recent wireless infrared communication systems .....	9
1.3.1	Indoor application .....	9
1.3.2	Outdoor application .....	10
1.4	Optical wireless link design .....	12
1.5	Motivation .....	13
1.6	Organisation of the thesis .....	16
	References .....	20
2	Background and Related Work .....	24
2.1	Photodetectors .....	25

2.2	Optical preamplifier structures .....	31
	2.2.1 High impedance amplifier .....	32
	2.2.2 Transimpedance amplifier .....	35
2.3	Transimpedance amplifier design requirements .....	38
	2.3.1 Wide dynamic range .....	38
	2.3.2 Bandwidth enhancement .....	43
	2.3.3 Noise reduction .....	55
2.4	Voltage feedback amplifier versus Current feedback amplifier ...	58
2.5	Definition of dynamic service quality .....	60
2.6	Summary .....	61
	References .....	63
3	New transimpedance amplifier structures .....	69
	3.1 Transimpedance Amplifier with FET voltage control filter .....	72
	3.2 Transimpedance Amplifier with external voltage control .....	80
	3.3 Bootstrap Transimpedance Amplifier with adjustable capacitor ...	85
	3.4 Summary .....	92
	References .....	94
4	Composite transimpedance amplifier bandwidth adjustment structures .....	95
	4.1 Combination of voltage feedback and current feedback amplifier .....	96
	4.2 Combination of bootstrap transimpedance amplifier and voltage feedback amplifier .....	104

4.3	Combination of dual feedback loop and voltage feedback amplifier .....	109
4.4	Summary .....	115
	References .....	117
5	Integration of bandwidth control and automatic gain control .....	119
5.1	Automatic gain control (AGC) theory .....	120
5.2	Automatic gain control circuit configuration .....	123
5.3	Integration of AGC with bandwidth control circuits frequency response analysis .....	130
5.4	Bandwidth control and AGC or AGC and bandwidth control? ....	138
5.5	Summary .....	141
	References .....	143
6	Signal to noise ratio (SNR) – optical wireless systems .....	144
6.1	Definition of noise in infrared communication .....	145
6.2	Noise model of a receiver .....	149
6.2.1	Noise current of shot noise and thermal noise .....	156
6.2.2	Relationship between SNR and bandwidth .....	158
6.3	Output noise density of the designed circuits .....	161
6.4	Signal to Noise Ratio module design configuration .....	181
6.5	Summary .....	187
	References .....	190

7	Receiver fabrication and practical implementation setup .....	192
7.1	Hardware design documentation and setup .....	193
7.2	Experimental results .....	199
7.3	Summary .....	207
	References .....	209
8	Conclusions and Further Work .....	210
8.1	Summary of the work .....	210
8.2	Application of this research .....	212
8.3	Future improvements and suggestion for further work .....	214
	References .....	218
	Appendix .....	219

List of Tables	Pages
1.1 Properties of Infrared and Radio Channels.....	8
1.2 Receivers designed.....	17
2.1 Noise in Front Ends .....	31
3.1 $C_p$ versus voltage control and bandwidth .....	75
3.2 $R_f$ versus voltage control and bandwidth .....	84
3.3 $R_f$ versus capacitor, $C_p$ bandwidth and gain .....	88
3.4 Comparison of technique .....	92
4.1 LMH6732 parameters related to supply current .....	98
4.2 $R_f$ selection for various gain settings and $I_{cc}$ .....	99
4.3 $R_f$ versus Frequency response .....	105
4.4 Feedback resistor, $R_f$ and $R_{f1}$ versus gain .....	108
4.5 Comparison of composite amplifier technique .....	116
5.1 $R_f$ versus gain and bandwidth .....	130
5.2 Composite amplifier circuit with AGC .....	141
5.3 Comparison between VBA-VGA or VGA-VBA .....	142
6.1 Summary of the output noise density for the six designed techniques .....	187
6.2 Summary of the output noise density for composite amplifier with AGC .....	187
6.3 Comparison of output noise density between VBA-VGA or VGA-VBA .....	188
7.1 Comparison between simulated and practical results .....	207



List of Figures	Pages
1.1	Wired backbone and wireless access network ..... 2
1.2	The main features of IrDA ..... 5
1.3	Infrared transmission speed, time and coverage area ..... 5
1.4	An example of an IrDA link and the IrDA protocol stack ..... 6
1.5	Ambient Light Noises and Silicon Photodiode Responsivity ..... 8
1.6	Example of an IEEE 802.11 network with infrared transmission ..... 10
1.7	System image of a traffic information offering system using Infrared traffic light ..... 11
1.8	Block diagram of a typical optical wireless link ..... 12
1.9	Modeling a link as a baseband filter and time-invariant system having an impulse response $h(t)$ , with signal-independent, additive noise $N(t)$ . The photodetector has responsivity $R$ ..... 15
2.1	Photodetector ..... 26
2.2	Small-signal equivalent circuit model of photodiode ..... 27
2.3	Relative spectral sensitivity of (SFH 206K) silicon photodiode ..... 28
2.4	Photodiode capacitance versus Reverse bias voltage ..... 30
2.5	Receiver preamplifier based on a termination resistor ..... 33
2.6	High impedance amplifier with equalisation ..... 33
2.7	Small-signal noise model of the optical preamplifier based on a termination resistor ..... 35

2.8	Receiver preamplifier based on a transimpedance amplifier .....	37
2.9	Various methods of increasing dynamic range :	
	1) output signal limiting, 2) input current steering,	
	3) variable transimpedance gain 4) multiple feedback impedance	
	transimpedance amplifier control .....	39
2.10	Two existing variable gain transimpedance amplifier designs .....	42
2.11	Basic receiver front-end using positive feedback .....	44
2.12	Response as a function of frequency. The basic system,	
	the feedback system and the trade-off cases are shown .....	45
2.13	Two bootstrap transimpedance method :	
	1) Shunt bootstrap 2) Buffer bootstrap .....	47
2.14	Bootstrap transimpedance amplifier .....	48
2.15	Schematic of TIA with parasitic capacitances and inductors .....	49
2.16	TIA with peaking buffer .....	50
2.17	a) Circuit of C-peaking transimpedance amplifier b) Equivalent open-loop	
	circuit of transimpedance amplifier with and without a peaking capacitor .....	51
2.18	Common base transimpedance preamplifier with regulated cascade .....	53
2.19	Inverting amplifier with T network .....	54
2.20	Topology of transimpedance amplifier .....	55
2.21	High feedback resistance and the capacitance of the input circuit causing the	
	amplifier noise gain $A_{noise}$ rise at the higher frequency until level by the stray	
	capacitance and finally rolled off by the amplifier open-loop response .....	56
2.22	Voltage feedback amplifier and current feedback amplifier .....	59

3.1	Circuit stimulation of a photodiode .....	70
3.2	Frequency response plot when the photodiode junction capacitance is 13pF .....	71
3.3	Frequency response plot when the photodiode junction capacitance is 1.5pF .....	71
3.4	Characteristics JFET .....	72
3.5	Photodiode with FET as a voltage controlled filter .....	74
3.6	Frequency response of changing FET $V_{Gs}$ from -0.1V to -3V .....	74
3.7	Transimpedance amplifier with voltage control filter .....	76
3.8	Transimpedance as a function of frequency .....	78
3.9	Gain control circuit .....	79
3.10	Transimpedance with gain control as a function of frequency .....	79
3.11	Transimpedance amplifier with external voltage control .....	81
3.12	$V_{BQ3}$ versus $V_{control}$ .....	82
3.13	Simulated transfer function of the transimpedance amplifier .....	85
3.14	BTA Circuit .....	86
3.15	Simplified model of Figure 3.14 .....	86
3.16	Modified BTA circuit .....	89
3.17	BTA Bandwidth .....	89
3.18	Modified BTA Bandwidth .....	90
3.19	Simplified model of Figure 3.16 .....	90
4.1	LMH6624 current noise density versus $R_f$ .....	97
4.2	LMH6732 supply current control's simplified schematic .....	98
4.3	Graph $I_p(\mu A)$ versus $Bw(MHz)$ .....	100
4.4	Composite Voltage and Current feedback amplifier .....	101

4.5	Frequency responses versus gain .....	101
4.6	Practical measurements for LMH6624 and LMH6732 .....	102
4.7	Frequency versus $V_{\text{control}}$ .....	103
4.8	Composite bootstrap transimpedance amplifier with VFA .....	105
4.9	Frequency response composite transimpedance amplifier .....	106
4.10	Simplified model of Figure 4.8 .....	107
4.11	Composite dual feedback loop with VFA .....	110
4.12	Array of RC filter with comparator .....	111
4.13	Frequency response composite transimpedance amplifier .....	112
4.14	Simplified model of Figure 4.11 .....	113
5.1(a)	AGC block diagram .....	121
5.1(b)	A typical AGC's transfer function .....	121
5.2	Proposed AGC circuit .....	124
5.3	Simplified model of Figure 5.2 .....	125
5.4	Variation of input signal, $V_{\text{in}}$ amplitude with time .....	128
5.5	AGC circuit frequency responses .....	129
5.6	Integration of AGC with voltage feedback and current feedback amplifier .....	132
5.7	Frequency response of Figure 5.6 .....	133
5.8	Integration of AGC with bootstrap transimpedance amplifier and voltage feedback amplifier .....	134
5.9	Frequency response of Figure 5.8 .....	135
5.10	Integration of AGC with dual feedback loop and voltage feedback amplifier ...	136
5.11	Frequency response of Figure 5.10 .....	137

5.12	Simplified model of VBA before VGA configuration .....	138
5.13	AGC before bandwidth control configuration .....	139
5.14	Frequency response of Figure 5.13 .....	140
6.1	Simple receiver model and noise sources in the receiver .....	146
6.2	Noise model of amplifier .....	150
6.3	An equivalent noise model of input stage of preamplifier, where $I_p$ is the photocurrent, $I_{nd}$ is the detector noise, $I_{nb}$ is the background noise, $C_d$ , $R_d$ are capacitance and resistance of a detector, $I_n$ , $V_n$ are current noise and voltage noise of a preamplifier, $R_i$ , $C_i$ are input resistance and input capacitance of a preamplifier, $G$ is the voltage gain of a preamplifier .....	152
6.4	Plot of Noise current for shot noise .....	157
6.5	Plot of Noise current for thermal noise .....	158
6.6	$I_p$ and Quantum shot noise versus $P_t$ .....	159
6.7	Relationship between SNR and bandwidth .....	160
6.8	FET small-signal model .....	162
6.9	BJT small-signal hybrid- $\pi$ model .....	162
6.10	Circuit Noise Model for case (a) .....	163
6.11	Input and Output noise density for FET Voltage control filter and transimpedance amplifier .....	164
6.12	Input and Output noise density for transimpedance amplifier with external voltage control .....	167
6.13	Input and Output noise density for bootstrap transimpedance amplifier with adjusting capacitor .....	168

6.14	Circuit noise model for case (d) .....	170
6.15	Input and Output noise density for voltage feedback amplifier and current feedback amplifier .....	171
6.16	Input and Output noise density for bootstrap transimpedance amplifier with voltage feedback amplifier .....	173
6.17	BJT small-signal hybrid- $\pi$ model with series inductor .....	175
6.18	Input and Output noise density for dual feedback loop amplifier with voltage feedback amplifier .....	176
6.19	Input and Output Noise density for AGC circuit .....	178
6.20	Output noise density for composite VFA and CFA amplifier with AGC .....	179
6.21	Output noise density for BTA and VFA amplifier with AGC .....	179
6.22	Output noise density for dual loop feedback and VFA amplifier with AGC .....	180
6.23	Output noise density for AGC before bandwidth control .....	180
6.24	Block diagram of a multiplier .....	181
6.25(a)	First part of SNR measurement circuit .....	182
6.25(b)	Second part of SNR measurement circuit .....	183
6.26	AC-DC converters with inverting amplifier.....	185
6.27	Simulated transient responses for the SNR circuit .....	186
6.28	Simulated transient responses for the input SNR versus output SNR .....	186
6.29	Noise Figure, $F_A$ and $F_B$ versus Gain .....	189
7.1	Simplified block diagram of the transmitter-receiver frond-end .....	193
7.2	Laser diode bias-T PCB .....	194
7.3	Laser diode capacitance versus forward voltage .....	195

7.4	Laser diode : Forward voltage versus Forward current .....	196
7.5	Remodel of Figure 7.2 .....	196
7.6	Frequency response of the transmitter .....	197
7.7	Micrographs of the bandwidth adjustment amplifier .....	198
7.8	Frequency response when $V_{\text{control}}=0\text{V}$ .....	200
7.9	Frequency response when $V_{\text{control}} = -2.55\text{V}$ .....	200
7.10	Output waveform from oscilloscope when $F = 50\text{MHz}$ .....	201
7.11	Output waveform from oscilloscope when $F = 60\text{MHz}$ .....	202
7.12	Output spectrum when $V_{\text{control}} = -2.55\text{V}$ .....	203
7.13	Output spectrum when $V_{\text{control}} = 0\text{V}$ .....	204
7.14	Comparison between simulated and practical for $V_{\text{control}}=0\text{V}$ .....	205
7.15	Comparison between simulated and practical for $V_{\text{control}}=-2.55\text{V}$ .....	206
8.1	Suggested intelligent indoor all optical home networks .....	213
8.2	Principles of wireless optical in seat entertainment .....	214
8.3	A low voltage transimpedance amplifier .....	216
8.4	An alternative low voltage transimpedance amplifier .....	217

## GLOSSARY

AGC	Automatic gain control
BJT	Bipolar junction transistor
BTA	Bootstrapped transimpedance amplifier
CFA	Current feedback amplifier
EMI	Electro-magnetic interference
FET	Field effect transistor
FTTH	Fibre-to-the-home
IrDA	Infrared data association
LAN	Local Area Network
NF	Noise figure
QoS	Quality-of-service
SNR	Signal-to-noise ratio
VCR	Variable resistor
VFA	Voltage feedback amplifier
VFIR	Very Fast IR
VGA	Variable gain amplifier
USB	Universal serial bus



## Acknowledgements

First of all I would like to thank God and the many people that had helped me to make this study and thesis possible. I am indebted to my supervisor, Prof Roger Green, for being my mentor for the last four years, for his keen guidance, encouragement and valuable comments throughout my research. I wish to thank my second supervisor, Dr. Mark Leeson for his valuable comments and suggestions throughout the research and thesis. I endeavour to pass on to future students that which I have experienced from them. I wish to express my gratitude to the Ministry of Science and Technology Malaysia and College University Technology Tun Hussein Onn for their financial support of this study.

I would also like to express my thanks to all the technical staff of the University of Warwick, Jonathan and Ian for their technical support.

I wish to thank my friends in the Communications and Signal Processing Research Group, my friends back in Malaysia and my friends who are venturing the same journey in other universities in United Kingdom for providing valuable support over the years.

Special gratitude to my loving wife, Anika Zafiah: for being a wonderful wife and for your tireless support of our family, even though you are striving for your PhD research studies at the same time. To you I wish you the very best of luck in your viva and I owe everything to you with compound interest. I wish to thank my parents, Gwi Peng for her support. A special thanks goes to my brother-in law, Akmal for his invaluable support. To our three loving children, Zu Arasy (6), Sadrina (5) and Syakib (3), who was born 4 months after we began our PhD studies, for constantly bringing joy, excitement and always testing our parenting skill. Finally this thesis is also dedicated to our “baby” who is going to be born at the end of March 2007.

## DECLARATION


The work described in this thesis is entirely original and my own, except where otherwise indicated.

Parts of this work were presented at conferences, namely

“Optical Wireless Front-Ends”, 2<sup>nd</sup> Malaysian Research Group Annual Conference, Manchester, Sept 2003.  
([www.mrg-online.org/conference/02/mohdabdullah.htm](http://www.mrg-online.org/conference/02/mohdabdullah.htm))

“Optical Wireless Communication Front-Ends” High Frequency Postgraduate Student Colloquium, pp. 3-8, Manchester, 6-7 Sept 2004.

  
\_\_\_\_\_  
Signed

  
\_\_\_\_\_  
Date

## ABSTRACT

The challenge of creating a new environment of links for wireless infrared and optical local area networks (LANs) is driving new innovations in the design of optical transceivers. This thesis is concerned with a systematic approach to the design of receivers for indoor optical wireless communication. In particular, it is concerned with how to offer bandwidth adjustment capability in a receiver according to the dynamic service quality of the incoming signals. Another part of the discussion of the thesis is how one can properly choose the front-end preamplifier and biasing circuitry for the photodetector. Also, comparison is made between different types of amplifier, and the methods of bandwidth enhancement.

The designs of six different techniques of integrating transimpedance amplifiers, with photodetectors to adapt an adjustable bandwidth control receiver are discussed. The proposed topologies provide an adjustable range of bandwidths for different frequency ranges, typically between 52Hz to 115MHz. The composite technique designs were used to incorporate into a system with an automatic gain control to study its effect, on an optical wireless receiver which had bandwidth adjustment and automatic gain adjustment. Theoretical analysis of noise performance for all the designed circuits is also presented. The theory and design of obstacles of indoor optical wireless receiver delivery, in addition to techniques for mitigating these effects, are discussed. This shows that infrared is a viable alternative to radio for certain applications.

- 1.1 Overview
  - 1.2 Wireless Infrared Medium – Advantages and Drawbacks
  - 1.3 Recent Wireless Infrared Communication Systems
    - 1.3.1 Indoor Application
    - 1.3.2 Outdoor Application
  - 1.4 Optical wireless link design
  - 1.5 Motivation
  - 1.6 Organisation of the Thesis
  - References
- 

### 1.1 Overview

Trends in the telecommunications and computer industries suggest that the network of the future will consist of a high capacity backbone network with short range communication links providing network access to portable communicators and portable computers. In this vision of the future, mobile users will have access to similar grade high-speed network services available to wired terminals. For this purpose, some parts of communication links

need to be constructed wirelessly. This situation is illustrated in Fig. 1.1. During the last decade, therefore, wireless communication technology, such as optical local area networks (LANs) and wireless infrared (IR) communication systems has grown rapidly [1.1 – 1.5]. Optical LANs use fibre as the physical transmission medium for networks serving resources within a small geographic area, while wireless IR uses free space as a communication channel for short-range, localised networks. Optical wireless communications is becoming one of the cornerstones of today's revolution in information technology because of its benefits of high speed transmission and isolation from electromagnetic interference. With the drive towards portable and multimedia communications, we are faced with the challenge of bringing the capacity of our communications infrastructure directly to the user, providing seamless access to large quantities of information anywhere and at any time. To accomplish this however, will require mid-range or short-range wireless communication links with extremely high capacity. In an extreme case, for example, uncompressed high-definition video can require a data rate of in excess of 100 Mbit/s.

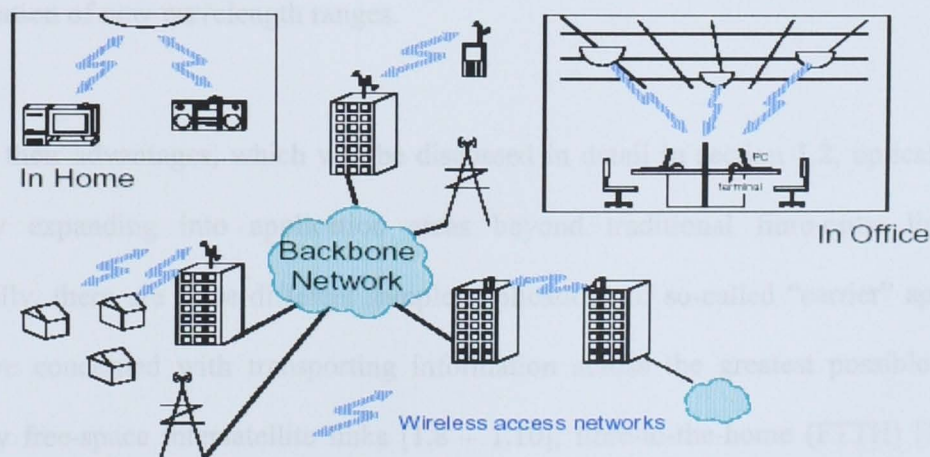


Figure 1.1 Wired backbone and wireless access network [1.1]

Light offers great advantages as a medium of communication. It enjoys unequalled channel bandwidth and is capable of data rates in the terabits per second range, whether traveling through free space or through optical fibre. This tremendous capacity is due to the nature of the photons that constitute an optical signal. Unlike electrons, photons react weakly to their environment and to one another as such optical signals neither generate nor are sensitive to electromagnetic interference (EMI), parasitic coupling and other problems faced by electrical signals [1.6]. In comparison, from IR to radio frequencies, the technology suffers from electro-magnetic interference (EMI) problems as the radio spectrum gets increasingly crowded. Now that personal communications and wireless computer networks are evolving rapidly, the available spectrum is considered to be a scarce resource. Simultaneously, there is an increase in the interference level caused by switched node power supplies and other high-frequency equipment. Particularly in hospitals and industrial environments, the applicability of radio systems is already seriously limited by these problems. Extensive frequency allocation regulations can only partly solve them. Eventually although EMI aspects will become an integral part of every system design, future applications require the exploration of new wavelength ranges.

Given their advantages, which will be discussed in detail in section 1.2, optical links are rapidly expanding into application areas beyond traditional fibre-optic links [1.7]. Basically, there are three different sample applications of so-called “carrier” applications that are concerned with transporting information across the greatest possible distance, namely free-space intersatellite links [1.8 – 1.10], fibre-to-the-home (FTTH) [1.11-1.12]

and terrestrial free-space links for inter-building communications [1.13]. Current optical LANs, represented by the Gigabit Ethernet and ATM-PON network specifications, can be used to realise high data rate systems that find their application in parallel processing environments, newspaper and magazine production, and medical imaging networks [1.14]. The immunity of fibre optic LANs to electromagnetic radiation makes this technology an attractive choice for implementation in sensitive environments, such as in aircraft and vehicles [1.15-1.16]. Furthermore, broadband requirements to connect central office locations to customer premises benefit from the high bandwidths made feasible through the use of FTTH technology. Today, the limiting factor in the deployment of advanced optical LANs is the prohibitive cost of the transmitter and receiver [1.17]. However, novel integrated circuit design techniques are helping drive down the cost of implementation, in order for these LAN solutions to become more common. Finally, so called “optical wireless links” provide a communications solution for portable applications [1.18]. In particular, short range “point-and-shoot” systems in accordance with the infrared Data Association (IrDA) standard provide a simple solution for transferring information to and from portable devices, offering high data rates at low cost and with a small form factor that is not prone to mechanical wear [1.19].

The success of such short range systems is particularly showing how optical communication systems are likely to proliferate in the future, where IrDA wireless links have overshadowed both the Universal Serial Bus (USB) and IEEE 1394 FireWire to become the leading serial port alternative for connectivity [1.20]. A new technology has been proposed for indoor, short range wireless communication, called IrGate. IrGate core

technology is based on a method of diffused-infrared (DIR) communication links, performing at high bit rates reaching up to 10Mbps [1.21]. IrDA is also extending its IR-PHY standard to 16Mbps, a new high speed extension called Very Fast IR (VFIR). VFIR is designed as an extension to the current 4Mbps FIR, where the much higher throughput enables wider applications beyond the current perception of a “wire replacement” [1.22]. Figure 1.2 and Figure 1.3 show the main features of the IrDA standards and the IR transmission speed, time and coverage area of the current implementations.



Figure 1.2 The main features of IrDA [1.23]

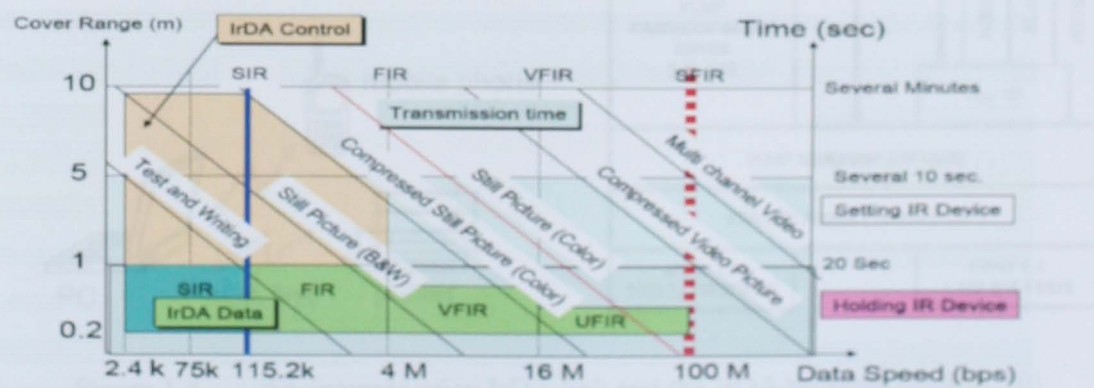


Figure 1.3 Infrared transmission speed, time and coverage area [1.23]