

Technical University of Denmark



Pilot tone modulation used for channel identification in OTDM networks

Clausen, Anders; Bennike, Jon; Oxenløwe, Leif Katsuo; Seoane, Jorge; Siahlo, Andrei; Jeppesen, Palle

Published in:
Technical Digest Conference on Lasers and Electro-Optics 2004

Publication date:
2004

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Clausen, A., Bennike, J., Oxenløwe, L. K., Seoane, J., Siahlo, A., & Jeppesen, P. (2004). Pilot tone modulation used for channel identification in OTDM networks. In Technical Digest Conference on Lasers and Electro-Optics 2004 (Vol. 2, pp. CThQ7). IEEE.

DTU Library

Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

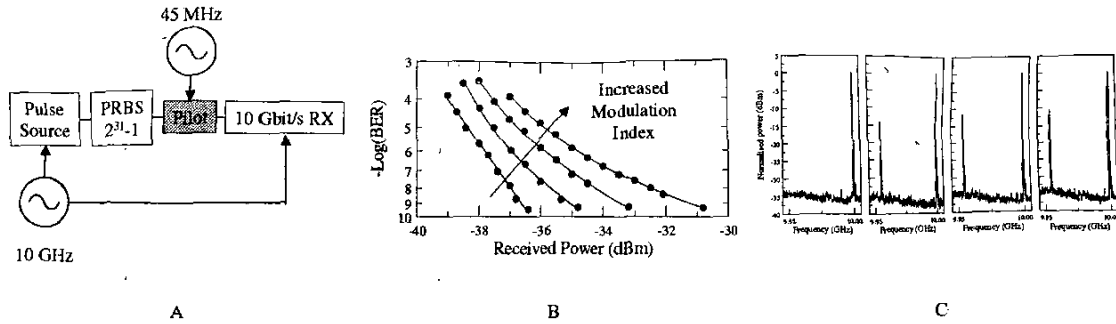


Figure 2: A) Experimental set-up B) BER measurements for increasing modulation index, i.e. 0.00, 0.27, 0.35 and 0.41. C) corresponding electrical spectra showing the PT power.

In order to implement a reliable pilot tone detector, it is important to obtain a significant contrast in PT power when demultiplexing the PT modulated channel and when demultiplexing the other OTDM channels, typically determined by the extinction ratio of the demux. For illustration, the set-up in Figure 3A was implemented. The PRBS modulated data signal was split into two arms. One of the signals was AM modulated and delayed 50 ps before the two signals were multiplexed, generating a 20 Gbit/s signal. By tuning the clock applied to the Electro Absorption Modulator (EAM) in time, and measuring the power of the PT, a contrast of 18 dB is obtained, see Figure 3B.

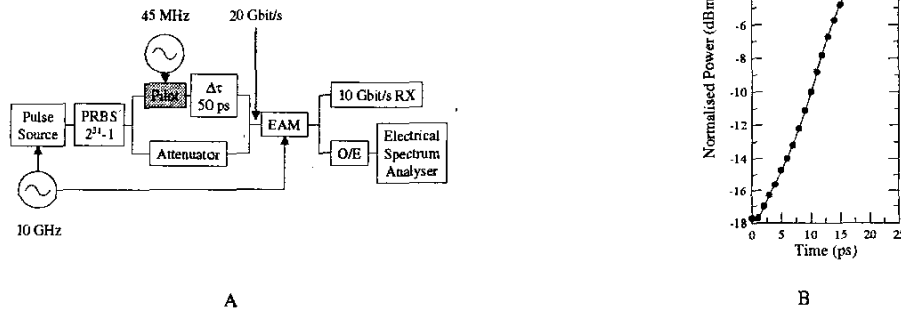


Figure 3: A) Experimental set-up B) Measured contrast by tuning the time delay controlling the position of the demultiplexing window.

4. Conclusion

A novel scheme used for identifying OTDM channels is proposed. The impact on the system performance was characterised by measuring the BER for varied m . For $m = 0.27$, the penalty is ~ 1.5 dB. The contrast in pilot tone power between the modulated channel and the remaining OTDM channels is measured to 18 dB – sufficient for the control electronics.

5. References

1. M. Nakazawa, T. Yamamoto, K.R. Tamura, "1.28Tbit/s-70km OTDM transmission using third- and fourth-order simultaneous dispersion compensation with a phase modulator," *Electron. Lett.* 36 (24), page 2027-2029 (2000).
2. European IST project TOPRATE IST-2000-28657
3. C. Schubert, C. Schmidt, S. Ferber, R. Ludwig, H. G. Weber, "Error-free all-optical add-drop multiplexing at 160 Gbit/s", *Electron. Letters* 39 (14), page 1074-1076 (2003)
4. E. Duservire, C. R. Giles, J.R. Simpson, "Gain Saturation Effects in High-speed, Multichannel Erbium-Doped Fiber Amplifiers at $\lambda = 1.53 \mu\text{m}$ ", *Journal of Lightwave Technology*, 7 (12), page 2095-2104 (1989)