



UNIVERSITI PUTRA MALAYSIA

**A NEW SCHEME FOR REDUCTION OF
PEAK-TO-AVERAGE POWER RATIO IN ORTHOGONAL
FREQUENCY DIVISION MULTIPLEXING**

AHMED MUSTAFA H. MELAD

FK 2003 28

**A NEW SCHEME FOR REDUCTION OF PEAK-TO-AVERAGE POWER
RATIO IN ORTHOGONAL FREQUENCY DIVISION
MULTIPLEXING**

By

AHMED MUSTAFA H. MELAD

**Thesis submitted to School of Graduate Studies, Universiti Putra Malaysia, in
Partial Fulfillment of the Requirement for the Degree of Master of Science**

June 2003



Abstract of the thesis presented to the senate of Universiti Putra Malaysia in partial fulfillment of the requirement for the degree of Master of Science

A NEW SCHEME FOR REDUCTION OF PEAK-TO-AVERAGE POWER RATIO IN ORTHOGONAL FREQUENCY DIVISION MULTIPLEXING

By

AHMED MUSTAFA H. MELAD

June 2003

Chairman: Professor Borhanuddin Mohd Ali, Ph.D.

Faculty: Engineering

Orthogonal Frequency Division Multiplexing (OFDM) is an attractive modulation method for channels with a non-flat frequency response, as it saves the need for complex equalizers. However, its main disadvantage is the high peak-to-average power ratio (PAPR) of the output signal, which may take values within a range that is proportional to the number of carriers in the system. As a result, a linear behavior of the system over a large dynamic range is needed and therefore the efficiency of the output amplifier is reduced. Many methods have been proposed to reduce the PAPR of the OFDM signal, among them a clipping technique which has been focused and investigated.



OFDM signal, among them a clipping technique which has been focused and investigated.

This thesis proposes a new scheme to reduce the PAPR. We name it Off technique. Further the effects of clipping scheme as well as the new scheme on the OFDM system performance in terms of Bit Error Rate (BER) and PAPR reduction is investigated. The results obtained indicate that both parameters, i.e. the reduction in PAPR and BER of this scheme were worse than those of the Clipping Scheme. In conclusion, results indicate that Off Technique does not offer a better solution to PAPR reduction in the OFDM system.



Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi sebahagian keperluan untuk ijazah Master Sains

**SKIM BARU PENGURANGAN NISBAH KUASA PUNCAK-KE-PURATA
DALAM OFDM**

Oleh

AHMED MUSTAFA H. MELAD

Jun 2003

Pengerusi: Profesor Borhanuddin Mohd Ali

Fakulti: Kejuruteraan

Pemultipleksan Pembahagian Frekuensi Ortogonal (OFDM) adalah merupakan satu kaedah pemodulatan bagi saluran yang mempunyai respon frekuensi bukan-rata, kerana ia tidak memerlukan penyama-penyama (equalisers) yang kompleks. Walau bagaimanapun, kelemahannya yang utama adalah nisbah kuasa puncak-ke-purata (PAPR) yang tinggi dalam isyarat keluaran, yang mempunyai nilai dalam satu julat yang berkadar dengan bilangan pembawa dalam sistem itu. Hasilnya, sifat lefarus sistem tersebut dalam satu julat dinamik yang besar adalah diperlukan dan oleh kerana itu, kecekapan pembesar keluaran menjadi berkurangan. Banyak kaedah telah dicadangkan untuk mengurangkan PAPR dari isyarat OFDM, antaranya, teknik pemotongan (clipping) yang telah diberi perhatian dan dikaji dalam tesis ini.



Selama ini, pemotongan dan skema baru itu ke atas prestasi sistem OFDM dari segi Kadar Ralat Bit (BER) dan pengurangan PAPR. Dikaji-Hasil yang didapati menunjukkan bahawa kedua-dua parameter, iaitu pengurangan PAPR dan BER, adalah lebih buruk dalam skema ini berbanding Skema Pemotongan. Sebagai kesimpulan, keputusan-keputusan menunjukkan bahawa Teknik Tutup tidak menawarkan penyelesaian yang lebih baik untuk mengurangkan PAPR dalam sistem OFDM.

ACKNOWLEDGEMENTS

In the name of Allah, the Most Beneficent, the Most Merciful

I would like to thank both my supervisor and former supervisor, Professor Borhanuddin Mohd Ali and Dr. Veeraraghvan Prakash for their support, encouragements and patience towards completing the research. Without all that nothing would have been accomplished.

A research project as this entails a lot of sacrifice in term of time, energy, money etc, not only on my part but also on that of my supervisor.

My special thanks to Pn. Ratna for accepting to be on my committee. And his guidance.

I am also grateful to Dr. Mohd Hadi Habaebe for his guidance, comments and advices throughout the entire project.

I am indebted to all the people at the wireless laboratory for creating the conducive and encouraging atmosphere.

Last but not least, I would like to thank my father, mother, eldest brother and the rest of my family who keep encouraging and supporting me in whatever I do. Thank you very much.



I certify that an Examination Committee met on 19th Jun 2003 to conduct the final examination of Ahmed Mustafa H. Melad on his Master of Science thesis entitled “A New Scheme For Reduction of Peak-to-Average Power Ratio in Orthogonal Frequency Division Multiplexing” in accordance with Universiti Pertanian Malaysia (Higher Degree) Act 1980 and Universiti Pertanian Malaysia (Higher Degree) Regulations 1981. The Committee recommends that the candidate be awarded the relevant degree. Members of the Examination committee are follows:

MOHD HADI HABAEB, Ph.D.


Department of Computer and Communication systems.
Faculty of Engineering,
Universiti Putra Malaysia
(Chairman)

BORHANUDDIN MOHD ALI, Ph.D.

Professor,
Department of Computer and Communication systems.
Faculty of Engineering,
Universiti Putra Malaysia.
(Member)

RATNA KALOS ZAKIAH SAHBUDIN, M.Sc.

Department of Computer and Communication systems.
Faculty of Engineering.
Universiti Putra Malaysia.

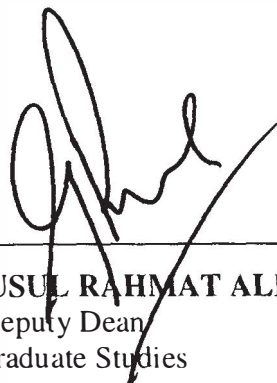

GULAM RUSUL RAHMAT ALI, Ph.D.

Professor / Deputy Dean
School Of Graduate Studies
University Putra Malaysia

DATE: 22 JUL. 2003

The thesis submitted to the senate of Universiti Putra Malaysia has been accepted as fulfillment of the requirement for the degree of Master of Science. The members of Supervisory Committee are as follows:

BORHANUDDIN MOHD ALI, Ph.D.

Professor,
Department of Computer and Communication systems,
Faculty of Engineering,
Universiti Putra Malaysia.
(Chairman)

RATNA KALOS ZAKIAH SAHBUDIN, M.Sc.

Department of Computer and Communication systems,
Faculty of Engineering,
Universiti Putra Malaysia.
(Member)



AINI IDERIS, Ph.D.

Professor / Dean
School Of Graduate Studies
University Putra Malaysia

DATE: 15 AUG 2003



DECLARATION

I hereby declare that the thesis is based on my original work except for the quotations and citations, which have been duly acknowledged. I also declare that it has not been previously or concurrently submitted for any other degree at UPM or other institutions.

Ahmed Mustafa H. Melad

Date:



TABLE OF CONTENTS

	Page
ABSTRACT	ii
ABSTRAK	iv
ACKNOWLEDGMENT	vi
APPROVAL SHEET	vii
DECLARATION FORM	ix
LIST OF TABLES	x
LIST OF FIGURES	xix
LIST OF ABBREVIATIONS	xvii

CHAPTER

1 INTRODUCTION

1.1 Background	1.1
1.2 Orthogonal Frequency Division Multiplexing (OFDM)	1.3
1.2.1 Basic of OFDM	1.3
1.2.2 History of OFDM	1.5
1.2.3 Advantages of OFDM System	1.7
1.2.4 Disadvantages of OFDM System	1.7
1.3 Problem Statement	1.8
1.4 Objectives of this Thesis	1.9
1.5 Brief Methodology	1.9
1.6 Organization	1.11

2 OFDM SYSTEM AND A PEAK POWER PROBLEM

2.1 Introduction	2.1
2.2 Generation of an OFDM Time Waveform	2.2
2.2.1 OFDM Signal	2.2
2.2.2 OFDM Modulation	2.4
2.2.3 OFDM Demodulation	2.6
2.2.4 OFDM Modulation as IFFT	2.7
2.2.5 Guard Time and Cyclic Extension	2.9
2.2.6 Windowing	2.9
2.3 The Peak Power Problem	2.10
2.4 Existing Metrics	2.14



2.4.1 Peak-to-Average Power Ratio	2.14
2.4.2 Peak Factor / Crest Factor	2.15
2.5 Distribution of the Peak-to-Average Power Ratio	2.15
2.6 PAPR Reduction Techniques	2.20
2.6.1 Clipping	2.20
2.6.2 Peak Cancellation	2.26
2.6.3 Error-Control Coding and Scrambling	2.29
2.6.4 PAPR Reduction Codes	2.30
2.6.5 Symbol Scrambling Techniques	2.31
2.6.6 Pulse Shaping	2.32
2.6.7 OFDM Carrier Interferometry	2.32
2.6.8 Adaptive Sub-Carrier Selection	2.33
2.6.9 Selected Mapping	2.33
2.6.10 Tone Reservation and Tone Injection	2.34
2.7 Conclusion	2.34

3 METHODOLOGY

3.1 Introduction	3.1
3.2 System Description	3.1
3.3 Simulation and Modeling	3.3
3.3.1 Introduction to MATLAB	3.3
3.3.2 Designing and Simulator	3.4
3.3.3 System Setup	3.8
3.3.3.1 Inverse Fast Fourier Transform	3.8
3.3.3.2 Number of Carriers	3.9
3.3.3.3 Guard Period Type	3.10
3.3.3.4 Guard Time	3.11
3.3.3.5 Peak Power Clipping Ratio or Offing Ratio	3.11
3.3.3.6 Signal-to-Noise Ratio	3.12
3.5 Modulation	3.12
3.6 Windowing	3.15
3.7 PAPR Reduction Techniques	3.16
3.7.1 Clipping Technique	3.16
3.7.2 OFF Scheme	3.19
3.8 RF Modulator	3.22
3.9 Channel	3.22
3.10 Reception and Demodulation	3.22
3.11 System Performance	3.23
3.11.1 Bit-Error rate	3.23
3.11.2 Peak-to-Average Power Ratio	3.24
3.11.3 Power Spectral Density	3.25



4	RESULTS AND DISCUSSION	
4.1	Introduction	4.1
4.2	Power Spectral Density PSD	4.2
4.3	Peak-to-Average Power Ratio Reduction by Clipping or Offing	4.5
4.4	BER Performance	4.10
4.5	Conclusion	4.15
5	CONCLUSION AND FUTURE WORK	
5.1	Conclusion	5.1
5.2	Future Work	5.3
	REFERENCES	R.1
	APPENDIX	
A		A.1
B		A.6
	BIODATA OF THE AUTHOR	B.1



LIST OF TABLES

TABLE	Page
1.1 Comparison of Parallel and Serial Transmission Scheme.	1.4
1.2 Summaries of Characteristics of IEEE802.11a and HiperLAN2.....	1.6



LIST OF FIGURES

FIGURE	Page
2.1 Sub-carriers within an OFDM Symbol (Time Domain)	2.3
2.2 Sub-carriers in the OFDM Spectrum	2.4
2.3 OFDM Modulation	2.5
2.4 OFDM Demodulation	2.7
2.5 Square root of peak-to-average power ratio for 16-channel OFDM signal, modulation with the same initial phase for All sub-channels	2.11
2.6 Cumulative Distribution Function of PAPR	2.16
2.7 Cumulative Distribution Function of PAPR for a number of Sub carriers of (a) 32, (b) 64, (c) 128, (d) 256, and (e) 1024. Solid lines are calculated, dotted lines are simulated	2.17
2.8 Effects of Clipping on OFDM Spectrum	2.21
2-9: Peak Cancellation Technique	2.27
2.10 Packet error ratios versus E_b / N_o for 64-byte packet in WAGN. PAPR is reduced to 5 dB by (a) clipping, (b) packet cancellation, and (c) peak windowing	2.29
3.1 Block diagram showing a basic OFDM transmitter	3.2
3.2 Block diagram showing a basic OFDM receiver	3.3
3.3 Frequency domain distribution of signal	3.5
3.4 Flowchart of OFDM transmitter and Channel using Matlab	3.6
3.5 Symbols with cyclic extension	3.10
3.6 OFDM Signal, (a) 1 Symbol Period, (b) After adding guard period and windowing	3.14



3.7 Soft envelope limiter model	3.17
3.8 OFDM Time Waveform	3.18
3.9 The distribution of peaks that exceed the threshold (0.0533)	3.19
3.10 ON / OFF Concept	3.20
3.11 The OFDM samples time, (a) before off technique is applied, (b) After off technique.	3.21
3.12: Power Spectral Density (PSD) without windowing, Clipping or OFFing for 400 carriers.	3.26
4.1 OFDM Spectrum without clip or off to OFDM signal	4.3
4.2 OFDM Spectrum, (a) Clipping with PPC Ratio =1, (b) Off with PPO Ratio =1	4.4
4.3 OFDM Spectrum, (a) Clipping with PPC Ratio =2, (b) Off with PPO Ratio =2	4.5
4.4 OFDM Spectrum, (a) Clipping with PPC Ratio =3, (b) Off with PPO Ratio =3	4.6
4.5 OFDM time signal after clipping	4.7
4.6 The OFDM signal after Offing	4.8
4.7 The PAPR versus with Peak Power Clipping Ratio PPC (dB), Clipping and Offing and without any Clipping or Offing	4.9
4.8 Bit-Error Rate versus with Peak Power Clipping Ratio, different digital modulations is used	4.10
4.9 BER versus peak power clipping PPC Ratio with clipping technique. Several of number of carriers (32, 64, 128 and 256)	4.11
4.10 BER versus peak power offing PPO Ratio with Offing technique. Several of number of carriers (32, 64, 128 and 256)	4.12
4.11 BER versus SNR for OFDM using BPSK, QPSK and 16 PSK	4.13
4.12 BER in OFDM system with various values of Peak Power Clipping Ratio PPC (5 dB, 10 dB and 15 dB). QPSK modulation was used	4.14

4.13 BER in OFDM system with various values of Peak Power Offing Ratio PPO and Comparison with system without Clipping or offing. QPSK modulation was used	4.15
4.14 shows comparison between the performance of clipping and offing for the OFDM System with various PPC or PPO	4.15
4.15 BER vs. SNR, Number of carriers = 200 carriers, PPC and PPO ratios = 5 dB	4.16
4.16 BER vs. SNR for 400 carriers, PPC and PPO ratios = 5 dB	4.17



LIST OF ABBREVIATIONS

DS-CDMA	Direct Sequence Code Division Multiplexing Access
DMT	Discrete Multi Tone
ADSL	Asymmetric Digital Subscriber Line
DAB	Digital Video Broadcasting
LAN	Local Area Network
WLAN	Wireless Local Area Network
4G	Fourth Generation
DFT	Discrete Fourier Transform
QAM	Quadrature Amplitude Modulation
BPSK	Binary Phase Shift Keying
TDMA/TDD	Time Division Multiplexing Access
PAPR	Peak-to-Average Power ratio
BER	Bit Error rate
A/D-D/A converters	Digital-to-Analogue; Analogue-to-Digital
CF	Crest Factor
RF	Radio Frequency
SNR	Signal-to-Noise Ratio
PPC	Peak Power Clipping
VDSL	Very-high Digital Subscriber Line
HPA	High power amplifier
IFFT	Inverse Fast Fourier Transform
ISI	Inter Symbol Interference



ICI	Inter Carrier Interference
MCM	Multi Carrier Modulation
CDF	Cumulative Density Function
FEC	Forward Error Correction
OBO	Out Back Off
SC	Signal Carrier
BPF	Band Pass Filter
PER	Packet Error Rate



CHAPTER 1

INTRODUCTION

1.1 Background

Recently, there have been emerging demands for high-rate data transmission such as digital audio and video broadcasting, and multimedia communication in wireless environment. Therefore, it is expected that a commercial wireless network will be available for high-rate communications in the near future. Orthogonal frequency division multiplexing (OFDM) is believed to be a possible candidate for high-rate data transmission in wireline and wireless communication since it exhibits robustness over frequency selective fading. The robustness is due to the fact that each subcarrier of OFDM systems has relatively narrow bandwidth compared with the coherent bandwidth of channel [1, 2 and 3]. Therefore, OFDM system doesn't need to adopt complex RAKE receiver which is an essential demodulator in direct sequence code division multiple access (DS-SS) system [4, 5] since each subcarrier signal of OFDM system eventually experience flat fading.

In the real world, OFDM has been adopted in various wireline and wireless applications as follows:

- 1- In wire line systems, OFDM, under the name of Discrete Multi-Tone (DMT), was adopted as an efficient technology for asymmetric digital subcarrier line



(ADSL) for its easy implementation, high performance, and low cost [6, 7]. The ADSL was first proposed in [8, 9], and supports a service of delivering high-rate half-duplex data to residential telephone customers with existing copper lines. Since severe channel attenuation, inter-symbol interference, crosstalk, and impulse noise occur in an ADSL channel environment, an efficient modulation scheme is required in ADSL system, which results in the utilization of OFDM techniques.

- 2- For wireless systems, OFDM was proposed as multi-carrier modulation scheme in digital audio broadcasting (DAB) by the European telecommunication standards institute (ETSI) [10, 11]. The DAB systems provide reliable and rugged reception of high-quality audio services, including multimedia service, to mobile, portable and fixed receiver.

While present communication systems are primarily designed for one specific application, such as speech on mobile telephone or high-data rate in wireless local area network LAN, the next generation of WDMCS is expected to provide its users with customer premises services that have information rates exceeding 2Mbps. Most WLAN systems currently use the IEEE802.11b standard, which provides a maximum data rate of 11 Mbps [12]. Supporting such a large data rates with sufficient robustness to radio channel impairments, requires careful choosing of modulation techniques. The most suitable modulation choice seems to be orthogonal frequency division multiplexing OFDM. Newer WLAN standards such as IEEE802.11a [13] and HiperLAN2 [14, 15] are based on OFDM technology and provides a much higher data rate of 54 Mbps. However systems of the near future will require WLANs with data rates of greater than



100 Mbps, and so there is a need to further improve the spectral efficiency and data capacity of OFDM systems in WLAN applications. In response to this need, OFDM systems have been proposed to provide broadband communication at a reasonable cost.

OFDM can be seen as either a modulation technique or multiplexing technique. One of the main reasons to use OFDM is to increase the robustness against frequency selective fading or narrowband interference. In a single carrier system, a single fade or interferer can cause the entire link to fail, but in a multicarrier system, only a small percentage of the subcarriers will be affected.

1.2 Orthogonal Frequency Division Multiplexing (OFDM)

The name 'OFDM' is derived from the fact that the digital data is sent using many carriers, each of a different frequency (Frequency Division Multiplexing) and these carriers are orthogonal to each other.

1.2.1 Basic of OFDM

OFDM is an alternative wireless modulation technology to CDMA. It has the potential to surpass the capacity of CDMA systems and provide the wireless access method for 4G systems. It is a modulation scheme that allows digital data to be efficiently and reliably transmitted over a radio channel, even in multipath environments. It transmits data by using a large number of narrow bandwidth carriers. These carriers are regularly



spaced in frequency, forming a block of spectrum. The frequency spacing and time synchronization of the carriers is chosen in such a way that the carriers are orthogonal, meaning that they do not cause interference to each other. This is despite the carriers overlapping each other in the frequency domain. The comparison of the parallel transmission scheme with a single high rate data transmission is shown in Table 1.1. T_s is the symbol time, N number of subcarriers.

Table 1.1: Comparison of Parallel and Serial Transmission Schemes [16].

Transmission method	Parallel	Serial
Symbol time	T_s	T_s/N
Rate	$1/T_s$	N/T_s
Total BW required	$2*N/T_s + N*0.1/T_s$ (Assume Guard band = $0.1/T_s$)	$2*N/T_s$
Susceptibility to ISI	Less	More

From Table 1.1, shows that the major disadvantages of the parallel transmission scheme are that is bandwidth inefficient and that several modulators and demodulator blocks are required.

In OFDM, these problems are overcome by

- 1- Using orthogonal sub-carriers instead of widely spaced sub-carriers (i.e., carriers with guard band between them).

- 2- Using IFFT and FFT algorithms for implementing the modulation and demodulation operations.

1.2.2 History of OFDM

The origins of OFDM development started in the late 1950's [17] with the introduction of Frequency Division Multiplexing (FDM) for data communications. In 1966 Chang patented the structure of OFDM [18] and published [19], the concept of using orthogonal overlapping multi-tone signals for data communications. In 1971 Weinstein [20] introduced the idea of using a Discrete Fourier Transform (DFT) for implementation of the generation and reception of OFDM signals, eliminating the requirement of banks for analog subcarrier oscillators. This presented an opportunity for an easy implementation of OFDM, especially with the use of Fast Fourier Transforms (FFT), which was an efficient implementation of the DFT. Recently the advances in integrated circuit technology have made the implementation of OFDM cost effective. The reliance on DSP prevented the wide spread use of OFDM during the early development of OFDM. It wasn't until the late 1980's that work began on the development of OFDM for commercial use, with the introduction of the Digital Audio Broadcasting (DAB) system. Development of the European HiperLAN2 standard was started in 1995, with the standard of HiperLAN2 being defined in June 1999. HiperLAN2 pushes performance of WLAN systems, allowing a data rate of up to 54 Mbps [21]. HiperLAN2 uses 48 data and 4 pilot subcarriers in a 16 MHz channel, with 2 MHz on either side of the signal to allow out of band roll off. User allocation was



achieved by using TDM, and subcarriers were allocated using a range of modulation schemes, from BPSK up to 64-QAM, depending on the link quality.

Forward Error Correction was used to compensate for frequency selective fading. Since the physical layer of HiperLAN2 is very similar to the IEEE802.11a standard these examples are applicable to both standards.

Table 1.2 Summary of Characteristics of IEEE802.11b, IEEE802.11a and HiperLAN2. Derived From [21].

Standard	802.11b	802.11a	HiperLAN2
Spectrum	2.4 GHz	5.2GHz	5.2GHz
Modulation Technique	DSSS	OFDM	OFDM
~ Max physical rate	11Mbps	54Mbps	54Mbps
~ Max data rate, layer3	5Mbps	32Mbps	32Mbps
Medium access control	CSMA/CA	Add Hoc	TDMA/TDD
Connectivity	Connectivity less	Connectivity less	Connectivity orientated