



**UNIVERSITY OF LEEDS**

This is a repository copy of *An Integrated 3.5-THz QCL Optical Breadboard System for the LOCUS Atmospheric Sounder*.

White Rose Research Online URL for this paper:  
<http://eprints.whiterose.ac.uk/140609/>

Version: Accepted Version

---

**Conference or Workshop Item:**

Valavanis, A [orcid.org/0000-0001-5565-0463](https://orcid.org/0000-0001-5565-0463), Auriacombe, O, Rawlings, T et al. (12 more authors) *An Integrated 3.5-THz QCL Optical Breadboard System for the LOCUS Atmospheric Sounder*. In: 8th International Quantum Cascade Lasers School and Workshop (IQCLSW), 02-07 Sep 2018, Cassis, France.

---

This article is protected by copyright.

**Reuse**

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

**Takedown**

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing [eprints@whiterose.ac.uk](mailto:eprints@whiterose.ac.uk) including the URL of the record and the reason for the withdrawal request.



[eprints@whiterose.ac.uk](mailto:eprints@whiterose.ac.uk)  
<https://eprints.whiterose.ac.uk/>

# An Integrated 3.5-THz QCL Optical Breadboard System for the LOCUS Atmospheric Sounder

**A. Valavanis<sup>1,\*</sup>, O. Auriacombe<sup>2</sup>, T. Rawlings<sup>2</sup>, Y. Han<sup>1</sup>, S. P. Rea<sup>2</sup>, M. Crook<sup>2</sup>, D. Brooks<sup>3</sup>, C. Arena<sup>3</sup>, D. Walker<sup>4</sup>, G. Yu<sup>4</sup>, L. H. Li<sup>1</sup>, A. G. Davies<sup>1</sup>, G. Savini<sup>3</sup>, E. H. Linfield<sup>1</sup> and B. N. Ellison<sup>2</sup>**

<sup>1</sup> School of Electronic and Electrical Engineering, University of Leeds, Leeds, LS2 9JT, UK

<sup>2</sup> STFC Rutherford Appleton Laboratory, Harwell Oxford, Didcot, OX11 0QX, UK


<sup>3</sup> Department of Physics and Astronomy, University College London, London, WC1E 6BT, UK

<sup>4</sup> National Facility for Ultra Precision Surfaces, OpTIC Centre, St. Asaph, LL17 0JD, UK

\*Contact Email: a.valavanis@leeds.ac.uk

## Introduction

An “elegant breadboard” system has been developed, which demonstrates the integration of terahertz-frequency (THz) sources, optics and compact cryocooler technology for the LOCUS satellite (Linking Observations of Climate, the Upper Atmosphere and Space Weather) [1]. This proposed satellite instrument has the aim of providing the first global mapping of key molecular species within the mesosphere and lower thermosphere (MLT) from low-earth orbit (LEO), using compact radiometers operating in the 0.8–4.7-THz band and a set of infrared detectors. The LOCUS THz radiometers will incorporate planar-Schottky-diode (SD) mixers, driven using waveguide-integrated local-oscillators (LOs). The LOs will be based on SD multipliers operating at 0.8 and 1.1 THz, and THz quantum-cascade lasers (QCLs) operating at 3.5 and 4.7-THz. A key technological challenge, addressed by the LOCUS elegant breadboard, is the integration of these components into a compact and robust satellite payload, including space-qualified cryocooler technology, and suitable fore-optics. In this paper, we discuss recent progress in QCL integration within the 3.5-THz channel.

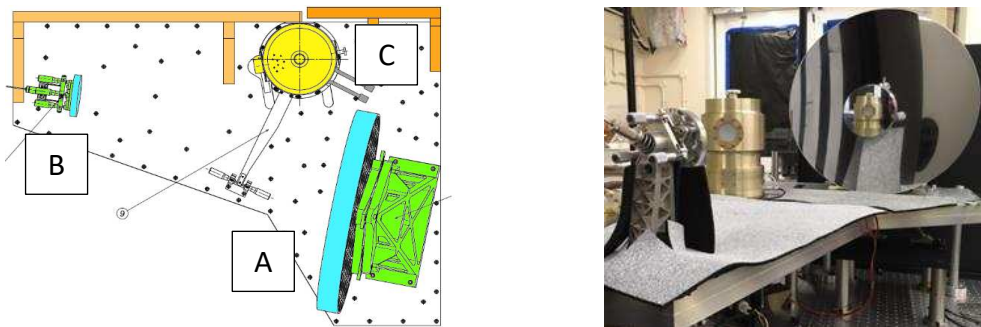


**Fig. 1:** (Left) Top-down CAD illustration of LOCUS breadboard: A, B = telescope optics, C = cryocooler. (Right) Photograph of fully-constructed system.

## 1. System architecture

Figure 1 shows a CAD illustration and photograph of the LOCUS elegant breadboard system, which is constructed on a custom-machined aluminium supporting plate. A Cassegrain telescope configuration (A,B) is used for the fore-optics to yield a compact instrument envelope ( $< 1 \text{ m}^3$ ). A 480-mm-diameter diamond-turned concave primary mirror, and 100-mm convex secondary were designed to yield 2-km atmospheric-layer resolution from an 800-km altitude, and onto a 25-mm focal plane diameter. The optical focal-plane lies within a compact, space-qualified Sterling-cycle cryocooler. Within a flight-ready system, the mixer and LO for each channel will

be mounted within the cooler. In the present configuration, however, the LO source under-test has been mounted individually, and used as an emitter to test the optical system integration.

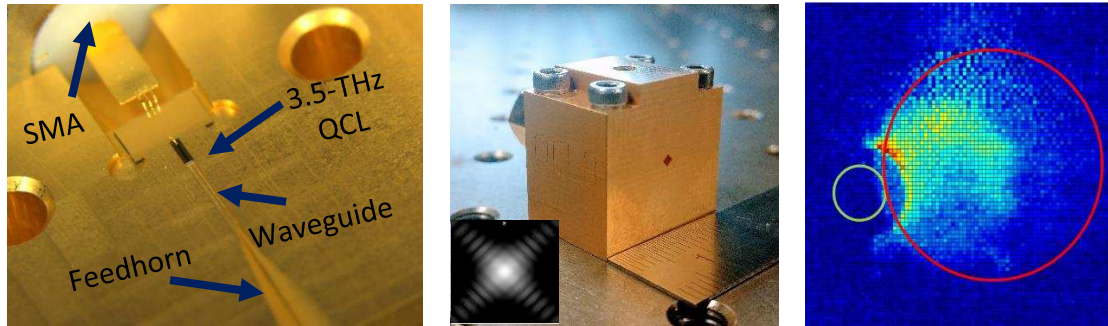

**Fig. 2:** (Left) 3.5-THz QCL mounted within a 150- $\mu\text{m}$ -wide waveguide channel. (Centre) Complete assembled QCL/waveguide enclosure, with diagonal feedhorn aperture visible. Inset: Simulated far-field beam pattern. (Right) Measured near-field profile from Cassegrain optics showing location of primary and secondary mirrors (large and small circles, respectively).

For the LO, a 3.5-THz QCL, based on the active region in [2] has been processed into a double-metal ridge waveguide with 75- $\mu\text{m}$  width, and the substrate reduced through mechanical and chemical etching to a thickness of 90  $\mu\text{m}$ . The device was cleaved to a length of 980- $\mu\text{m}$  and diced into a 110- $\mu\text{m}$ -wide chip. The QCL was subsequently solder-mounted within a precision micro-machined 130- $\mu\text{m}$ -wide  $\times$  75- $\mu\text{m}$ -deep channel within an oxygen-free copper enclosure (Fig. 2:left), and ribbon-bonded to an integrated SMA connector. A second, symmetrical copper section was attached above the QCL to form a rectangular waveguide enclosure around the device. In contrast to our previous work [3], a single QCL ridge has been used, and a diagonal feedhorn (Fig. 2:center) has been integrated into the waveguide structure to improve free-space coupling.

## 2. Results and conclusion

The QCL waveguide block was mounted within the cryocooler and driven in continuous-wave (cw) operation using a dc current source. The cryocooler was found to provide sufficient heat-lift at the optimal QCL bias (3 W) and maintained a stable temperature of 60 K. The THz output power was measured using a photoacoustic power meter as  $> 8$  mW, and the beamwidth was found to be 5–8 $^\circ$ , using a raster-scanned Golay detector positioned in the far-field of the feedhorn antenna. The telescope optics were positioned and aligned on the breadboard, and the THz beam was measured, using the same technique, in the near-field of the primary mirror. Absorbing media were placed adjacent to the beam-path to eliminate stray reflections. Fig. 2:right shows that successful propagation of the 3.5-THz signal along the complete optical path has been achieved. Subsequent alignment optimisation is expected to eliminate the slight field-truncation caused by the positioning of the secondary mirror, and beam-spillover from the QCL source.

In conclusion, we have integrated a 3.5-THz QCL-LO, waveguide and feedhorn within a space-qualified cooler, and demonstrated successful propagation of radiation through a custom-machined Cassegrain optical system. This is a key step in raising the technology-readiness level of core system components for the proposed LOCUS satellite instrument.

## References

- [1] S. P. Rea et al., “The Low-Cost Upper-Atmosphere Sounder (LOCUS),” in 26th international symposium on space terahertz technology, Cambridge, MA, 2015.
- [2] G. Scalari et al., “Far-infrared ( $\lambda \approx 87\mu\text{m}$ ) bound-to-continuum quantum-cascade lasers operating up to 90 K,” *Appl. Phys. Lett.*, vol. 82, no. 19, pp. 3165–3167, May 2003.
- [3] A. Valavanis et al., “Mechanically robust waveguide-integration and beam shaping of terahertz quantum cascade lasers,” *Electron. Lett.*, vol. 51, no. 12, pp. 919–921, Jun. 2015.