

SYSTEM IDENTIFICATION AND SPEED CONTROL OF ELECTRO-
MECHANICAL DUAL ACTING PULLEY CONTINUOUSLY VARIABLE
TRANSMISSION

MOHD AZWARIE MAT DZAHIR

A thesis submitted in fulfilment of the
requirements for the award of the degree of
Doctor of Philosophy (Mechanical Engineering)

Faculty of Mechanical Engineering
Universiti Teknologi Malaysia

SEPTEMBER 2017

Specially dedicated to:

My beloved parents:

Mat Dzahir Ali

Zaimah Mohamad

My brother and sisters:

Siti Nor Azlima, Mohd Azuwan, Nor Azmiera,

Nor Anisa and Nor Atiqah

ACKNOWLEDGEMENT

Alhamdulillah, all praises to Allah S.W.T. His Blessings and guidance have given me inspiration and strength to prepare, to complete as well as to submit this thesis properly.

I owe my deepest appreciation to my parents for their nurturing and love. Their continued encouragement, supports, advice and whole-hearted prayers have guided me to successfully overcome my life's difficulties and problems with confidence, faith and courage. I am genuinely indebted to my twin brother, Mohd Azuwan Mat Dzahir who constantly motivated me to strive earnestly in my study. I would also like to thank to all my siblings and other family members for their supports throughout all along.

I also wish to convey my utmost appreciation and gratitude to my research advisors Assoc. Prof. Dr. Mohamed Hussein, Assoc. Prof. Dr. Kamarul Baharin Tawi, Assoc. Prof. Dr. Shafiek Yaacob and Dr. Bambang Supriyo. Their continuous advice, motivation and assistance throughout this research have significantly encouraged me in achieving academic goals. Without their sustained supports and interests, this thesis would not have been possible and appeared the same as it is being presented now.

I owe my sincere gratitude to all of them and may Allah S.W.T bless each and every one of us, *Insyaa Allah*.

ABSTRACT

Researchers at Universiti Teknologi Malaysia (UTM) has designed, developed and patented an Electro-Mechanical Dual Acting Pulley Continuously Variable Transmission (EMDAP CVT). The newly developed EMDAP CVT is a complex nonlinear system. Since the system is difficult to be modeled, designing the suitable controller for the EMDAP CVT is a challenging task. However, it is possible to obtain model system and transfer function by employing System Identification (SI) technique. By having mathematical representation of the EMDAP CVT in form of transfer function, controller's analysis and future works relating to the EMDAP CVT will be much easier. The main part of this research is to develop a model which is able to imitate the current EMDAP CVT system behaviours. Therefore, SI was performed to develop the model system and transfer function. Genetic Algorithm (GA) is used as an estimator with Nonlinear ARX (NARX) as a model structure. The mathematical modelling of the EMDAP CVT system is successfully presented and verified in form of 3rd order nonlinear transfer function. The focus of this research work is more on the implementation of speed control for the EMDAP CVT system based on model obtained from the SI. The EMDAP CVT speed controllers are designed for adjusting speed through providing appropriate CVT ratio to the system. The control objective is to achieve a desired output speed, which is used to specify and maintain the desired CVT ratio for the EMDAP CVT system. Proportional-Integral-Derivative (PID) controller is used as the basis and then fine tuned using conventional Ziegler-Nichols and Particle Swarm Optimization (PSO) method. Three controllers which are Proportional-plus-PSO (P-PSO), Proportional-Derivative-plus-PSO (PD-PSO) and Proportional-Integral-Derivative-plus-PSO (PID-PSO) were developed to test the reliability of the obtained model system and transfer function. The performance of the designed controllers was demonstrated and validated through simulations and experiments. The error performance of the developed controllers is evaluated in terms of Integral of Absolute Error (IAE), Integral Square of Errors (ISE), Integral of Time multiplied by Absolute Errors (ITAE), and Mean Square Error (MSE). Based on the results, the PIDPSO speed controller gives a sufficient performance, such as settling time, overshooting and error performance. The validation approach resulted in lower than 5% percentage error thus verified the 95% confidence limit of the model system. Further controller's analysis using Fuzzy Logic (FL) and Neural Network (NN) controllers were performed on the obtained model system and transfer function. The performance of the tested controllers were evaluated in terms of Steady State Error (SSE) and MSE values. All of the tested controllers produced good performance with steady state response within 5 seconds and SSE percentage lower than 5%. The end results show that, NARMA-L2 neural speed controller gives the best performance with SSE percentage of 0.91% and smallest MSE value of 3.28.

ABSTRAK

Penyelidik di Universiti Teknologi Malaysia (UTM) telah mereka bentuk, membangun dan mempatenkan sebuah penggerak-dua-takal-elektro-mekanikal penghantar kuasa pembolehubah berterusan (EMDAP CVT). Oleh kerana sistem ini sukar dimodelkan, mereka bentuk pengawal yang sesuai untuk EMDAP CVT adalah tugas yang mencabar. Walaubagaimanapun, adalah mungkin untuk mendapatkan sistem model dan fungsi pindah dengan menggunakan teknik Pengenalan Sistem (SI). Dengan mempunyai perwakilan matematik untuk EMDAP CVT dalam bentuk fungsi pindah, analisis pengawal dan kerja-kerja masa depan yang berkaitan dengan EMDAP CVT akan menjadi lebih mudah. Bahagian utama penyelidikan ini adalah untuk membangunkan model yang dapat meniru tingkah laku sistem EMDAP CVT. Oleh itu, SI telah dilakukan untuk membangunkan sistem model dan fungsi pindah. Algoritma Genetik (GA) digunakan sebagai penganggar dengan Nonlinear ARX (NARX) sebagai struktur model. Permodelan matematik untuk sistem EMDAP CVT berjaya dibentangkan dalam bentuk fungsi pindah tak linear ketiga. Tumpuan kerja penyelidikan ini lebih kepada pelaksanaan kawalan laju untuk sistem EMDAP CVT dengan berdasarkan model yang diperolehi daripada SI. Pengawal kelajuan EMDAP CVT direka untuk menyesuaikan kelajuan dengan memberikan nisbah CVT yang sesuai kepada sistem. Objektif kawalan adalah untuk mencapai kelajuan output yang dikehendaki, yang digunakan untuk menentukan dan mengekalkan nisbah CVT yang dikehendaki sistem EMDAP CVT. Pengawal Proportional-Intergal-Derivative (PID) telah digunakan sebagai pengawal asas dan kemudian ditala menggunakan kaedah konvensional Ziegler-Nichols dan kaedah Particle Swarm Optimization (PSO). Tiga pengawal seperti Proportional-plus-PSO (P-PSO), Proportional-Derivative-plus-PSO (PD-PSO) dan juga Proportional-Integral-Derivative-plus-PSO (PID-PSO) dibangunkan untuk menguji sistem model EMDAP CVT dan fungsi pindah yang diperolehi. Prestasi pengawal yang direka telah ditunjukkan dan disahkan melalui simulasi dan eksperimen. Prestasi kesilapan pengawal yang dibangunkan dinilai dari segi Integral of Absolute Error (IAE), Integral Square of Errors (ISE), Integral of Time multiplied by Absolute Errors (ITAE), dan juga Mean Square Error (MSE). Berdasarkan keputusan, pengawal kelajuan PID-PSO memberikan prestasi yang mencukupi, seperti masa penetapan, keterlaluhan dan kesilapan prestasi. Pendekatan pengesahan menunjukkan ralat peratusan dibawah 5% mengesahkan had keyakinan 95% sistem model. Analisis pengawal lanjutan menggunakan pengawal Fuzzy Logic (FL) dan Neural Network (NN) dilakukan pada sistem model dan fungsi pindah yang diperolehi. Prestasi pengawal yang diuji telah dinilai dari segi Steady State Error (SSE) dan nilai MSE. Kesemua pengawal yang diuji menghasilkan prestasi yang bagus dengan respon keadaan mantap sekitar 5 saat dan peratusan SSE dibawah 5%. Keputusan akhir menunjukkan pengawal kelajuan NARMA-L2 neural memberikan prestasi terbaik dengan peratusan SSE 0.91% dan nilai MSE terkecil 3.28.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	xi
	LIST OF FIGURES	xiii
	LIST OF ABBREVIATION	xix
	LIST OF SYMBOLS	xxii
	LIST OF APPENDICES	xxiv
1	INTRODUCTION	1
	1.1. Introduction	1
	1.2. Problem Statement	4
	1.3. Research Objectives	4
	1.4. Scopes and Limitation	4
	1.5. Research Methodology	5
	1.6. Research Contributions	9
	1.7. Structure of Thesis	10
2	LITERATURE REVIEW	12
	2.1. Introduction	12
	2.2. Development of Automotive Transmission System	12
	2.2.1. Continuous Variable Transmission	13
	2.2.2. Efficiency Losses in CVT	17
	2.2.2.1. Power Losses	18

	2.2.2.2. Belt Slip	19
	2.3. System Identification on CVT	20
	2.3.1. System Identification History	23
	2.3.2. Identification for Control	25
	2.4. CVT Speed Ratio and Ratio Controls	26
	2.4.1. Classical Control	31
	2.4.2. Advanced Control	35
	2.5. Basic Speed Ratio Control for EMDAP CVT System	40
	2.5.1. Tuning PID Parameters	41
	2.5.1.1. Ziegler-Nichols Oscillatory Responds	42
	2.5.1.2. Åström-Hägglund Relay Feedback	44
	2.5.2. PSO Tuning of PID Parameters	45
	2.6. Summary	48
3	THE EMDAP CVT SYSTEM AND TEST RIG DESCRIPTION	50
	3.1. Introduction	50
	3.2. Preliminaries	50
	3.2.1. Pushbelt CVT Working Principles	51
	3.2.2. Definitions	52
	3.2.3. The EMDAP CVT System	52
	3.2.3.1. The EMDAP CVT System Control Objectives	55
	3.2.4. EMDAP CVT DC Motor System	55
	3.2.5. EMDAP CVT Speed Sensor	57
	3.2.6. Experimental Test-rig Engine	60
	3.2.7. System Power Supply	60
	3.3. Experimental Setup	61
	3.3.1. Instrumental and Data Acquisition System	63
	3.3.2. Software Development	66
	3.4. Summary	69
4	EMDAP CVT IDENTIFICATION	70
	4.1. Introduction	70

4.2. Identification Experiment I	71
4.2.1. Selection of Input Signal	71
4.2.1.1. PRBS Signal	72
4.2.1.2. PRMS Signal	72
4.2.2. Prior Experimental Test and Results	73
4.2.3. Prior Experimental Test Discussion	75
4.3. Identification Experiment (II)	78
4.3.1. Model Structure Selection	78
4.3.2. Linear and Nonlinear Identification	79
4.3.3. Model Validation	94
4.3.3.1. Mean Square Error (MSE)	94
4.3.3.2. Correlation Test	96
4.4. Model Simulation and Discussion	99
4.5. Summary	100
5	
EMDAP CVT CONTROL	101
5.1. Introduction	101
5.2. PID Controller	101
5.2.1. Ziegler-Nichols Tuning Method	102
5.2.1.1. Setting Initial PID Parameters	103
5.3. Particle Swarm Optimization (PSO)	107
5.3.1. PSO Tuning Method	108
5.4. PSO Tuning Settings	109
5.4.1. Selection of PSO Parameters	110
5.4.2. Performance Indices for the PSO Algorithm	110
5.4.3. Parameter Optimization	111
5.5. Simulation Testing	111
5.5.1. P-PSO Controller	112
5.5.2. PD-PSO Controller	113
5.5.3. PID-PSO Controller	115
5.6. Simulation Results and Comparison	117
5.6.1. Performance Related to Steady State Conditions	118
5.6.2. Simulation Robustness Investigation	119

	5.7. Experimental Validation	120
	5.7.1. Experimental Results	121
	5.7.2. Validation Results	127
	5.8. Summary	130
6	FURTHER CONTROLLER ANALYSIS	131
	6.1. Introduction	131
	6.2. Fuzzy Logic Controller	132
	6.2.1. Fuzzy Logic Speed Controller	132
	6.2.2. Design of FPIDPSO speed Controller	133
	6.2.2.1. Input and Output Variables	134
	6.2.2.2. Fuzzification	135
	6.2.2.3. Fuzzy Inference	140
	6.2.2.4. Defuzzification	141
	6.2.3. Fuzzy Results and Discussion	142
	6.3. Neural Network (NN) Controller	144
	6.3.1. NN Predictive Controller	144
	6.3.2. NARMA-L2 Neural Controller	148
	6.4. Performances Evaluation	152
	6.5. Summary	154
7	CONCLUSIONS AND FUTURE WORKS	155
	7.1. Conclusions	155
	7.2. Future Works	157
	REFERENCES	158
	Appendices A-D	175-178

LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	System identification performed on CVT	22
2.2	CVT ratio controller utilizing PID based Controller	33
2.3	CVT ratio controller utilizing Fuzzy Logic Controller	37
2.4	CVT ratio controller utilizing Fuzzy-PID controller	39
2.5	Ziegler-Nichols formula for oscillatory response mehod	44
3.1	The specification of the BLDC motor	56
3.2	Manual speed sensors calibration results	59
4.1	The initialized selected parameters value for linear identification	82
4.2	The initialized selected parameters value for nonlinear identification	85
4.3	MSE value linear and nonlinear identification	95
5.1	The proposed controllers initial PID parameters	104
5.2	The initialized value for selected parameters	110
5.3	Proposed speed controller parameters gain	117
5.4	Time domain specifications comparison	119
5.5	Z-N and PSO tuning methods performance indexes comparison	119
5.6	Overshoot percentage and steady state error for proposed controller	122
6.1	FPIDPSO-5MF input and output variables, linguistic and label	136
6.2	FPIDPSO-7MF input and output variables, linguistic and label	138
6.3	FPIDPSO-5MF rules for K'_p , K'_i , and K'_d	141

6.4	FPIDPSO-7MF rules for K'_p , K'_i , and K'_d	141
6.5	Steady state error performance and MSE value for testing controllers	153

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	The System Identification (SI) procedure	5
1.2	Research control diagram	7
1.3	Research flow chart	8
2.1	Leonardo Da Vinci's CVT sketch	15
2.2	EMPAct CVT	16
2.3	Dry hybrid belt electro-mechanical CVT	17
2.4	EMDAP CVT	17
2.5	CVT system typical operating characteristics	28
2.6	A critical point in the Nyquist plot	42
2.7	Oscillatory response	43
2.8	Relay feedback	44
2.9	Outputs of control variable (u) and process variable (y)	45
2.10	PSO Algorithm flowchart	48
3.1	A schematic diagram of the pushbelt CVT variator	51
3.2	A schematic diagram of the ideal geometric belt configuration	51
3.3	The EMDAP CVT system	53
3.4	(a) Under-drive (b) 1:1 Ratio (c) Over-drive	55
3.5	BLDC Motor	56
3.6	Torque-speed curve characteristic of the BLDC motor	56
3.7	BLDC speed controller unit	57
3.8	Block diagram manually control of DC motor system	57
3.9	EMRON encoder	58
3.10	Signal conditioning of speed sensor	58
3.11	Geartooth speed sensor	59

3.12	Graph of time versus speed reading for both sensors	60
3.13	Block diagram of EMDAP CVT test rig control unit	61
3.14	Schematic representation of the experimental setup	62
3.15	Actual representation of the experimental setup	63
3.16	Computer information	64
3.17	DAS-1602 card	64
3.18	DAS-1602 analog input output connector	65
3.19	DAS-1602 digital input output connector	65
3.20	Simulink block diagram of manual control for the EMDAP CVT system interface	67
3.21	Main Simulink block diagram for the manual control for the EMDAP CVT system Simulink program	68
3.22	Block diagram for speed control part	69
4.1	Block diagram of the identification experiment around a certain operating point	72
4.2	PRBS	72
4.3	PRMS	73
4.4	Prior experimental results of the desired CVT ratio versus CVT ratio based on speed with PRMS input signal	74
4.5	Prior experimental results of the desired CVT ratio versus CVT ratio based on position with PRMS input signal	74
4.6	Prior experimental results of the CVT ratio based on speed versus CVT ratio based on position with PRMS input signal	75
4.7	Experimental results of the CVT ratio based on position and speed	76
4.8	Experimental results of the CVT ratio based on position	76
4.9	Output response of ratio based on position and speed with different setting points	77
4.10	Input and output data for identification	80
4.11	Parameter estimation stage for prior experiment data	81
4.12	The principle scheme for parameters estimation	81
4.13	Output responses for Linear models with number of lags	83

	(a) 10, (b) 20, and (c) 30	
4.14	Identification errors for Linear models with number of lags (a) 10, (b) 20, and (c) 30	83
4.15	Poles-zeros maps for Linear models with number of lags (a) 10, (b) 20, and (c) 30	84
4.16	Root locus maps for Linear models with number of lags (a) 10, (b) 20, and (c) 30	84
4.17a	Model output for 3rd order nonlinear model with input-output lags 30	86
4.17b	Closer view for model output for 3rd order nonlinear model with input-output lags 30	86
4.18	Output responses for 2nd order nonlinear models with number of lags (a) 10, (b) 20, and (c) 30	87
4.19	Identification errors for 2nd order nonlinear models with number of lags (a) 10, (b) 20, and (c) 30	87
4.20	Output responses for 3rd order nonlinear models with number of lags (a) 10, (b) 20, and (c) 30	88
4.21	Identification errors for 3rd order nonlinear models with number of lags (a) 10, (b) 20, and (c) 30	88
4.22	Closer view of 3rd order nonlinear model output responses with number of lags 30 at different operating points	89
4.23	Complexity of 3rd order nonlinear model with number of lags 30 before and after tuned over MSE value	90
4.24	Complexity of 2nd order nonlinear model before and after tuned with number of lags (a) 10, (b) 20, and (c) 30	91
4.25	Complexity of 3rd order nonlinear model before and after tuned with number of lags (a) 10, (b) 20, and (c) 30	91
4.26	Pole-Zero maps for 2nd order of nonlinear model with number of lags (a) 10, (b) 20, and (c) 30	92
4.27	Root locus maps for 2nd order of nonlinear model with number of lags (a) 10, (b) 20, and (c) 30	92
4.28	Pole-Zero maps for 3rd order of nonlinear model with	93

	number of lags (a) 10, (b) 20, and (c) 30	
4.29	Root locus maps for 3rd order of nonlinear model with number of lags (a) 10, (b) 20, and (c) 30	93
4.30	Figure 4.30: Correlation tests	98
4.31	Simulator block diagram for simulation test	99
4.32	Simulated output response of the model with random PRMS input	100
4.33	Simulated CVT ratio response of the model with random PRMS input	100
5.1	Simulation process block diagram	104
5.2	Output speed response of the system with $K_c = 180$	105
5.3	P speed controller output response	106
5.4	PD speed controller output response	106
5.5	PID speed controller output response	106
5.6	PSO tuning algorithm	109
5.7	General block diagram for the PID-PSO speed controllers	112
5.8	P-PSO speed controller block diagram	113
5.9	Best solution of K_p for P-PSO speed controller within 50 generations	113
5.10	PD-PSO speed controller block diagram	114
5.11	Best solution of K_p and K_d for PD-PSO speed controller within 50 generations	115
5.12	PID-PSO speed controller block diagram	116
5.13	Best solution of K_p , K_i and K_d for PD-PSO speed controller within 50 generations	116
5.14	IAE value for PID-PSO speed controller within 50 generations	117
5.15	Output response performance comparison	118
5.16	Experimental test engine speed setting points	121
5.17	P-PSO, PD-PSO and PID-PSO speed controllers output system responses with different setting points	123
5.18	Single speed change output responses	124
5.19	Multiple speed change with two CVT ratio shifts output	125

	responses	
5.20	Multiple speed change with three CVT ratio shifts output responses	126
5.21	Simulation and experimental output responses for PID-PSO speed controller with different setting points	128
5.22	PID-PSO speed controller steady state errors performance	129
5.23	Simulation and experimental results validation error performance	129
6.1	Fuzzy logic speed controller block	133
6.2	Block diagram of FPIDPSO speed controllers for EMDAP CVT system	133
6.3	Basic structure of FPID-PSO speed controllers	134
6.4	Fuzzy inference block	134
6.5	FPIDPSO-5MF controller membership function of error (e)	137
6.6	FPIDPSO-5MF controller membership function of derivative error (de)	137
6.7	FPIDPSO-5MF controller membership function of tuning factors	137
6.8	FPIDPSO-7MF controller membership function of error (e)	139
6.9	FPIDPSO-7MF controller membership function of derivative error (de)	139
6.10	FPIDPSO-7MF controller membership function of tuning factors	139
6.11	FPIDPSO speed controllers simulink block diagram	143
6.12	FPIDPSO speed controllers output responses	143
6.13	Neural Network process diagram	144
6.14	The neural network plant model structure	144
6.15	NN Predictive controller plant input output data	145
6.16	Training data for NN predictive control	145
6.17	Best validation performance for trained NN plant model	146
6.18	Block diagram of NN predictive controller for EMDAP	146

	CVT speed control	
6.19	NN Predictive speed controller output response	147
6.20	Output CVT ratio performance	147
6.21	Structure of a neural network representation	149
6.22	NARMA-L2 Neural controller block diagram	149
6.23	Training data for NARMA-L2 control	150
6.24	Best validation performance for trained NARMA-L2 plant model	150
6.25	NARMA-L2 neural speed controller block diagram for EMDAP CVT speed control	151
6.26	NARMA-L2 neural speed controller output response	151
6.27	The EMDAP CVT system model outputs performances	152

LIST OF ABBREVIATIONS

AANN	-	Adaptive Artificial Neural Network
A/F	-	Active Force
AMT	-	Automated Manual Transmission
ARMA	-	Auto-regressive with Moving Average
ARX	-	Auto-regressive with eXogenous
AT	-	Automatic Transmission
BLDC	-	Brushless DC
CVT	-	Continuously Variable Transmission
DAF	-	Van Doorne's Automobiel Fabriek
DAS	-	Data Acquisition System
DC	-	Direct Current
DCT	-	Dual Clutch Transmission
DRG	-	Drive-train Research Group
ECU	-	Electronic Control Unit
ECVT	-	Electronically Controlled CVT
EMAPS	-	Electro-Mechanical Actuated Pulley Sheaves
EMDAP	-	Electro-Mechanical Dual Acting Pulley
EMPA _{ct}	-	Electro-Mechanical Pulley Actuation
FAM	-	Fuzzy Associate Memory
FIS	-	Fuzzy Inference System
FL	-	Fuzzy Logic
FLC	-	Fuzzy Logic Controller
FPID	-	Fuzzy PID
FPID-5MF	-	Fuzzy Proportional Integral Derivative with 5 Membership Functions
FPID-7MF	-	Fuzzy Proportional Integral Derivative with 7 Membership

Functions

GA	-	Genetic Algorithm
HEV	-	Hybrid Electric Vehicle
HMCVT	-	Hydro-Mechanical CVT
I/O	-	Input/Output
IAE	-	Integral of Absolute Error
ICE	-	Internal Combustion Engine
IEEE	-	Institute of Electrical and Electronics Engineers
ISE	-	Integral of Square Error
IS-PID	-	Integral Separation PID
ITAE	-	Integral Time of Absolute Error
MPC	-	Model Predictive Control
MSE	-	Mean Square Error
MT	-	Manual Transmission
NARMA	-	Nonlinear Autoregressive-moving Average
NARX	-	Nonlinear ARX
NB	-	Negative Big
NN	-	Neural Network
NS	-	Negative Small
OOL	-	Optimal Operating Line
PB	-	Positive Big
PC	-	Personal Computer
P	-	Proportional
PPSO	-	Proportional-Particle-Swarm-Optimization
PD	-	Proportional-Derivative
PDPCI	-	Proportional-Derivative-plus-Conditional -Integrator
PDPSO	-	Proportional-Derivative-Particle-Swarm-Optimization
PID	-	Proportional-Integral-Derivative
PIDPSO	-	Proportional-Integral-Derivative-Particle-Swarm-Optimization
P-line	-	Pressure Line
PMF	-	Poison Moment Function
PRBS	-	Pseudo-Random Binary Signal
PRMS	-	Pseudo-Random Multi-level Signal

PS	-	Positive Small
PSO	-	Particle Swarm Optimization
PWM	-	Pulse-Width-Modulation
RCV	-	Ratio Control Valve
RCSV	-	Ratio Control Solenoid Valve
SI	-	System Identification
SISO	-	Single Input Single Output
SPU	-	Speed Controller Unit
TCVT	-	Toroidal CVT
TSK	-	Takagi-Sukeno-Kang
TVO	-	Throttle Valve Opening
UTM	-	Universiti Teknologi Malaysia
VDT	-	Van Doorne's Transmissie B.V.
ZN	-	Ziegler-Nichols

LIST OF SYMBOLS

R_P	-	primary pulley running radius
R_S	-	secondary pulley running radius
$RCVT$	-	CVT ratio
$RCVT_{output}$	-	output CVT ratio
$RCVT_{desired}$	-	desired CVT ratio
V_m	-	BLDC motor speed adjustment voltage
X_P	-	primary pulley position
X_{PO}	-	initial primary pulley position
X_S	-	secondary pulley position
X_{SO}	-	initial secondary pulley position
r_g	-	geometrical ratio
r_s	-	speed ratio
ω_e	-	angular speed of the engine
ω_P	-	angular speed of the primary (input) shaft
ω_S	-	angular speed of the secondary (input) shaft
e	-	system error
e_P	-	primary error
e_S	-	secondary error
$e(s)$	-	error response
de	-	derivative error
K_c	-	critical gain
K_d	-	derivative gain
K_i	-	integral gain
K_p	-	proportional gain
$r(s)$	-	input response
r_{out}	-	output CVT ratio
r_{des}	-	desired CVT ratio

r_{new}	-	new CVT ratio
T_c	-	critical period of oscillation
T_d	-	derivative time
T_P	-	primary torque
T_S	-	secondary torque
T_i	-	integral time
$u(s)$	-	control response
v	-	relative slip
F_P	-	primary clamping force
F_S	-	secondary clamping force
$y(s)$	-	output response

LIST OF APPENDICES

APPENDIX	TITLE	PAGES
A	List of Publications	172
B	Proton Wira CE 1.5 Engine Technical Data	173
C	DAS-1602 Analog and Digital Input	174
D	DAS-1602 Analog and Digital Output	175

CHAPTER 1

INTRODUCTION

1.1 Introduction

A continuously variable transmission (CVT) is used to exchange energy between the flywheel and the wheels. Most of the belt type CVT used in cars are hydraulically actuated. This kind of CVT has efficiency of approximately 85% (Kluger and Long, 1999) which is lesser than manual transmission which has 96% efficiency. The drawback of it is mostly related to high pump and high oil pressure of the hydraulic system. There is also drawback which is caused by the belt loss (Micklem et al., 1996; Ide, 2000; Matthes, 2005). The continuous power consumption of the hydraulic actuator, especially when driving using a constant transmission ratio, causes a power loss which contributes to a big part of the overall CVT loss.

However, in 2010, Universiti Teknologi Malaysia Drive-train Research Group (UTM-DRG) developed the Electro-Mechanical Dual Acting Pulley Continuously Variable Transmission (EMDAP CVT). The EMDAP CVT system which adopts power-screw mechanism, to overcome hydraulic power loss when maintaining constant transmission ratio, and two movable pulley sheaves on each of its pulley shaft, to eliminate belt misalignment. Axial movements of both primary (input) and secondary (output) movable pulley sheaves are electro-mechanically controlled by direct current (DC) motors that turn the power screw mechanism and shift the movable V-pulley sheaves axially. The axial movements of pulley sheaves change the effective pulley-belt contact radii and then consequently change the

transmission ratio. In order to provide sufficient clamping force on the V-belt to avoid slipping or overstress, the secondary DC electric motor adjust the length of the disk spring on secondary pulley accordingly. Therefore, the indirect control objective of the research is to specify the ratio of primary to secondary pulley speed by means of primary axial movements. Importantly, the primary control objective will be to achieve a desired output speed, which is considered a known function of throttle angle and vehicle speed. This desired output speed will be used to specify the desired CVT ratio ($RCVT_{desired}$), and then used it to specify the control input.

Previous work involving the EMDAP CVT mostly emphasizes on the developing the system itself. The first work was carried out by Ariyono (2009) focussed more on controlling the DC motor rotation accordingly to achieve the desired CVT ratio based on intelligent control system using adaptive artificial neural network (AANN). Ariyono's method provides an appropriate CVT ratio based on a vehicle maximum power strategy. He also used the EMDAP CVT as a means of matching the power transfer function between the engine and the transmission system. Additionally, the Proportional-Derivative (PD) ratio controller was applied to provides a suitable CVT ratio to the system such that the engine speed can be kept within its effective range. Ariyono stated that, the end results show the controller developed using standard vehicle performance equations and simplified powertrain model was able to varying the EMDAP CVT ratio from underdrive to overdrive in less than 15sec.

The work was then continued by Supriyo (2010) which emphasizes on the inner loop controller part of the work previously done by Ariyono, in order to improve the EMDAP CVT ratio controller. Supriyo's work focussed more on controlling the movement of the pulley sheaves to provide a suitable CVT ratio to the EMDAP CVT system based on several control algorithms such as PID based controllers consisting of PD and Proportional-Derivative-plus-Conditional-Integrator (PDPCI) and Fuzzy-PID (FPID) controllers. Supriyo's study shows that, the steady state error cannot be eliminated permanently by PD controller. On the other hand, PD-PCI and Fuzzy-PID controllers was able to reduce it significantly. Supriyo's experimental results confirm that when Fuzzy-PID control algorithms applied in EMDAP CVT ratio controller, it provides better performance compared to PD or

PDPCI control algorithms. Both of Ariyono and Supriyo research work around CVT ratio to improve the EMDAP CVT performance. Even though, it able to provide a good CVT ratio into the EMDAP CVT system, the EMDAP CVT output speed performance is still far from exceptional. By directly control the output speed of the EMDAP CVT while providing a good CVT ratio into the EMDAP CVT system, the performance of the EMDAP CVT system can be improve further. It is also hard to develop a controller using the existing system. However, by having mathematical representation of the EMDAP CVT system, controller's development and implementation will become much easier.

The current research involves the identification of the EMDAP CVT system speed change dynamics for improving the ratio change model. The main part of this research, work intensively on developing a system model and transfer function which able to exactly imitate the current EMDAP CVT system behaviours. System Identification (SI) is the field of mathematical modelling of systems using an experimental data. During an identification experiment, signals that excite all relevant system dynamics, are applied to the system inputs, while the system outputs are recorded. By means of a computational method, a mathematical description of the relation between the inputs and outputs is determined. This input-output description is called a mathematical model. However, there exist nonlinearities in the current EMDAP CVT system such as geometrical composition, friction, backlash and dead zone. To overcome this, a nonlinear autoregressive with exogenous input (NARX) is used as a model structure since it does not require detailed knowledge on the complex physical phenomena of the EMDAP CVT system. In following Chapter 4, the EMDAP CVT system dynamics were identified using this procedure.

This research also works on designing and developing a robust EMDAP CVT speed controller on several control algorithms such as PID speed controllers consisting of Proportional-plus-Particle-Swarm-Optimization (P-PSO), Proportional-Derivative-plus-Particle-Swarm-Optimization (PD-PSO), Proportional-Integral-Derivative-plus-Particle-Swarm-Optimization (PID-PSO), Fuzzy Logic (FL) and also Neural Network (NN) speed controller based on model obtained from system identification. The genuity of the proposed speed controllers is validated through simulation and experimental results.

1.2 Problem Statement

The newly developed EMDAP CVT is a complex and non-linear system. Therefore, the challenge of this research is to obtain a model which able to describe the exact behaviour of the EMDAP CVT system. However, it is possible to obtain the system model and transfer function by employing system identification techniques. Secondly, to develop a robust speed controller with a good performance for the EMDAP CVT system. Results from simulation with real system verification and validation will justify the findings.

1.3 Research Objectives

The general research objective is to study the speed change behaviours of the EMDAP CVT system by designing, developing and implementing a speed controller into the system. Several specific objectives are determined as follows:

- (i) to study System Identification (SI) techniques and optimization methods suitable for dynamic modelling of the EMDAP CVT system.
- (ii) to verify and validate the obtained system model and transfer function using simulated system and real plant data.
- (iii) to develop and implement robust speed controllers that able to provide the required transmission speed for the current EMDAP CVT system.

1.4 Scopes and Limitations

The scopes and limitations of this research are:

- (i) The modelling and experimental works are based on the present EMDAP CVT system.

- (ii) Input-output data from experimental is assumed representing the actual EMDAP CVT in vehicle operation.
- (iii) System response delay could occur due to the belt slip, mechanism friction and sensors delay with minimum effect.
- (iv) The nonlinearities are limited to geometrical composition, backlash, friction and dead zone might exist within the system.
- (v) EMDAP CVT ratio shifting only occurs every 0.2 CVT ratio change.
- (vi) Simulation and implementation of the algorithm are conducted using MATLAB/Simulink environment.

1.5 Research Methodology

The methodology of this research, as presented in Figure 1.1 and Figure 1.2, can be described as follows:

- (i) The first phase involves the literature reviews on the EMDAP CVT system, SI, and speed ratio controllers. The literature review provides a deep understanding on EMDAP CVT system and its functions, which is necessary before performing any other activities. The SI method was applied to get the mathematical representation of the EMDAP CVT system. The particular SI procedure used in this research is shown in Figure 1.1.

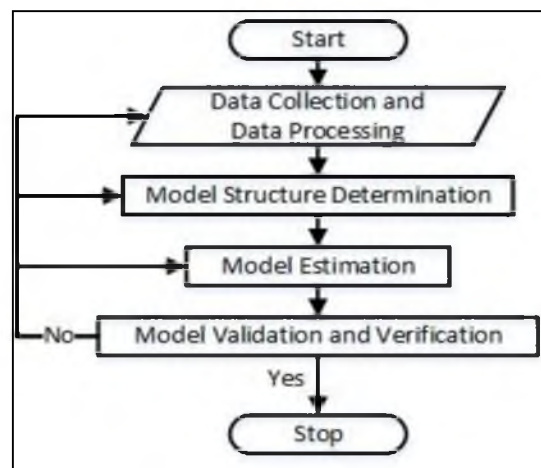


Figure 1.1 The System Identification (SI) procedure.

- (ii) The second phase of the research is the experimental test-rig set up. The experimental test-rig was set up to conduct all experiments including prior experimental test for data collection and also to test the performance of the developed EMDAP CVT speed controller at later stage of the research. To manage all task including the data collection, calibration test as well as the speed controller implementation, a control program was develop using MATLAB/Simulink application.
- (iii) The third phase of the research is system identification experiment. To perform the system identification, a set of time response sample data is needed. A prior experiment was conducted to gather the required data (input and output) from the current EMDAP CVT system for system identification purposes. The system was injected with various input signal such as step, sinusoidal, and also Pseudo-Random Multi-level Signal (PRMS) where these signal represents speed shift patterns. During the data processing, the unwanted noise and delay were removed to obtained the usable data for SI. The data obtained from the experiment the divided into two parts; one for the use of estimation process and the other part for validation purposes. The system parameters needed to construct the model structure of the system were first defined using the estimation data. To construct the model structure, an algorithm was developed using MATLAB/Simulink environment. The model of the system was obtained using this procedure. The model was then validated with the validation data. If the model is acceptable, a simulation process can be conducted and the control algorithm can be implemented; if not, the model needs to be identified again.
- (iv) The fourth phase of the research is evaluation of the proposed controllers for the EMDAP CVT system. Proportional-Integral-Derivative (PID) controller is used as the base controller. After performing calibration, initial PID parameters were estimated. Some of the existing experimental PID tuning techniques from literatures were reviewed. The selected tuning method to acquire initial PID parameters was based on Ziegler-Nichols formula utilizing relay

feedback experiment of the EMDAP CVT system to determine the critical gain (K_c) and critical period (T_c). The initial PID parameter were then, fined tuned using an algorithm based on Particle Swamp Optimization (PSO) method. Several literatures on PSO were reviewed to assists the construction of the tuning algorithm. The controller is tuned and acceptable results were achieved.

- (v) The fifth phase of the research is the validation results. In this phase, the developed controllers from the simulation were tested onto the experimental test-rig. Tests were conducted to observed the performance of the developed controllers. The output results were validated by comparing the results from the actual experimental tests with the results from the simulation. The research control diagram is shown in Figure 1.2 and the research flow chart is shown in Figure 1.3 respectively.

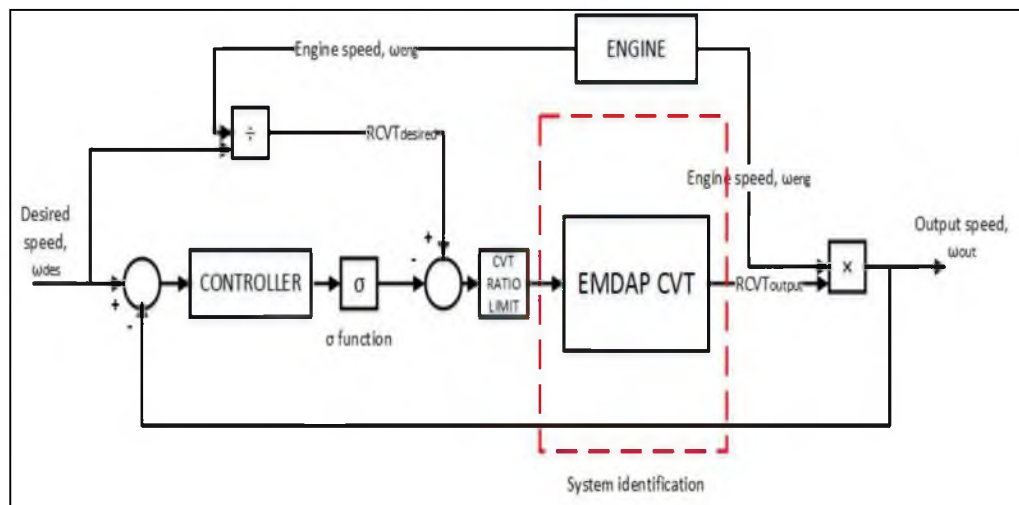


Figure 1.2 Research control diagram.

- (vi) The final phase of the research is further controller's analysis which involve further speed control evaluation of the EMDAP CVT system to test the reliability and robustness of the EMDAP CVT system model obtained and best controller for EMDAP CVT application.

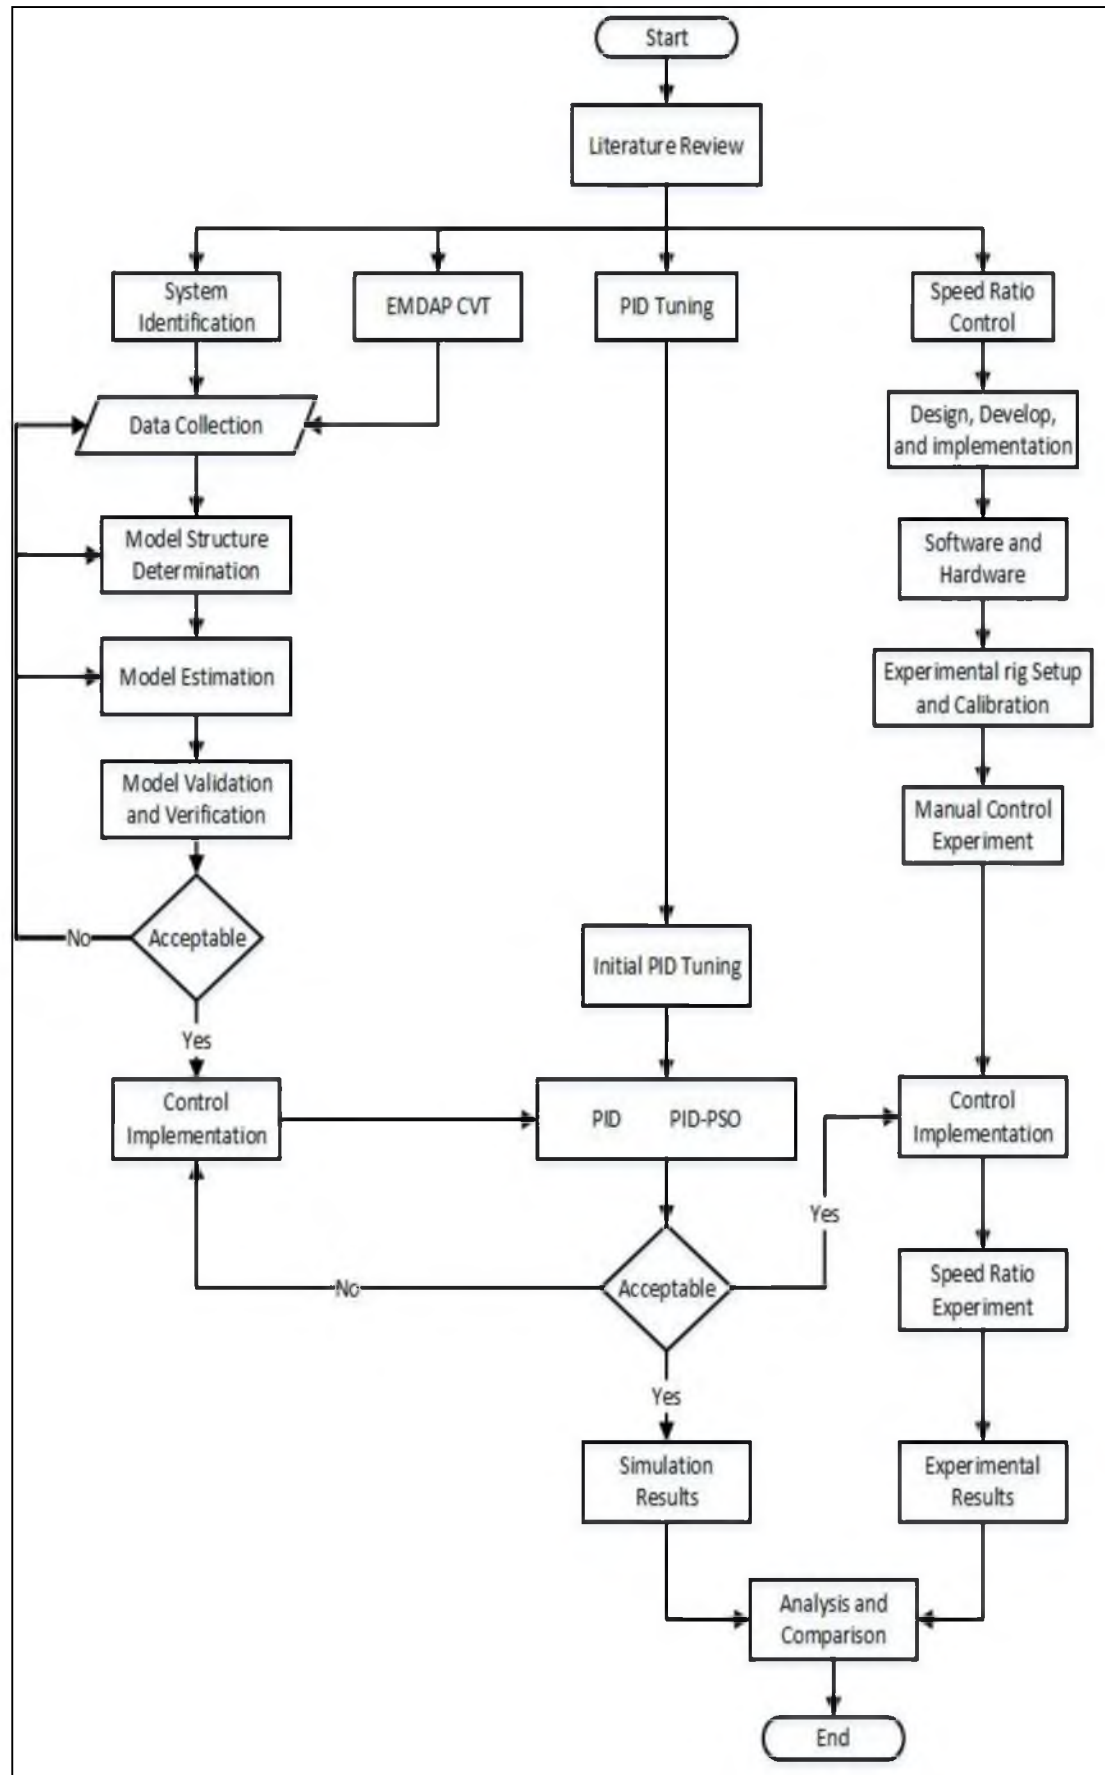


Figure 1.3 Research flow chart.

1.6 Research Contributions

This research aims to provide further improvement to the EMDAP CVT system. In 2009, Ariyono designed the EMDAP CVT prototype based on the dual acting pulley electromechanical system. Ariyono developed a drivetrain model of a vehicle equipped with EMDAP CVT system. Most of his work was focused on control strategy to control EMDAP CVT ratio using adaptive neural network (ANN). The research was then further continued by Supriyo (2010). In his research, Supriyo designed, developed and implemented electronic hardware for EMDAP CVT experimental test-rig and MATLAB/Simulink control algorithm program for EMDAP CVT ratio controller. His work focussed more on designing and developing EMDAP CVT ratio controllers in time domain analysis based on several algorithms. Two most important objectives of Suptiyo work are to eliminate both steady state power loss and belt misalignment (Supriyo, 2010). By implementing power screw mechanism to maintain its constant transmission ratio, the first problem was solved without consuming any power. Then the second problem was overcome by adopting two movable pulley sheaves on each pulley shaft to keep the belt continuously aligned.

The newly developed EMDAP CVT is a complex and non-linear system as mentioned in Section 1.2. One of the contributions of this research is to develop a simple and reliable transfer function of the EMDAP CVT system which is able to precisely imitate the actual system process. With the acquired transfer function model, future works related to the system will be much easier. This can be achieved by performing a System Identification (SI) on the EMDAP CVT system. The SI process of the EMDAP CVT will be further discussed in Chapter 4.

Both of the previous researchers, Ariyono (2009) and Supriyo (2010), contribute to the ratio controller of EMDAP CVT system. However, they barely mention about the speed control. The second contribution of this research is designing, developing and implementing the speed controller for the EMDAP CVT system. Besides controlling the EMDAP CVT system speed, the developed controller should also able to provide an appropriate transmission ratio for the

current system. The detailed explanation about the EMDAP CVT speed control is discussed in Chapter 5. In addition, for the third contribution of the research, a control algorithm program for EMDAP CVT speed controller using MATLAB/Simulink platform was also developed.

1.7 Structure of Thesis

This thesis contains seven chapters. Chapter 1 introduces and highlights the importance of the study. Chapter 2 presents the literature review. Several types of transmissions are briefly reviewed. Then, the review focuses on existing works related to CVT controls. The gaps are identified, and justifications of the research objectives and research methodology are presented.

Chapter 3 presents the EMDAP CVT system descriptions. This chapter presents the basic concept of CVT and elaborates more on EMDAP CVT especially in terms of hardware and software design, as well as procedure of performing speed control. This chapter describes the main mechanical and electronic parts of EMDAP CVT, and also the interfacing unit which makes possible for the EMDAP CVT to communicate with the computer via Data Acquisition (DAQ) system. The experimental test rig is set up and the CVT ratio is validated based on geometrical CVT ratio. The development of the manual control for EMDAP CVT system Simulink program was also presented in this chapter.

Chapter 4 presents the system identification process performed on the EMDAP CVT system. The input and output data were obtained from the prior experimental test conducted in Chapter 3. Nonlinear ARX (NARX) model was introduced as the model structure, and was constructed using genetic algorithm (GA). The obtained system model was also validated using several validation test methods such as Mean Square Error (MSE) and correlation tests.

Chapter 5 presents the control system part of the research. Using the obtained EMDAP CVT system model, control simulation testing was performed. At the start

REFERENCES

- Adachi, K., Ochi, Y. and Kanai, K. (2006). Development of CVT control system and its use for fuel-efficient operation of engine, *Asian Journal of Control* 8 (3) 219–226.
- Adel, T., Ali, L. and Abdelkader, C. (2013). A PSO Approach for Optimum Design of Multivariable PID Controller for Nonlinear System. *International Conference on Control, Engineering and Information Technology (CEIT' 13), Proceedings Engineering and Technology*. Vol. 2, pp. 206-210.
- Ahn, K. K. and Anh, H. P. H. (2010). Inverse Double NARX Fuzzy Modeling for System Identification. *IEEE/ASME Transactions on Mechatronics*, 15, pp. 136-148.
- Akaike, H. (1974). Stochastic theory of minimal realization, *IEEE Trans. Automatic Control* 26: 667–673.
- Akehurst, S., Vaughan, N. D., Parker, D. A. and Simmer, D. (2004). Modeling of loss mechanisms in a pushing metal V-belt continuously variable transmission. Part 1: torque losses due to band friction, *Proc. Inst. Mech. Eng. D J. Automob. Eng.* 218 (11): 1269–1281.
- Akehurst, S., Vaughan, N. D., Parker, D. A. and Simmer, D. (2004). Modeling of loss mechanisms in a pushing metal V-belt continuously variable transmission. Part 2: pulley deflection losses and total torque loss validation, *Proc. Inst. Mech. Eng. D J. Automob. Eng.* 218 (11): 1283–1293.
- Akehurst, S., Vaughan, N. D., Parker, D. A. and Simmer, D. (2004). Modeling of loss mechanisms in a pushing metal V-belt continuously variable transmission. Part 3: belt slip losses, *Proc. Inst. Mech. Eng. D J. Automob. Eng.* 218 (11): 1295–1306.
- Åkeson, B. M. and Toivonen, H. T. (2006). A Neural Network Model Predictive Controller. *Journal of Process Control*, vol.16: 937-946.

- Amisigo, B. A., Giesen, N. v. d., Rogers, C., Andah, W. E. I., & Friesen, J. (2007). Monthly Stream Flow Prediction in the Volta Basin of West Africa: A SISO NARMAX polynomial modelling. *Physics and Chemistry of the Earth*, 33(1-2), 141-150.
- Anderson, B., Moore, J. and Hawkes, R. (1978). Model approximation via prediction error identification, *Automatica* 14: 615–622.
- Angelov, P., Gegov, A., Jayne, C. and Shen, Q. (2016). Advance in Computational Intelligence System.
- Ariyono, S. (2009). *Intelligent Electromechanical Continuously Variable Transmission Ratio Controller*. Phd. Thesis: Universiti Teknologi Malaysia.
- Asano, K. (2004). Koyo's Approach to Continuously Variable Transmissions (CVT) for Automobiles. *Koyo Engineering Journal English Edition*. 1(164E): 14-18.
- Åström, K. J. (1980). Maximum likelihood and prediction error methods, *Automatica* 16: 551–574.
- Åström, K. J. and Bohlin, T. (1965). Numerical identification of linear dynamic systems from normal operating records, Proc. IFAC Symposium on Self-Adaptive Systems, Teddington, UK.
- Åström, K. J. and Eykhoff, P. (1971). System identification – A survey, *Automatica* 7: 123–162.
- Åström, K. J. and Hägglund, T. (1984). Automatic Tuning of Simple Regulators with Specifications on Phase and Amplitude Margins. *Automatica*. 20(5): 645–651.
- Åström, K. J. and Hägglund, T. (1995). *PID Controllers: Theory, Design, and Tuning*. (2nd edition). Research Triangle Park, NC: ISA.
- Astrom, K. J. and Hagglund, T. (2001). The Future of PID control, *Control Eng.Pract.*9 (11) 1163-1175.
- Åström, K. J. and Hägglund, T. (2004). Revisiting the Ziegler-Nichols Step Response Method for PID Control. *Journal of Process Control*. 14(1): 635-650.
- Åström, K. J. and Nilsson, J. (1994). Analysis of a scheme for iterated identification and control, Proc. IFAC Symp. on Identification, Copenhagen, Denmark, pp. 171–176.

- Bartz–Beielstein, T., Parsopoulos, K. E. and Vrahatis, M. N. (2004). Analysis of Particle Swarm Optimization Using Computational Statistics. *International conference on numerical analysis and applied mathematics (ICNAAM)*.
- Bdran, S., Shuyuan, M., Saufullah, S. and Huang, J. (2013). Control Speed Ratio Electro-Hydraulic System of Continuously Variable Transmission (CVT) by Robust PI Controller. *IACSIT International Journal of Engineering and Technology, Vol. 5, No. 5, October 2013*.
- Bertini, L., Carmignani, L. and Frenzo, F. (2014). Analytical model for the power losses in rubber V-belt continuously variable transmission (CVT), *Mech. Mach. Theory* 78: 289–306.
- Billings, S. A. and Voon, W. S. F. (1986). Correlation Based Model Validity Tests for Nonlinear Models. *Int. J. Control*, 44, pp. 235-244.
- Birch, S. (2000). Audi Takes CVT from 15th Century to 21st Century. *SAE International Automotive Engineering International Online*. 3(1): 1-3.
- Boëly, N. and Botez, R. M. (2010). New Approach for the Identification and Validation of a Nonlinear F/A-18 Model by Use of Neural Networks. *IEEE Trans Neural Networks*, vol. 21(11), pp. 1759-1765.
- Bombois, X., Gevers, M. and Scorletti, G. (2000). A measure of robust stability for an identified set of parametrized transfer functions, *IEEE Transactions on Automatic Control* 45(11): 2141–2145.
- Bonsen, B., Klaassen, T. W. G. L., Pulles, R.J., Simons, S. W. H., Steinbuch, M. and Veenhuizen, P.A. (2005). Performance optimization of the push-belt CVT by variator slip control, *International Journal of Vehicle Design* 39 (3) 232–256.
- Bonsen, B., Klaassen, T. W. G. L., Van de Meerakker, K. G. O., Steinbuch, M. and Veenhuizen, P. A. (2004). Measurement and Control of Slip in a Continuously Variable Transmission. *Proceedings of 3rd IFAC Symposium on Mechatronic Systems*. 6-8 September. Sydney, Australia, 43-48.
- Bonsen, B., Pulles, R. J., Simons, S. W. H., Steinbuch, M. and Veenhuizen, P.A. (2005). Implementation of a slip controlled CVT in a production vehicle, in: *Proceedings of the 2005 IEEE Conference on Control Applications*, Toronto, Canada, August 28–31, pp. 1212–1217.
- Box, G. and Jenkins, G. (1970). *Time Series Analysis, forecasting and control*, Holden-Day, Oakland, California.

- Chetouane, F. and Darenfed, S. (2008). Neural Network NARMA Control of a Gyroscopic Inverted Pendulum, *Engineering Letters*, vol. 16, no. 3.
- Chen, W. and Bingyi, Li. (2010). Modeling and Simulation of the Improved CVT Ratio Control System. International Conference on Computer, Mechatronics, Control and Electronic Engineering (CMCE).
- Chen, W. and Shieh, C. (2003). On angular speed loss analysis of flat belt transmission system by finite element method, *Int. J. Comput. Eng. Sci.* 4: Page 1–18.
- Chen, Y. Q. and Moore, K. L. (2005). Relay Feedback Tuning of Robust PID Controllers with Iso-Damping property. *IEE Transaction on Systems, Man and Cybernetics-Part B: Cybernetics*. 35(1): 23-30.
- Chen, Z. H. and Ni, Y. Q. (2011). On-board Identification and Control Performance Verification of an MR Damper Incorporated with Structure, *J. Intelligent Material Systems and Structures*, vol. 22, pp. 1551-1565, 2011.
- Cheng, W. and Chang-song, J. (2011). Computer Modeling of CVT Ratio Control System Based on Matlab. *2011 3rd International Conference on Computer Research and Development (ICCRD)*. 11-13 March. Shanghai, China, 146-150.
- Cheng, Y. C. and Yu, C. C. (2000). Relay Feedback Identification for Actuators with Hysteresis. *Ind. Eng. Chem. Res.* 39(1): 4239-4249.
- Childs, T. H. C. and Cowburn, D. (1987). Power transmission losses in V-belt drives, Part 1: mismatched belt and pulley groove wedge angle effects, *Proc. Inst. Mech. Eng. D J. Automob. Eng.* 201: 33–40.
- Childs, T. H. C. and Cowburn, D. (1987). Power transmission losses in V-belt drives, Part 2: effects of small pulley radii, *Proc. Inst. Mech. Eng. D J. Automob. Eng.* 201: 41–53.
- Cohen, G.H. and Coon, G.A. (1953). Theoretical Consideration of Retarded Control. *Trans ASME* 75, pp. 827/834.
- Cominos, P. and Munro, N. (2002). PID Controllers: Recent Tuning Methods and Design to Specifications. *IEE Proceedings -Control Theory and Applications*. 149(1): 46-53.
- Cosenza, B. (2012). Development of a Neural Network for Glucose Concentration Prevision in Patients Affected by Type 1 Diabetes. *Bioprocess & Biosystems Engineering*, 1-9.

- Dahunsi, O. A., Pedro, J. O., and Nyandoro, O. T. (2010). System Identification and Neural Network Based PID Control of Servo-Hydraulic Vehicle Suspension System, *SAIEE Africa Research J.*, vol. 101(3), pp. 93-105, 2010.
- Deistler, M. (2002). System identification and time series analysis: Past, present, and future, 'Stochastic Theory and Control', Festschrift for Tyrone Duncan, Springer, Kansas, USA, pp. 97–108.
- Desborough, L., Miller, R. and Nordh, P. (2000). *Regulatory Control Survey*. Unpublished Manuscript, Honeywell.
- de Vries, D. and Van den Hof, P. (1995). Quantification of uncertainty in transfer function estimation: a mixed probabilistic - worst-case approach, *Automatica* 31: 543–558.
- Diepstraten, J.F.P.B. (2007). Modeling of Pulley Based CVT Systems: Extension of the CMM Model with Bands Segment Interaction. Traineeship Polytecnico di Bari, Italy.
- Ding, F., Liu, P. X., and Liu, G. (2010). Multi-innovation Least-Squares Identification for System Modeling, *IEEE Trans. Systems, Man & Cybernetics - Part B: Cybernetics*, vol. 40(3), pp. 767-778.
- Driankov, D., Hellendoorn, H. and Reinfrank, M. (1993). *An Introduction to Fuzzy Control*. Berlin: Springer-Verlag.
- Dumitrache, I. and Buiu, C. (2000). Genetic Algorithms: Fundamental Principles and Applications in Control System. Ed. Mediamira, Cluj-Napoca.
- Duraisamy, V., Devarajan, N., Somasundareswari, D. and Sivanandam, S. N. (2004). Comparative Study of Membership Functions for Design of Fuzzy Logic Fault Diagnosis System for Single Phase Induction Motor. *Academic Open Internet Journal*. 13.
- Elfring, J. (2009). Master Dissertation: System Identification and Multivariable Control of a Hydraulically Actuated Pushbelt CVT.
- Evsukoff, A. G., Lima, B. S. L. P. d. and Ebecken, N. F. F. (2011). Long-Term Runoff Modeling Using Rainfall Forecasts with Application to the Iguazu River Basin. *Water Resource Management*: vol. 25, pp. 963-985.
- Fallbrook (2011). *Fallbrook and the Legacy of Leonardo*. Retrieved on 1 August 2011, from <http://www.fallbrooktech.com/Company.asp>.

- Fei, J., and Xin, M. (2012). An adaptive fuzzy sliding mode controller for MEMS triaxial gyroscope with angular velocity estimation, *Nonlinear Dynamics*, pp. 1-13.
- Firbank, T. C. (1970). Mechanics of the belt drive, *Int. J. Mech. Sci.* 12. 1053–1063.
- Foley, D.C., Sadegh, N., Barth, E.J. and Vachtsevanos, G.J. (2001). Model identification and backstepping control of a continuously variable transmission system, in: *Proceedings of the 2001 American Control Conference*, Arlington, VA, USA, vol. 6, June 25–27, pp. 4591–4596.
- Fuchino, M. and Ohsono, K. (1996). Development of Fully Electronic Control Metal Belt CVT. *Proceeding of the International Conference on Continuously Variable Power Transmissions. JSAE CVT'96*. 11-12 September. Yokohama, 23-32.
- Fushimi, Y., Fujii, T. and Kanehara, S. (1996). A Numerical Approach to Analyse the Power Transmitting Mechanisms of a Metal Pushing V-Belt Type CVT. *SAE Technical Paper Series 960720*.
- Gaing, Z. L. (2004). A Particle Swarm Optimization Approach for Optimum Design of PID Controller in AVR System. *IEEE Transaction on Energy Conversion*, Vol. 19(2), pp. 384-391.
- Gandomi, A. H., Alavi, A. H. and Arjmandi, P. (2010). Genetic Programming and Orthogonal Least Squares: A Hybrid Approach to Compressive Strength of CFRP-confined Concrete Cylinders Modeling, *J. Mechanics of Materials & Structures*, vol. 5(5), pp. 735–753.
- Gauss, C. (1809). *Teoria Motus Corporum Coelestium in Sectionibus Conicis Solem Ambientium*, Reprinted translation: *Theory of Motion of the Heavenly Bodies Moving about the Sun in Conic Sections*. Dover, New York.
- Gerbert, G. (1976). A note on slip in V-belt drives, *J. Eng. Ind. Trans.* 1366–1368.
- Gevers, M. (2005). Identification for control: from the early achievements to the revival of experiment design, *European Journal of Control* 11: 1-18.
- Giriraj Kumar, S. M., Jayaraj, D. and Kishan, A. R. (2010). PSO bases Tuning of a PID Controller for a High-Performance Drilling Machine. *International Journal of Computer Applications*, Vol. 1 – No. 19.
- Gonzales-Olvera, M. A. and Tang, Y. (2010). Black-Box Identification of a Class of Nonlinear Systems by a Recurrent Neurofuzzy Network. *IEEE Trans Neural Networks*, vol. 21(4), pp. 672-679.

- Guzzella, L. and Schmid, A.M. (1995). Feedback linearization of spark-ignition engines with continuously variable transmissions. *IEEE Transactions on Control Systems Technology*, 3 (1), pp. 54–60.
- Hahn, J. O., McCombie, D. B., Reisner, A. T., Hojman, H. M. and Asada, H. H. (2010). Identification of Multichannel Cardiovascular Dynamics Using Dual Laguerre Basis Functions for Noninvasive Cardiovascular Monitoring. *IEEE Trans. Automatic Control Technology*, vol. 18(1), pp. 170-176.
- Han, K., Ryu, W., Jang, I. G., Jeon, J., Kim, H. and Hwang, S. H. (2006). Experimental Study on the Shift Control Characteristics of CVT Using 168 Embedded System. *International Joint Conference SICE-ICASE, 2006*. 18-21 October. Busan, Korea, 3652-3657.
- Hang, C. C., Åström, K. J. and Ho, W. K. (1991). Refinements of the Ziegler-Nichols tuning formula, *Proc. IEE*, vol. 138, pp. 111-118.
- Heath, R. P. G. and Child, A. J. (2007). Zeroshift. A Seamless Automated Manual Transmission (AMT) With No Torque Interrupt. *SAE Technical Paper Series 2007-01-1307*.
- Hjalmarsson, H. (2005). From experiment design to closed-loop control, *Automatica* 41: 393-438.
- Ho, B. and Kalman, R. (1965). Effective construction of linear state-variable models from input-output functions, *Regelungstechnik* 12: 545–548.
- Ho, W. K., Hong, Y., Hansson, A., Hjalmarsson, H. and Deng, J. W. (2003). Relay Auto-tuning of PID Controllers Using Iterative Feedback Tuning. *Automatica*. 39(1): 149-157.
- Hong, X., Mitchell, R. J., Chen, S., Harris, C. J., Li, K., and Irwin, G. W. (2008). Model selection approaches for non-linear system identification: a review, *Int. J. of Systems Science*, vol. 39(10), pp. 925-946.
- Hu, H., Hu, Q., Lu, Z. and Xu, D. (2005). Optimal PID controller Design in PMSM Servo System via Particle Swarm Optimization. *31st Annual Conference of IEEE*, Industrial Electronics Society.
- Hwa K. D. and Ill, P. J. (2005). Intelligent PID Controller Tuning of AVR system using GA and PSO: Springer-Verlag Berlin Heidelberg: ICIC 2005, Part II, LNCS 3645, pp 366- 375.
- Iancu, I. (2012). A Mamdani Type Fuzzy Logic Controller, in *Fuzzy Logic: Controls, Concepts, Theories and Applications*. pp. 325–350, InTech.

- Ide, T. (2000). Effect of Belt Loss and Oil Pump Loss on the Fuel Economy of a Vehicle with a Metal V-Belt CVT. *Seoul 2000 FISITA World Automotive Congress*. 12-15 June. Seoul, Korea, 1-6.
- Ihsan, M. Y., Mohd Nasir, T., and Ramli, A. (2013). Recent Advancements & Methodologies in System Identification: A Review. *Scientific Research Journal (SCIRJ)*. Vol.1(1), pp. 14-32.
- Jan J. A. and Sulc, B. (2002). Evolutionary computing methods for optimizing virtual reality process models. *International Carpathian control conference ICCO 2002*, Malenovice Czech Republic, May 27-30.
- Jing, L. X. and Zhao, C. (2009). A Fuzzy Auto-Tuning PID Temperature Controller. *IEEE International Symposium on IT in Medicine & Education ITIME '09*. 14-16 August. Jinan, 215-220.
- Jingjing, X. and Chen, H. (2010). Ratio Control of CVT on Dynamic Characteristics. *International Conference on Computer, Mechatronics, Control and Electronic Engineering (CMCE)*.
- Kanehara, S., Fujii, T. and Oono, S. (1996). A Study of a Metal Pushing V-Belt Type CVT: Macroscopic Consideration for Coefficient of Friction between Belt and Pulley. *SAE Paper No. 9636277*.
- Kara, T. and Eker, I. (2003). Nonlinear Modeling and Identification of a DC Motor for Bidirectional Operation with Real Time Experiments. Article in Press: *Energy Conversion and Management*.
- Kaya, I., Tan, N. and Atherton, D. P. (2003). A Simple Procedure for Improving Performance of PID Controllers. *Proceeding of 2003 IEEE Conference on Control Application (CCA)*. 23-25 June. Istanbul, Turkey, 882 - 885
- Kasai, Y. and Morimoto, Y. (1988). Electronically Controlled Continuously Variable Transmission (ECVT-II). *International Congress on Transportation Electronics, 1988. Convergence 88*. 1988. Dearborn, Michigan, U.S.A, 33-42.
- Keen, S. D. and Cole, D. J. (2012). Bias-Free Identification of a Linear Model-Predictive Steering Controller from Measured Driver Steering Behavior. *IEEE Trans. Systems, Man & Cybernetics - Part B: Cybernetics*, vol. 42(2), pp. 434-443.
- Keithley (1994). DAS-1600/1400 Series. Cleveland, Ohio, USA: Keithley Instruments, Inc.

- Kennedy, J. and Eberhart, R. C. (1995). Particle swarm optimization. *In Proceedings of the 1995 IEEE International Conference on Neural Networks*. Vol. 4, pp. 1942–1948, 1995.
- Kim, T. and Kim, H. (2002). Performance of integrated engine-CVT control considering powertrain loss and CVT response lag, *Proceedings of the Institution of Mechanical Engineers, Part D: Journal of Automobile Engineering* 216 (7) 545–553.
- Kim, T., Kim, H., Yi, J. and Cho, H. (2000) Ratio control of metal belt CVT, in: *Transmission and Driveline Symposium*, SAE Paper No. 2000-01-0842, SAE Special Publications (SP-1522).
- Kim, W. and Vachtsevanos, G. (2000). Fuzzy Logic Ratio Control for a CVT Hydraulic Module. *Proceedings of the 2000 IEEE International Symposium on Intelligent Control*. 17-19 July. Rio Patras, Greece, 151-156.
- Klaassen, T. W. G. L., Bonsen, B., van de Meerakker, K. G. O., Steinbuch, M., Veenhuizen, P. A. and Veldpaus, F. E. (2004). Nonlinear Stabilization of Slip in a Continuously Variable Transmission. *Proceedings of the 2004 IEEE International Conference on Control Applications* 2-4 September. Taipei, Taiwan, 338-343.
- Kosut, R. and Anderson, B. (1994). Least-squares parameter set estimation for robust control design, *Proc. American Control Conference*, Baltimore, Maryland, pp. 3002–3006.
- Kluger, M. A. and Long, D. B. (1999). An Overview of Current Automatic, Manual and Continuously Variable Transmission Efficiencies and Their Projected Future Improvements. *SAE Technical Paper Series 1999-01-1259*.
- Kuphaldt, T. R. (2009). *Lessons in Industrial Instrumentation*. (Version 4.0). San Francisco, California: Creative Common.
- Lechner, G., Naunheimer, H. and Ryborz, J. (1999). *Automotive Transmissions: Fundamentals, Selection, Design and Application*. Berlin Heiderberg: Springer-Verlag.
- Lee, C. C. (1990). Fuzzy Logic in Control Systems: Fuzzy Logic Controller. I. *IEEE Transactions on Systems, Man and Cybernetics*. 20(2): 404-418.
- Lee, H. and Kim, H. (2002). Improvement of fuel economy by shift speed control for a metal belt continuously variable transmission, *Proceedings of the*

- Institution of Mechanical Engineers, Part D: Journal of Automobile Engineering 216 (9) 741–749.
- Lee, W., Anderson, B., Kosut, R. and Mareels, I. (1993). A new approach to adaptive robust control, *Int. Journal of Adaptive Control and Signal Processing* 7: 183-211.
- Ljung, L. (1976). On Consistency and Identifiability, *Mathematical Programming Study* 5: 169–190.
- Ljung, L. (1978). Convergence Analysis of Parametric Identification Methods. *IEEE Trans. Automatic Control AC-23*: 770-783.
- Ljung, L. (1985). Asymptotic Variance Expressions for Identified Black-box Transfer Function Models. *IEEE Trans. Automatic Control AC-30*: 834-844.
- Ljung, L. (1987). *System Identification: Theory for the User*, Prentice-Hall, Englewood Cliffs, NJ.
- Ljung, L. and Caines, P. (1979). Asymptotic Normality of Prediction Error Estimators for Approximative System Models, *Stochastics* 3: 29–46.
- Ljung, L. (1999). *System Identification*. (Second edition). Prentice Hall.
- Leva, A. (1993). PID Autotuning Algorithm Based on Relay Feedback. *IEE Proceedings-D*. 160(5): 328-338.
- Leva, A. (2005). Model-Based Proportional-Integral-Derivative Autotuning Improved with Relay Feedback Identification. *IEE Proceedings -Control Theory and Applications*. 152(2): 247-256.
- Liu, S. and Stefanopoulou, A.G. (2002). Effects of control structure on performance of an automotive powertrain with a continuously variable transmission, *IEEE Transactions on Control Systems Technology* 10 (5) 701–708.
- Liu, S. and Paden, B. (1997). Survey of today's CVT controls, in: *Proceedings of the 1997 IEEE Conference on Decision and Control*, San Diego, CA, USA, vol. 5, December 10–12, pp. 4738–4743.
- Mamoria, P. and Raj, D. (2016). Comparison of Mamdani Fuzzy Inference System for Multiple Membership Functions. *Int. Journal of Image, Graphics and Signal Processing*, Vol. 9, pp.26-30.
- Marchetti, G., Schali, C. and Lewin, D. R. (2001). Identification and Control of Open-Loop Unstable Processes by Relay Methods. *Automatica*. 37(1): 2049-2055.

- Markos, S. and Kamal, H. (2012). Optimal Tuning of PID Controller using Adaptive Hybrid Particle Swarm Optimization Algorithm. *Int. Journal of Computers, Communication and Control*. Vol. VII-pp 101-114.
- Mashadi, B., Kazemkhani, A. and Lakeh, R. B. (2007). An Automatic Gear-shifting Strategy for Manual Transmission. *Proc. IMechE, Part I: Journal Systems and Control Engineering*. 221(1): 757-768.
- Mat Darus, I. Z. and Ali, A. M. Al-Khafaji. (2012). Non-parametric Modeling of a Rectangular Flexible Plate Structure. *Journal of Engineering Application of Artificial Intelligence* 25, 94-106.
- Matus, M., Sáez, D., Favley, M., Suazo-Martínez, C., Moya, J., Jiménez-Estévez, G., Palma-Behnke, R., Olguín, G. and Jorquera, P. (2012). Identification of Critical Spans for Monitoring Systems in Dynamic Thermal Rating. *IEEE Trans. Power Delivery*, vol. 27(2), pp. 1002-1009.
- Matthes, B. (2005). Dual Clutch Transmission-Lessons Learned and Future Potential. *SAE Technical Paper Series 2005-01-1021*.
- Meilan, Z., Jiabin, W., Xudong, W. and Yongqin, Z. (2008). Modeling and Performance Simulation of Transmission System for Car Equipped with Metal Pushing V-belt Type CVT. *IEEE Vehicle Power and Propulsion Conference (VPPC '08)*. 3-5 September. Harbin, China, 1-5.
- Mensler, M., Joe, S. and Kawabe, T. (2006). Identification of Toroidal Continuously Variable Transmission using Continuous-time System Identification Methods. *Control Engineering Practice*. Vol. 14(1), pp.45-58.
- Micklem, J. D., Longmore, D. K. and Burrows, C. R. (1996). The Magnitude of The Losses in The Steel Pushing V-belt Continuously Variable Transmission. *Proc. IMechE., Part D*. 210(1): 57-62.
- Naderi, A., Aliasghary, M., Pourazar, A. and Ghasemzadeh, H. (2011). A 19MFLIPS CMOS Fuzzy Controller to Control Continuously Variable Transmission Ratio. 7th Conference on Ph.D. Research in Microelectronics and Electronics (PRIME), pp.45-48.
- Narendra, K. S. and Mukhopadhyay, S. (1997). Adaptive control using neural networks and approximate models. *IEEE Transactions on Neural Networks*, 8(3):475-485.
- Ogata, K. (1990). *Modern control engineering*, USA: Prentice Hall Inc.

- Oh, S. R., Sun, J., Li, Z., Celkis, E. A. and Parsons, D. (2010). System Identification of a Model Ship Using a Mechatronic System. *IEEE/ASME Trans. Mechatronics*, vol. 15(2), pp. 316-320.
- Oliveira, J. C. P. and Bauchspiess, A. (2008). Neural Control of 4th order level process. ABCM Symp. Ser. Mechatronics, Vol. 3, 197–206.
- O'Dwyer, A. (2009). *Handbook of PI and PID Controller Tuning Rules*. London: Imperial College Press.
- Oomen, T., van der Meulen, S., Bosgra, O., Steinbuch, M. and Elfring, J. (2010). A Robust Control Relevant Model Validation Approach for Continuously Variable Transmission Control. *American Control Conference*, Marriot Waterfront, Baltimore, MD, USA.
- Oomen, T. and van der Meulen, S. (2013). High Performance Continuously Variable Transmission Control through Robust Control-relevant Model Validation. *Journal of Dynamic Systems, Measurement and Control*, 135, pp. 1-14.
- Oviedo, J. J. E., Boelen, T. and van Overschee, P. (2006). Robust Advanced PID Control (RaPID): PID Tuning Based on Engineering Specifications. *IEEE Control Systems Magazine*, 26 /1, 15-19.
- Parsopoulos, K. E., and Vrahatis, M. N. (2002). Recent approaches to global optimization problems through Particle Swarm Optimization. *Natural Computing* 1:235-306.
- Pesgens, M., Vroemen, B., Stouten, B., Veldpaus, F. and Steinbuch, M. (2005). Control of a hydraulically actuated continuously variable transmission, *Vehicle System Dynamics* 44 (5) 387–406.
- Pfiffner, R. and Guzzella, L. (2001). Optimal operation of CVT-based powertrains, *International Journal of Robust and Nonlinear Control* 11 (11) 1003–1021.
- Pfiffner, R., Guzzella, L. and Onder, C.H. (2003) Fuel-optimal control of CVT powertrains, *Control Engineering Practice* 11 (3) 329–336.
- Piroddi, L. (2010). Adaptive model selection for polynomial NARX models, *IET Control Theory & Applications*, vol. 4(12), pp. 2693-2706.
- Piroddi, L. and Lovera, M. (2008). NARX model identification with error filtering, in *Proc. 17th World Congress Int. Federation of Automatic Control*, Seoul, Korea, pp. 2726-2731.
- Pulles, R. J., Bonsen, B., Steinbuch, M. and Veenhuizen, P. A. (2005). Slip Controller Design and Implementation in a Continuously Variable

- Transmission. *Proceedings of the 2005 American Control Conference*. 8-10 June. Portland, Oregon, USA, 1625-1630.
- Qing-Guo, W., Tong-Heng, L., Ho-Wang, F., Qiang, B. and Yu, Z. (1999). PID Tuning for Improved Performance. *IEEE Transactions on Control Systems Technology*. 7(4): 457-465.
- Ramachandran, R., Lakshminarayanan, S. and Rangaiah, G. P. (2005). Process identification using open-loop and closed loop step responses. *Journal of the institute of Engineers*, Singapore vol.45, Issue 6.
- Reynolds, O. (1874). On the efficiency of belts or straps as communicators of work, *Engineering* 38. 396.
- Rienks, M. D. (1995). Master Dissertation: Control and Identification of a Continuously Variable Transmission.
- Robertson, A. J. and Tawi, K. B. (1997). Misalignment Equation for the Van Doorne Metal Pushing V-belt Continuously Variable Transmission. *Proc. IMechE, Part D: Journal of Automobile Engineering*. 211(1): 121-128.
- Ryu, W., Nam, J., Lee, Y. and Kim, H. (2005). Model based control for a pressure control type CVT, *International Journal of Vehicle Design* 39 (3) 175–188.
- Saito, T. and Lewis, A.D. (2004). Development of a simulation technique for CVT metal pushing V-belt with feedback control, in: *SAE Transmissions and Driveline Symposium*, Paper No. 2004-01-1326, pp. 353–359.
- Sakaguchi, S., Kimura, E. and Yamamoto, K. (1999). Development of an engine-CVT integrated control system, in: *Transmission and Driveline Symposium*, Paper No. 1999-01-0754, *SAE Special Publications (SP-1440)*, pp. 171–179.
- Schrama, R. and Bosgra, O. (1993). Adaptive performance enhancement by iterative identification and control design, *Int. Journal of Adaptive Control and Signal Processing* 7(5): 475–487.
- Setlur, P., Wagner, J.R., Dawson, D.M. and Samuels, B. (2003). Nonlinear control of a continuously variable transmission (CVT), *IEEE Transactions of Control System Technology* 11 (1) 101–108.
- Shi, Y. and Sen, P. C. (2000). Effects of Different Slopes of Membership Functions on the Fuzzy Control of DC-DC Converters. *Proceeding of the 3rd International Power Electronics and Motion Control Conference PIEMC2000*. 15-18 August. Beijing, China, 1160-1165.

- Silva, M. M. d., Wigren, T. and Mendonça, T. (2012). Nonlinear Identification of a Minimal Neuromuscular Blockade Model in Anesthesia, *IEEE Trans. Control Systems Technology*, vol. 20(1), pp. 181-188.
- Simoes, M. G. (2007). Introduction to Fuzzy Control. Tutorial, Colorado School of Mines.
- Singh, I., Verma, A., Kumar, P. and Gulati, N. (2014). Designing Neural Network Predictive Controller using MATLAB. *3rd International Conference on System Modeling and Advancement in Research Trends (SMART)*.
- Sjöberg, J., Zhang, Q., Ljung, L., Benveniste, A., Delyon, B., Glorennec, P. Y., Hjalmarsson, H. and Juditsky, A. (1995). Nonlinear black-box modeling in system identification: a unified overview. *Automatica*, vol. 31, no. 12, pp. 1691-1724.
- Soyguder, S., Karakose, M. and Alli, H. (2008). Design and Simulation of Self-tuning PID-Type Fuzzy Adaptive Control for an Expert HVAC System. *Expert Systems with Applications*. 36(3): 4566-4573.
- Supriyo, B. (2010). Real Time Implementation of Proportional Integral Derivative Based Ratio Controller for Electro-Mechanical Dual Acting Pulley Continuously Variable Transmission. Phd. Thesis: Universiti Teknologi Malaysia.
- Srinivasan, K. and Chidambaran, M. (2003). Modified Relay Feedback Method for Improved System Identification. *Computers and Chemical Engineering*. 27(1): 727-732.
- Takiyama, T. and Morita, S. (1996). Analysis of improvement of fuel consumption by engine-CVT consolidated control, in: *Proceedings of AVEC'96, International Symposium on Advanced Vehicle Control*, pp. 1159–1167.
- Takiyama, T. (2001). Engine-CVT-A/F consolidated control using decoupling control theory, *JSAE Review* 22 (1) 9–14.
- Tan, A. H. and Cham, C. L. (2011). Continuous-time model identification of a cooling system with variable delay, *IET Control Theory Applications*, vol. 5(7), pp. 913–922.
- Tian, J. and Su, J. (2004). Hydraulic System Simulation of CVT with Fuzzy Logic Controllers. *Proceedings of the First International Conference on Power Electronics Systems and Applications*. 9-11 November. Hong Kong, China, 136-141.

- Thyagarajan, T., Yu, C. C. and Huang, H. P. (2003). Assessment of Controller Performance: A Relay Feedback Approach. *Chemical Engineering Science*. 58(1): 497-512.
- Van de Meerakker, K.G.O., Rosielle, P.C.J.N, and Bonsen, B. (2004). Design of an Electromechanical Ratio and Clamping Force Actuator for a Metal V-belt Type CVT. *International Continuously Variable and Hybrid Transmission Congress*. 23-25 September. UC Davis, USA.
- Vivek, S. and Chidambaran, M. (2005). Identification Using Single Symmetrical Relay Feedback Test. *Computers and Chemical Engineering*. 29(1): 1625-1630.
- Vladu, E. E. and Dragomir, T. L. (2005). On Data Management in Elementary System Identification Approaches using Genetic Algorithms. *Proceedings SOFA*.
- Wahlberg, B. and Ljung, L. (1986). Design Variables for Bias Distribution in Transfer Function Estimation. *IEEE Trans. On Automatic Control*. Vol, AC-31(2), pp.134-144.
- Wang, C.Z., Song, J. C. and Li, S. (2010). Research on Fuzzy Control of the Hydraulic System for Continuously Variable Transmission. *Applied Mechanics and Materials*. 29-32(1): 2114-2118.
- Wang, X., Zhou, M. and Zhou, Y. (2006). Research on Electronic Control System of New-Type CVT. *The 1st International Forum on Strategic technology*. 18-20 October. Ulsan, Korea, 289-292.
- Xinhua, Y., Naishi, C. and Zhaohui, L. (2008)., J. W. and Feng, X. (2004). Electro Mechanical Control Devices for Continuously Variable Transmission. *SAE International Powertrains. Fuels and Lubricants Congress*. SAE 2008-01-1687.
- Xu, J. W. and Feng, X. (2004). Design of Adaptive Fuzzy PID Tuner Using Optimization Method. *Proceedings of the 5th World Congress on Intelligent Control and Automation*. 15-19 June. Hangzhou, China, 2454 - 2458.
- Xudong, W., Meilan, Z. and Yongqin, Z. (2006). Research on Electronic Control System of a New-type CVT. *IEEE Proceedings on the 1st International Forum on Strategic Technology (IFOST 2006)*. 23-25 October. Ulsan, Korea, 289-292.

- Yang, S., Liu, J., Zhao, Y. and He, L. (2010). Dynamic Modeling and Optimal Design of the Speed Ratio Control Valve in CVT. *2nd International Conference on Informatics in Control, Automation and Robotics*.
- Yamamoto, M., Wakahara, T., Okahara, H. and Oshita, H. (2004). Hydraulic System, Shaft and Lockup Controls Developed for a Large Torque Capacity CVT. *International Continuously Variable Transmission and Hybrid Transmission Congress*. 23-25 September. San Fransisco, California, USA, 1-7.
- Yasin, S. Y. (2002). *Systematic Methods for The Design of a Class of Fuzzy Logic Controller*. PhD Thesis: Western Michigan University.
- Yasuoka, M., Uchida, M., Katakura, S. and Yoshino, T. (1999). An integrated control algorithm for an SI engine and a CVT, in: Transmission and Driveline Symposium, Paper No. 1999-01-0752, SAE Special Publications (SP-1440), pp. 155–160.
- Yu, C. (2009). *Autotuning of PID Controllers: A Relay Feedback Approach*. London: Springer-Verlag.
- Yeo, H., Song, C.H., Kim, C.S. and Kim, H.S. (2004). Hardware in the loop simulation of hybrid vehicle for optimal engine operation by CVT ratio control, *International Journal of Automotive Technology* 5 (3) 201–208.
- Yoshida, H., Kawata, K., Fukuyana, Y. and Nakanishi, Y. (1999). A particle swarm optimization for reactive power and voltage control considering voltage stability. *IEEE international conference on intelligent system applications to power systems (ISAP '99)*. Rio de Janeiro, April 4-8.
- Zadeh, L. A. (1965). Fuzzy sets, *Inform. Contr.*, Vol. 8, pp.338-353.
- Zang, F. (2010). Simulation and Fuzzy Control Study on the CVT Metal V Belt Axial Misalignment of Car. *Key Engineering Materials*. 426-427(1): 97-101.
- Zang, Z., Bitmead, R. and Gevers, M. (1995). Iterative weighted least-squares identification and weighted LQG control design, *Automatica* 31(11): 1577-1594.
- Zhang, L., Li, H. and Li, G. (2009). The Control Theory and Implementation Method of Clamping Force on Metal Belt CVT. *International Conference on Artificial Intelligence and Computational Intelligence (AICI'09)*. 7-8 November. Shanghai, China, 422-426.

- Zhang, M., Zhou, Z. and Xu, L. (2010). Principle of Weight Dynamic Change Fuzzy-PID Integrated Control for the Displacement Ratio Multi-range HMCVT. *International Conference on Intelligent Computation Technology and Automation (ICICTA 2010)*. 11-12 May. Changsha, China, 935-938.
- Zhao, J., Li, T. and Qian, J. (2005). Application of Particle Swarm Optimization Algorithm on Robust PIDcontroller Tuning. Springerlink-Verlag. Berlin Heidelberg, pp. 948-957.
- Zhao, Y., Westwick, D. T. and Kearney, R. E. (2011). Subspace Methods for Identification of Human Ankle Joint Stiffness. *IEEE Trans. Biomedical Engineering*, vol. 58(11), pp. 3039-3048.
- Zheng, Y., Zhang, L. and Ma, J. (2002). Robust PID Controller Design using PSO. *International Symposium on Intelligent Control IEEE*. October.
- Zhu, D., Guo, J., Cho, C., Wang, Y. and Lee, K. M. (2012). Wireless Mobile Sensor Network for the System Identification of a Space Frame Bridge, *IEEE/ASME Trans. on Mechatronics*, vol. 17(3), pp. 499-507.
- Zhou, Y., Chan, S. C. and Ho, K. L. (2011). New Sequential Partial-Update Least Mean M-Estimate Algorithms for Robust Adaptive System Identification in Impulsive Noise, *IEEE Trans. Industrial Electronics*, vol. 58(9), pp. 4455-4470.
- Ziegler, J. G. and Nichols, N. B. (1942). Optimum settings for Automatic Controllers. *Trans. ASME*. 64(1): 759-768.
- Zwe-Lee, G. (2002). A particle swarm optimization approach for optimum design of PID controller in AVR system. *IEEE transactions on energy conversion*. November 6.
- Sjöberg, J., Zhang, Q., Ljung, L., Benveniste, A., Delyon, B., Glorennec, P. Y., Hjalmarsson, H. and Juditsky, A. (1995). Nonlinear black-box modeling in system identification: a unified overview. *Automatica*, vol. 31, no. 12, pp. 1691-1724.