



This item was submitted to Loughborough's Institutional Repository (<https://dspace.lboro.ac.uk/>) by the author and is made available under the following Creative Commons Licence conditions.

  
C O M M O N S D E E D

**Attribution-NonCommercial-NoDerivs 2.5**

**You are free:**

- to copy, distribute, display, and perform the work

**Under the following conditions:**



**Attribution.** You must attribute the work in the manner specified by the author or licensor.



**Noncommercial.** You may not use this work for commercial purposes.



**No Derivative Works.** You may not alter, transform, or build upon this work.

- For any reuse or distribution, you must make clear to others the license terms of this work.
- Any of these conditions can be waived if you get permission from the copyright holder.

**Your fair use and other rights are in no way affected by the above.**

This is a human-readable summary of the [Legal Code \(the full license\)](#).

[Disclaimer](#) 

For the full text of this licence, please go to:  
<http://creativecommons.org/licenses/by-nc-nd/2.5/>

# An Analytical Approach to Modifying the Properties of Dielectric Substrates Composed of Nanomaterials

Chinwe C. Njoku<sup>1</sup>, William G. Whittow<sup>2</sup>, J(Yiannis) C. Vardaxoglou<sup>3</sup>

*Electronic and Electrical Engineering Department, Loughborough University, Loughborough, LE11 3TU, UK*  
<sup>1</sup>c.c.njoku, <sup>2</sup>w.g.whittow, <sup>3</sup>j.c.vardaxoglou@lboro.ac.uk

## I. INTRODUCTION

The aim of this research is to fabricate antennas and dielectrics out of nanomaterials. This method has the potential of integrating the whole antenna structure into one process. Since nanomaterials are extremely small, larger structures (~mm) can be created by suitably arranging many such particles (metallic and/or non-metallic), and thus resonance at microwave frequencies can be achieved. Fabrication and physical advantages include potentially faster fabrication processes and reduced production costs [1]. Using nanomaterial fabrication methods will enable novel and bespoke substrate properties, by controlling the size and volume ratio of the particles. Electromagnetic advantages (bandwidth, size and efficiency) can be achieved by varying the local permittivity with the local electric field strength, or by creating substrates with equal permittivity and permeability.

## II. LITERATURE REVIEW

Lord Rayleigh [2] examined how the properties of a medium are affected when obstacles are placed in it. However, more commonly cited and used for related problems is the analysis carried out by Lewin [3]. Lewin studied a homogenous medium within which were embedded spherical particles, with uniform spacing,  $s$  and radius,  $a$ , in order to determine the effective permittivity ( $\epsilon$ ) and permeability ( $\mu$ ) of the mixture. The validity of his study is restricted to high frequencies where the size of the particles is much smaller than the wavelength and the particles are not too densely packed. Also, the analysis assumes that the particles are arranged in a cubic lattice with uniform spacing. The effective properties of the mixture are defined in (1) while those of the particle are defined in (2).

$$\mu = \mu_1 \left( 1 + \frac{3f}{\frac{\mu_p + 2\mu_1}{\mu_p - \mu_1} - f} \right); \quad \epsilon = \epsilon_1 \left( 1 + \frac{3f}{\frac{\epsilon_p + 2\epsilon_1}{\epsilon_p - \epsilon_1} - f} \right) \quad (1)$$

where  $(\epsilon, \mu)$ ,  $(\epsilon_1, \mu_1)$  and  $(\epsilon_p, \mu_p)$  are the effective permittivity and permeability of the mixture, host medium and the particles respectively, and  $f = \frac{4}{3}\pi a^3/s^3$  is the particle volume ratio. Also,

$$\frac{\epsilon_p}{\epsilon_2} = \frac{\mu_p}{\mu_2} = \frac{2(\sin\theta - \theta\cos\theta)}{(\theta^2 - 1)\sin\theta + \theta\cos\theta} = F(\theta) \quad (2)$$

where  $\epsilon_2$  and  $\mu_2$  are the parameters of the particle's bulk material,  $\theta = ka\sqrt{\mu\epsilon}$ , vacuum wave number,  $k = 2\pi/\lambda$ .

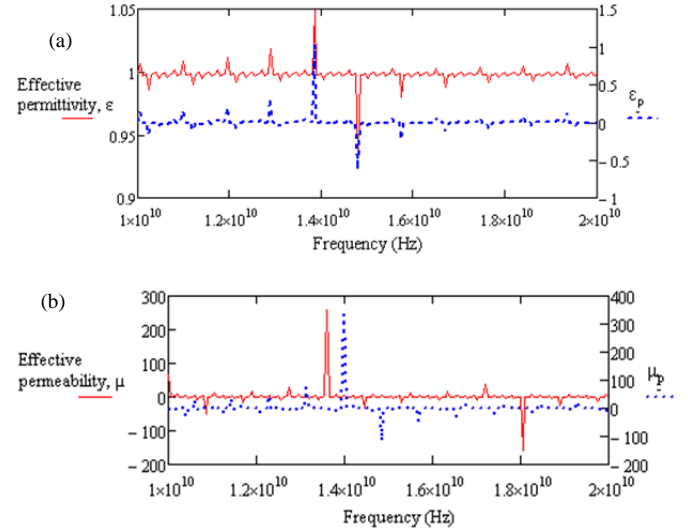


Figure 1: Effective (a) permittivities and (b) permeabilities of the mixture (—) and the particle (---)

## III. RESULTS

The equations were analysed using MathCAD. For example, by adding spheres composed of many Cobalt particles ( $\epsilon_2 = 1$ ,  $\mu_2 = 250$ ) to a Polymer host ( $\epsilon_1 = 1.05$ ) with  $a/s = 0.2$ , over a frequency range of 10-20 GHz, the effective  $\epsilon$  and  $\mu$  of the mixture, in (1) varies with frequency as shown in Fig. 1. By controlling the dielectric properties of the host and the inserted spheres, and also the size and spacings of the spheres, we can theoretically create any mixture of  $\epsilon$  and  $\mu$ .

## IV. CONCLUSIONS AND FUTURE WORK

By fabricating antennas and substrates using nanomaterials, the effective substrate properties can be controlled by varying the fractional particle volume and the type of inserted particle. These bespoke substrates are good for antenna design. Future work will compare these results with simulations and measurements, and extend this theoretical model to design novel substrates at microwave frequencies.

## REFERENCES

- [1] W. G. Whittow, and J. C. Vardoxoglou, "Modifying conventional microwave antenna designs using fine scale structures and nanomaterials," *LAPC 2009*, pp. 749-752, Dec. 2009.
- [2] L. Rayleigh, "On the influence of obstacles arranged in rectangular order on the properties of a medium," *Phil. Mag.*, ser. 5, vol. 34, pp.481-502, 1892.
- [3] L. Lewin, "The electrical constants of a material loaded with spherical particles," in *Proc. Inst. Elec. Eng.*, vol. 94, pp. 65-68, 1947.