



Klemm, M., & Troster, G. (2004). Characterisation of an aperture-stacked patch antenna for ultra-wideband wearable radio systems. In 15th International Conference on Microwaves, Radar and Wireless Communications, 2004 (MIKON-2004), Warsaw, Poland. (Vol. 2, pp. 395 - 398). Institute of Electrical and Electronics Engineers (IEEE).
10.1109/MIKON.2004.1357046

Link to published version (if available):
[10.1109/MIKON.2004.1357046](https://doi.org/10.1109/MIKON.2004.1357046)

[Link to publication record in Explore Bristol Research](#)
PDF-document

University of Bristol - Explore Bristol Research

General rights

This document is made available in accordance with publisher policies. Please cite only the published version using the reference above. Full terms of use are available:
<http://www.bristol.ac.uk/pure/about/ebr-terms.html>

Take down policy

Explore Bristol Research is a digital archive and the intention is that deposited content should not be removed. However, if you believe that this version of the work breaches copyright law please contact open-access@bristol.ac.uk and include the following information in your message:

- Your contact details
- Bibliographic details for the item, including a URL
- An outline of the nature of the complaint

On receipt of your message the Open Access Team will immediately investigate your claim, make an initial judgement of the validity of the claim and, where appropriate, withdraw the item in question from public view.

Characterisation of an Aperture-Stacked Patch Antenna for Ultra-Wideband Wearable Radio Systems

Maciej Klemm, Gerhard Tröster
Electronics Laboratory, ETH Zürich, Switzerland
e-mail: klemm@ife.ee.ethz.ch, tel.: +41 1 632 51 91

Abstract – This paper presents, for the first time, the time-domain characteristics of an Aperture-Stacked Patch Antenna (ASPA) for Ultra-wideband (UWB) wearable devices. The methodology of antennas characterisation for UWB radio systems is also outlined. The antenna operates within the 3-6 GHz frequency band. Time- and frequency-domain characteristics of this antenna are presented in transmission mode (Tx), receiving mode (Rx) and for 2-antenna (Tx-Rx) system. The pulse driving the antenna has duration of 0.65 ns. In the Tx mode, pulses radiated in different directions of the H-plane have very similar shapes. Fidelity factors are as high as 91.6-99.9%. For 2-antenna system, pulses received in normal and end-fire-like directions have the fidelity of 69.5%. As it was found, antenna does not behave 'reciprocal' comparing Tx and Rx modes. For normal propagation direction, radiated pulse is the 2nd derivative of the input waveform, but in the RX mode, received pulse is the 1st derivative of the incident plane wave. This antenna can be used for transmission of short-pulses, even 0.65-1ns in duration. It is also small (planar dimensions 32/19mm) and compact. Microstrip configuration allows further integration of active devices on the same board. Taking into account above results we can say that ASPA is a good candidate for UWB non-invasive Wireless Body Area Network (WBAN) applications [1].

1. Introduction

Ultra-wideband (UWB) communication systems have recently received more and more attention in the wireless world. Their envisioned advantages over conventional wireless communication systems are: extremely low power consumption, high data rates and simple hardware configuration. UWB radio is characterised by a wide signal spectrum and low radiated power spectral density (for FCC regulation refer to [2]). The most interesting approach of the UWB radio system is so-called *impulse radio* [3]. Its basic concept is to transmit and receive very short electromagnetic pulses (few tens of picoseconds to few nanoseconds in duration), where the pulse shape is crucial information.

Antennas play a critical role in UWB communication systems since they influence the complexity of the receiver and transmitter (pulse generator) designs. Generally, ordinary wideband antennas will not transmit short pulses without distortions. Good examples are well-known broadband radiators: log-periodic and spiral antennas. They can be called ultra-wideband in terms of input matching and radiation characteristics, but since they radiate different frequency components from different parts of the antenna, fast transient waveforms are distorted and stretched out [4, 5]. Other radiators (e.g. bow-ties or dipoles) use resistive loading to improve transient characteristics, but at the cost of the radiation efficiency.

The ultra-wideband antenna design is even more challenging for UWB wearable devices. The antenna is mounted on the human body and more aspects are of great importance: antenna dimensions, possibilities of integration into the clothing, human body influence on the antenna characteristics and also on the short-pulses propagation.

We aimed our research interests at antennas for non-invasive Wireless Body Area Networks (WBAN) [1]. WBAN nodes are usually placed close to the body, on or in everyday clothing. It has some distinct features from other wireless networks, which are also constraints for antenna designs: close proximity of the human body (electromagnetic 'pollution' should be extremely low), low transmitting power, possibly low radiation towards body. From the practical point of view, aperture-stacked patch microstrip antenna is a very attractive candidate for WBAN applications (is small and compact, do not radiate significant power into the human body). Moreover, its wideband matching and radiation characteristics were reported [6]. So, to make sure that ASPA is suitable for UWB (pulsed) WBAN wearable radios, we have investigated its transient characteristics.

2. Antennas in UWB systems

Characteristic parameters of antennas for UWB communication differ from those known from the classical antenna theory. The classic concepts of return loss, gain, and radiation pattern are not applicable to pulsed antennas. Return loss still can be useful in guiding the efficiency, but is no longer a useful measure to characterise short-pulse radiation. Typical antenna parameters for UWB radio systems are described in [7,8]. Fig.1 schematically presents components of a UWB radio link, which can be equally characterised in time- or frequency-domain. $X(f)$ represents the signal created in the pulse generator, which feeds the transmit (Tx) antenna. Next, we have 3 transfer functions: $H_{tx}(f)$ stands for the Tx antenna transfer function, $h_{ch}(t)$ indicates channel characteristics, $H_{rx}(f)$ is the receiving (Rx) antenna transfer function. All these functions are not only time (frequency) dependent, but depend also on the direction of the signal propagation.

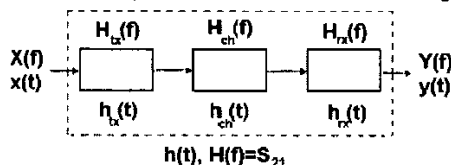


Fig.1 UWB communication link.

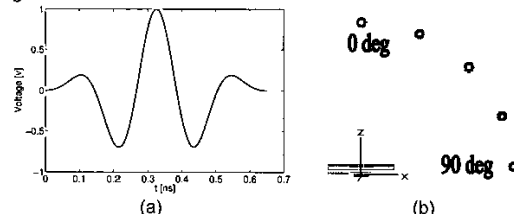


Fig.2 (a) Excitation pulse, (b) time-domain probes.

The characteristic feature in the UWB radio systems is that an antenna must be designed taking into account the entire system. For the particular waveform driving different antennas, in the receiver we will get different pulse shapes. Thus, depending on the receiving method, the system performance will vary and in the worst case it can even stop working. This can be the case for the template receiver (e.g. Rake), where the received waveform is compared with the reference pulse. For this kind of receiver, its complexity will depend on the excitation pulse and the antennas used. From the other side, for the same kind of the template receiver, one could assume different approach. To achieve the simplest detection, one can define the received pulse shape $y(t)$, and based on the known function $h(t)$, one could calculate desired excitation $x(t)$. So, in this case we could achieve the simple receiver, but since $x(t)$ can be the arbitrary waveform, pulse generation can become quite complicated. For our investigations we have used the pulse, which comprise trade-off between transmitter and receiver complexities. Fig.2(a) presents the excitation pulse with duration of 0.65ns, and the time-domain probes (20cm from antenna) used within simulations to find Tx transfer functions for different directions. The pulse was created by the method described in [9]. In this method, for a given duration of the pulse and a limited signal bandwidth we get the set of orthogonal pulses.

3. Antenna design

The geometry of the aperture-stacked patch microstrip antenna is shown in Fig.3. It differs from typical aperture-coupled patch antennas in that a larger aperture and thicker substrates with low dielectric constants have to be used. Because the aperture in the ASPA is also used as a radiator, dual-offset tuning stubs control the coupling from the feedline. Length and distance between them are one of the important parameters to achieve broadband characteristics. For our application, we have designed the ASPA for a frequency range from 3 to 6 GHz, considering the input matching. Referring to the antenna geometry from Fig.3, the dimensions are shown in Tab.1.

	h [mm]	ϵ_r	$\tan\delta$
Feed substrate	1.58	2.2	0.0009
Foam sub.#1	4	1.07	0.0009
Substrate #1	3.175	2.2	0.0009
Foam sub.#2	2.4	1.07	0.0009
Substrate #2	1.58	2.2	0.0009
	width [mm]	length [mm]	
Feedline	4.8	-	
Stubs	1.4	7.4*	
Patch1	32	19	
Patch2	32	17	

* distance from the stub open-end to the aperture centre

Tab.1 Dimensions of the ASPA.

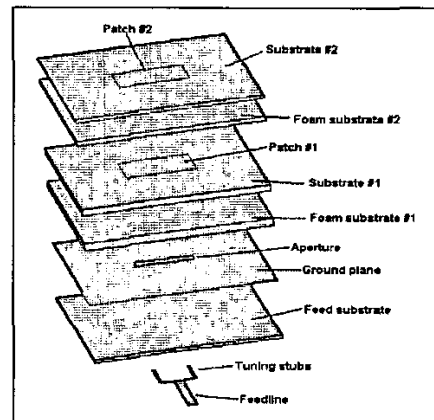


Fig.3 The geometry of ASPA.

4. Antenna characteristics.

The antenna was designed and analysed with aid of the commercial time-domain simulator CST Microwave Studio (finite integration (F) method).

4.1 Frequency domain (FD) characteristics

The simulated return loss (RL) of the ASPA is shown in Fig.4. The $RL > 10\text{dB}$ bandwidth is from 3 to 6 GHz, what is sufficient for our application.

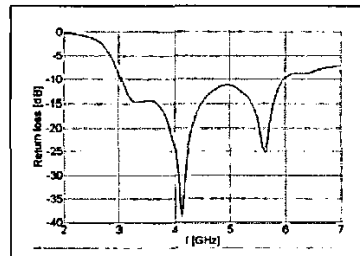


Fig.4 Return loss of ASPA.

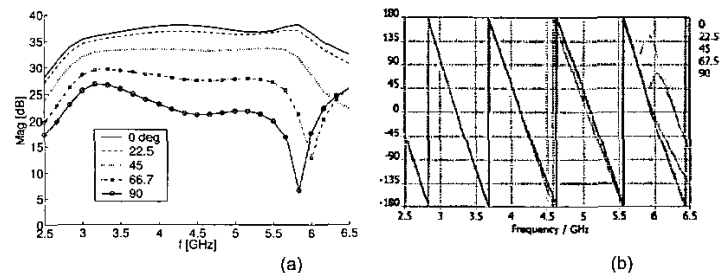


Fig.5 $H_u(f)$: a) amplitude [dBV/m], b) phase [degrees].

The $H_u(f)$ transfer function in different radiation directions (see Fig.2b) is shown in Fig.5. 0 deg indicates radiation perpendicular to the patch surface (normal mode), 90 deg is for end-fire-like propagation (what can represent e.g. communication between

antennas placed along the human body). Since the antenna has linear polarisation, all results are shown for a dominant electric field component. The distance from the antenna to electric field probes is 20cm.

From Fig.5(a) we can see that the transfer function is flat (max.variations-3dB) within 3-6 GHz bandwidth, for 0-45deg directions. Together with linear phase for these directions (Fig.5b) this indicates that the pulse components in this range are radiated without distortions. For radiation at angles between 66.7 and 90 deg, we can see a notch (6 and 5.8 GHz) in the amplitude characteristic of the $H_{tx}(f)$, which causes also non-linear phase response. The same effect can be seen in Fig.6, where we have $H_{rx}(f)$ and $H(f)$ (2-antenna) transfer functions. This result probably from the slot radiation. For these directions on the frequencies where the notch occurs, waves radiated from 2 slot edges have approx. 180° phase difference. For the worst case, end-fire-like (90deg) propagation direction, variations in the amplitude of $H_{tx}(f)$, $H_{rx}(f)$ and $H(f)$ (for 3-6 GHz range) are 20, 30 and 47 dB, respectively. This suggests that the pulse will suffer from distortions. For 0 deg direction, these variations are interesting to notice is the fact that H_{tx} and H_{rx} functions are not the same, thus indicating differences in the antenna transmission and reception behaviours. As we will see in the next paragraph this fact has great influence on the pulse shapes.

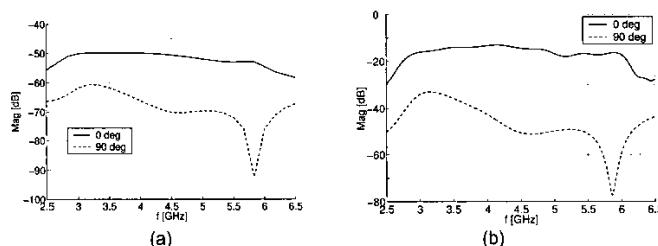


Fig.6 Transfer Functions: (a) $H_{rx}(f)$ -Rx mode, (b) $H(f)$ -2-antenna system.

4.2 Time domain (TD) characteristics

In Fig.7 we present radiated pulses in five different directions, when the ASPA was excited by the pulse from Fig.3(a). Fig.7(a) and (b) show absolute and normalized (to the maximum) values of electric field intensity of radiated pulses, respectively. From Fig.7(b) we can see the fidelity (pulse shape changes in different propagation directions) of the pulses. Assuming a reference pulse radiated in normal direction, the fidelities are 99.9, 99.2, 97 and 91.6% for directions 22.5, 45, 66.7 and 90 deg, respectively.

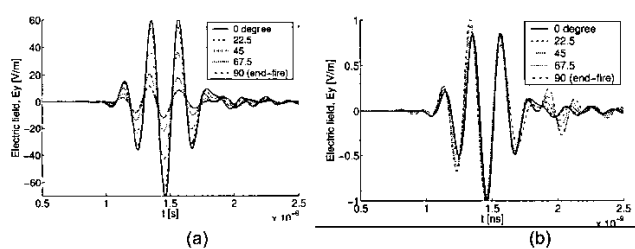


Fig.7 Radiated pulses: (a) absolute values, (b) normalized values.

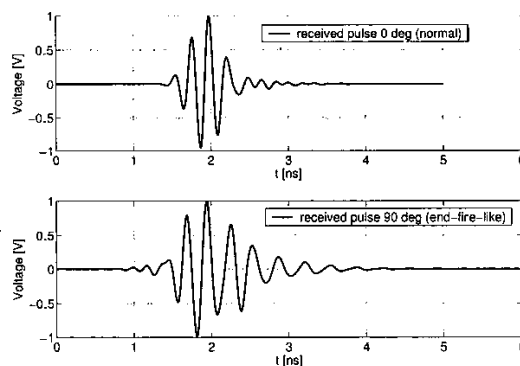


Fig.8 Received pulses.

All pulses are very similar, nevertheless for 66.7-90 deg directions we can see the late-time ringing, caused by the notch and non-linear phase of the Tx transfer function. To avoid pulse distortions, antenna for UWB systems should have the linear phase response. This is even better seen when we look at the pulse shapes (normalized) at the terminals of the receiving antenna (we used the same ASPA in Tx and Rx) from Fig.8. They differ not only in shape, but also in duration. Their fidelity is only 69.5%, their duration (counted for the 10% of a V_{max}) is 0.89 and 1.62 ns, for normal and end-fire-like directions, respectively. The longer pulse duration for 90deg indicates lower achievable data-rates; its complicated shape (more zero-crossing points within the effective duration of the pulse) can make the detection process more difficult (e.g. more fingers for the Rake receiver).

In the UWB transmitter-receiver system, output signals can be (with some assumptions) often approximated by several time derivatives of the input driving pulse (e.g. output waveform from the 2 electrically small Tx-Rx dipoles is a 3rd derivative of the input pulse) [10,11]. But if the antennas are not electrically small (e.g. horn or reflector antennas) they can have no influence on the pulse shape. Other behaviours, even integrations, are also possible. For that reason we have also investigated this aspect. Fig.9 presents comparison between ideal derivatives of input signal for Tx, Rx (input signal as a plane wave) and Tx-Rx modes. All pulses are normalized so that we can compare their shapes.

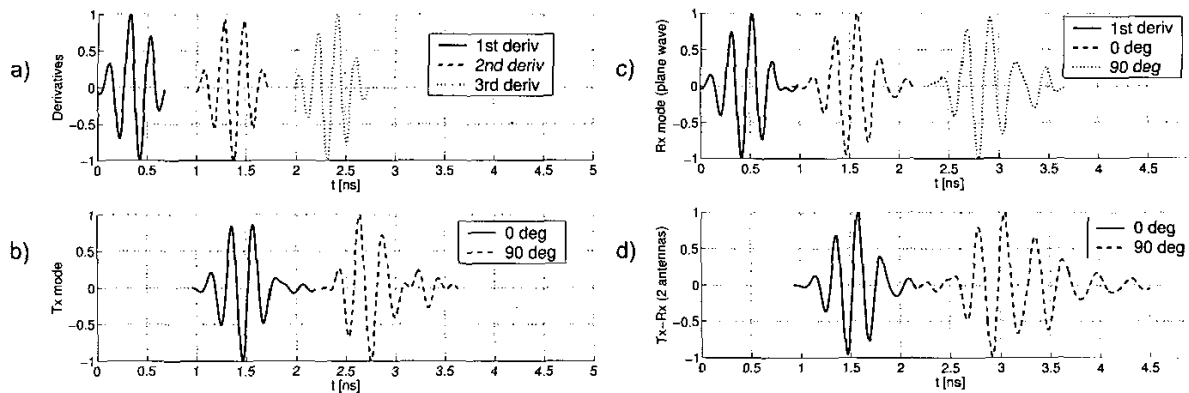


Fig.9 Comparison between ideal derivative of input signals and output waveforms (0 and 90 deg propagation directions): a) input pulse derivatives, b) Tx mode, c) Rx mode, d) for 2-antenna system.

In Fig.9(a) we have waveforms of the 1st, 2nd and 3rd derivative of the input pulse (Fig.3a). Fig.9(b) presents radiated waveforms for 0 and 90 deg directions (the same as in Fig.7). It can be seen that pulse radiated in 0 deg direction is very similar to the 2nd derivative of the excitation. For 90 deg direction, excluding late-time distortions, the pulse is a good replica of the 1st derivative of the input waveform. This effect is very interesting, especially if we compare it with the results obtained for the Rx mode. In Rx mode, we have used plane wave excitation with the time shape as for the radiated pulse (Fig.9b, left) in normal direction. The left pulse in Fig.9(c) is the 1st derivative of the plane wave pulse and then we see 2 received pulses. Unlike in the Tx mode, both pulses are very similar to the 1st derivative of the plane wave. For 90 deg direction, pulse is stretched and distorted at the end, because of the notch in the Rx transfer function. These results show that the antenna is not 'reciprocal' in Tx and Rx modes, if we look at the output waveforms. Finally, for the whole Tx-Rx system, we can notice that: for 0 deg direction, received pulse is the replica of the 3rd derivative of the input waveform; for 90 deg direction, the pulse is seriously distorted and stretched in time, and there is no simple relation with any of derivatives. This is the effect of the entire system transfer function characteristic (Fig.6b). From Fig.9 we can say that the reception mechanism has the bigger influence of the pulse distortions, for end-fire-like transmission.

5. Conclusions

In this paper we investigated the ASP microstrip antenna for UWB wearable applications. Based on the general methodology (using TD simulator), the most important parameters of the pulse antenna were found. Their knowledge is necessary to perform simulations of the UWB radio system, including pulse generator, UWB channel model and receiver front-end. It is very difficult to judge the pulse antenna performance, since it cannot be separated from the entire system. There is a clear call for generator-antenna-receiver co-design in UWB radios. Because of the high fidelity of radiated pulses (above 90%), ASPA could be successfully used for transmitting-only nodes of the WBAN, in the case of on-the-body and body-environment communications scenarios. But it could also be used in both (Tx and Rx) modes, if we could accept lower data-rates for end-fire-like direction (which is the case for on-the-body placed network nodes). In this case, the template receiver is probably not the best solution. Taking into account all practical requirements (small size and compactness), we can say that ASPA is a good candidate for UWB wearable radio systems. Further investigations will include measurements of this antenna, influence of the human body on the antenna parameters and UWB signals propagation.

References:

- [1] T. Zasowski, F. Althaus, M. Stäger, A. Wittneben, and G. Tröster, 'UWB for Noninvasive Wireless Body Area Networks: Channel Measurements and Results', IEEE Conference on Ultra Wideband Systems and Technologies, Reston, Virginia, USA, 16.-19. November 2003
- [2] Federal Communication Commission, First Order and Report, revision of Part 15 of the Commission's Rules Regarding UWB Transmission Systems, FCC 02-48, April 22, 2002.
- [3] M.Z. Win, R.A. Scholtz, 'Impulse radio: how it works', IEEE Communications Letters, Volume: 2 Issue: 2, pp.36-38, Feb. 1998.
- [4] W. Soergel, Ch. Waldschmidt, W. Wiesbeck, 'Antenna Characterization for Ultra Wideband Communications', 2003 International Workshop on Ultra Wideband Systems (IWUWBS), Oulu, Finland, 2. - 5. June, 2003.
- [5] jakas spiral antenna dla pulsow
- [6] S.D. Targonski, R.B. Waterhouse, D.M. Pozar, 'Design of Wide-Band Aperture-Stacked Patch Microstrip Antennas', IEEE Transactions on Antennas and Propagation, vol.46, no.9, September 1998.
- [7] Ch. Robin, S. Bories, A. Sibille, 'Characterization Tools of Antennas in the Time Domain', 2003 International Workshop on Ultra Wideband Systems (IWUWBS), Oulu, Finland, 2. - 5. June, 2003.
- [8] A. Shlivinski, E. Heyman, R. Kastner, 'Antenna Characterization in the Time Domain', IEEE Transactions on Antennas and Propagation, vol.45, no.7, July 1997.
- [9] B. Parr, B. Cho, K. Wallace, Z. Ding, 'A Novel Ultra-Wideband Pulse Design Algorithm', IEEE Communication Letters, vol.7, no.5, May 2003.
- [10] R.W. Ziolkowski, 'Properties of electromagnetic Beams Generated by Ultra-Wide Bandwidth Pulse-Driven Arrays', IEEE Transactions on Antennas and Propagation, vol.40, no.8, August 1992.
- [11] C.E. Baum, 'General Properties of Antennas', IEEE Transactions on Electromagnetic Compatibility, vol.44, no.1, February 2002.