

## Repositório ISCTE-IUL

---

**Deposited in *Repositório ISCTE-IUL*:**

2018-12-10

**Deposited version:**

Post-print

**Peer-review status of attached file:**

Peer-reviewed

**Citation for published item:**

Vaquero, A. F., Arrebola, M., Pino, M. R., Costa, J. R., Matos, S. A. & Fernandes, C. A. (2018). Low cost dielectric flat lens for near-field focusing. In 2018 IEEE International Symposium on Antennas and Propagation and USNC-URSI Radio Science Meeting. Boston: IEEE.

**Further information on publisher's website:**

--

**Publisher's copyright statement:**

This is the peer reviewed version of the following article: Vaquero, A. F., Arrebola, M., Pino, M. R., Costa, J. R., Matos, S. A. & Fernandes, C. A. (2018). Low cost dielectric flat lens for near-field focusing. In 2018 IEEE International Symposium on Antennas and Propagation and USNC-URSI Radio Science Meeting. Boston: IEEE.. This article may be used for non-commercial purposes in accordance with the Publisher's Terms and Conditions for self-archiving.

---

Use policy

Creative Commons CC BY 4.0

The full-text may be used and/or reproduced, and given to third parties in any format or medium, without prior permission or charge, for personal research or study, educational, or not-for-profit purposes provided that:

- a full bibliographic reference is made to the original source
- a link is made to the metadata record in the Repository
- the full-text is not changed in any way

The full-text must not be sold in any format or medium without the formal permission of the copyright holders.

---

# Low-cost Dielectric Flat Lens for Near-Field Focusing

Álvaro F. Vaquero, Manuel Arrebola, Marcos R. Pino  
 Group of Signal Theory and Communications,  
 Universidad de Oviedo, Spain  
 avaquero@tsc.uniovi.es, arrebola@uniovi.es,  
 mpino@uniovi.es

Jorge R. Costa, Sérgio A. Matos  
 Instituto de Telecomunicações, Instituto Universitário de  
 Lisboa, (ISCTE-IUL), Lisbon, Portugal

Carlos A. Fernandes  
 Instituto de Telecomunicações, Universidade de Lisboa,  
 Lisbon, Portugal

**Abstract**—This paper presents a NF-focused antenna based on a low-cost dielectric planar lens. The working principle is based on the variation of dielectric material density in order to obtain a variation in the effective  $\epsilon_r$ . A prototype in the 28GHz band is designed and manufactured with a 3D printer using Polylactic Acid (PLA) material. The breadboard is simulated with a full wave tool and measured in an XYZ planar range, resulting in a very good agreement between simulations and measurements.

**Keywords**—3D-printed lens, dielectric flat lens, near-field focusing.

## I. INTRODUCTION

In the last years the near field antennas become more interesting because of the number of applications. In some of them near field focusing in the Fresnel region is required. When it comes to focus the near field an aperture antenna should be used and different solutions can be proposed. For example, reflectarray and transmitarray antennas are suitable candidates. However, the main drawback of both of them is the bandwidth limitation. In principle, this problem can be avoided by using reflector or lenses which are wideband antennas. In the case the use of high dielectric-constant material allows to reduce the volume of the antenna. In this line, there are some previous works where a dual dielectric hyperbolic lens is proposed with this goal [1, 2]. However, this kind of lenses have a drawback; they are bulky and the manufacturing process is not much simple because of the curved surfaces to be implemented and expensive if low roughness is required

In order to overcome this limitation in this work a flat dielectric lens is proposed and studied for near-field focusing in the 28 GHz frequency band. The phase distribution to be introduced by the lens is implemented by varying the dielectric material density in order to control the effective dielectric constant along the surface of the lens.

The flat dielectric lens proposed in this work provides an easier manufacturing process with a similar performance. A prototype is designed, manufactured and measured, which demonstrates the performances of the antenna.

## II. NEAR-FIELD FOCUSING ANTENNA

The proposed antenna is based on the structure shown in Fig. 1 and it is made up of two elements: a horn antenna working as primary feed and a planar lens that focuses the incident electric field to produce a near-field focusing spot. As shown in the figure, two focal distances are defined for the antenna F1 and F2 that are the distances from the lens to the placement of the feed and the focussing spot respectively. If a focal area with a spot of 30 mm and focal lengths F1 and F2 of 100 and 150 mm respectively are required, a diameter lens of 120 mm is required at 28 GHz. As primary feed the NARDA V637 standard horn antenna is used. This horn antenna generates an illumination taper of 10 dB at the edges of the lens ensuring low diffraction.

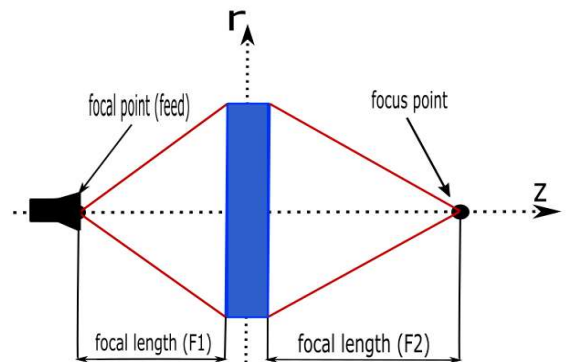


Figure 1. Description of the system employed to design the lens.

The working principle of the antenna consists of the constant phase delay from the feed to the focusing point for all the possible paths. So, as the path length from the feed changes along the radius of the lens, the phase delay introduced by the lens along its surface should be adjusted. In order to do that, the lens is divided into a number of cells in a regular lattice of  $0.5\lambda_0 \times 0.5\lambda_0$  as usually in transmitarrays so each one can be considered as a phase shifter. In this case, the equation to be fulfilled by all the cells of the lens is:

$$\phi_{in}(r) + \phi_{lens}(r) + \phi_{out}(r) = C_{tant} \quad (1)$$

where  $\phi_{in}(r) = -k_0\sqrt{F_1^2 + r^2}$  is the phase of the incident field on the inner surface of the lens cell (because of the phase delay from the feed to the cell),  $\phi_{lens}(r)$  the phase introduced by the lens,  $\phi_{out}(r) = -k_0\sqrt{F_2^2 + r^2}$  the phase introduced by path from the outer surface of the cell to the focusing point,  $r$  is the distance from the centre of the cell to the centre of the lens and  $C_{tant}$  is constant. Thus,  $\phi_{lens}(r)$  can be computed as, assuming  $C_{tant} = 0$ :

$$\phi_{lens}(r) = k_0 \left( \sqrt{F_1^2 + r^2} + \sqrt{F_2^2 + r^2} \right) \quad (2)$$

According to (2) and the antenna optics defined above the phase distribution to be introduced by the planar lens are computed.

### III. FABRICATION AND RESULTS

In order to implement the phase required along the lens surface, a variation in the dielectric material density is defined so the equivalent dielectric constant can be modified and therefore the phase introduced by the lens cell.

In order to achieve a low-cost lens, it was used a 3D printing option. This method consists of making a three dimensional object using an additive process. The material is deposited layer by layer until the desired shape is achieved. In this work, the Polylactic Acid, PLA, ( $\epsilon_r = 2.98$ ,  $\tan \delta = 0.015$ ) [3] was used to print the lens. The flat dielectric lens was designed in a square shape of  $120 \times 120$  mm<sup>2</sup>. This shape allows an easier integration with the assembling structure which is also manufactures using 3D printing process.

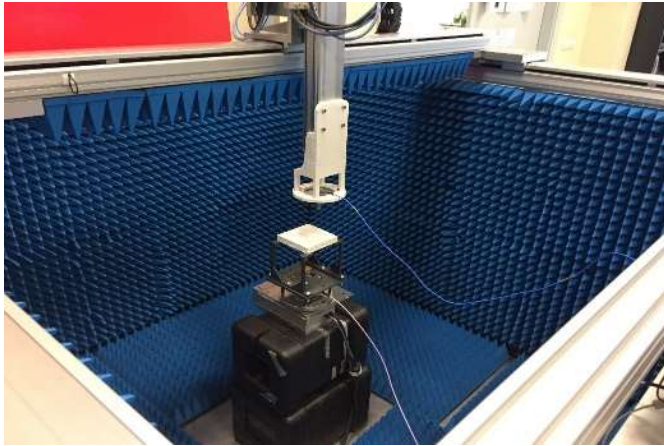


Figure 2. Setup used for the measurement of the antenna in the XYZ planar acquisition range of Universidad de Oviedo.

The lens was measured in the XYZ planar acquisition range in anechoic environment at Universidad de Oviedo, see Fig. 2, using an open-ended waveguide as probe. In order to check the accuracy of the manufacturing process, the co-polarization component of the electric field was measured along the z-axis (axial axis of the antenna), and these results are compared with simulations carried out with **CST-Microwave Studio** [4].

As it is showed in Fig. 3 an excellent agreement was found between the measurement and the simulation results. Although the theoretical focus point is placed at a distance of 150 mm from

the surface of the lens, the experimental results suffered a displacement of 40 mm, being placed the focus point achieved at 110 mm far from the lens. This behaviour is well known and has been discussed in previous works [5].

Finally, the weight of the lens is 168 grams which is 80% of the equivalent dual hyperbolic lens (214 grams).

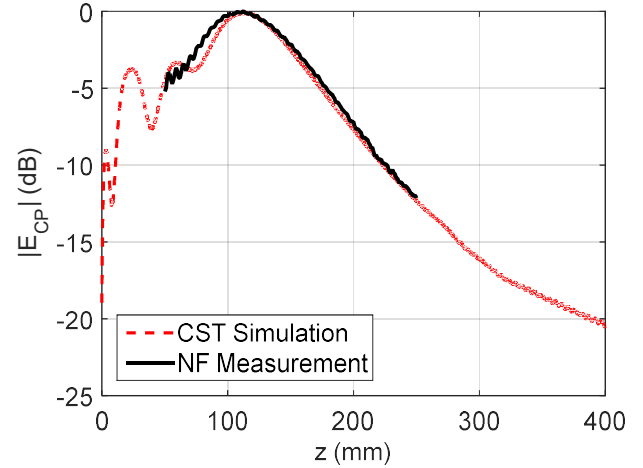


Figure 3. Normalized electric field intensity (copolar) of the flat dielectric lens along the axial axis of the lens.

### IV. CONCLUSION

A low-cost flat dielectric lens for focusing in the near field region at 28 GHz has been presented in this contribution. The lens was manufactured using a 3D printing technique based on an additive process of PLA material to reduce the cost. The antenna has been measured in a XYZ planar range and compared with the simulations carried out **with CST** obtaining very good agreement. Compared with conventional hyperbolic lenses, the one proposed in this work is 20% more lightweight.

### ACKNOWLEDGMENT

This work was supported in part by COST Action TD1301, MiMed; by the Ministerio de Economía y Competividad (Spanish Government), under the projects TEC2017-86619-R (ARTEINE) and TEC2016-75103-C2-1-R (MYRADA).

### REFERENCES

- [1] Jorge R. Costa, Eduardo B. Lima, and Carlos A. Fernandes, "Antenna Phase Center Determination from Amplitude Measurements using a Focusing Lens," *IEEE trans. Antennas Propag.*, vol. 65, no5, pp. 1481-1487, May 2011.
- [2] David R. Reid, and Glenn S. Smith, "A comparison of the Focusing Properties of a Fresnel Zone Plate with a Hyperbolic Lens Using a Full Electromagnetic Analysis," *IEEE Antennas and Propagation Society International Symposium (AP-S)*, 5-11 Jul. 2008.
- [3] Jorge P. Teixeira, Sérgio A. Matos, Jorge R. Costa, Carlos A. Fernandes, Nour Nachabe, Cyril Luxey, Diane Titz, and Frederic Ganesello, "Transmit Array as a Viable 3D Printing Option for Backhaul Applications at V-Band," *IEEE Antennas and Propagation Society International Symposium (AP-S)*, 9-14 Jul. 2017.
- [4] CST Microwave Studio 2017; [www.cst.com](http://www.cst.com)
- [5] A. Buffi, P. Nepa, G. Manara, "Design Criteria for Near-Field-Focused Planar Arrays", *IEEE Antennas and Propagation Magazine*, Vol. 54, no 1, pp. 40-50, 2012

