

BiSON

Birmingham
Solar-Oscillations
Network

TECHNICAL REPORT NO. 243

BeebSub #56C — An Improved BBC Computer Substitute

Ian Barnes, Barry Jackson, and Brek A. Miller
The University of Birmingham, Edgbaston, Birmingham B15 2TT

2004 November 3

This technical report series is published by:



**THE UNIVERSITY
OF BIRMINGHAM**

High-Resolution Optical-Spectroscopy Group

School of Physics and Astronomy
The University of Birmingham
Edgbaston, Birmingham B15 2TT, United Kingdom
Telephone: +44-121-414-4551 FAX: +44-121-414-1438

BeebSub #56C — An Improved BBC Computer Substitute

Ian Barnes, Barry Jackson, and Brek A. Miller

The University of Birmingham, Edgbaston, Birmingham B15 2TT

2004 November 3

Abstract

The improved BBC Computer Substitute in Izaña is described.

1 Introduction

In 2003 December, the old BBC computer that was collecting Mark I data from the BBC scalers was replaced with a new PC. The BBC scalers [1] have a 10-ms window in which the data can be read. Although the typical interrupt latency for the Izaña PC is $25\ \mu\text{s}$, the worst-case latency measured while the system is under a heavy load is 30 ms. This means that if the computer tries to read the data from the scalers itself, it may miss points.

To solve this problem, we have created a BBC Computer Substitute (BeebSub) which reads the data from the scalers in place of the BBC computer. It then forwards the data to the new PC over an RS-232 connection.

Two of these devices were built and sent [2, 3] to Izaña in 2003 December. They are called BeebSub #56A and BeebSub #56B. The first device actually started out as PIC Development System #3 (Picdev #3) [4]. It was used to test the interrupt latency of the PC and was then transformed into BeebSub #56A.

Both of these devices performed well. However, on very rare occasions, the PIC has crashed. This latest version, the BeebSub #56C, incorporates filters and clamps to deal with the electrical problems causing the crashes.

2.2 Rear Panel

The rear-panel of the BeebSub is shown in Figure 2. The rear-panel connectors are summarized in Table 1.

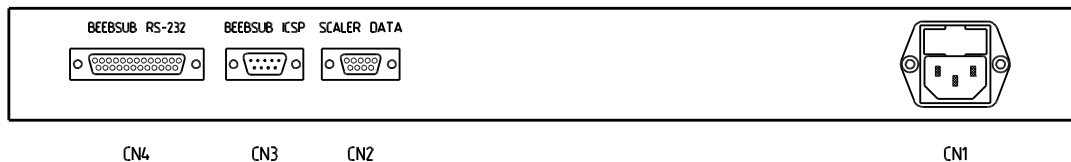


Figure 2: The rear panel.

Table 1: Rear-Panel Connectors

| | <i>Connector</i> | <i>Label</i> | <i>Description</i> |
|-----|------------------|----------------|-------------------------------|
| CN4 | 25-pin female D | BeebSub RS-232 | Serial data |
| CN3 | 9-pin male D | BeebSub ICSP | In-circuit serial programming |
| CN2 | 9-pin female D | Scaler Data | |
| CN1 | male IEC | | Mains |

2.3 Connections

The pin-outs of some of the connectors situated on the rear of the BeebSub are shown in Tables 2 to 4.

Table 2: RS-232 Connector (CN4)

| <i>Pin</i> | <i>Label</i> | <i>I/O</i> | <i>Description</i> |
|------------|--------------|------------|--------------------|
| 1 | CGND | | Chassis ground |
| 2 | TxD | I | Transmit data |
| 3 | RxD | O | Receive data |
| 7 | GND | | Signal ground |

Table 3: ICSP Connector (CN3)

| <i>Pin</i> | <i>Label</i> | <i>I/O</i> | <i>Description</i> |
|------------|------------------------------|------------|---|
| 1 | V _{FLASH} | I | Connects to $\overline{\text{MCLR}}$ on PIC |
| 2 | PGC+ | I | Programming clock |
| 3 | PGD+ | I/O | Programming data |
| 4 | RD/ $\overline{\text{WR}}$ + | I | High when PGD should be output |
| 5 | CGND | — | Chassis ground |
| 6 | DGND | — | Digital ground |
| 7 | PGC- | I | |
| 8 | PGD- | I/O | |
| 9 | RD/ $\overline{\text{WR}}$ - | I | |

Table 4: Scaler Data Connector (CN2)

| <i>Pin</i> | <i>Signal</i> | <i>I/O</i> | <i>PIC Pin</i> | <i>PIC Name</i> | <i>Description</i> |
|------------|------------------------|------------|--------------------|---------------------|---------------------|
| 1 | $\overline{\text{MT}}$ | I | 33 | RB0/INT | Not empty |
| 2 | CB1 | I | 34 | RB1 | Next digit is ready |
| 3 | CB2 | O | 35 | RB2 | Request next digit |
| 4 | D0 | I | 19 | RD0/PSP0 | Data |
| 5 | D1 | I | 20 | RD1/PSP1 | Data |
| 6 | D2 | I | 21 | RD2/PSP2 | Data |
| 7 | D3 | I | 22 | RD3/PSP3 | Data |
| 8 | DGND | — | | | Digital Ground |
| 9 | CGND | — | | | Chassis Ground |

Table 5: Scaler-Data Cable

Station: Izaña.

Cable: 12-wire, 7/0.2-mm, Shielded.

Length: 7 m

| <i>Cable Label:</i> | Scaler Data | Scaler Data | |
|---------------------------|--------------------|----------------------------|-------------------------|
| <i>Connects to:</i> | BeebSub | BBC Scalers | |
| <i>Connects to Label:</i> | Scaler Data | <i>none</i> | |
| <i>Connector:</i> | 9-pin male D | 14-pin male IEEE-488 | |
| \overline{MT} | 1 | 6 | black |
| CB1 | 2 | 12 | brown |
| CB2 | 3 | 13 | red |
| D0 | 4 | 2 | orange |
| D1 | 5 | 3 | yellow |
| D2 | 6 | 4 | green |
| D3 | 7 | 5 | blue |
| Digital Gnd | 8 | { 1 7 11 | violet grey white |
| Chassis Gnd | 9 | — | shield |

3 System Design

The BeebSub is a 1U rack case which contains a toroidal transformer and five separate PCBs, these are:

PIC PCB The main board in the BeebSub containing most of the electronics including the PIC microcontroller.

POWER-LED PCB Shows the status of the +5-V DC supply.

ICSP-LED PCB Shows which mode the PIC is in and also the state of the Clock and Data lines when in program mode.

IO-LED PCB Shows the status of each of the I/O lines used on the PIC.

RS-232-LED PCB Shows the status of the Rx and Tx lines of the RS-232 interface.

All of the PCBs, apart from the PIC board, are mounted on the front panel enabling the user to visually check that the unit is functioning.

3.1 System Wiring Diagram

A wiring diagram of the BeebSub enclosure can be found in Figure 3.

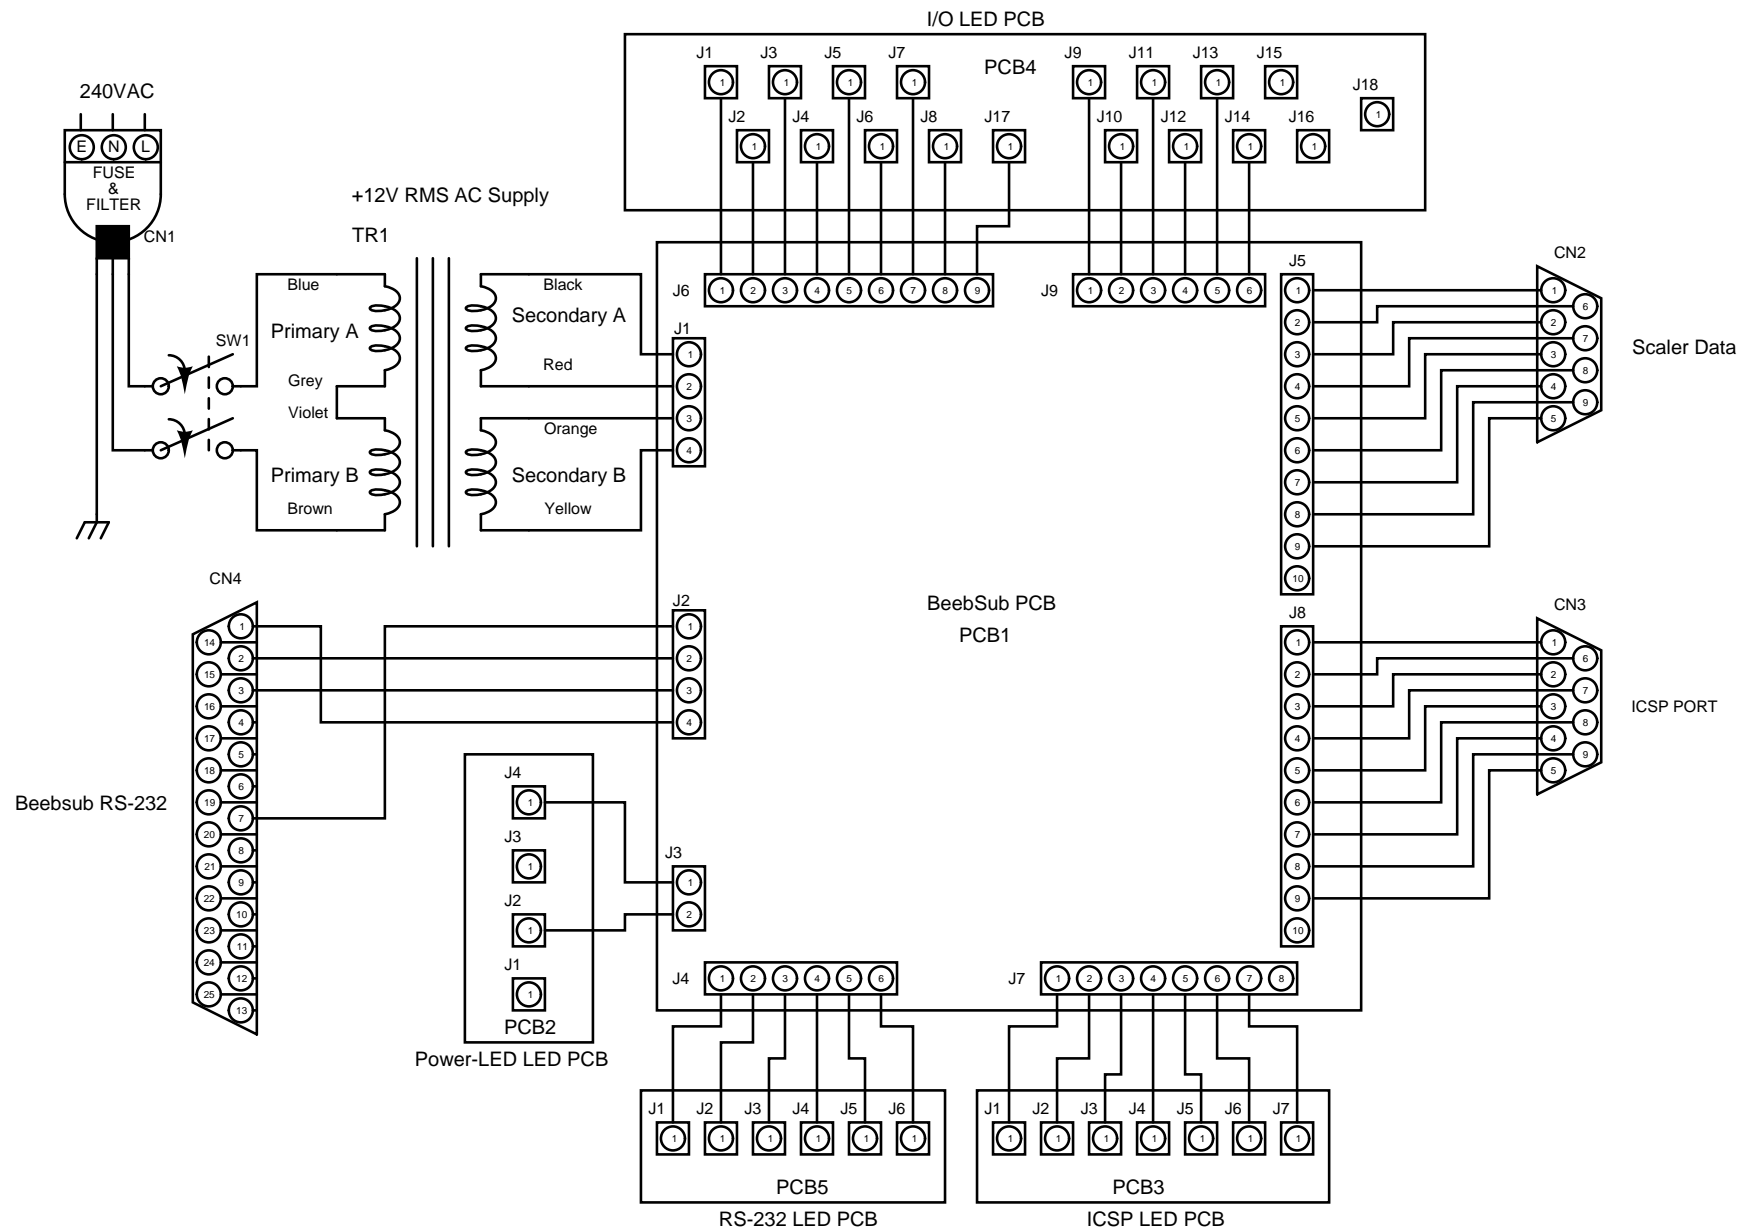


Figure 3: BeebSub System Wiring diagram.

3.2 BeebSub Parts List

The parts list for the BeebSub unit is given in Table 6. Note that the ID field relates to the wiring diagram given in Figure 3.

Table 6: Parts List - BeebSub System

| ID | Part Number | Description | Unit Cost* |
|--------|---------------|--|------------|
| – | RS 224-234 | rack case 1 U × 84 HP × 254 mm | 52.57 |
| CN1 | FEC 453-705 | filtered IEC inlet | 16.45 |
| CN2 | RS 408-3172 | 9-pin female IDC D-connector | 1.53 |
| CN3 | RS 408-3144 | 9-pin male IDC D-connector | 1.53 |
| CN4 | Rapid 15-0160 | 25-pin female D-connector | 0.15 |
| SW1 | Rapid 75-0330 | red visirocker switch | 0.53 |
| TR1 | Rapid 88-2500 | 15-VA 6-V 1.25-A toroidal transformer | 5.10 |
| J1–J2 | Rapid 22-0915 | 4-way Molex KK crimp housing | 0.019 |
| J3 | Rapid 22-0905 | 2-way Molex KK crimp housing | 0.01 |
| J4, J9 | Rapid 22-0925 | 6-way Molex KK crimp housing | 0.026 |
| J5, J8 | Rapid 19-0300 | 10-way IDC cable-mounted socket | 0.10 |
| J6 | Rapid 22-2355 | 9-way Molex KK crimp housing | 0.039 |
| J7 | Rapid 22-0930 | 8-way Molex KK crimp housing | 0.035 |
| – | Rapid 22-1097 | Molex KK crimp terminal (100 pack) | 1.70 |
| – | Rapid 33-3525 | M3 × 12 hexagonal PCB Spacer (100 pack) | 1.90 |
| – | Rapid 33-2950 | M3 × 6 Pozidriv countersunk screw (100 pack) | 0.95 |
| PCB1 | BS-PIC-1 | BeebSub PIC PCB Assembly | 0.00 |
| PCB2 | PWR-LED-2 | Power-LED PCB Assembly | 0.00 |
| PCB3 | ICSP-LED-1 | ICSP LED PCB Assembly | 0.00 |
| PCB4 | IO-LED-1 | I/O LED PCB Assembly | 0.00 |
| PCB5 | 232-LED-2 | RS232-LED PCB Assembly | 0.00 |

*All prices correct at time of going to press.

4 PIC Board

The PIC Board contains most of the necessary electronics of the BeebSub. The BeebSub is a microprocessor-based system based around a Microchip PIC 16F877 microcontroller. The PIC has the ability to be programmed in-circuit via the ICSP port situated on the back of the unit.

The PIC board also contains a +5-V power supply, RS-232 communications driver, as well as all the electronics to drive the various panel-mounted LEDs.

4.1 Schematic Diagram

There are several drawings that make up the circuit schematic for the PIC Board. They are summarized in Table 7.

Table 7: PIC Board Drawings

| <i>Drawing</i> | <i>Figure</i> | <i>Page</i> |
|--------------------------------------|---------------|-------------|
| Hierarchical Block Diagram | 4 | 10 |
| +5-V DC Power Supply & Decoupling | 5 | 11 |
| In-Circuit Serial Programming (ICSP) | 6 | 12 |
| PIC Microcontroller & I/O Interface | 7 | 13 |
| I/O LED Drivers | 8 | 14 |
| RS-232 Communications | 9 | 15 |




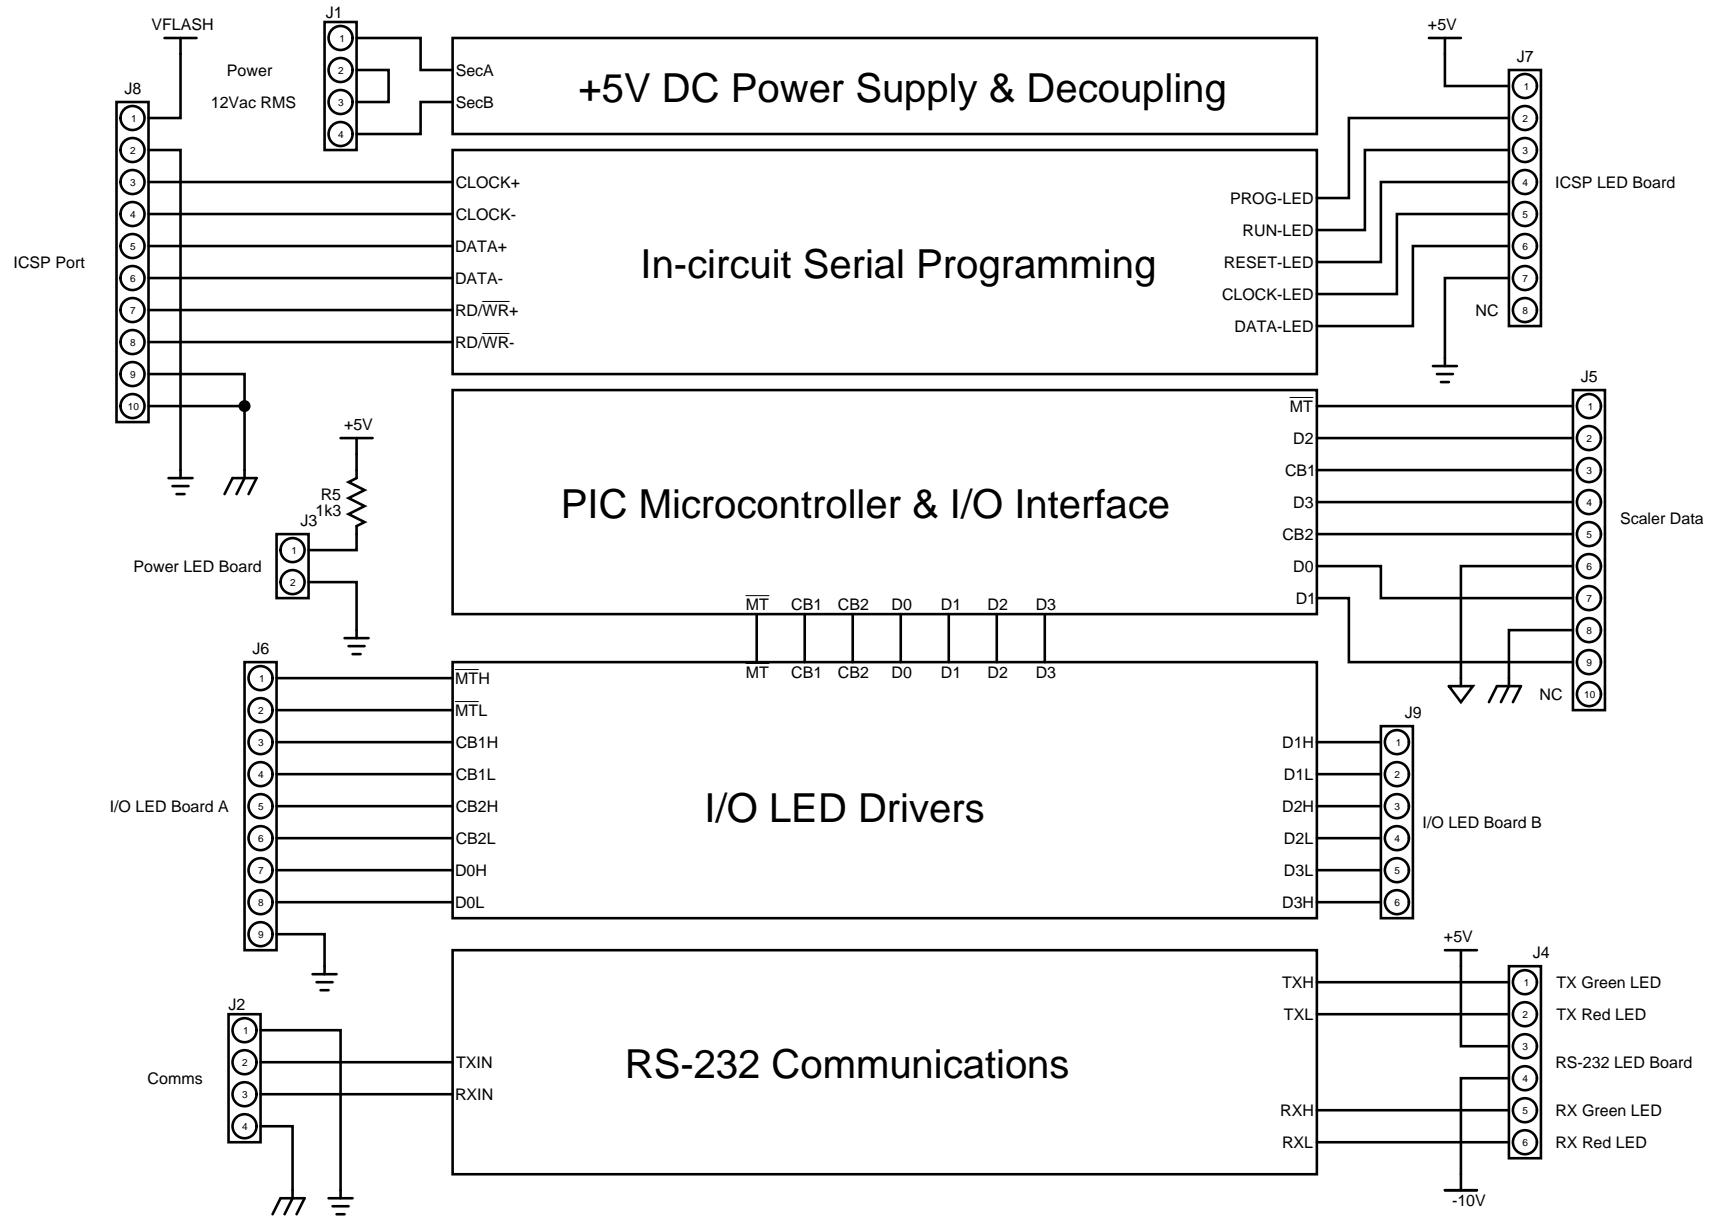



Figure 4: Hierarchical block diagram of the PIC board.

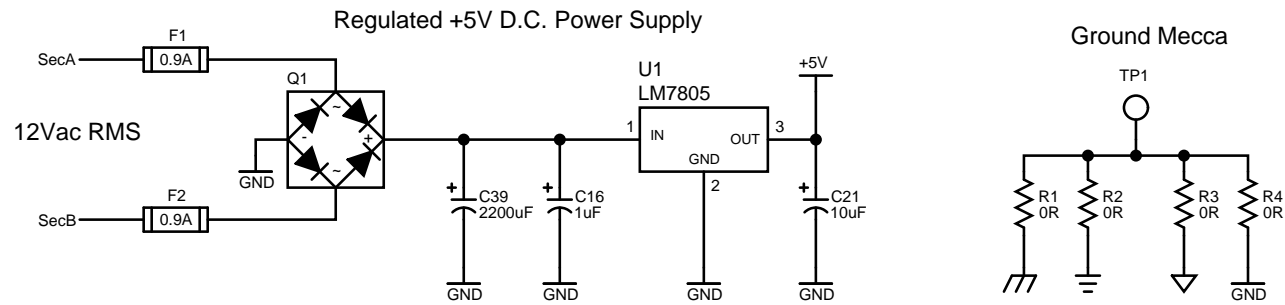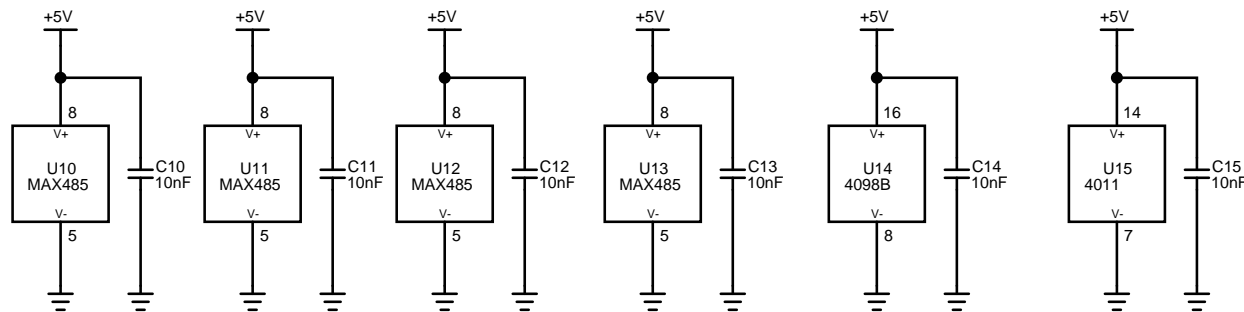

Decoupling

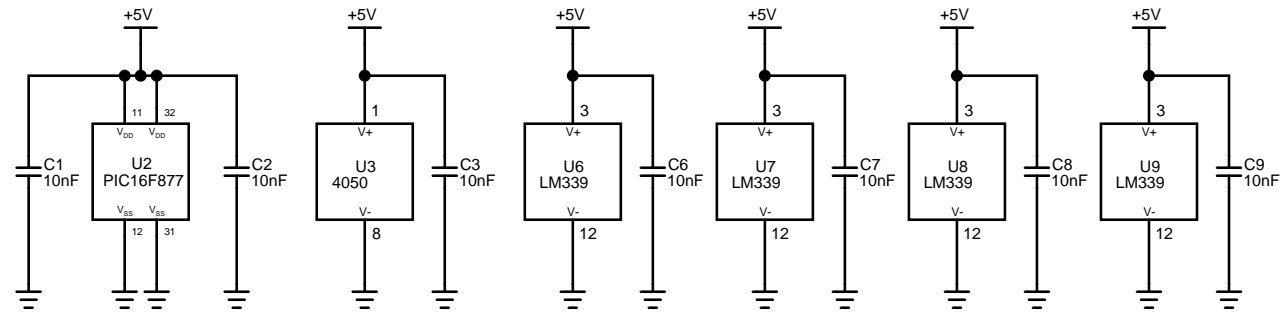

Ground Test Points



Logic Probe




Figure 5: Schematic diagram of the power supply section of the PIC board.

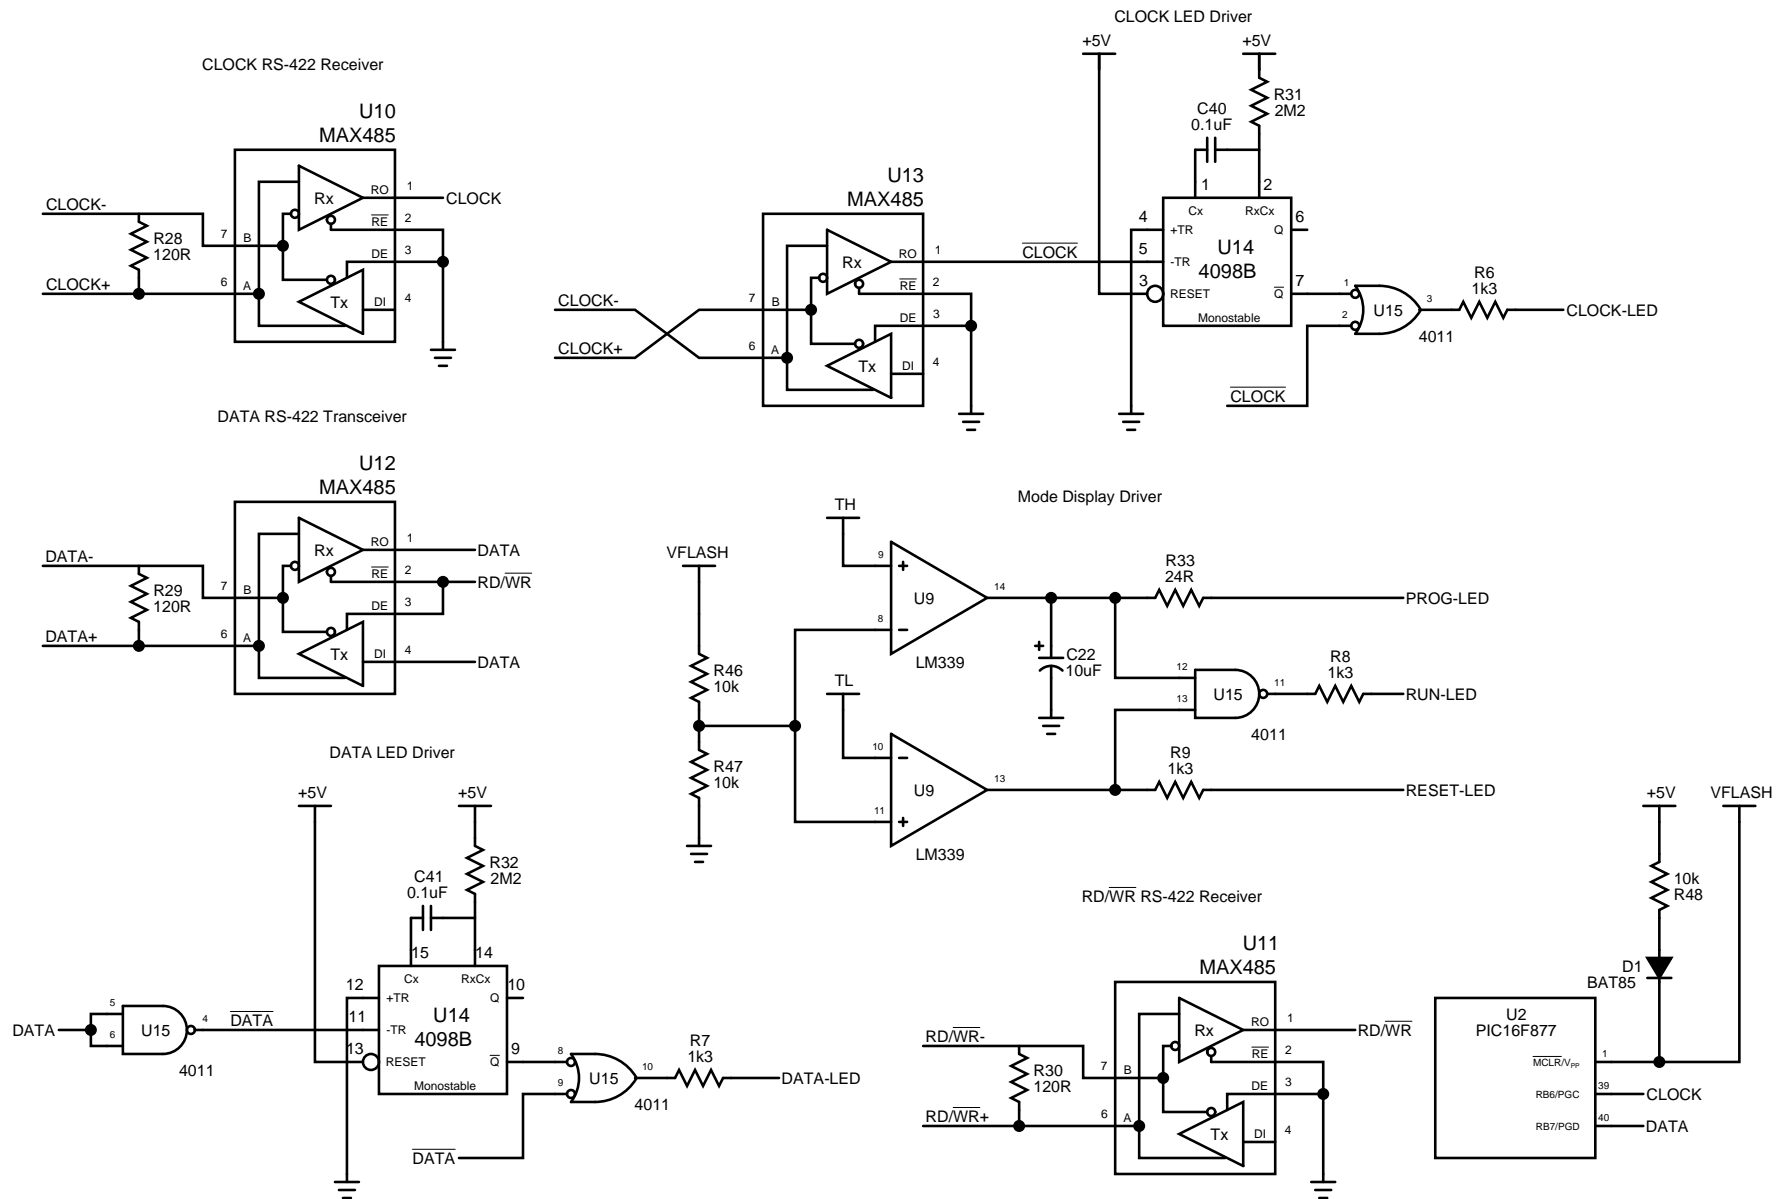


Figure 6: Circuit schematic for the In-Circuit Serial Programming (ICSP) section of the PIC board.

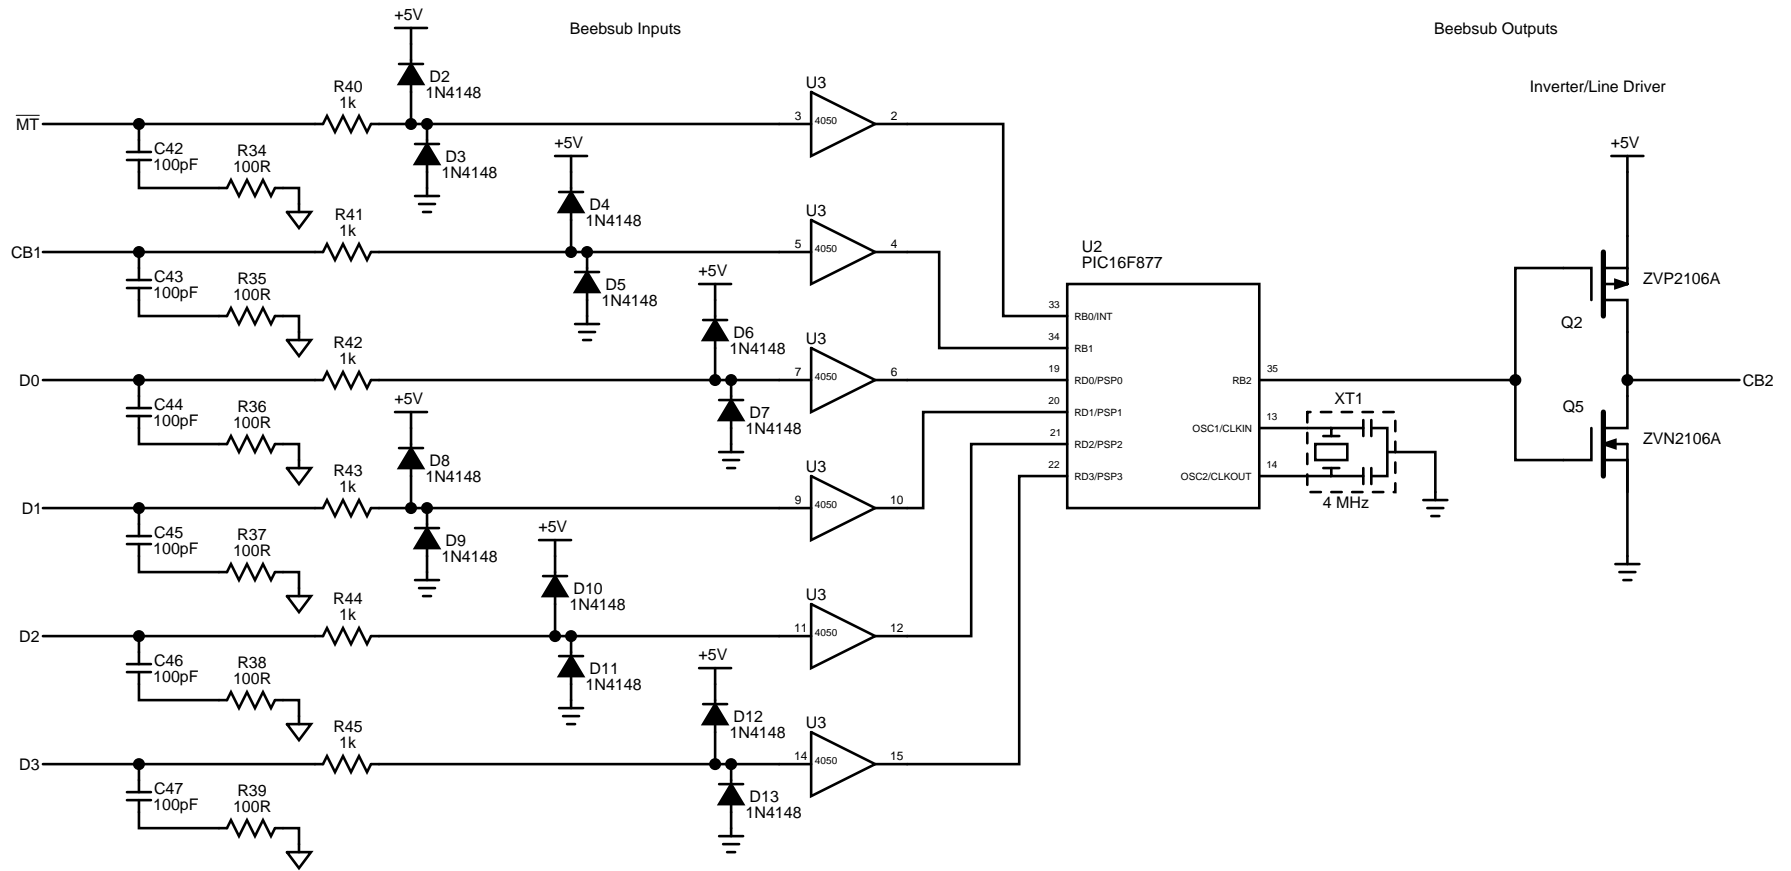


Figure 7: Circuit schematic for the I/O interface section of the PIC board.

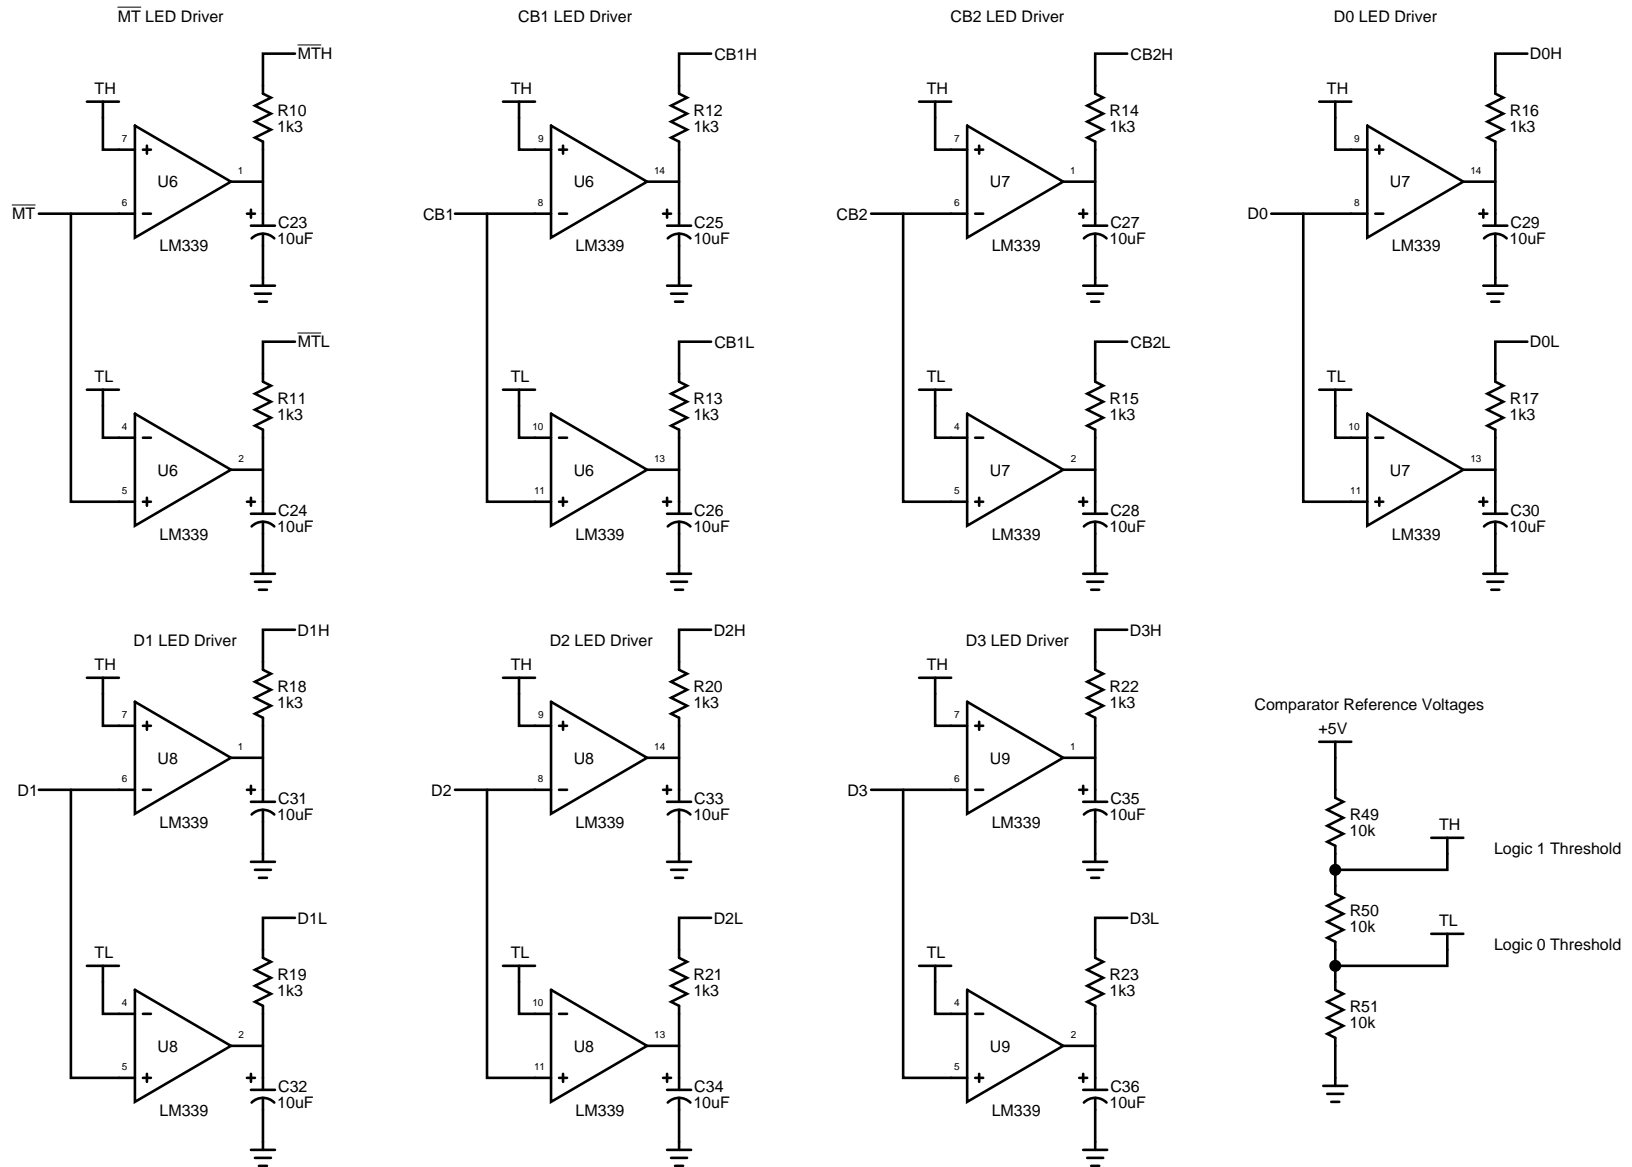


Figure 8: Circuit schematic for the I/O LED drivers section of the PIC board.

RS-232 Communications & Rx Tx LED Drivers

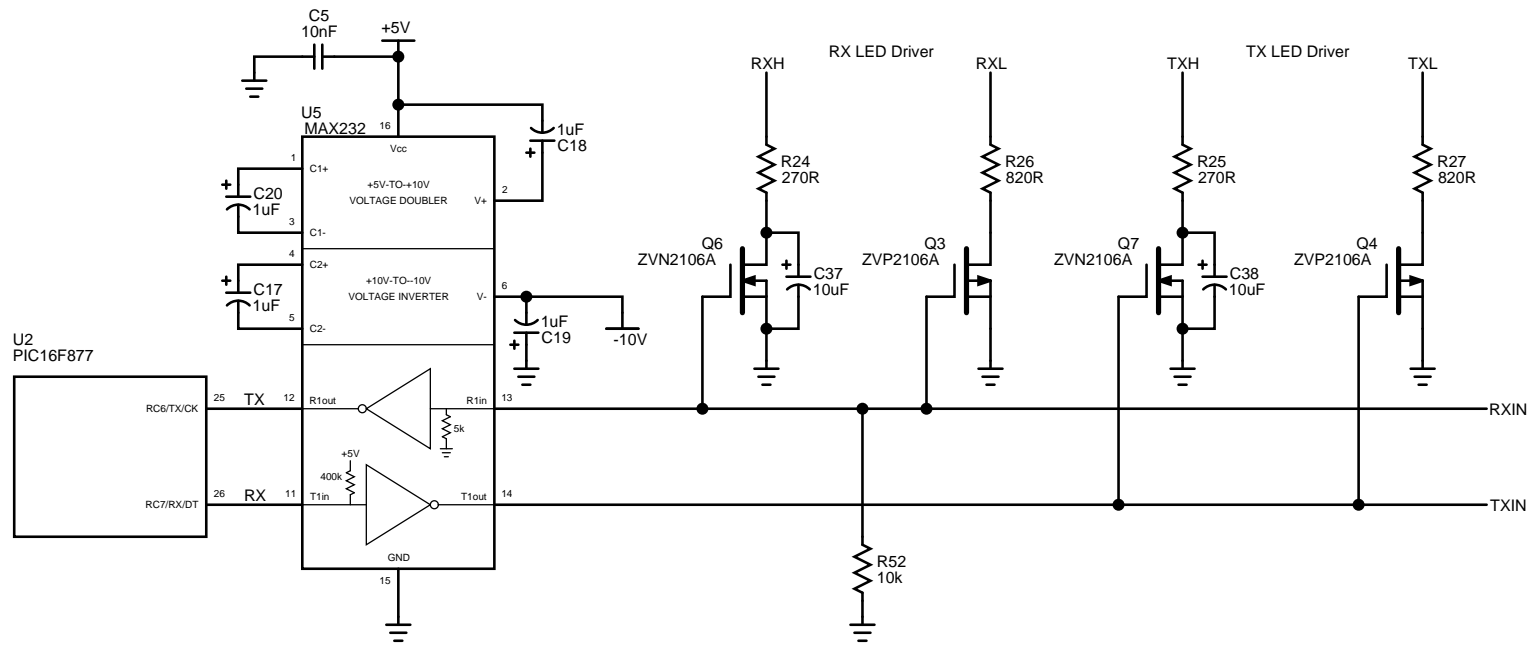


Figure 9: Circuit schematic of the RS-232 section of the PIC Board.

4.2 PCB Layout

The PIC PCB is a double-sided PCB. Due to the PCB being double-sided and the amount of holes and vias on this PCB, it will be manufactured by an outside contractor.

The component-side layout is given in Figure 10. The solder-side layout is given in Figure 11.

CUT ALONG THIS LINE

17

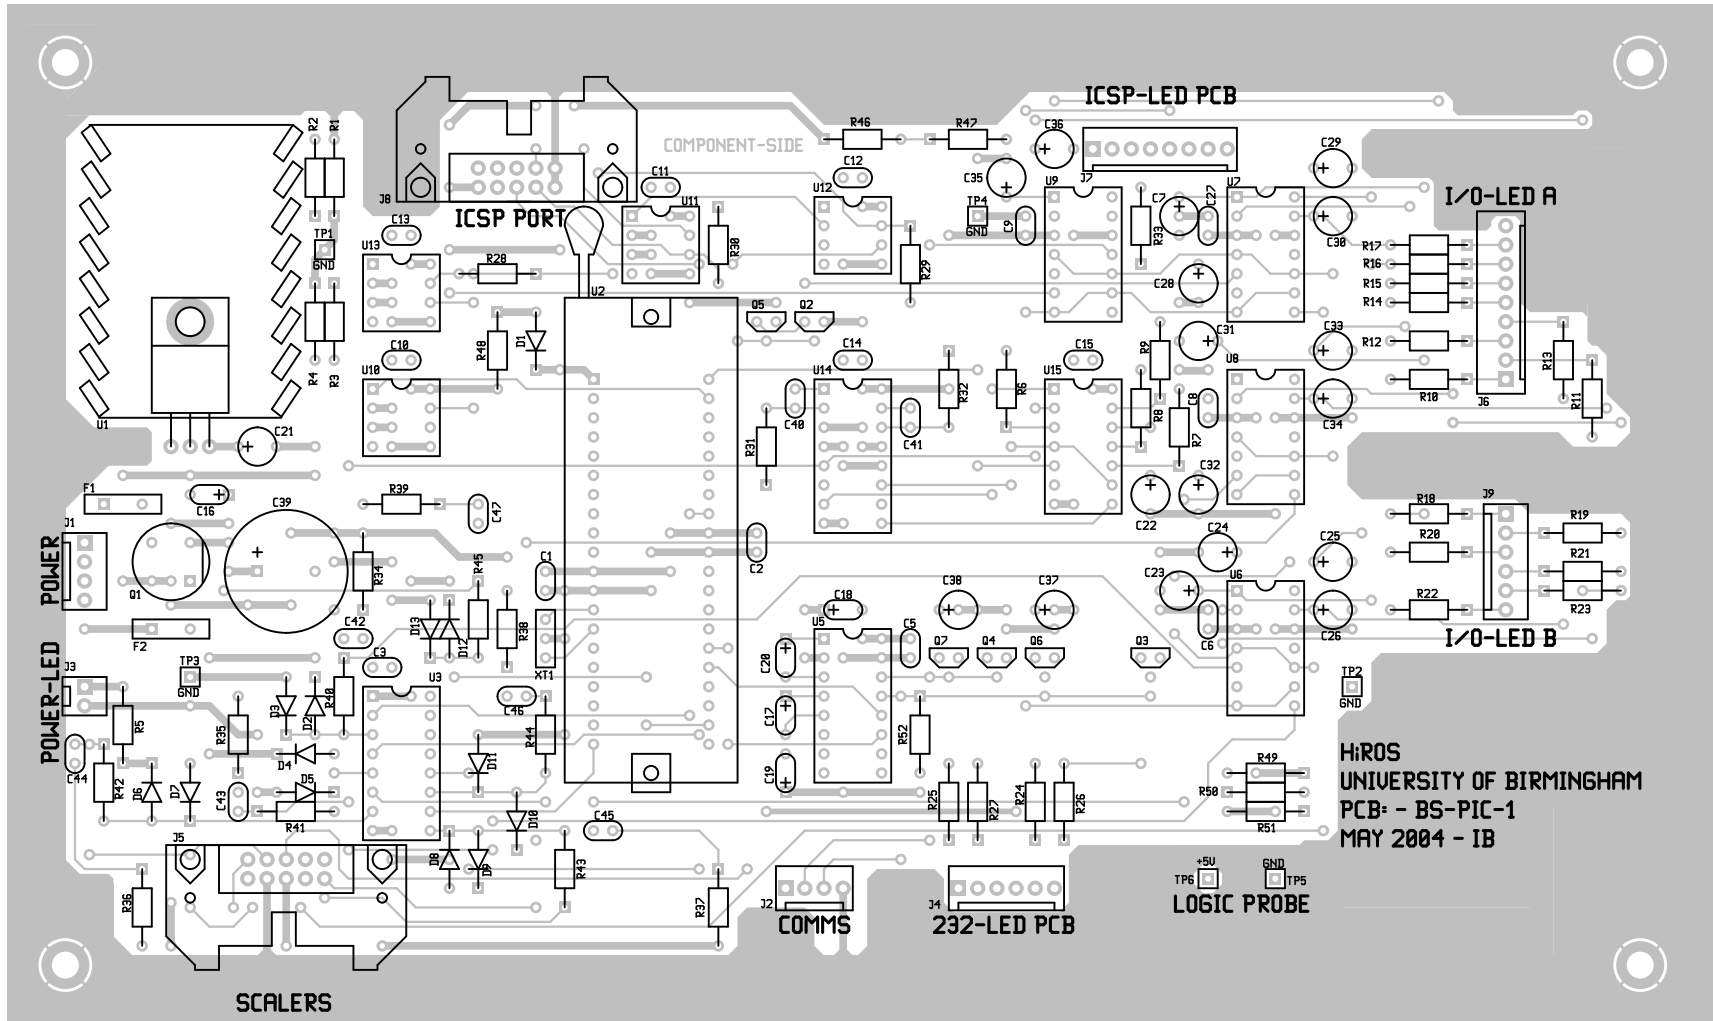


Figure 10: PIC Board component silkscreen & component-side tracks.

CUT ALONG THIS LINE

18

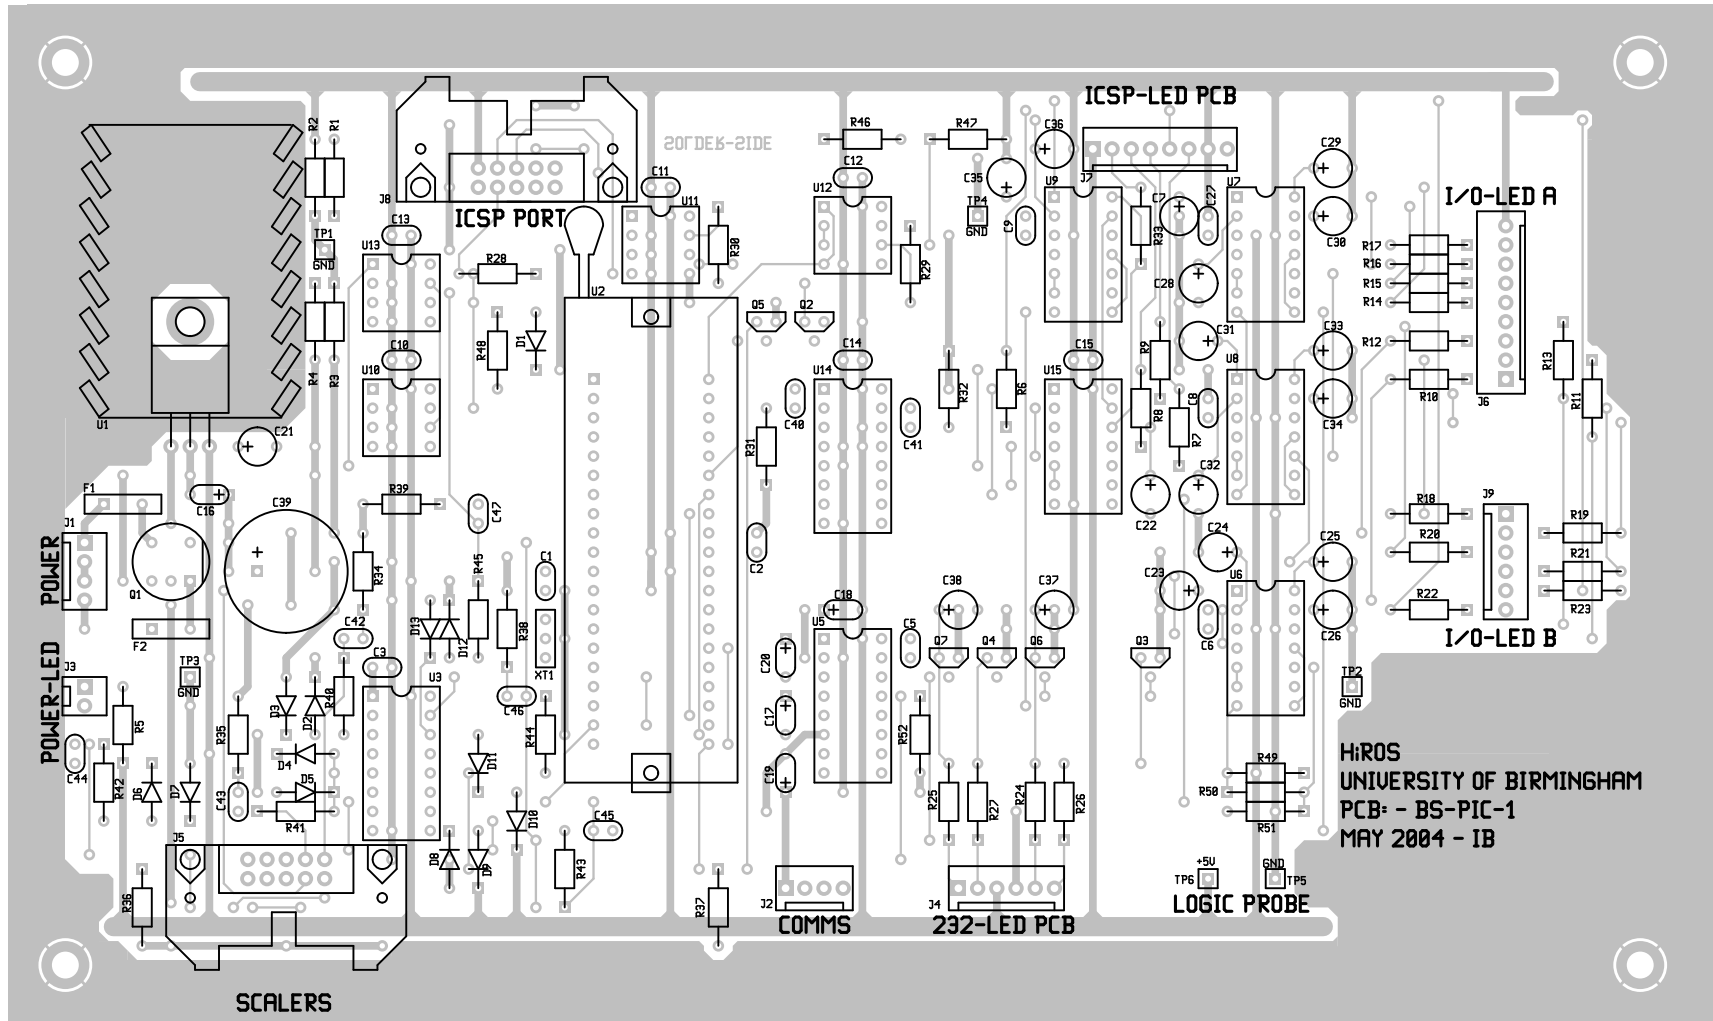


Figure 11: PIC Board component silkscreen & solder-side tracks.

4.3 PIC PCB Parts List

4.3.1 Resistors

Table 8: Parts List - Resistors

| ID | Part Number | Description | Unit Cost* |
|---------|-------------|-------------------------------------|------------|
| R1–R4 | FEC 508-792 | 0 Ω link MCF series | 0.010 |
| R5–R23 | FEC 543-410 | 1.3 k Ω 0.25 W 1%MF25 series | 0.047 |
| R24–R25 | FEC 543-240 | 270 Ω 0.25 W 1% MF25 series | 0.047 |
| R26–R27 | FEC 543-866 | 820 Ω 0.25 W 1% MF25 series | 0.047 |
| R28–R30 | FEC 543-160 | 120 Ω 0.25 W 1% MF25 series | 0.047 |
| R31–R32 | FEC 336-749 | 2.2 M Ω 0.6W 1% MRS25 series | 0.040 |
| R33 | FEC 542-994 | 24 Ω 0.25 W 1% MF25 series | 0.047 |
| R34–R39 | FEC 543-147 | 100 Ω 0.25 W 1% MF25 series | 0.047 |
| R40–R45 | FEC 453-380 | 1 k Ω 0.25 W 1% MF25 series | 0.047 |
| R46–R52 | FEC 543-627 | 10 k Ω 0.25 W 1% MF25 series | 0.047 |

*All prices correct at time of going to press.

4.3.2 Capacitors

Table 9: Parts List - Capacitors

| ID | Part Number | Description | Unit Cost* |
|-----------------|---------------|---------------------------------------|------------|
| C1–C3 C5–C15 | Rapid 08-1000 | 10 nF 100 V ceramic | 0.036 |
| C16–20 | Rapid 11-0688 | 1 μ F 35 V tantalum | 0.12 |
| C21–C38 | Rapid 11-0698 | 10 μ F 35 V tantalum | 0.34 |
| C39 | Rapid 11-0765 | 2200 μ F 35 V radial electrolytic | 0.28 |
| C40-C41 | Rapid 08-1015 | 0.1 μ F 100 V ceramic | 0.049 |
| C42–C47 | Rapid 08-0940 | 100 pF 25 V ceramic | 0.01 |

*All prices correct at time of going to press.

4.3.3 Semiconductors

Table 10: Parts List - Semiconductors

| ID | Part Number | Description | Unit Cost* |
|---------|---------------|-------------------------------------|------------|
| U1 | Rapid 47-3290 | LM7805 +5-V 1-A voltage regulator | 0.145 |
| U2 | Rapid 73-3202 | PIC16F877-04P microcontroller | 3.90 |
| U3 | Rapid 83-0382 | 4050 hex non-inverting buffer | 0.13 |
| U5 | Rapid 82-0148 | MAX232CPE RS-232 line driver | 1.18 |
| U6–U9 | Rapid 82-0242 | LM339 quad comparator | 0.09 |
| U10–U13 | Rapid 82-0308 | MAX485CPA RS-485/RS-422 transceiver | 1.62 |
| U14 | Rapid 83-0426 | 4098B dual monostable | 0.40 |
| U15 | Rapid 83-0328 | 4011 quad dual-I/P NAND | 0.20 |
| Q1 | RS 659-832 | 1.5-A 400-V bridge rectifier | 0.33 |
| Q5–Q7 | Rapid 47-0156 | ZVN2106A n-channel MOSFET | 0.22 |
| Q2–Q4 | Rapid 47-0174 | ZVP2106A p-channel MOSFET | 0.29 |
| D1 | Rapid 47-3108 | BAT85 Schottky diode | 0.045 |
| D2–D13 | Rapid 47-3308 | 1N4148 small-signal diode | 0.006 |

*All prices correct at time of going to press.

4.3.4 Miscellaneous

Table 11: Parts List - Miscellaneous

| ID | Part Number | Description | Unit Cost* |
|---------|---------------|------------------------------------|------------|
| J1–J2 | Rapid 22-0915 | 4-pin Molex KK vertical header | 0.042 |
| J3 | Rapid 22-0955 | 2-pin Molex KK vertical header | 0.022 |
| J4, J9 | Rapid 22-0970 | 6-pin Molex KK vertical header | 0.062 |
| J6 | Rapid 22-2395 | 9-pin Molex KK vertical header | 0.095 |
| J7 | Rapid 22-0975 | 8-pin Molex KK vertical header | 0.085 |
| J5, J8 | Rapid 19-0200 | 10-way right-angled IDC connector | 0.185 |
| TP1–TP5 | Rapid 17-1810 | black test terminal (100 pack) | 7.50 |
| TP6 | Rapid 17-1819 | yellow test terminal (100 pack) | 7.50 |
| XT1 | Rapid 90-0625 | 4-MHz ceramic resonator | 0.19 |
| F1–F2 | Rapid 26-4614 | 0.9-A resettable fuse | 0.26 |
| – | Rapid 22-1580 | 40-pin ZIF IC socket | 8.27 |
| – | Rapid 22-0400 | 8-pin turned-pin IC socket | 0.078 |
| – | Rapid 22-0405 | 14-pin turned-pin IC socket | 0.132 |
| – | Rapid 22-0410 | 16-pin turned-pin IC socket | 0.145 |
| – | Rapid 36-0250 | TO-220 heatsink | 0.38 |
| – | Rapid 36-0480 | TO-3P SP2000 thermal pad (10 pack) | 5.50 |
| – | Rapid 33-4210 | M3 × 6 panhead bolt (100 pack) | 1.80 |
| – | Rapid 33-4305 | M3 nut (100 pack) | 1.50 |


*All prices correct at time of going to press.

5 RS-232 LED Board

The RS-232 LED Board is mounted on the front panel of the case. It contains four LEDs that display the state of the RS-232 lines. A green LED indicates that the line is high whilst a red LED signifies that the line is low. Should the cable accidentally become disconnected then none of the LEDs will be illuminated. The status of the TX line is on the left whilst the RX line is on the right.

5.1 Circuit Schematic

The schematic diagram for the RS-232 LED board is shown in Figure 12.

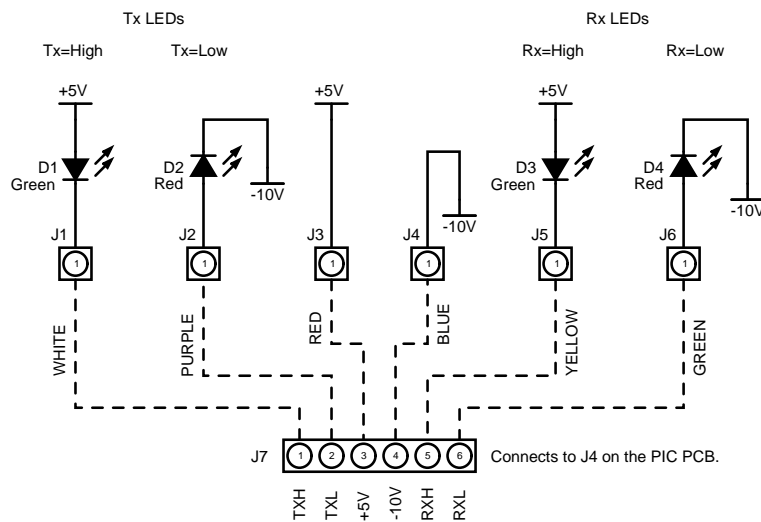

NOTES:

1. Dashed lines indicate a wire connection to an off-board component rather than a PCB track.
2. D1-D4 are mounted on 7.6mm LED spacers.
3. J1-J6 are pads on the PCB with strain-relief holes for soldered wire connections.
4. J7 is a Molex KK crimp housing connected to J1-J6 using 8-core screened cable (screen not used) soldered to the PCB.

Figure 12: Schematic Diagram for the RS-232 LED Board.

5.2 PCB Layout

The component layout and solder-side tracks are shown in Figure 13. The board is single-sided and is made in-house, therefore there will not be a silkscreen on the finished board. For further details on how to manufacture PCBs using the etch tanks consult the document BTR-208.

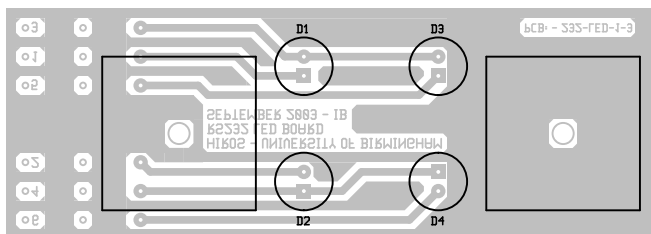


Figure 13: RS-232 LED Board component layout and solder-side tracks.

5.3 RS-232 LED Board Parts List

All of the components that are required to manufacture the RS-232 LED Board are given in Table 12.

Table 12: Parts List - RS-232 LED Board

| ID | Part Number | Description | Unit Cost* |
|--------|---------------|---|------------|
| – | 232-LED-2 | RS-232 LED PCB | 0.00 |
| D1, D3 | Rapid 56-0435 | green low-current 5-mm LED | 0.038 |
| D2, D4 | Rapid 56-0430 | red low-current 5-mm LED | 0.049 |
| J7 | Rapid 22-0925 | 6-way Molex KK crimp housing | 0.026 |
| – | Rapid 22-1097 | Molex KK crimp terminal (100 pack) | 1.70 |
| D1–D4 | Rapid 38-0770 | 7.6-mm 5-mm-LED spacer (25 pack) | 2.00 |
| – | Rapid 33-2135 | 9.5-mm self-adhesive PCB pillar (25 pack) | 1.87 |


*All prices correct at time of going to press.

6 Power LED Board

The Power LED Board contains a single front-panel-mounted LED which is illuminated when the +5-V DC power supply is present.

6.1 Circuit Schematic Diagram

The schematic diagram for the Power LED board is shown in Figure 14.

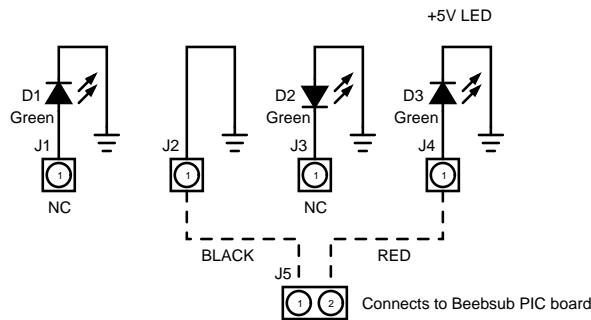

NOTES

1. All Dashed lines indicate a wire connection to an off-board component rather than a PCB track.
2. J1-J4 are pads on the PCB with strain-relief holes for soldered wire connections.
3. J5 is a Molex KK crimp housing connected to J2,J4 using 7/0.2 cable twisted together.
4. For the Beebsub de-populate D1-D2.
5. D3 is mounted on a 7.6mm LED spacer.

Figure 14: Schematic Diagram for the Power LED Board.

6.2 PCB Layout

The component layout and solder-side tracks are shown in Figure 15. The board is single-sided and is made in-house, therefore there will not be a silkscreen on the finished board. For further details on how to manufacture PCBs using the etch tanks consult the document BTR-208.




Figure 15: Power LED Board component layout and solder-side tracks.

6.3 Power LED Board Parts List

Table 13: Parts List - Power LED Board

| ID | Part Number | Description | Unit Cost* |
|-------|---------------|---|------------|
| – | PWR-LED-1 | Power LED PCB | 0.00 |
| D1–D3 | Rapid 56-0435 | 5-mm green low-current LED | 0.038 |
| J5 | Rapid 22-0905 | 2-way Molex KK crimp housing | 0.01 |
| – | Rapid 22-1097 | Molex KK crimp terminal (100 pack) | 1.70 |
| – | Rapid 38-0770 | 7.6-mm 5-mm-LED spacer (25 pack) | 2.00 |
| – | Rapid 33-2135 | 9.5-mm self-adhesive PCB pillar (25 pack) | 1.87 |

*All prices correct at time of going to press.

7 ICSP LED Board

The ICSP LED Board is mounted on the front panel of the case. It contains five LEDs that display the mode that the PIC of the BeebSub is currently in, and also the state of the clock and data lines when in programming mode.

On the left there are three LEDs that indicate the mode that the BeebSub is currently operating in. These different modes are summarized in Table 14.


Table 14: BeebSub Modes

| <i>LED Colour</i> | <i>System Mode</i> | <i>Description</i> |
|-------------------|--------------------|--------------------------------------|
| Blue | Program | The system firmware is being updated |
| Green | RunD | System is running normally |
| Red | Reset | System is doing a hardware reset |

During Program Mode two green LEDs to the right of the mode LEDs illuminate when the clock or data lines are high. These LEDs are not used in Run or Reset mode.

7.1 Circuit Schematic Diagram

The schematic diagram for the ICSP LED board is shown in Figure 16.

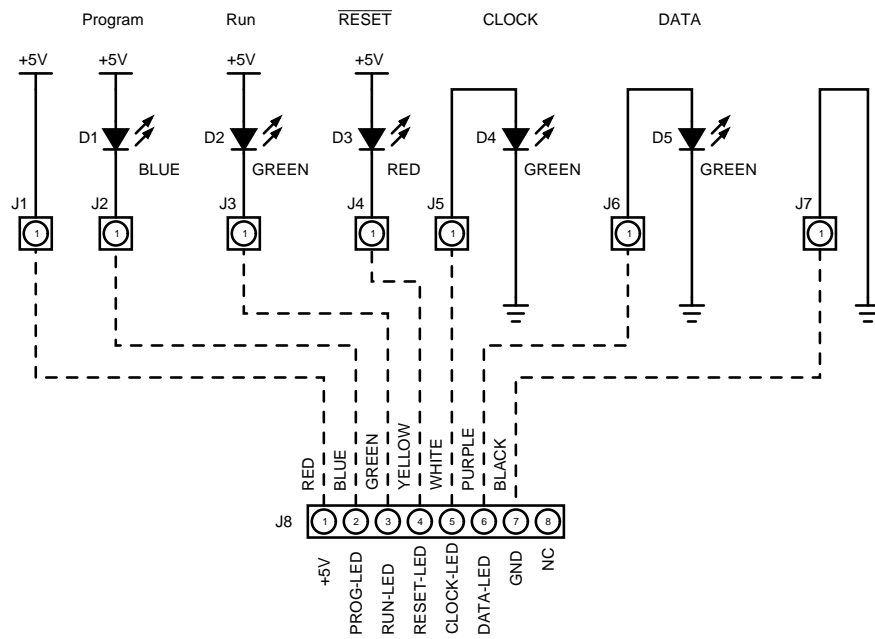

NOTES

1. All dashed lines indicate a wire connection rather than a PCB Track.
2. D1-D5 are mounted on 7.6mm LED spacers.
3. J1-J7 are pads on the PCB with strain-relief holes for soldered wire connections.
4. J8 is a Molex KK crimp housing connected to J1-J7 using 8-core screened cable (screen not used) soldered to the PCB.
5. J8 is to be fully loaded with crimp terminals.

Figure 16: Schematic Diagram for the ICSP LED Board.

7.2 PCB Layout

The solder-side tracks and the component layout are shown in Figure 17. The board is single-sided and is made in-house, therefore there will not be a silkscreen on the finished board. For further details on how to manufacture PCBs using the etch tanks consult the document BTR-208.

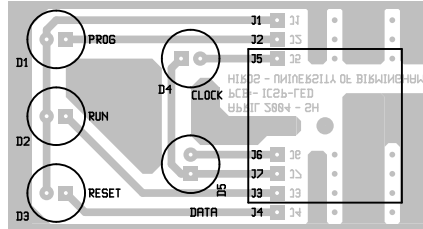


Figure 17: ICSP LED Board component layout and solder-side tracks.

7.3 ICSP LED Board Parts List

All of the components that are required to manufacture the ICSP LED Board are given in Table 15.

Table 15: Parts List - ICSP LED Board

| ID | Part Number | Description | Unit Cost* |
|--------------|---------------|---|------------|
| – | ICSP-LED-1 | ICSP LED PCB | 0.00 |
| D1 | Rapid 55-1810 | 5-mm blue LED | 0.215 |
| D3 | Rapid 56-0430 | 5-mm red low-current LED | 0.049 |
| D2, D4–D5 | Rapid 56-0435 | 5-mm green low-current LED | 0.038 |
| J8 | Rapid 22-0930 | 8-way Molex KK crimp housing | 0.035 |
| D1–D5 | Rapid 38-0770 | 7.6-mm 5-mm-LED spacer (25 pack) | 2.00 |
| – | Rapid 22-1097 | Molex KK crimp terminal (100 pack) | 1.70 |
| – | Rapid 33-2135 | 9.5-mm self-adhesive PCB pillar (25 pack) | 1.87 |


*All prices correct at time of going to press.

8 IO-LED Board

The IO-LED board contains red and green LEDs to indicate the status of the system I/O lines. A green LED indicates that the corresponding line is high whilst red indicates that it is low.

8.1 Circuit Schematic Diagram

The schematic diagram for the IO-LED board is given in Figure 18

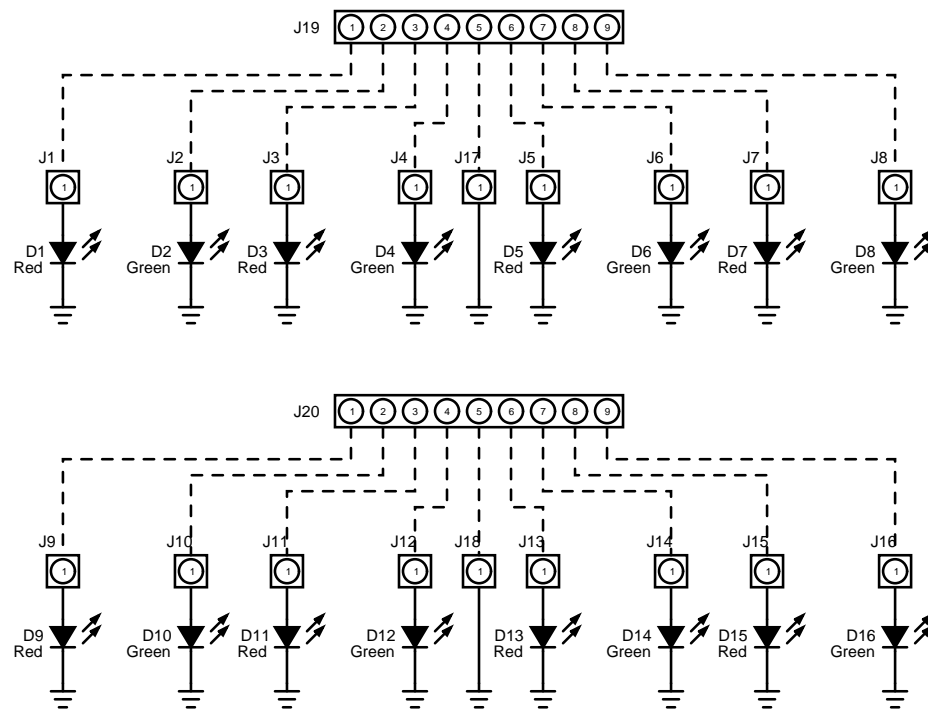

NOTES:

1. Dashed lines indicate a wire connection to an off board component rather than a PCB track.
2. J19 & J20 are Molex KK crimp housings which are to be fully loaded.

Figure 18: Schematic Diagram for the IO-LED Board.

8.2 PCB Layout

The IO-LED board is a single-sided PCB and therefore can be made in-house or by an outside contractor. For further details on how to manufacture boards using the in-house etch-tanks consult BTR-208. The silkscreen and solder-side tracks are given in Figure 19.

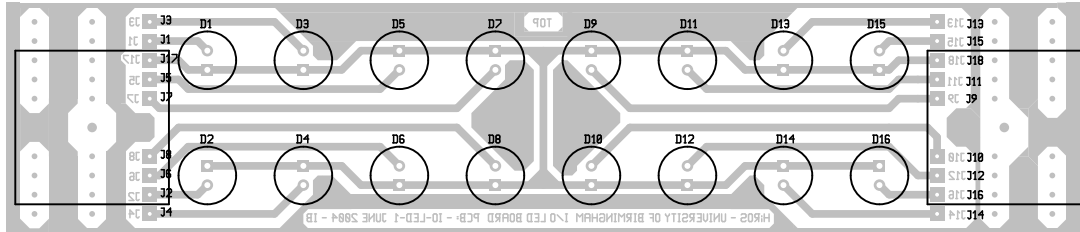


Figure 19: IO-LED Board component layout and solder-side tracks.

9 Blunders

During the testing of the BeebSub it was discovered that some blunders had been accidentally made in the design phase of the project. This section describes the errors that were found and the action taken in order to make the system function as intended.

9.1 Blunders on the PIC Board

A couple of errors were found on the PIC board.

- The pin-out of Q1 was found to be incorrect.
- There was a problem with the RS-232 communications. This was traced to an error on the schematic. The RX and TX lines between the PIC (U2) and the MAX232 (U5) were in fact swapped over and hence connected to the wrong pins. The correct connection between the PIC and the MAX232 is U2-25 connects to U5-11 and U2-26 connects to U5-12.

9.2 Modifications to the PIC Board

The following modifications to the PIC board are required to fix the errors that were found.

- Q1 should be rotated anti-clockwise by 90°, compared with the silkscreen that is on the board. This means that the flat edge of the rectifier should be facing towards the voltage regulator.
- On the component-side of the PCB cut the track that links U2 pin 25 to U5 pin 12 (the track passes in between C17 and C20).
- On the solder-side of the PCB cut the track to the via that is adjacent to U2 pin 26 (track runs between two vias adjacent to pins 21 and 26 of U2).
- On the solder-side of the PCB solder a wire link to connect U2 pin 25 to U5 pin 11.
- On the solder-side of the PCB solder a wire link to connect U2 pin 26 to U5 pin 12.
- Remove TP6 and solder a length of red 7/0.2 cable to the board (this is required to fix a blunder on the IO-LED board - see next section for details).

9.3 Blunders on the IO-LED Board

There was only one blunder on the IO-LED board but it affected all of the red LEDs on the Board. All of the LEDs are driven by logic from the PIC board. The mistake that was made was that on the IO-LED board both red and green LEDs used the same circuitry which they should not have done. The green LEDs have the cathodes tied to GND and +5V supplied to the anode via the LED driver circuit on the PIC board. For the red LEDs the anodes should have been tied to +5V and the cathodes driven by the LED driver on the PIC board sinking current to light the LED.


9.4 Modifications to the IO-LED Board

The following modifications to the IO-LED board are required in order to make the red LEDs work as intended.

- Reverse all red LEDs (D2, D4, D6, D8, D10, D12 and D14).
- Cut the track between D13 pin 1 and D15 pin 1.
- Cut the GND track in the centre of the board that links the two GND rails together.
- On the component-side fit a 0Ω resistor between D15 pin 1 and D16 pin 1.
- Connect a red 7/0.2 wire from TP6 on the PIC board to J18 pin 1 (this wire provides the +5-V feed to the red LEDs).

9.5 Schematic Diagram of the Modified IO-LED Board

Figure 20 shows the schematic diagram of the modified IO-LED board.

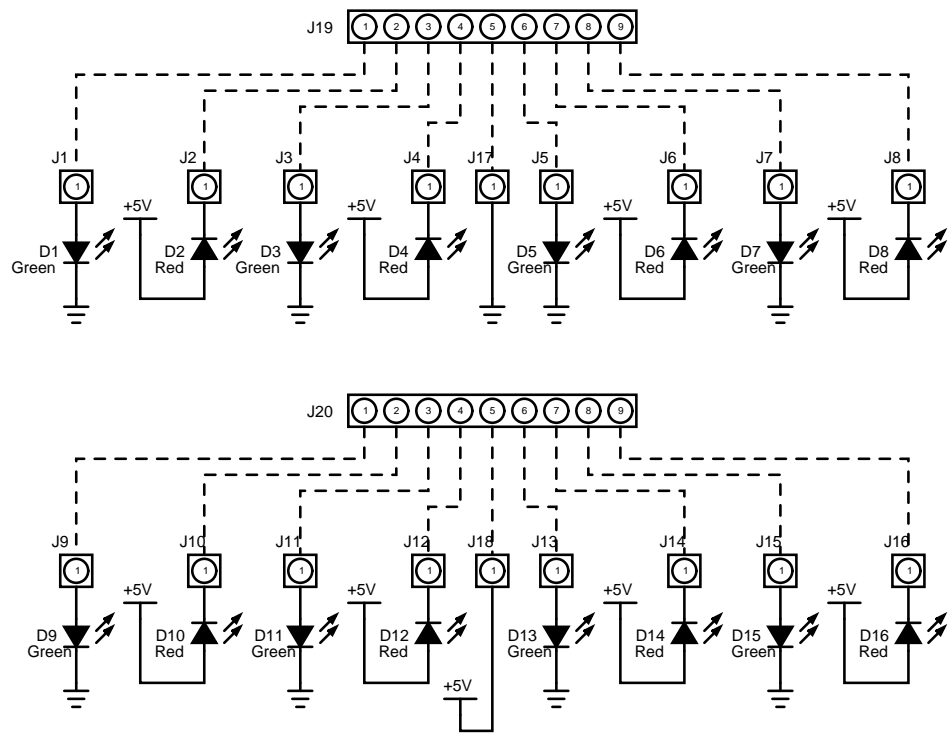

NOTES:

1. Dashed lines indicate a wire connection to an off board component rather than a PCB track.
2. J19 & J20 are Molex KK crimp housings which are to be fully loaded.
3. De-populate D15-D16.

Figure 20: Schematic Diagram for the Modified IO-LED Board.

10 RS-232 Interface

The BeebSub communicates with the computer through an RS-232 connection. The connector for this link is at the far left on the rear panel. It is a 25-pin, female D-connector. The only pins used in this connector are: 1 (chassis ground), 2 (transmit data, TxD), 3 (receive data, RxD), and 7 (signal ground). The BeebSub is configured as data communications equipment (DCE) and transmits on pin 3 and receives on pin 2. The RS-232 settings are 9600 baud, 8 bits, no parity. No handshaking (hardware nor software) is provided.

Four LEDs on the front panel show the state of the TxD and RxD lines. The left column is for the TxD line and the right column is for the RxD line. The red LEDs on the bottom are illuminated when the corresponding line is low. The green LEDs on the top are illuminated when the line is high.

The BeebSub communicates with the computer using one-line messages. Each message begins with a dollar sign (“\$”, ASCII 36) and ends with a carriage-return/line-feed pair. The BeebSub will send an asterisk (“*”, ASCII 42) followed by a two-character checksum at the end of each message.

The checksum is calculated by XORing the ASCII values of all of the characters in the message that follow the dollar and precede the asterisk. The dollar and asterisk are not included in the checksum calculation. The resulting checksum is included in the message as a two-character hexadecimal value.

The following messages are sent from the BeebSub to the computer.

10.1 Counter Data

`$C,<DIGIT-STRING>,<OVERFLOW>*<CK><CR><LF>`

`<DIGIT-STRING>` The string of hex digits read from the BBC scalars.

`<OVERFLOW>` Zero (“0”, ASCII 48) if all of the digits read from the BBC scalars are present in this message, or one (“1”, ASCII 49) if the BBC scalars returned more digits than would fit in this message. The BeebSub can buffer only 96 digits.

The BeebSub will send one counter-data message every time the BBC scalars raise the \overline{MT} line.

10.2 Error Message

`$E,<ERROR-CODE>,<DESCRIPTION>*<CK><CR><LF>`

`<ERROR-CODE>` A numeric error code.

`<DESCRIPTION>` A description of the error in text form for humans to read.


The BeebSub can send these two error messages:

```
$E,01,!MT stuck low*72
```


```
$E,02,!MT stuck high*0B
```

A Component Pin-Outs


The pin-outs of some of the components is shown in Figures 21 to 22.

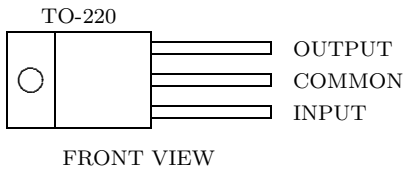


(a) LM7805




(b) ZVN2106A




(c) ZVP2106A




(d) 4050




(e) 4011

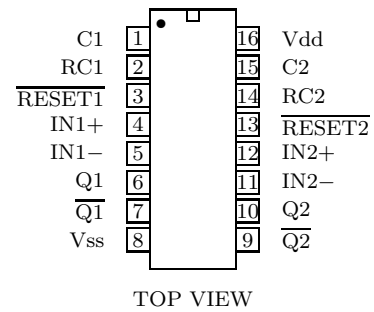


(f) 4098



(g) LM339




(h) MAX232



(i) MAX485

Figure 21: Pin-outs of various components.

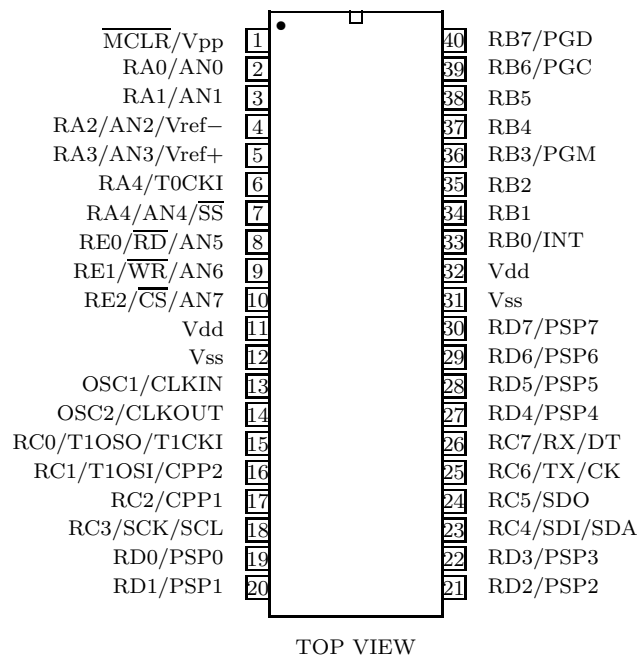

(a) PIC 16F877

Figure 22: Pin-outs of various components.

References

- [1] CLIVE P. MCLEOD. Mark I scaler system. *BISON Technical Report Series*, Number 184, High-Resolution Optical-Spectroscopy Group, Birmingham, United Kingdom, July 2002.
- [2] IAN BARNES, BARRY JACKSON, AND BREK A. MILLER. BeebSub #56A and BeebSub #56B — BBC computer substitutes. *BISON Technical Report Series*, Number 218, High-Resolution Optical-Spectroscopy Group, Birmingham, United Kingdom, November 2003.
- [3] GEORGE R. ISAAK AND BREK A. MILLER. The grand opening of the Izaña Zoo in 2003 December. *BISON Technical Report Series*, Number 222, High-Resolution Optical-Spectroscopy Group, Birmingham, United Kingdom, March 2004.
- [4] IAN BARNES, BARRY JACKSON, AND BREK A. MILLER. Picdev #3 — A PIC development system. *BISON Technical Report Series*, Number 217, High-Resolution Optical-Spectroscopy Group, Birmingham, United Kingdom, November 2003.
- [5] IAN BARNES. In-house PCB manufacture using PCB etch tanks. *BISON Technical Report Series*, Number 208, High-Resolution Optical-Spectroscopy Group, Birmingham, United Kingdom, September 2003.