

Demonstration of Load Rating Capabilities through Physical Load Testing: Sioux County Bridge Case Study



Final Report 1 of 3
August 2013



IOWA STATE UNIVERSITY
Institute for Transportation

Sponsored by
Soy Transportation Coalition
Federal Highway Administration
Iowa Department of Transportation
(Part of InTrans Project 12-444)

About the BEC

The mission of the Bridge Engineering Center is to conduct research on bridge technologies to help bridge designers/owners design, build, and maintain long-lasting bridges.

Disclaimer Notice

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the information presented herein. The opinions, findings and conclusions expressed in this publication are those of the authors and not necessarily those of the sponsors.

The sponsors assume no liability for the contents or use of the information contained in this document. This report does not constitute a standard, specification, or regulation.

The sponsors do not endorse products or manufacturers. Trademarks or manufacturers' names appear in this report only because they are considered essential to the objective of the document.

Non-Discrimination Statement

Iowa State University does not discriminate on the basis of race, color, age, religion, national origin, sexual orientation, gender identity, genetic information, sex, marital status, disability, or status as a U.S. veteran. Inquiries can be directed to the Director of Equal Opportunity and Compliance, 3280 Beardshear Hall, (515) 294-7612.

Iowa Department of Transportation Statements

Federal and state laws prohibit employment and/or public accommodation discrimination on the basis of age, color, creed, disability, gender identity, national origin, pregnancy, race, religion, sex, sexual orientation or veteran's status. If you believe you have been discriminated against, please contact the Iowa Civil Rights Commission at 800-457-4416 or Iowa Department of Transportation's affirmative action officer. If you need accommodations because of a disability to access the Iowa Department of Transportation's services, contact the agency's affirmative action officer at 800-262-0003.

The preparation of this report was financed in part through funds provided by the Iowa Department of Transportation through its "Second Revised Agreement for the Management of Research Conducted by Iowa State University for the Iowa Department of Transportation" and its amendments.

The opinions, findings, and conclusions expressed in this publication are those of the authors and not necessarily those of the Iowa Department of Transportation or the U.S. Department of Transportation Federal Highway Administration.

Technical Report Documentation Page

1. Report No. Part of InTrans Project 12-444		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Demonstration of Load Rating Capabilities through Physical Load Testing: Sioux County Bridge Case Study				5. Report Date August 2013	
				6. Performing Organization Code	
7. Author(s) Travis Hosteng and Brent Phares				8. Performing Organization Report No. Part of InTrans Project 11-411	
9. Performing Organization Name and Address Bridge Engineering Center Iowa State University 2711 South Loop Drive, Suite 4700 Ames, IA 50010-8664				10. Work Unit No. (TRAIS)	
				11. Contract or Grant No.	
12. Sponsoring Organization Name and Address Iowa Department of Transportation, 800 Lincoln Way, Ames, IA 50010 Soy Transportation Coalition, 1255 SW Prairie Trail Parkway, Ankeny, IA 50023 Federal Highway Administration, U.S. Department of Transportation, 400 7th Street SW, Washington, DC 20590				13. Type of Report and Period Covered Final Report 1 of 3	
				14. Sponsoring Agency Code SPR RB32-013	
15. Supplementary Notes Visit www.intrans.iastate.edu for color pdfs of this and other research reports.					
16. Abstract The objective of this work, Pilot Project - Demonstration of Capabilities and Benefits of Bridge Load Rating through Physical Testing, was to demonstrate the capabilities for load testing and rating bridges in Iowa, study the economic benefit of performing such testing, and perform outreach to local, state, and national engineers on the topic of bridge load testing and rating. This report documents one of three bridges inspected, load tested, and load rated as part of the project, the Sioux County Bridge (FHWA #308730), including testing procedures and performance of the bridge under static loading along with the calculated load rating from the field-calibrated analytical model. Two parallel reports document the testing and load rating of the Ida County Bridge (FHWA #186070) and the Johnson County Bridge (FHWA #205750). A tech brief provides overall information about the project.					
17. Key Words agricultural traffic routes—bridge capacities—bridge loads—bridge rating—load restrictions—load testing—superloads				18. Distribution Statement No restrictions.	
19. Security Classification (of this report) Unclassified.		20. Security Classification (of this page) Unclassified.		21. No. of Pages 25	22. Price NA

DEMONSTRATION OF LOAD RATING CAPABILITIES THROUGH PHYSICAL LOAD TESTING: SIOUX COUNTY BRIDGE CASE STUDY

**Final Report 1 of 3
August 2013**

Principal Investigators

Brent Phares, Director
Bridge Engineering Center, Iowa State University

Travis Hosteng, Bridge Research Specialist
Bridge Engineering Center, Iowa State University

Authors

Travis Hosteng and Brent Phares

Sponsored by

Iowa Department of Transportation,
Soy Transportation Coalition,
Federal Highway Administration
State Planning and Research Funding
(SPR RB32-013)

Preparation of this report was financed in part
through funds provided by the Iowa Department of Transportation
through its Research Management Agreement with the
Institute for Transportation
(InTrans Project 12-444)

A report from

Institute for Transportation

Iowa State University

2711 South Loop Drive, Suite 4700

Ames, IA 50010-8664

Phone: 515-294-8103

Fax: 515-294-0467

www.intrans.iastate.edu

TABLE OF CONTENTS

ACKNOWLEDGMENTS	vii
INTRODUCTION	9
OBJECTIVE AND SCOPE	9
BRIDGE DESCRIPTION.....	9
FIELD TESTING.....	12
Methodology.....	12
Instrumentation	13
Static Loading	14
LOAD TEST RESULTS.....	16
LOAD RATING	20
Model Calibration	20
Calibration Results.....	21
Rating Factors	22
SUMMARY AND CONCLUSIONS	24
REFERENCES	25

LIST OF FIGURES

Figure 1. Original two-lane Sioux County Bridge.....	10
Figure 2. Current two-lane Sioux County Bridge.....	10
Figure 3. Sioux County Bridge end view.....	10
Figure 4. Sioux County Bridge elevation view.....	11
Figure 5. Sioux County Bridge bearings.....	11
Figure 6. Sioux County Bridge plan view	12
Figure 7. Sioux County Bridge profile view.....	12
Figure 8. Sioux County Bridge plan view of strain transducer locations	13
Figure 9. Sioux County Bridge cross-section view of strain transducer locations	14
Figure 10. Sioux County Bridge instrumentation setup.....	14
Figure 11. Sioux County Bridge test truck	15
Figure 12. Sioux County Bridge truck configuration and axle loads	15
Figure 13. Transverse load position for Sioux County Bridge testing	16
Figure 14. Data reproducibility for Sioux County Bridge test.....	17
Figure 15. Sioux County Bridge center span distribution factors.....	18
Figure 16. Sioux County Bridge approach span distribution factors.....	18
Figure 17. Sioux County Bridge top and bottom flange strains on Girder 4 for Load Case 3	19
Figure 18. Finite element model of Sioux County Bridge with modeled test truck footprint	20
Figure 19. Sioux County Bridge member strain comparisons on G6 for LC3	21
Figure 20. Sioux County Bridge midspan lateral distribution strain comparison for LC3.....	22
Figure 21. AASHTO load rating vehicle configurations for Sioux County Bridge	23
Figure 22. Iowa load rating vehicle configurations for Sioux County Bridge.....	23

LIST OF TABLES

Table 1. LFR rating factors applied	22
Table 2. Sioux County Bridge critical rating factors	24

ACKNOWLEDGMENTS

The authors would like to acknowledge the Soy Transportation Coalition and the Iowa Department of Transportation (DOT) Office of Bridges and Structures for sponsoring this research using Federal Highway Administration (FHWA) state planning and research (SPR) funds. The authors would like to thank the technical advisory committee (TAC): Mark Dunn, Ahmad Abu-Hawash, Darla James, Nicole Fox, Mike Steenhoek, Craig Markley, Ping Lu, and Scott Neubauer. In addition, the authors would like to thank Justin Dahlberg, Tyler Muhlbauer, and Doug Wood at Iowa State University for their efforts during bridge testing. Finally, the research team would like to thank County personnel for their assistance with traffic control, use of load trucks, and other services.

INTRODUCTION

The US is heavily dependent on its transportation system for the quick and efficient movement of people, goods, and military assets. While the bulk of traffic volume utilizes state routes, agricultural industries are dependent on both the state and local systems for their travel. With that said, the more than 4,000 load-restricted (i.e., posted) bridges on the secondary road system represent potential reductions in the efficiency of the movement of farm goods. This inefficiency has the potential to reduce the cost-competitiveness of the US agricultural industry.

Currently, the rating and potential posting of bridges is completed by bridge engineers who rely on theoretical analyses based on codified approaches. By no fault of their own, codified approaches must be widely applicable and, as a result, many assumptions must be made. Therefore, while the techniques provide a reliable means for assessing the safe load-carrying capacity, they are, by their very nature, sometimes conservative.

An alternative approach is to create an analytical model that represents the behavior of a specific bridge—as opposed to a code-specified, generic bridge—based on field test results from the bridge itself and subsequently perform the load ratings using the calibrated model.

Currently, the Iowa Department of Transportation (DOT) Office of Bridges and Structures identifies structures to be tested and is responsible for determining capacities and ratings based on the load test results. In addition to determining ratings, the Iowa DOT uses data from load tests to aid in permitting superloads and to resolve design questions. In addition, several counties across Iowa have utilized the same approaches to evaluate the need for load restrictions.

This report documents one of three bridges inspected, load tested, and load rated as part of the project, the Sioux County Bridge (FHWA #308730), including testing procedures and performance of the bridge under static loading along with the calculated load rating from the field-calibrated analytical model. Two parallel reports document the testing and load rating of the Ida County Bridge (FHWA #186070) and the Johnson County Bridge (FHWA #205750).

OBJECTIVE AND SCOPE

The objective of this work was to demonstrate the capabilities for load testing and rating bridges in Iowa, study the economic benefit of performing such testing, and perform outreach to local, state, and national engineers on the topic of bridge load testing and rating.

BRIDGE DESCRIPTION

The Sioux County Bridge (FHWA #308730) is a two-lane, three-span, continuous steel girder bridge located on paved County Road (CR) B-58, one mile west of Maurice, Iowa over the west branch of the Floyd River (approximately 35 miles northeast of Sioux City). The bridge was originally built in 1939 as a two-lane bridge with four girders and a roadway width of 20 ft curb to curb as shown in Figure 1.

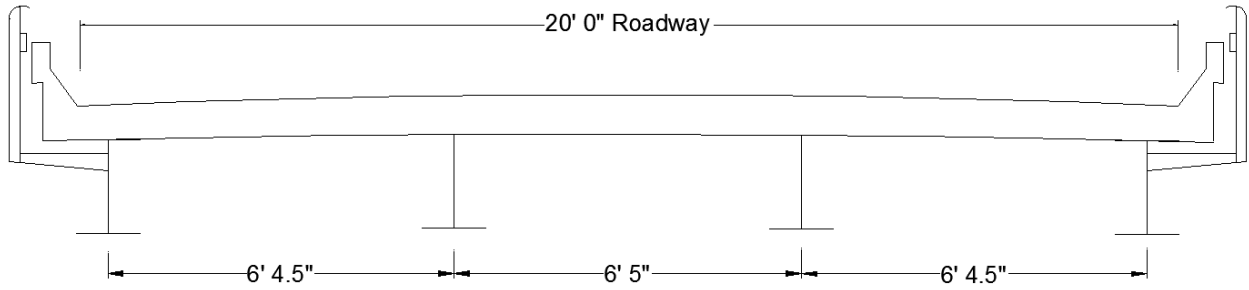


Figure 1. Original two-lane Sioux County Bridge

In 1970, the bridge was widened to its current geometry with a roadway width of 30 ft curb to curb by adding one girder line to each side of the bridge as illustrated in Figure 2.

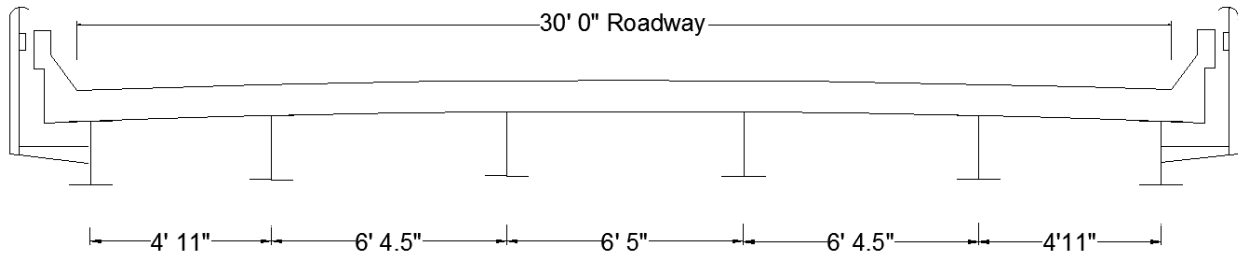


Figure 2. Current two-lane Sioux County Bridge

Figures 3 and 4 are end and elevation views, respectively, at the time of testing in 2013. Currently, the bridge is posted for one-lane traffic, with no further load restriction.



Figure 3. Sioux County Bridge end view



Figure 4. Sioux County Bridge elevation view

The bridge substructure consists of concrete abutments/backwalls and concrete piers. Seven-inch curved plates provide the bearing at the abutments and rockers provide the bearing at each pier as shown in Figure 5.



a. Abutment bearing



b. Pier bearing

Figure 5. Sioux County Bridge bearings

As previously noted, the bridge superstructure is a three-span continuous steel girder bridge with two 50 ft center-to-center of bearing end spans and a 65 ft center-to-center of bearing center span, for a total length of 165 ft. Figures 6 and 7 illustrate the bridge plan and profile views, respectively.

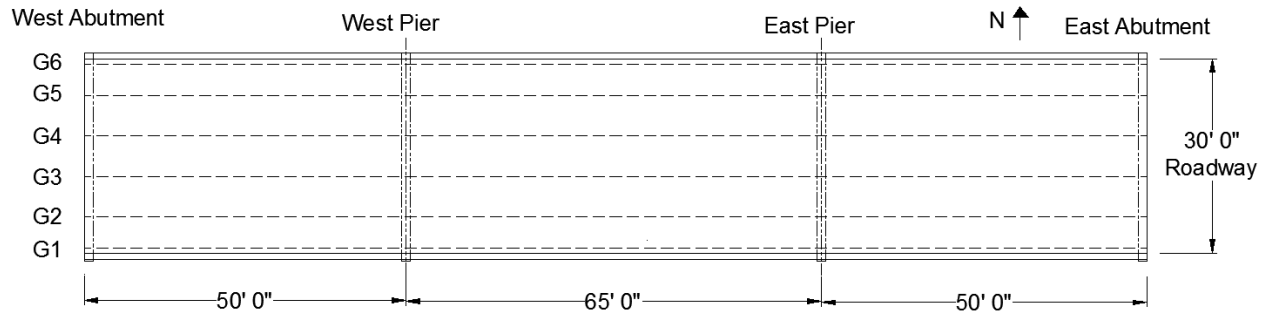


Figure 6. Sioux County Bridge plan view

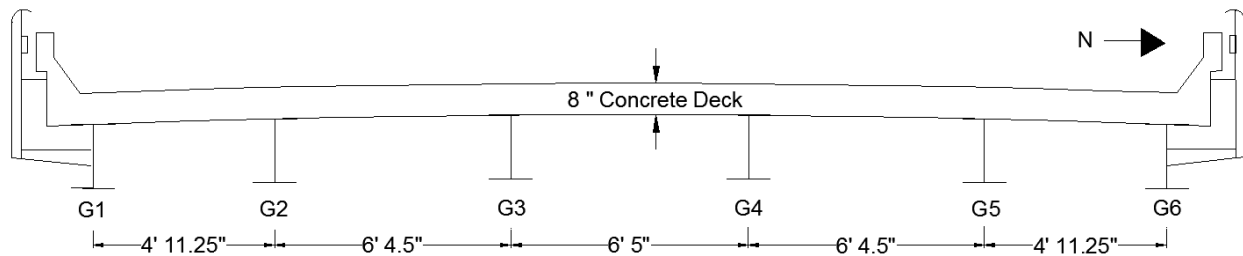


Figure 7. Sioux County Bridge profile view

The original interior two girders of the bridge (girders G3 and G4 in Figure 7) are W27x94s, the original exterior girders (girders G2 and G5 in Figure 7) are W24x74s, and the new exterior girders (girders G1 and G6 in Figure 7) are W27x84s. In addition, cover plates are present on all girders in the negative moment regions on both the top and bottom flange. Cover plates are centered over the piers and are sized as follows (width x thickness x length/span): G1 and G6 – 8.5 in. x 0.5 in. x 10 ft, G2 and G5 – 8 in. x 9/16 in. x 9 ft, and G3 and G4 – 9 in. x 5/8 in. x 8 ft. The original girders, G2 through G5, are equally spaced at 76.5 in.; the new exterior girders, G1 and G6, are spaced 59.25 in. outside the original exterior girders. The deck for the superstructure consists of an approximately 8 in. thick concrete slab with concrete curbs and a steel beam/rail guardrail as illustrated in Figure 7.

FIELD TESTING

Methodology

The bridges selected for inclusion in this work were selected by the Iowa DOT Office of Bridges and Structures with the assistance of the BEC and the Soy Transportation Coalition, based on the criterion specified in the proposal. After bridge selection, preliminary information including as-built plans, photographs, inspection reports, and geometrical data were collected, if available, from the bridge owners (in this case, the Sioux County Engineer's Office). In addition, information related to any critical sections within the bridges was collected from the Iowa DOT Rating Engineer.

Once the basic bridge geometry information and photographs were obtained, an instrumentation scheme was developed such that all critical and necessary data could be collected during load testing. For the Sioux County Bridge, the instrumentation plan included the use of strain transducers at critical locations and five transversely-spaced load cases. Strains were collected using Bridge Diagnostics, Inc. (BDI) strain transducers and the BDI Structural Testing System (STS).

Load testing was then completed by monitoring the performance of the bridge as a controlled and known load crossed the bridge. The collected data were then evaluated and used in the creation and calibration of an analytical model. This calibrated model was then used for direct calculation of bridge rating factors using the rating and legal loads.

Instrumentation

The instrumentation plan was developed based on the following: suggested critical sections as specified by the Office of Bridges and Structures (in this case, midspan of the end span was determined to be the controlling section) and the information necessary to create and calibrate an accurate model of the bridge.

Based on these two criteria, strain transducers were installed on the top and bottom flange of each girder at the following cross-sections, as shown in Figures 8 and 9 in plan and cross-section views, respectively: A) a distance d , depth of girder, from the face of abutment, B) midspan of one end span, C) a distance d , depth of girder, from the face of pier, and D) midspan of the center span. Girders are labeled G1 through G6 from south to north. An image of a typical instrumentation installation is shown in Figure 10.

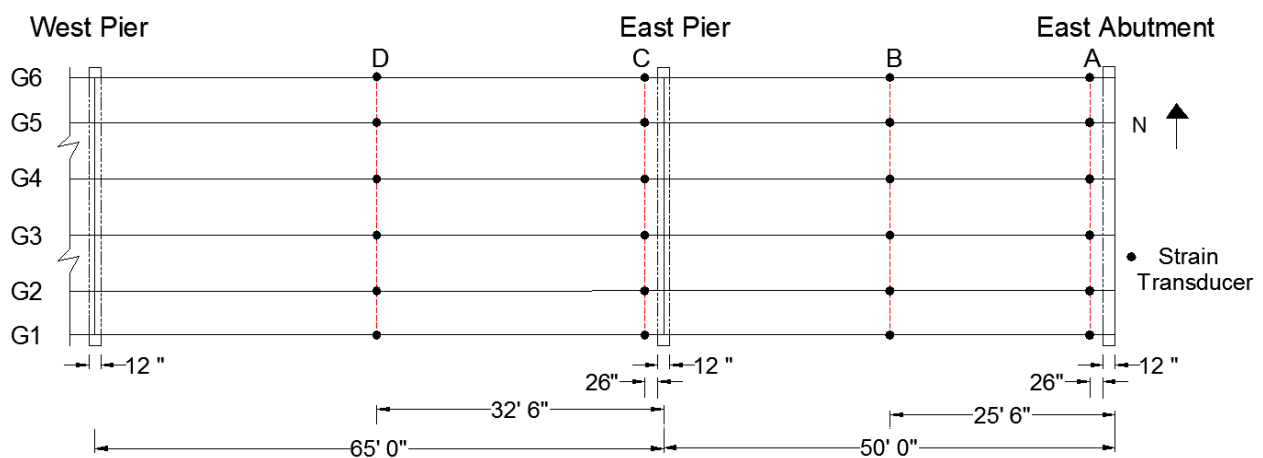


Figure 8. Sioux County Bridge plan view of strain transducer locations

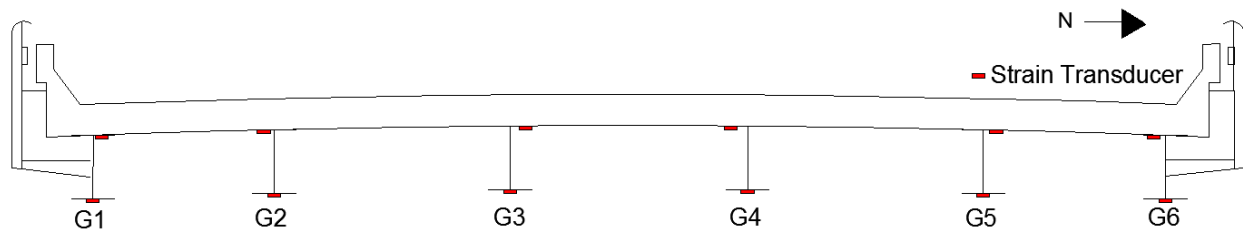


Figure 9. Sioux County Bridge cross-section view of strain transducer locations



Figure 10. Sioux County Bridge instrumentation setup

Static Loading

Loading of the structure was completed using a loaded and known tandem axle dump truck provided by Sioux County. The load truck is shown in Figure 11. Figure 12 shows the load truck dimensions and axle weights at the time of testing.

The total weight of the truck was 44,400 lb., with front and rear axle weights of 18,820 lb., 12,790 lb., and 12,790 lb., respectively. The front and rear axle wheelbase were 7 ft and 6 ft, respectively; the rear axle spacing was 4 ft 6 in. center to center, and the distance from the forward most rear axle to the front axle was 14 ft 7 in.



Figure 11. Sioux County Bridge test truck

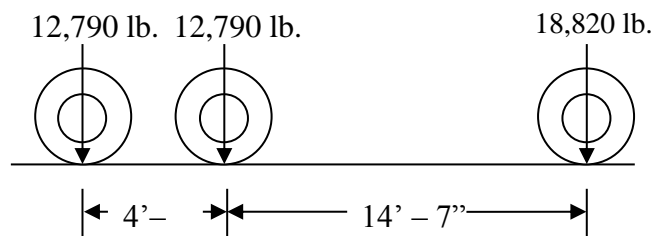


Figure 12. Sioux County Bridge truck configuration and axle loads

Selection of truck positions for the five load cases was based on meeting the goals of this project and general bridge engineering concepts. The five load cases are illustrated in Figure 13.

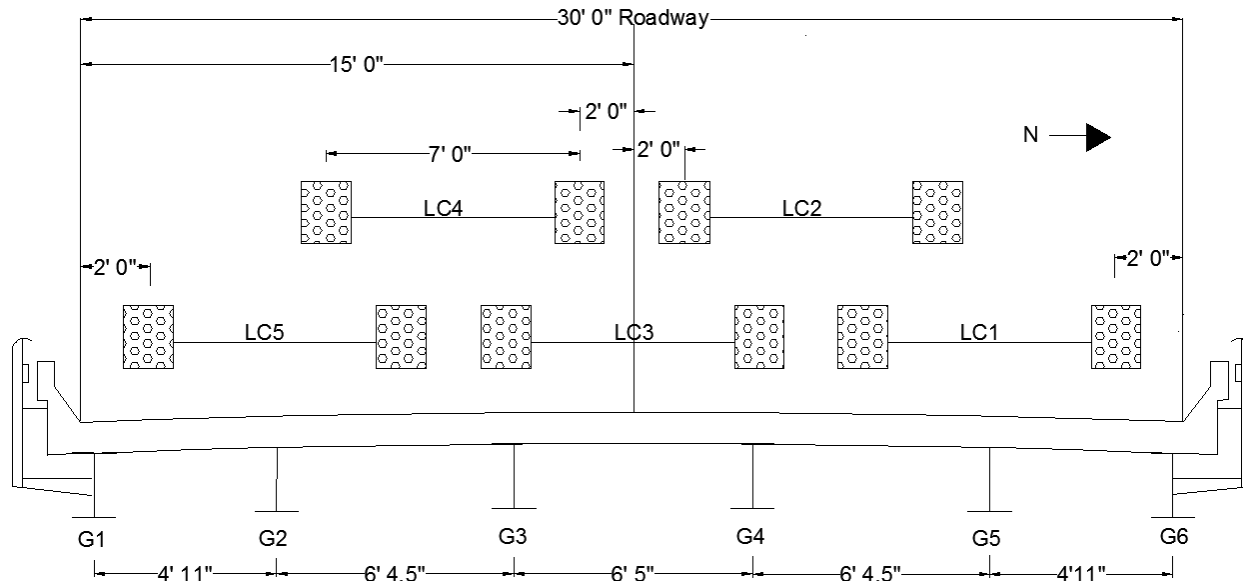


Figure 13. Transverse load position for Sioux County Bridge testing

For the first load case, the truck was driven west at crawl speed with the centerline of the passenger-side wheel line offset from the north curb by 2 ft. The second load case involved the load truck driving west at crawl speed with the driver-side wheel line offset 2 ft north of the longitudinal centerline of the bridge. The third load case consisted of the load truck driving west at crawl speed with the middle of the truck centered on the longitudinal centerline of the bridge. The fourth load case involved the load truck driving west at crawl speed with the passenger wheel line offset 2ft south of the longitudinal centerline of the bridge. The fifth and final load case involved the load truck driving west at crawl speed with the driver-side wheel line offset from the south curb by 2 ft.

Crawl speed indicates the load truck was moving across the bridge at less than 5 mph. At this low speed, any dynamic effects that may be induced in the structure are negligible. The location of the truck was recorded using the front axle as a reference point by creating a data spike for every 10 ft traveled. This allowed the data to be presented and evaluated as a function of known truck position.

LOAD TEST RESULTS

Following load testing, all field data were reviewed graphically to provide a qualitative assessment of the structure’s live-load response. Some common assessments include strain history reproducibility for tests on common load paths, elastic strain response (strains return to zero after truck exits bridge), transverse load distribution, and axle signatures in strain data from gauges close to the load.

Figure 14 illustrates a strain history plot versus truck position for two tests of Load Case 3 on the bridge.

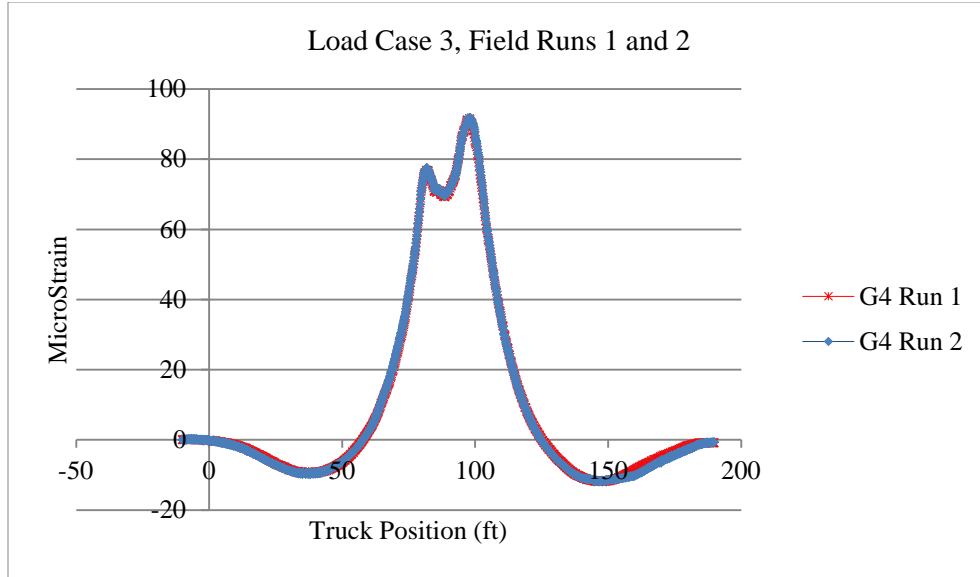


Figure 14. Data reproducibility for Sioux County Bridge test

Comparison of the two data sets in Figure 14 indicates good reproducibility in the data. Returns to approximately zero after passage of the load truck suggests elastic behavior in the response. All load cases had similar response histories with respect to the degree of reproducibility and elastic behavior; therefore, one data set from each load case was selected for further, more in-depth, evaluation.

Approximations of the transverse load distribution characteristics of the structure were obtained using the measured strains from the load tests. Using the measured strains and equation 1, distribution factors (per wheel line) were calculated for each load case, as well as a two lanes loaded case (LC2 + LC4), at midspan of both the center span and the approach span and are presented in Figure 15 and 16, respectively.

$$DF = \left(\frac{\mathcal{E}_i}{\sum_{i=1}^n \mathcal{E}_i} \right) * 2, \text{ decimal percentage of a single wheel line} \quad (1)$$

where:

\mathcal{E}_i = maximum measured bottom flange strain from *i*th girder.

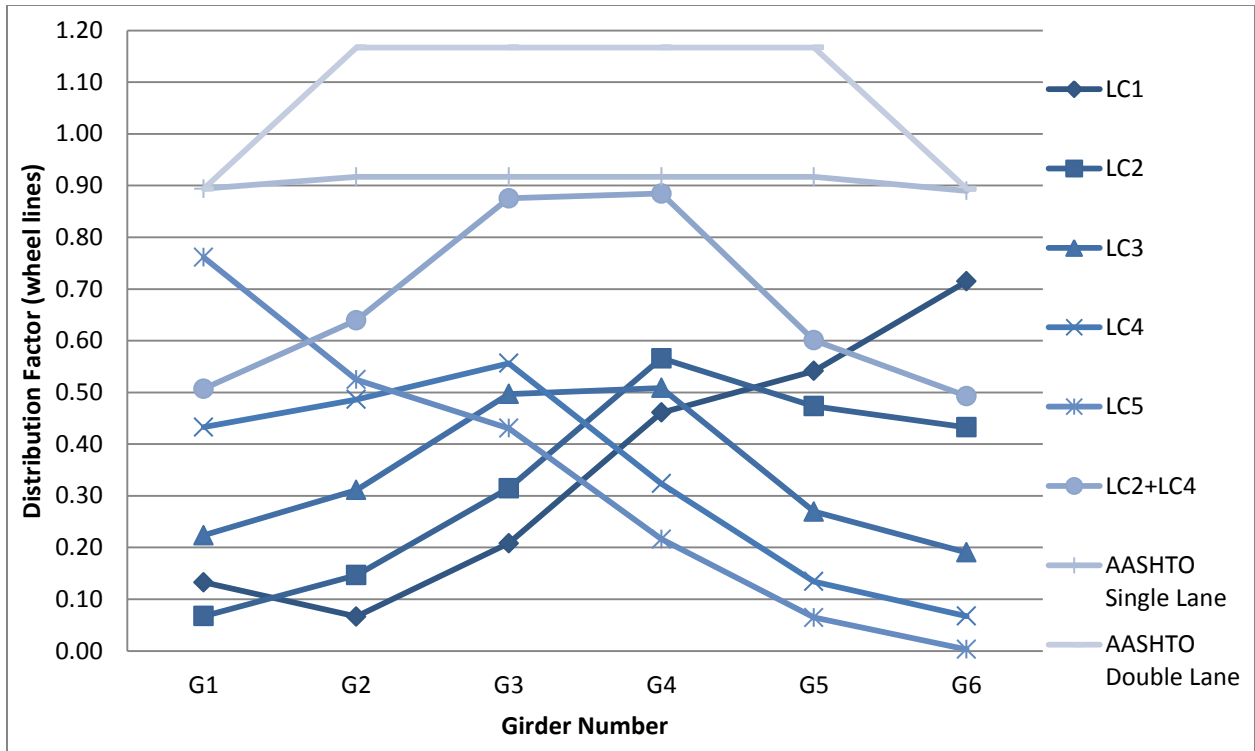


Figure 15. Sioux County Bridge center span distribution factors

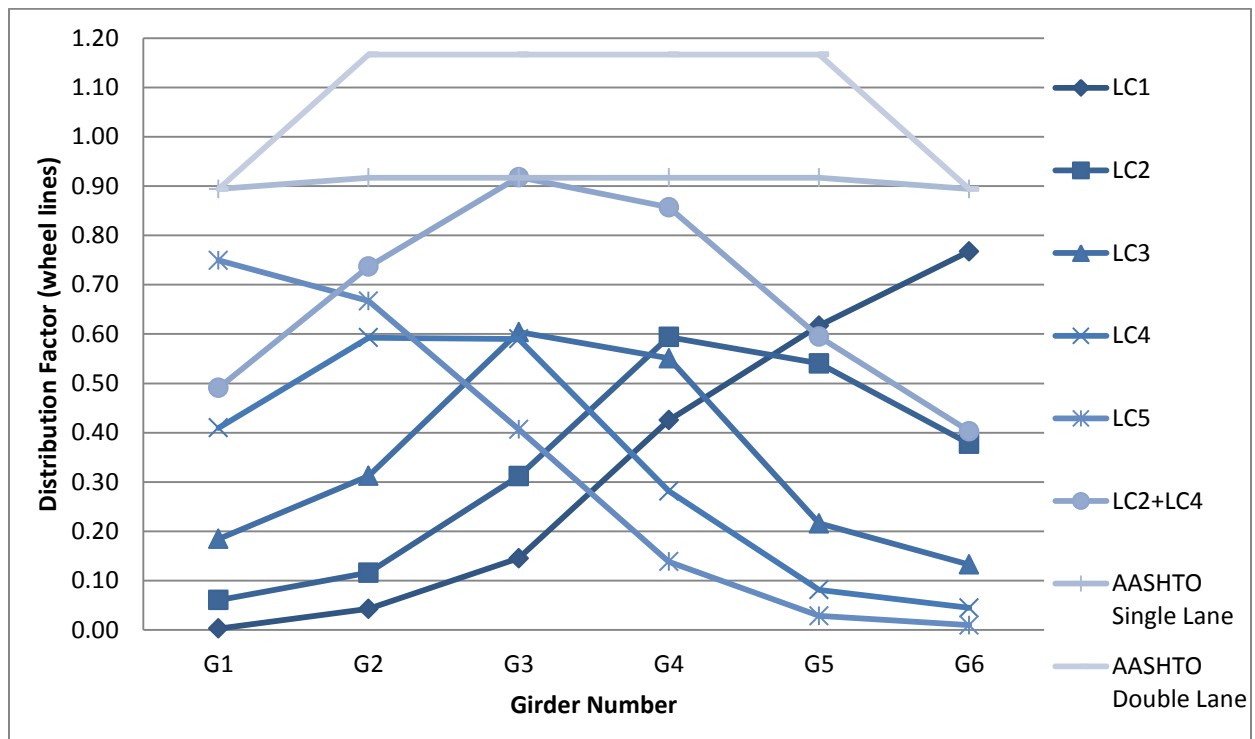


Figure 16. Sioux County Bridge approach span distribution factors

In addition to the calculated distribution factors from the field strains, the American Association of State Highway and Transportation Officials (AASHTO) Standard Specification (1996) load distribution factors are also presented for comparison. In all cases, the field-measured distribution factors are less than those calculated using the code specified equations.

Based on the information available from the inspection reports and plan sheets, it was believed that shear connectors were not utilized on the original structure and it was noted in the plans for the widening that composite action was not considered in the widening design. With that said, evaluation of the top and bottom strain magnitudes for each girder was completed to determine the location of the neutral axis and therefore the presence and degree of any unintended composite action. The field-calculated neutral axis information was then utilized during the model calibration discussed in the next section. Figure 17 illustrates the top and bottom flange strains measured on girder G4 for Load Case 3.

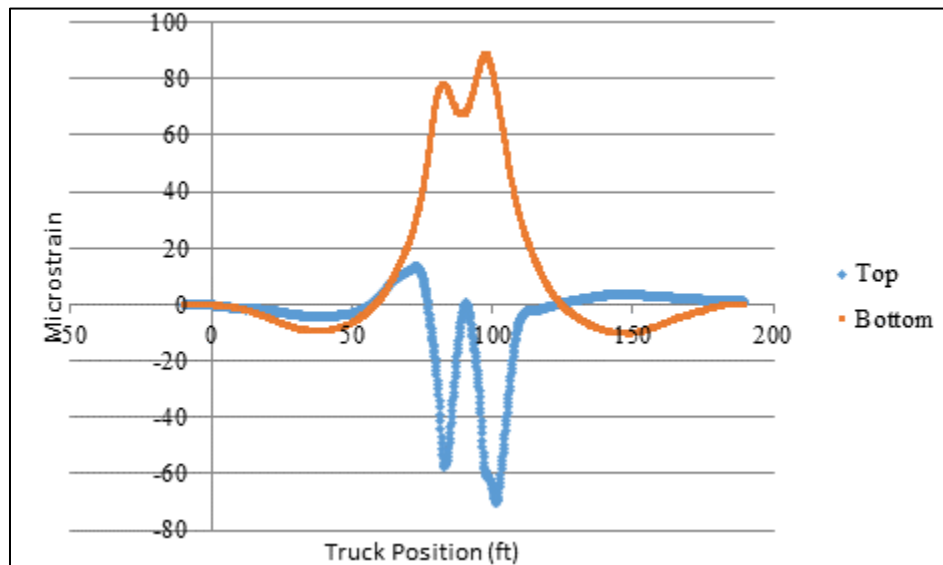


Figure 17. Sioux County Bridge top and bottom flange strains on Girder 4 for Load Case 3

Similar plots were generated for all girders at both midspan cross sections (sections B and D in Figure 8), for evaluation of the neutral axis location at each location. Based on the data illustrated in Figure 17 and similar plots for all girders, it was determined that the Sioux County Bridge exhibited some degree of unintended composite action at all girder locations. The exterior two girders, G1 and G6, displayed the least significant amount of composite action.

LOAD RATING

This section briefly discusses the model calibration, validation procedures, and calculated rating factors for the Sioux County Bridge.

Model Calibration

Information gathered from the bridge and the load test data evaluation was utilized to generate an initial two-dimensional, finite element model of the bridge using BDI's WinGEN modeling software as illustrated in Figure 18.

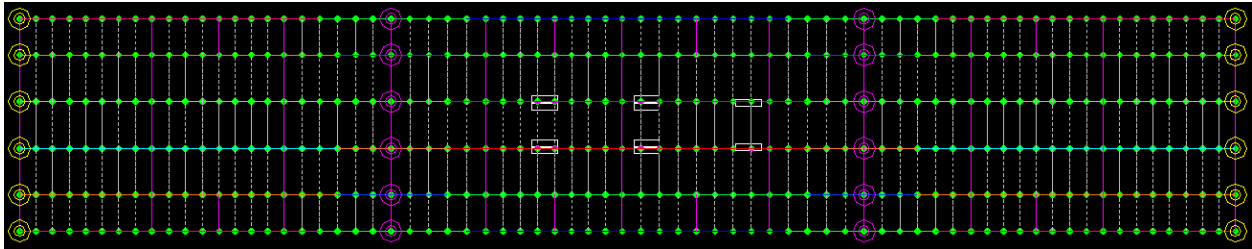


Figure 18. Finite element model of Sioux County Bridge with modeled test truck footprint

Overall bridge geometry, girder and deck dimensions, approximate boundary (support restraint) conditions, neutral axis information from the field data, along with known and calculated material properties (modulus of elasticity, moment of inertia, etc.) were input for the basic model generation. Once the model was generated, a two-dimensional footprint and corresponding axle loads of the test truck, along with the load test data files, were input into the software.

With the initial model created, the load test procedures were reproduced analytically using BDI's WinSAC structural analysis and data correlation software. The software accomplishes this by moving the analytical truck footprint of the test truck across the model in consecutive load cases simulating the truck paths used during field testing. The analytical responses of this simulation were then compared (both statistically and graphically) to the field responses to validate the model's basic structure and to identify modeling deficiencies.

Model calibration continued until an acceptable level of correlation between the measured and analytical responses was achieved. This calibration involved an iterative process of optimizing material and stiffness properties (both cross-sectional and boundary conditions) until they were quantified realistically and the analytical model test results closely matched those from the field test results.

For bridges of this type and configuration, an acceptable level of correlation is on the order of less than 10 percent error. In the case of the Sioux County Bridge, the majority of the calibration effort was spent optimizing the approximate end restraint and stiffness characteristics observed in the test data.

Calibration Results

At the conclusion of model calibration, the final model produced a 0.9762 correlation and approximately 4.7 percent error with the measured responses, which can be considered an excellent match for a continuous steel girder structure such as the Sioux County Bridge. The final model was found to closely match the member strains in magnitude and strain-history as shown in Figure 19.

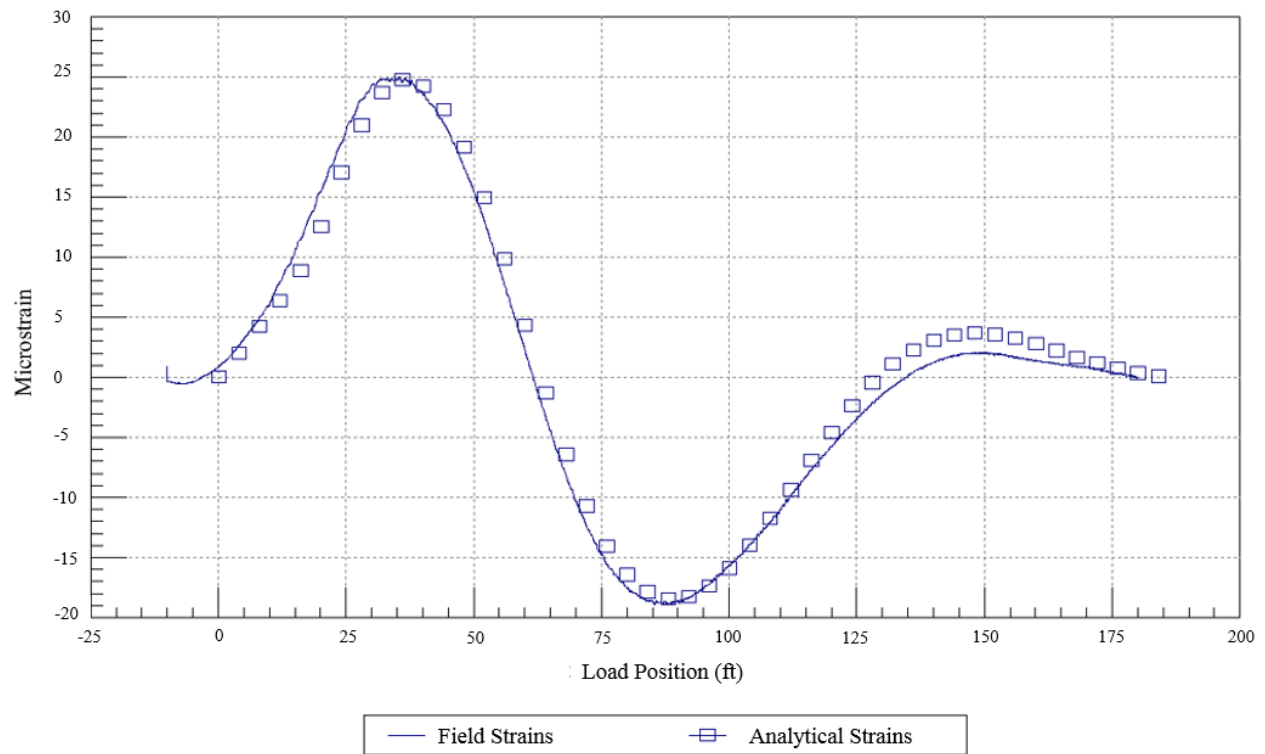


Figure 19. Sioux County Bridge member strain comparisons on G6 for LC3

In addition, the model's midspan lateral distribution of strain closely matched that of the actual structure as shown in Figure 20.

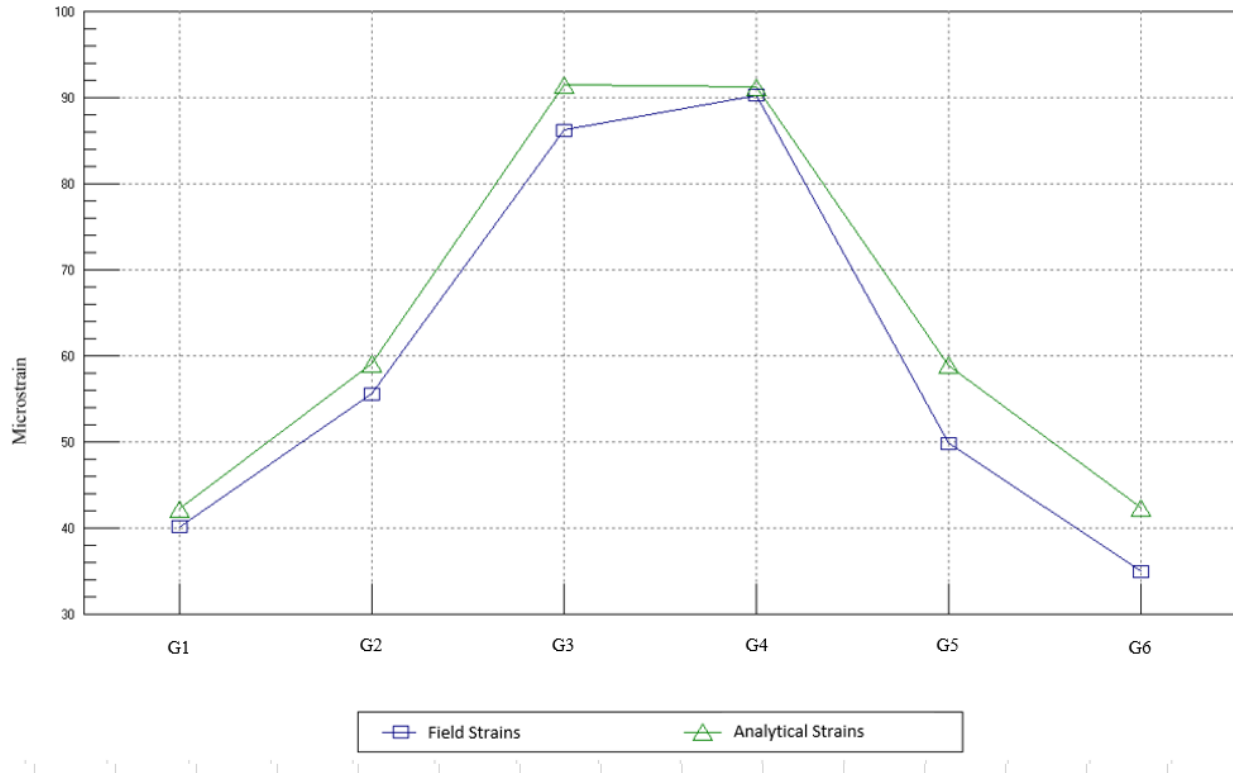


Figure 20. Sioux County Bridge midspan lateral distribution strain comparison for LC3

Rating Factors

This section briefly discusses the methods and findings of the load rating procedures for the Sioux County Bridge. All appropriate bridge elements were load rated in accordance with the AASHTO load factor rating (LFR) guidelines shown in Table 1.

Table 1. LFR rating factors applied

Factor	Inventory	Operating
Dead Load	1.3	1.3
Live Load	2.17	1.3
Impact Load	1.3	1.3

All structural dead loads were applied automatically by the modeling program’s self-weight function. Member capacities were calculated according to the AASHTO Manual for Bridge Evaluation (2013) guidelines and the final calibrated finite-element model provided the structural responses due to the rating and legal trucks. A concrete compressive strength of 3 ksi and a steel reinforcing yield strength of 33 ksi were utilized based on the structure’s age.

A library of the rating and Iowa legal loads was generated in WinGEN allowing these vehicles to be evaluated on the calibrated analytical model. Figures 21 and 22 illustrate the AASHTO rating

vehicle configuration and Iowa legal load configurations, respectively, used for the Sioux County Bridge. Given the 24 ft wide roadway, both one and two lane loaded scenarios were considered.

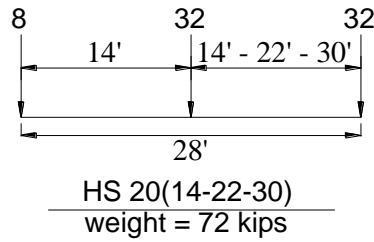


Figure 21. AASHTO load rating vehicle configurations for Sioux County Bridge

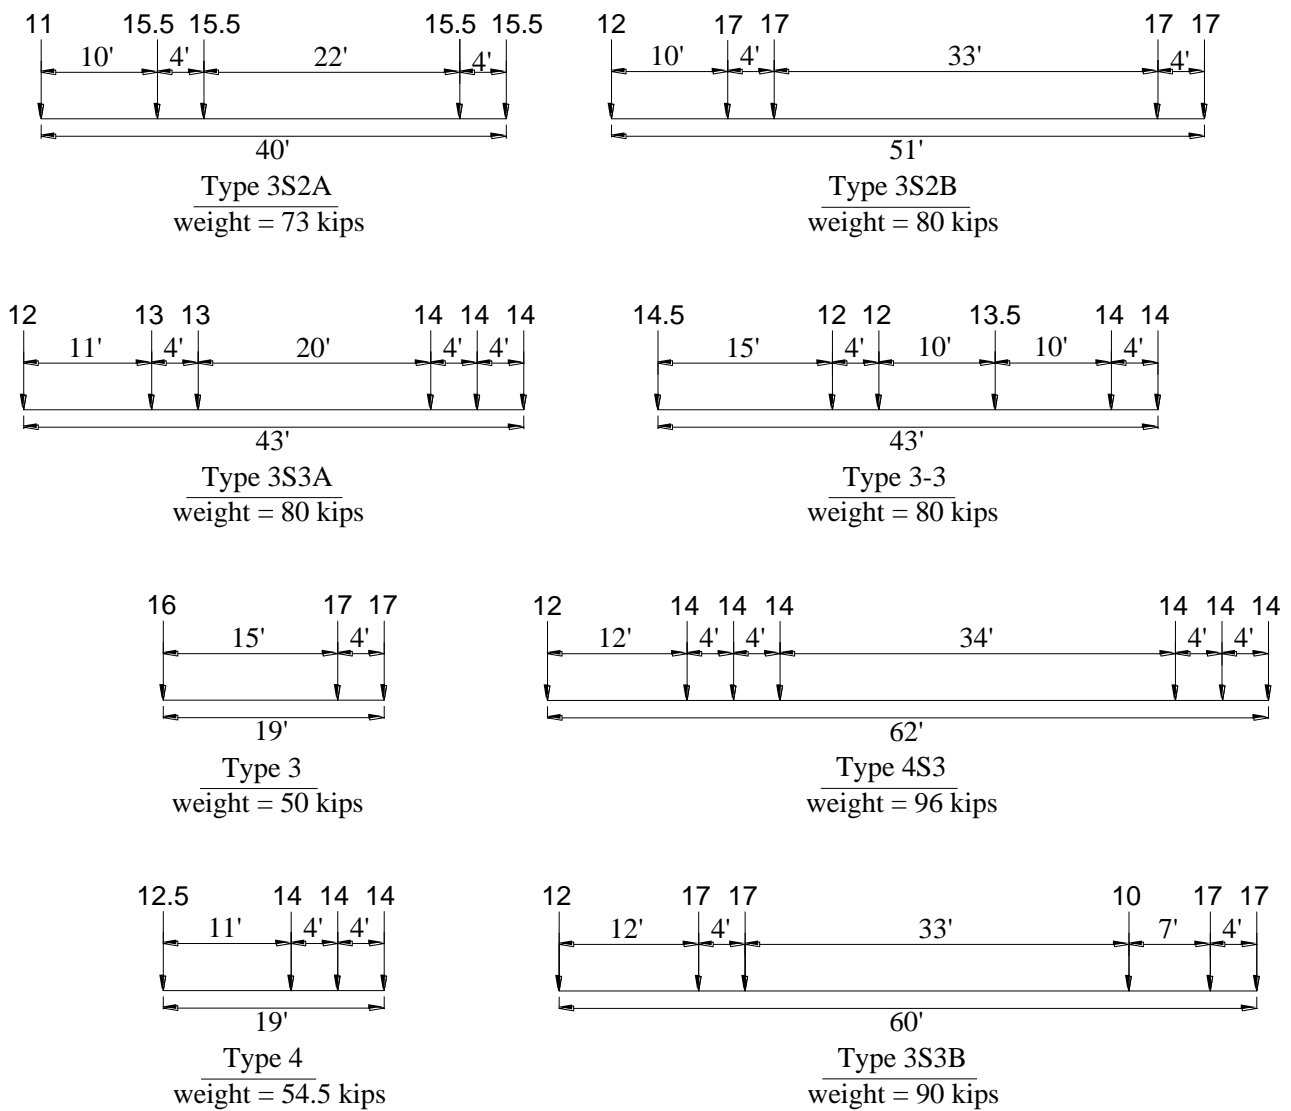


Figure 22. Iowa load rating vehicle configurations for Sioux County Bridge

Using WinSAC, all of the rating and Iowa legal loads were applied individually to the structure as outlined in the specifications. Member rating factors were then output for each vehicle and are presented in Table 2.

Table 2. Sioux County Bridge critical rating factors

Rating Vehicle	Location/Limiting Capacity	Inventory Rating Factor		Operating Rating Factor	
		Two Lane	One Lane	Two Lane	One Lane
HS-20(14)	Exterior, Center Span, (+) Flexure	0.61	0.80	1.02	1.33
HS-20(22)	Exterior, Center Span, (+) Flexure	0.72	0.95	1.21	1.59
HS-20(30)	Exterior, Center Span, (+) Flexure	0.86	1.12	1.43	1.88
Type 4	Exterior, Center Span, (+) Flexure	0.73	0.94	1.22	1.57
Type 3S3A	Exterior, Center Span, (+) Flexure	0.75	1.00	1.26	1.66
Type 3-3	Exterior, Center Span, (+) Flexure	0.72	0.96	1.20	1.60
Type 3S3B	Exterior, Center Span, (+) Flexure	0.93	1.16	1.55	1.93
Type 4S3	Exterior, Center Span, (+) Flexure	0.80	1.01	1.34	1.68
Type 3	Exterior, Center Span, (+) Flexure	0.81	1.04	1.35	1.74
Type 3S2B	Exterior, Center Span, (+) Flexure	0.86	1.09	1.43	1.82
Type 3S2A	Exterior, Center Span, (+) Flexure	0.79	1.05	1.32	1.75
Midspan and Endspan Lane Load	Exterior, Center Span, (+) Flexure	0.92	1.19	1.53	1.99
Both Endspans Lane Load	Exterior, Pier, (-) Flexure	1.95	2.61	3.25	4.36
Midspan Lane Load	Exterior, Center Span, (+) Flexure	1.33	1.77	2.23	2.95
Single Endspan Lane Load	Exterior, Pier, (-) Flexure	1.89	2.52	3.15	4.21

The bridge met operational rating criteria ($RF > 1.0$) for all standard design and posting loads for both one and two lanes loaded, as shown in Table 2. The inventory rating criteria ($RF > 1.0$) was not satisfied for either the rating vehicle or any of the Iowa legal loads for two lanes loaded. However, the bridge met the inventory rating criteria for all but the HS-20 (14 ft and 22 ft) rating vehicle and the Type 4 and Type 3-3 Iowa legal loads for one lane loaded. The critical rating factor for all vehicles was controlled by the flexural capacity of the girders near midspan of the center span.

SUMMARY AND CONCLUSIONS

Overall, the live load response data recorded during the field testing of the Sioux County Bridge revealed no abnormalities. The test data exhibited response magnitudes and shapes typical of a three-span continuous, steel girder structure.

Following testing of the structure, a two-dimensional finite element model of the structure was created using the collected structural information, and subsequently calibrated until an acceptable match between the measured and analytical responses was achieved. A very good correlation between the measured and computed response was obtained during the modeling process. The calibrated model was then utilized to conduct load ratings for the bridge by applying the

AASHTO rating vehicle and Iowa legal loads to the model. Comparison of the input member capacities with the model-generated moments resulted in output rating factors for all vehicles.

The load rating results were controlled by the ultimate flexural capacity of the girders near midspan of the center span. The results indicated that the bridge had satisfactory operating level ratings ($RF > 1.0$) for all standard AASHTO design and rating loads for both one and two lanes loaded. The inventory rating criteria ($RF > 1.0$) was not satisfied for either the rating vehicle or any of the Iowa legal loads for two lanes loaded. However, the bridge met the inventory rating criteria for all except the HS-20 (14 ft and 22 ft) rating vehicle and the Type 4 and Type 3-3 Iowa legal loads for one lane loaded.

REFERENCES

AASHTO (1996). *AASHTO Standard Specifications*. Washington, DC.

AASHTO (2013). *Manual for the Bridge Evaluation*, Second Edition – 2013 Revisions. Washington, DC.