

UDC 621.313

## METHOD FOR BASIC MEASUREMENT ADJUSTMENT OF COMMUTATOR PROFILES

Yu.S. Borovikov, S.I. Kachin, V.Yu. Sablukov

Tomsk Polytechnic University

E-mail: borovikov@tpu.ru

The possibility of error minimization as a result of noncontact measurement of the distance between eddy-current converter and commutator has been shown. The problem was solved by means of adjustment in transfer constant of the device measuring channel in the process of measuring distance to arbitrary taken commutator bar according to the method proposed.

## Introduction

It is shown in the series of papers that embedding devices of diagnostic and forecasting performance quality of electric machine (EM) sliding contact (SC) allows increasing significantly their service reliability, decreasing costs for maintenance and repair, actually excluding losses from emergency and unplanned downtimes, increasing service life [1–4]. The most widespread EM SC complexes in the systems of dynamic diagnostic are those constructed on the basis of noncontact measuring converters (MC) of eddy-current type [5–7]. The main sources of output errors of diagnostic complex analog parts appearing when using converters of such nature are unlike specific electric resistances of separate commutator bars (CB) (especially their surface layer, properties of which may depend on process technology), temperature difference of plates heating, linear velocity of controlled surface movement relative to MC as well as inaccuracy of MC orientation relative to controlled surface in calibration process and when measuring on real object [8–10].

The problem of clearing the mentioned errors influence is urgent and may be solved by means of changing calibrating characteristic parameter (coefficient of transmitting the device measuring circuit) in the process of measuring the distance to arbitrary CB according to the method of base adjustment of measuring results suggested at the chair of electric drive and electrical equipment of Tomsk Polytechnic University [11].

## Main part

Using noncontact measuring device (Fig. 1) the dependence of output parameter  $y_i$  on measured gap size  $x$  between MC and controlled area is written as

$$y_i = a_{1i} + a_{2i}x, \quad (1)$$

where  $i$  is the serial number of measurement;  $a_{1i}$ ,  $a_{2i}$  are the parameters of calibrating characteristic.

At proper installation of MC and adjustment of measuring device  $a_{1i} = 0$  may be taken. Then (1) is rearranged in the form:

$$y_i = a_{2i}x.$$

This implies that output parameter of measuring device is proportional not only to the measured gap  $x$  but to the coefficient of calibrating characteristic  $a_{2i}$  which depends on many factors including external influences on object of measuring and elements of measuring device.

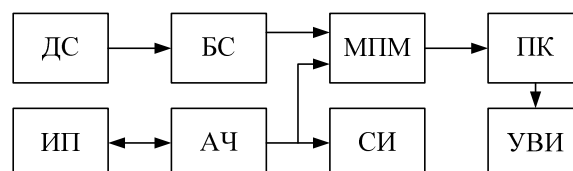


Fig. 1. Flowchart of noncontact profilometer with eddy-current measuring converter: ИП (MC) is the measuring converter of eddy-current type; ПК (SC) is the signal converter; МПМ (MPM) is the microprocessor module; СИ (PI) is the pointer indicator; ПК (PC) is the personal computer; УВИ (DIO) is the device of information output; ДС (SS) is the synchronization sensor; БС (CU) is the clock unit

Therefore, it is appropriate to correct parameter  $a_{2i}$  in the process of measuring that allows increasing accuracy of measurement [12]. It may be carried out by reference and additional measuring at the gap increased by a reference value. We obtain a system of two equations with equal coefficients  $a_{21} = a_{22}$  as the measurements are carried out on one object at identical perturbation actions

$$y_1 = a_{21}x;$$

$$y_2 = a_{21}(x + \delta_0), \quad (2)$$

where  $\delta_0$  is the reference value of gap changing.

The solution of the system (2) is of the following form:

$$a_{2i} = \frac{y_2 - y_1}{\delta_0}, \quad x = \frac{y_1 \delta_0}{y_2 - y_1}. \quad (3)$$

It follows from the expression (3) that gap design value does not depend on the mentioned above instability of parameter  $a_{2i}$  that results in increasing accuracy of measurements. When gap decreasing by reference value the system of initial equations is written similarly to the system (2)

$$y_1 = a_{21}x;$$

$$y_2 = a_{21}(x - \delta_0).$$

The solution of this system is of the form:

$$a_{2i} = \frac{y_1 - y_2}{\delta_0}, \quad x = \frac{y_1 \delta_0}{y_1 - y_2}. \quad (4)$$

Thus, expressions (3, 4) ensure the adjustment of parameter  $a_{2i}$  of linear correcting characteristic in measuring device at any direction of gap changing that allows decreasing significantly negative influence of a number of factors on the results of measurement and increasing its accuracy.

As the gap changes by reference value with a certain error (which may be stipulated by inaccuracy of measurement of the given movement by this or that reason) then this influences the accuracy of defining the parameter of calibrating characteristic  $a_2$  and correspondingly the measured gap. The error of gap measuring of inaccuracy of MC movement by a reference value should not exceed, as a rule, 1 %. For this purpose it is necessary to change the gap until the following conditions are fulfilled:

- at gap increasing  $y_2 \geq y_1 \left(1 + \frac{\Delta}{\Delta x}\right)$ ;
- at gap decreasing  $y_2 \leq y_1 \left(1 - \frac{\Delta}{\Delta x}\right)$ ,

where  $\Delta$  is the maximal error of gap changing by a reference value;  $\Delta x$  is the permissible error of gap measuring stipulated by inaccuracy of gap changing by a reference value.

The value of reference gap change  $\delta_0$  achieved in this case is measured by auxiliary measuring system and used for determining the parameter  $a_2$  and correcting the results of measurement according to the expressions (3, 4).

MC relative to the commutator of electrical machine may be installed for example by the device with a micrometer screw, Fig. 2.

The matter of the technique may be illustrated by the following example, Fig. 3

Let the parameter of calibrating characteristic be determined at measuring the gap between MC and CB № 1. Then calibrating characteristic of the device  $y=f(x)$  represents the line passing through the naught on-the-miter of 45° to the abscissa axis (characteristic 1, Fig. 3). In this case the output values of the device conform to the real distance from MC to the controlled surface of CB № 1 and line 1 is the standard calibrating characteristic (output characteristic of profilometer). If the distance between MC and CB № 1 equals to the base one (the recommended initial distance from MC to the measured commutator profile) then the value  $y_a$  corresponding to point  $a$  on its calibrating characteristic ( $y_a = x_{base}$ ) is fixed at the device output.

If CB № 2 with the same level of profile that CB № 1 has another electric resistance then the device calibrating characteristic at CB № 2 controlling passes on another miter to the abscissa axis (line 2 in Fig. 3). Then the profile level of CB № 2 ( $y_c$ ) is interpreted as the distance  $x_2$  corresponding to point  $cc'$  at calibrating characteristic 1. The measured value  $x_2$  here differs from the real value  $x_{base}$ .

By analogy of measured value  $y_b$  at CB № 3 (characteristic 3) stay-put at value  $x_{03}$  relative to bars № 1, 2, the false value  $x_3$  corresponding to the point  $b'$  at reference characteristic 1 is bound. For projecting bar № 4 (by value  $x_{04}$  relative to bars 1, 2) the false measured value equals to  $x_4$ , corresponding to the point  $d'$  at characteristic 1 etc.

To eliminate disagreements between measured valu-

es and real gap sizes it is necessary to reduce the slopes of characteristics 2, 3, 4 to the reference value which is the slope of characteristic 1. Slope angles of characteristics 2, 3, 4 in the general case are unknown and they should be determined somehow.

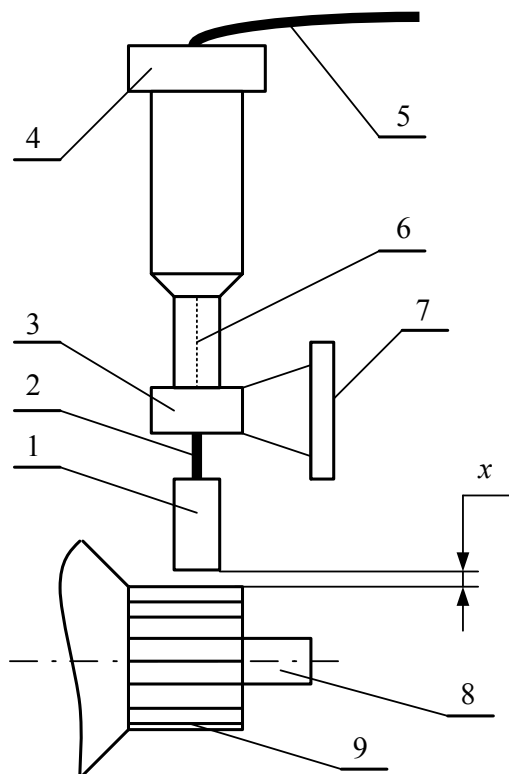


Fig. 2. The example of installing the measuring converter relative to the object of measurement: 1) the MC; 2) the moving (in the direction perpendicular to commutator cylindrical surface) element, at which MC is fixed; 3) the body; 4) the rotating element; 5) the electric cable; 6) the vernier reference scale; 7) the frame; 8) the shaft; 9) the commutator;  $x$  is the measured gap

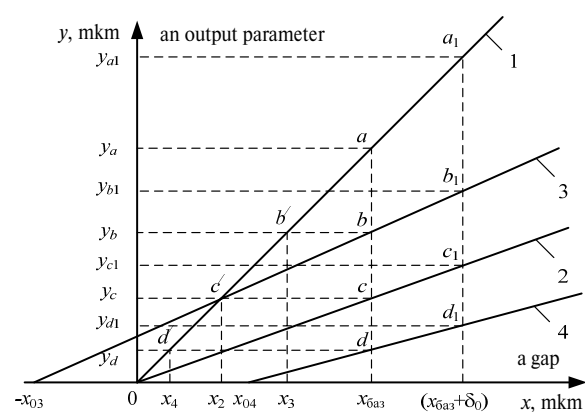


Fig. 3. Calibrating characteristic of profilometer

For this purpose the reference movement ( $\delta_0$ ) of MC relative to measured object to the side of gap increasing may be carried out in the process of measuring. It is fixed by means of reference scale of micrometer screw (or measuring head etc.). In this case actual magnitude of the gap between MC and CB № 1, 2 equals to  $(x_{base} + \delta_0)$ .

Instrument readings for point  $a_1$  of characteristic 1 equal to  $y_{a1}$  ( $y_{a1} = x_{base} + \delta_0$ ). Instrument readings for bars 2, 3, 4 equal  $y_{c1}$ ,  $y_{b1}$ ,  $y_{d1}$  in this case.

As a result, slope ratios of characteristics 2, 3, 4, ...,  $i$  are solved by the expression

$$\text{tg}\alpha_i = \frac{\Delta y_i}{\delta_0},$$

where  $\alpha_i$  is the slope of  $i^{\text{th}}$  characteristic;  $\Delta y_i$  is the increment of instrument readings at  $i^{\text{th}}$  characteristic at converter moving by value  $\delta_0$ .

It allows defining the parameters of corrected calibrating characteristics 2, 3, 4, ...,  $i$ :

$$a_i = \text{tg}\alpha_i = \frac{\Delta y_i}{\delta_0}.$$

Naturally the corrected instrument readings at  $i^{\text{th}}$  characteristic equal:

$$y_{i0} = y_i / a_i.$$

The calibrating characteristics of the device for bars 2, 3, 4 corrected according to the suggested technique look like it is shown in Fig. 4.

The corrected calibrating characteristic for bar № 2 coincides here with the reference line 1. Instrument readings for bars 1, 2 in base point equal respectively  $y_{a,c0}$ , that corresponds to the real values of gaps between MC and bars № 1, 2 ( $y_{a,c0} = x_{base}$ ). Instrument readings at characteristic 3 in this case equals to  $y_{b0}$  that corresponds to the ordinate of point  $b_0'$  on line 1 and gap  $x_3$  ( $x_3 = x_{base} + x_{03}$ ). Similarly the instrument reading at characteristic 4 equals  $y_{d0}$  that corresponds to the coordinate of point  $d_0'$  on reference line 1 and gap  $x_4$  ( $x_4 = x_{base} - x_{04}$ ).

Therefore, the corrected readings of the instrument correspond to the actual values of the gaps between the measuring converter and controlled collector bars.

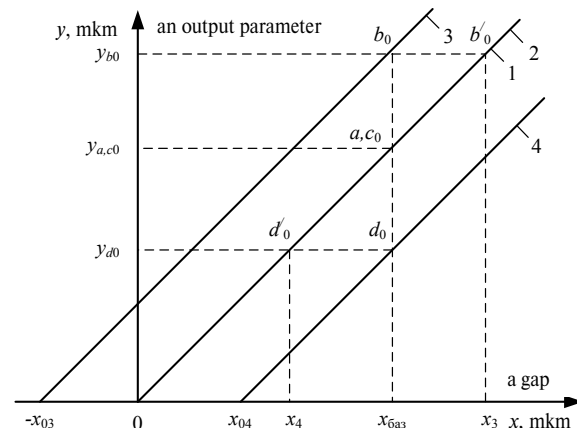


Fig. 4. Calibrating characteristics of profilometer corrected by calculated way

The adjustment of calibrating characteristic parameter may be carried out by analogy in the case of gap decreasing by the reference value  $\delta_0$ .

Another example of applying the technique of base adjustment may be the use of measuring device for recording linear microdisplacements of some object, for example, EM brush in a brush-holder well in operating process. For this purpose copper foil relative to which eddy current MC is based may be glued on external face surface of a brush. After that at inactive EM the operations of reference and additional measuring similar to the stated above ones are carried out. It allows determining the calibrating characteristic parameter:

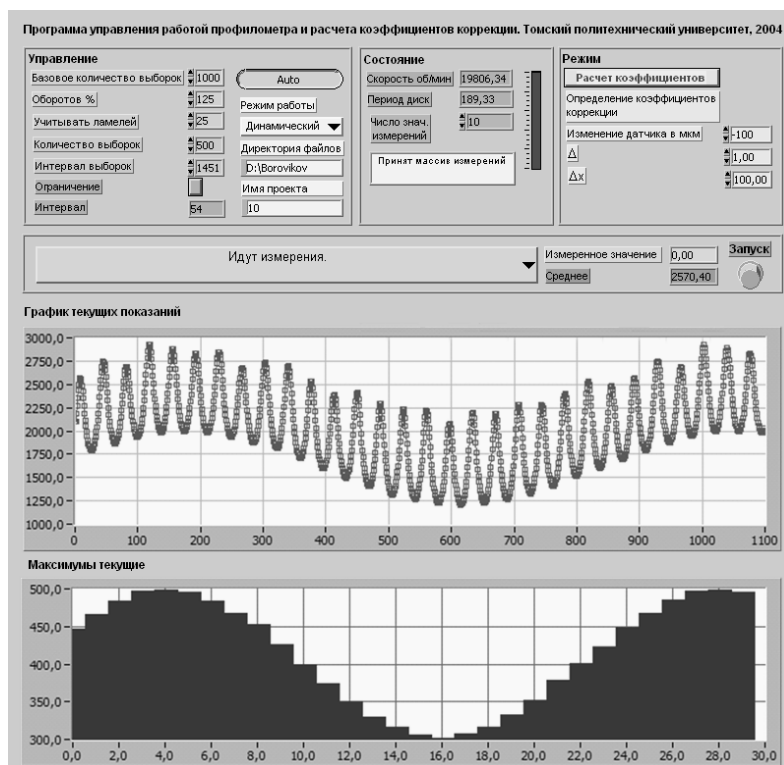


Fig. 5. The example of output of commutator profile measuring results

$$a_{2i} = \frac{y_{ad} - y_0}{\pm \delta_0},$$

where  $y_{ad}$  and  $y_0$  are the values of additional and reference measuring. Signs (+/-) corresponds to increase/decrease of a gap by  $\delta_0$ .

The suggested technique is realized in graphic programming environment LabVIEW 5.0. The example of output to the monitor the commutator profile measuring results is shown in Fig. 5.

The carried out experiments showed that when applying the technique of bar base adjustment in dynamic operating conditions the correcting of profile level upon the average 25 % occurs [13, 14].

#### REFERENCES

1. Plokhov I.V. Complex diagnostic and forecasting operating conditions of sliding current transfer knots in turbo-generator: Abstract of a thesis ... of Doctor of Engineering. – Saint-Petersburg, 2001. – 36 p.
2. Singh R., Onwubolu G., Singh K., Ram R. DC Motor Control Predictive Models // American Journal of Applied Sciences. – 2006. – V. 3. – № 11. – P. 2096–2102.
3. Harlamov V.V. Upgrading diagnostic techniques and devices of operating conditions of collector-brush assembly in rolling stock drive motor: Thesis ... of Doctor of Engineering. – Omsk, 2003. – 376 p.
4. Kachin S.I., Borovikov Yu.S., Nechaev M.A. Hardware-software system for estimating mechanic condition of sliding contacts of electric drive commutator machine // Bulletin of the Tomsk Polytechnic University. – 2004. – V. 307. – № 1. – P. 140–144.
5. Harlamov V.V. Diagnostic techniques and devices of operating condition of collector-brush assembly in drive motor and other continuous current commutator machine. – Omsk: OmGUPS, 2002. – 233 p.
6. Rodionov Yu.A., Plokhov I.V., Egorov V.E., Savraev I.E. Estimating performance quality of electric machine brush apparatus by the devices of diagnostic complex DIAKOR // Elektrotehnika. – 1995. – № 3. – P. 16–19.
7. Denisov V.A., Shaternikov V.E. Devices for controlling mechanical agents of commutator electric machine commutation // Elektrotehnika. – 1971. – № 5. – P. 29–32.
8. Burridd M., Qu Z. An Improved Nonlinear Control Design for Series DC Motors // Computers & Electrical Engineering. – 2003. – V. 29. – № 2. – P. 273–288.
9. Kozlov A.A., Scorospeshkin A.I. Dynamic control of electric machine collector profile // Elektrotehnika. – 1977. – № 7. – P. 36–39.
10. Gerasimov V.G., Klyuev V.V., Shaternikov V.E. Methods and devices of industrial products magnetic control. – Moscow: Energoatomizdat, 1983. – 271 p.
11. Pat. 2234054 RF. ISI' G01B 7/14. Method of measuring gap between measuring converter and controlled surface (variants) / S.I. Kachin, Yu.S. Borovikov, M.A. Nechaev, O.S. Kachin. Stated 17.07.2003; Published 10.08.2004, Bulletin № 22. – 11 p.: ill.
12. Bromberg E.M., Kulikovskiy K.L. Test methods of increasing measuring accuracy. – Moscow: Energiya, 1978. – 176 p.
13. Kachin S.I. Highly used collector electric machine of low power: Thesis ... of Doctor of Engineering. – Tomsk, 2002. – 438 p.
14. Borovikov Yu.S. Soft hardware for estimating commutation intensity for commutator electric machine: Thesis ... of Doctor of Engineering. – Tomsk, 2003. – 155 p.

#### Conclusions

1. The developed and approved technique of measuring the electrical machine commutator profile allows increasing the control accuracy at varying heating temperature of commutator bars, change of specific resistances of bars surface layer, linear velocity of commutator moving relative to measuring converter and inaccuracy of its orientation relative to the controlled surface.
2. Testing high-speed electric machines of low power in dynamic conditions showed that adjustment of commutator profile level achieves 25 %. It allows developing constructions and technologies of commutator manufacturing at all stages of production process.

*Received on 01.12.2006*