

“Design and Fabrication of an Electrically Small Meander Line MIMO Antenna System for Wireless Communication Applications”

Prof. Prakash S. Andhare
PG Student, Electronics & Communication Engg.
Marathwada Institute of Technology,
Aurangabad (MS), India
piyuprakash18@gmail.com

Dr. Abhilasha Mishra
Asso. Prof, Electronics & Communication Engg.
Marathwada Institute of Technology,
Aurangabad (MS), India
abhilasha@gmail.com

Abstract—A multiple-input multiple-output (MIMO) technique has been considered one of the most promising technologies to enhance the performance of wireless communication systems with high-speed transmission rates. A MIMO system utilizing several antenna components is more advantageous than a single-input single-output (SISO) system in terms of increasing channel capacity and reducing transmitting power. Conventional universal serial bus (USB) dongles are attractive for providing plug and-play functionality in mobile communication devices such as laptops. Future wireless USB dongles should be capable of accommodating higher data rates than the current systems owing to the advent of various multimedia services. Up to date, most MIMO antenna systems with more than two antennas are three-dimensional rather than planar. However, the basic problem with the MIMO systems is the requirement of electrically small antennas which usually have several constraints. Hence, these antennas are considered in our project work.

In this work the design, optimization, fabrication & testing of electrically small antennas suitable for MIMO (multiple input multiple output) applications are presented. When the transceiver uses more than one antenna, the antennas must be placed at least half of the carrier wavelength apart, in order to transmit/receive uncorrelated signals. We propose an electrically small antenna (ESA) that is based on the meander line antenna structure that operates in the 2.4-2.7 GHz ISM band. The proposed antenna has measured center frequency of 2.50 GHz with 240 MHz bandwidth and total size of antenna is 14.5X26.6 mm. In addition, we present the design of a compact dual element MIMO antenna system for a USB dongle operating in the 2.5-2.7 GHz frequency band. The designed MIMO antenna has the compact size of 26.0 mm×32.0 mm, more than 200 MHz bandwidth. Both simulation and experiment results from the fabricated antennas are presented.

Keywords-Electrically Small Antenna (ESA), RL, Meander Line Antenna, VSWR, SISO & MIMO, USB applications.

I. INTRODUCTION

A multiple-input multiple-output (MIMO) technique has been considered one of the most promising technologies to enhance the performance of wireless communication systems with high-speed transmission rates. A MIMO system utilizing several antenna components is more advantageous than a single-input single-output (SISO) system in terms of increasing channel capacity and reducing transmitting power. Conventional universal serial bus (USB) dongles are attractive for providing plug and-play functionality in mobile communication devices such as laptops. Future wireless USB dongles should be capable of accommodating higher data rates than the current systems owing to the advent of various multimedia services. Up to date, most MIMO antenna systems with more than two antennas are three-dimensional rather than planar. In practice, low-profile planar antennas are more preferred so that antenna radiators can easily be integrated with other printed circuit board (PCB) components in USB dongles [1].

Multiple-input-multiple-output (MIMO) transmission is one of the promising antenna technologies used for wireless communications. Through spatial multiplexing, MIMO achieves high capacities. The only limitation is that, the transmitting and receiving antennas should be placed at least half the wave length of the carrier signal in order to transmit or receive uncorrelated signals. Apart from that, each of transmit or receive antenna requires a separate circuit which means, higher the no of antennas used higher the cost. It is indisputable that antenna plays a significant part in communication system. Therefore, an increasingly number of

technicians begin to do some research and development of antenna. However, with rapid development of the communication industry, the requirement of antenna will be achieved with high quality. Nowadays, there are different kinds of antennas in the market such as dipole antenna, patch antenna, loop antenna, meander-line antenna and so on [2].

Antenna integration and miniaturization are two major challenges. The meander line antenna is a type of printed antenna that achieves miniaturization in size by embedding the wire structure on a dielectric substrate. In basic form meander line antenna is a combination of conventional wire and planer strip line. Benefits include configuration simplicity, easy integration to a wireless device, inexpensive and potential for low SAR features [3]. Meander line antenna is one type of the micro strip antennas. The meander line antenna was proposed by Rashed and Tai for reduce the resonant length [4].

Because recent years there are lot of changes in wireless communication technologies such as increase in data rate, MIMO system and at same time antenna size and weight is reduced. There are varieties of techniques to reduce the size of micro strip antennas: use of high permittivity substrates [5], shorting pins [6], and meander line. Inserting suitable slots in radiating patch is also a common technique in reducing the dimensions of patch antenna. The slots introduce parasitic capacitances which tend to reduce the resonant frequency of the antenna. For wireless communications applications such as USB Dongle, radio frequency identification tags, Bluetooth headset, Mobile phone Meander line antenna is convincing solution [7]. Meandering the patch increases the path over which the surface current flows and that eventually results in

lowering of the resonant frequency than the straight wire antenna of same dimensions.

The electrical small antenna defines as the largest dimension of the antenna is not more than one-tenth of a wavelength ($\lambda/10$) [8]. Electrically small antennas (ESA) are antennas that can be enclosed within a radian sphere, meaning that the relationship

$$K_a=1 \text{ or } a=1/k, \quad (1)$$

Where $k=2\pi/\lambda$ and a is the largest diameter of the circle inclosing the complete antenna, has to be satisfied [9]. ESAs have high input reactance and low input resistance. Therefore, they have high Quality factor (Q) and low frequency bandwidth. In [10], an expression for the Q was derived and is given by,

$$Q = \frac{1}{K_a}^3 \quad (2)$$

Meander antenna is electrically small antenna. The design of meander line antenna is a set of horizontal and vertical lines. Combination of horizontal and vertical lines forms turns. Number of turns increases efficiency increases. In case of meander line if meander spacing is increase resonant frequency decreases. At the same meander separation increase resonant frequency decreases [11].

The meander line element consists of vertical and horizontal line so it formed a series of sets of right angled bends. The polarization of antenna depends on radiations from the bend. The spacing between two bends is very vital, where if the bends are too close to each other, then cross coupling will be more, which affects the polarization purity of the resultant radiation pattern. In other case the spacing is limited due to the available array grid space and also the polarization of the radiated field will vary with the spacing between the bends, and the spacing between the micro strip lines [12].

II. MEANDER LINE STRUCTURE AND DESIGN



Fig.1 Meander Line Structure

A meander antenna is an extension of the basic folded antenna and frequencies much lower than resonances of a single element antenna of equal length. Radiation efficiency of meander line antenna is good as compare to conventional half and quarter wavelength antennas. Antenna size reduction factor β depends primarily on the number of meander elements per wavelength and spacing of element widths of the rectangular loops [13]. Planar meander line antenna with added quarter wave parasitic element at the both side of the meander can produce double beam radiation pattern at

frequencies much lower than resonances of a single-element antenna of equal length [14]. A planar meander line monopole antenna element is the most suitable choice for the MIMO antenna system [15].

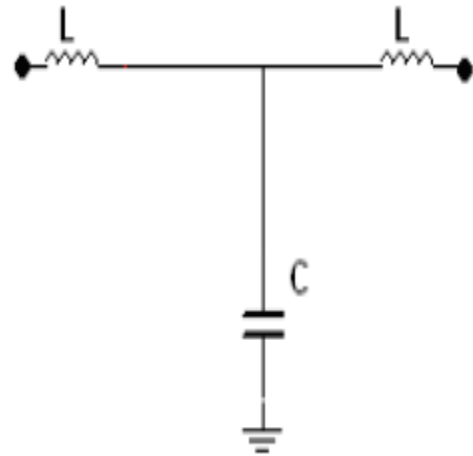


Fig.2 Lumped equivalent model of meander

The meander line antenna acts as a resonant LC circuit. The vertical elements act as the inductor, horizontal elements act as capacitor. The horizontal lines lie in the short length of the PCB while the vertical lines are placed along the long length of the PCB. The meander line configuration of the monopole allows reducing the occupied space of the antenna element to less than $0.1\lambda_0$ in each dimension.

The lumped inductance and capacitance are calculated as follows:

$$\text{Lumped inductance } L_A = \frac{Ll}{2} \quad (3)$$

$$\text{Lumped capacitance } C_B = C l \quad (4)$$

Where L inductance per unit length is, C is capacitance per unit length and l is length of line segment [16].

Total length of antenna is given by

$$\lambda/10 = N \times S \quad (5)$$

Where N number of turns, S is spacing between two meander lines

The meander-line antenna can be in a dipole or ground plane format. The idea is to fold the conductors back and forth to make the overall antenna shorter, which is shown in Figure 3. It is a smaller area, but the radiation resistance, efficiency and bandwidth decrease. The parameters of meander shape, for example H , L_a , L_b and L_c shown as in the figure 3 will affect the antenna performance parameter. In order to find the best antenna solution, different values of meander width are simulated and studied. Radiation efficiency of meander line antenna is good as compare to conventional half and quarter wavelength antennas. Antenna size reduction factor β depends primarily on the number of meander elements per wavelength and spacing of element widths of the rectangular loops. Planar meander line antenna with added quarter wave parasitic element at the both side of the meander can produce double beam radiation pattern at frequencies much lower than resonances of a single-element antenna of equal length.

A meander-line antenna can be realized by bending the conventional linear monopole antenna to decrease the size of antenna. The influence of the meander part of the antenna is

similar to a load and the meander line sections are considered as shorted-terminated transmission lines as shown in Figure 4.

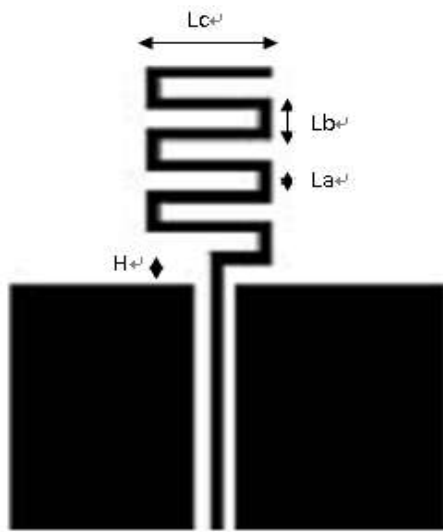


Fig.3. Shape of Meander Line Antenna (MLA)

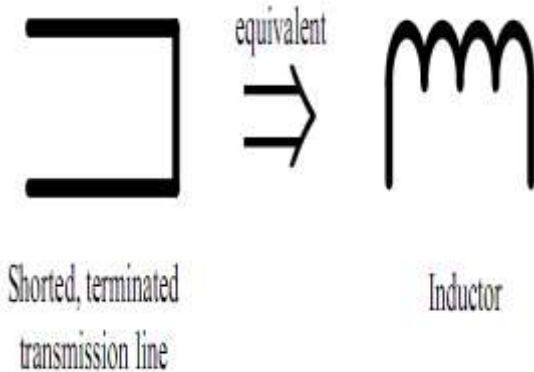


Fig.4. Equivalent Model of meander line sections

In this work, a compact electrically small antenna (ESA) design and fabrication that is based on the MLA presented. The antenna is intended for the use in the 2.4-2.7 GHz for USB applications. This antenna is in single input single output MLA with a center frequency around 2.52 GHz, bandwidth of at least 240 MHz and total size of an antenna 14.5X 26.6 mm. In addition, a dual element MIMO antenna system is also fabricated to operate in the same band using the same compact element presented. Simulation and measurement results are compared. This paper presents an overview design printed meander antennas in the ISM band by providing a good initial geometrical configuration of the antenna. This article has been divided into four sections. Section I describes introduction. Section II describes in detail of the meander line antenna structure and design. Section III describes in detail modeling of the meander line antenna. The results obtained from our proposed antenna are listed and discussed in Section IV. Finally concluding remarks are presented in Section V.

III. MODELLING OF THE ANTENNA

A meander line antenna shrinks the electrical length of a regular monopole or dipole antenna by folding its length back

and forth to create a structure with multiple turns. This method has advantages when antennas with low frequency of operation are of interest, since this will reduce the size of the antenna significantly. The size of the antenna will even get smaller because of the use of a dielectric substrate. Printed meander antennas usually have good radiation efficiency and close to Omni-directional radiation patterns [17].

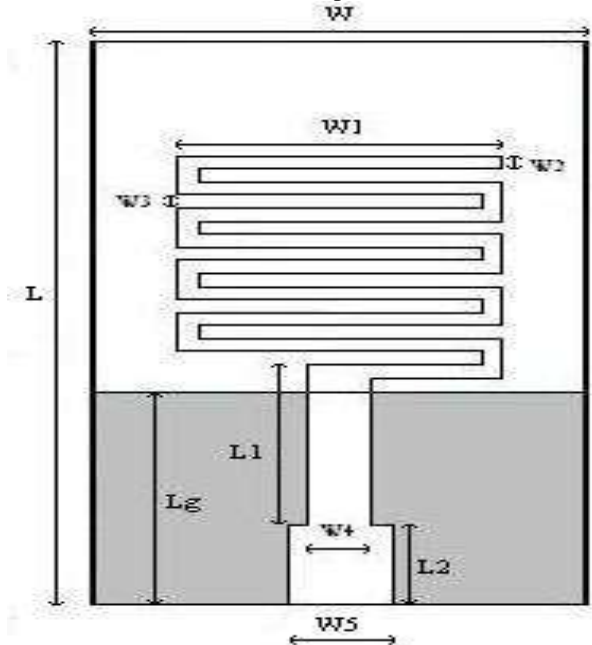


Fig.5. Geometry of the single element Meander Line ESA.

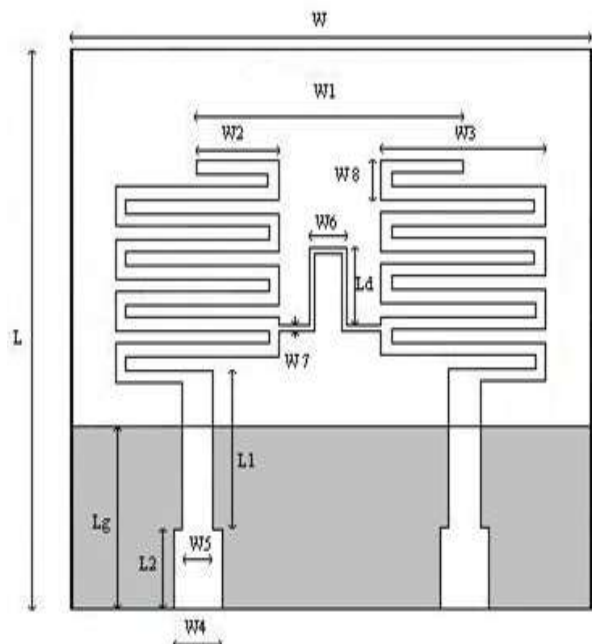


Fig.6. Geometry of the dual element Meander Line ESA.

The designed single element (SISO) Meander antenna structure is shown in Figure 5. Antenna dimensions were optimized using HFSS. The dimensions of the antenna are in mm and given by, $L=26.6$, $W=14.5$, $L_g=11.32$, $W_1=9.6$, $W_2=0.62$, $W_3=0.62$, $W_4=1.86$, $W_5=3.1$, $L_1=$ and $L_2=$. The antenna was etched on an FR-4 substrate with 1.59 mm

thickness, copper was used. A right angle PCB mount SMA connector was used as the feeding port for the antenna.


The designed dual element MIMO Meander antenna structure is shown in Figure 6. Antenna dimensions were optimized using HFSS. The dimensions of the antenna are in mm and given by, $L=26.0$, $W=32.0$, $W1=15.56$, $W2=4.5$, $W3=9.0$, $W4=2.35$, $W5=0.93$, $W6=2.1$, $W7=0.2$, $W8=1.86$, $Lg=8.68$, $L1=7$, $L2=3.72$ and $Ld=3.72$. The antenna was etched on an FR-4 substrate with 1.59 mm thickness, copper was used. A right angle PCB mount SMA connector was used as the feeding port for the antenna. The substrate used in simulations is FR4 with relative dielectric constant of 4.4 (loss tangent=0.01) and height of the substrate equal to 1.59 mm. Table I shows the effect of No. of turns on different antenna parameter.

Sr. No.	No. of Turns	FR (GHz)	R.L. (dB)	VS WR	BW (MHz)	Gain (dB)
1)	10 turns	2.34	08.01	21.04	225	2.72
2)	09 turns	2.34	17.38	1.38	225	5.42
3)	08 turns	2.52	39.12	1.05	240	7.22
4)	07 turns	2.79	38.23	1.04	260	6.18
5)	06 turns	2.79	54.01	1.04	261	6.15
6)	05 turns	2.80	-3.46	5.1	260	5.57

Table 1: Effect of No. of Turns on Different Antenna Parameters.

IV. RESULTS AND DISCUSSION

Figure 7 shows the top and bottom views of the fabricated single MLA antenna. The radius of the sphere enclosing this antenna is 1.45 cm. Figure 8 shows the measured and simulated reflection coefficients. An HP 8514B Network Analyzer was used to conduct this measurement. The correlation between the two is very well observed. The simulated f_c was 2.50 GHz, while the measured one was 2.49 GHz. The simulated -10 dB bandwidth was 240 MHz while the measured one was 200 MHz. This shows a good match between the two, although some discrepancy is expected due to the presence of the GND plane. The MLA total size is 14.5 X 26.6 mm. This section presents the simulated results of modified MLA. HFSS has been used to simulate the antenna for several performance parameters such as impedance bandwidth, radiation patterns and VSWR. The parametric study of the antennas reveals the band behavior. The antenna is designed to operate on 2.5 GHz ISM band.

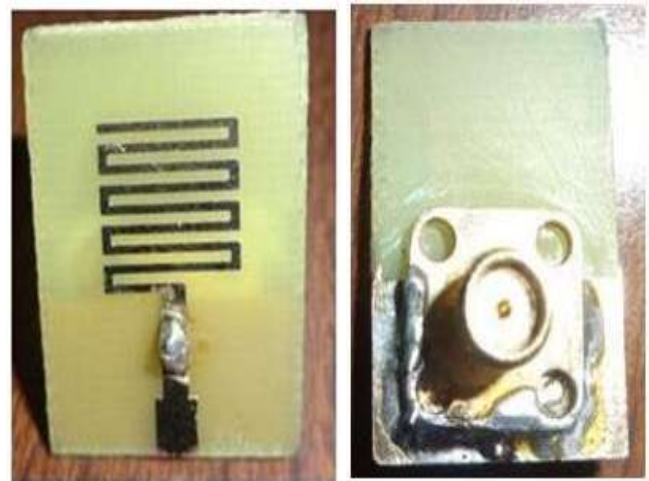

(a) Top view (b) Back view
 Fig.7 Photo of the fabricated single element MLA antenna

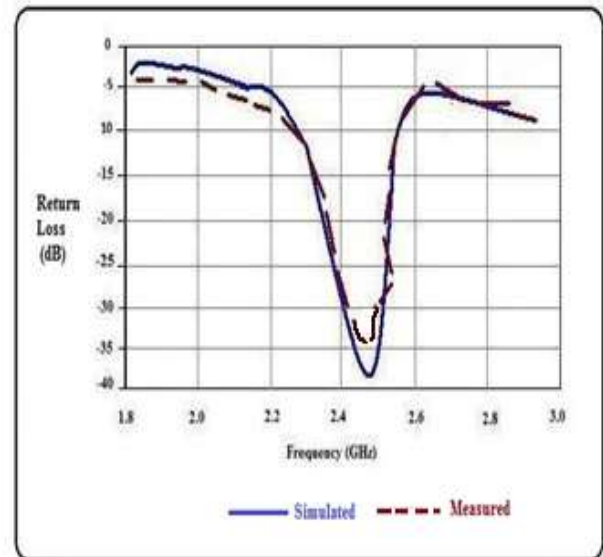


Fig.8 Experimental results of SISO MLA R.L

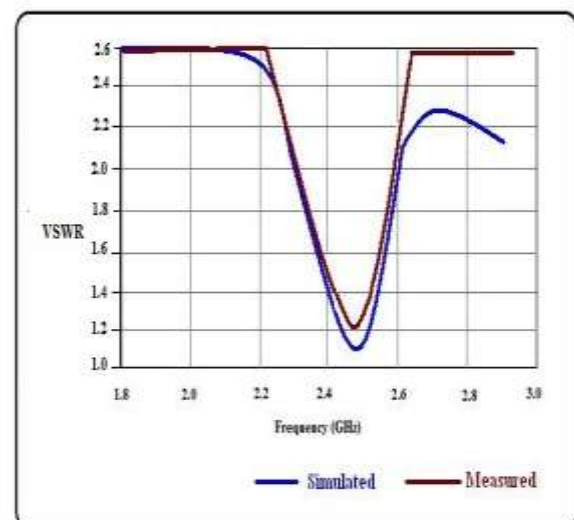


Fig.9 Experimental results of SISO MLA VSWR.

Fig. 8 illustrates the S11 of MLA; where it shows a return loss of -39.1 dB for the operation on 2.5 GHz. The impedance bandwidth calculated at -10 dB scale for this band is 240 MHz. Figure 9 shows the simulated and measured VSWR for proposed MLA antenna. In small antennas, the ground plane plays a major part in radiation. As a consequence of the change in ground plane size, shift in the resonant frequencies has been noticed. The current distribution on the ground plane and its effect on the resonant frequencies were also observed during simulation. The measured radiation patterns for the single element MLA antenna are shown in figure 10.

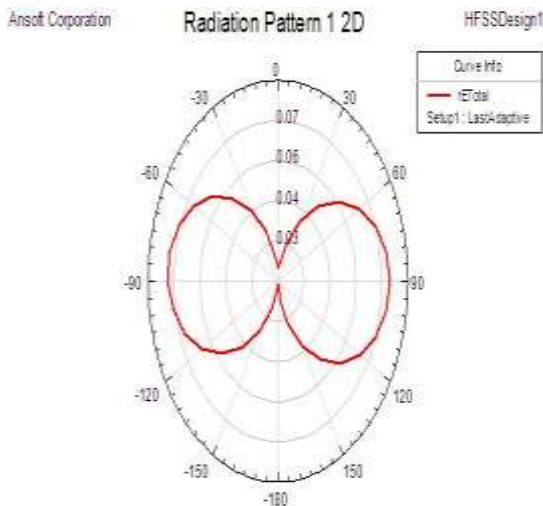


Fig.10 Radiation Pattern of Proposed antenna

Figure 11 shows the fabricated dual element MIMO antenna along with its reflection coefficient performance. In this, two identical designed monopole antenna elements were placed near each other to form a MIMO antenna system. The total occupied area of the antenna system is less than 26.0 mm×32.0 mm. The distance between two meander line monopoles was set to 6 mm that is about $0.05\lambda_0$. The isolation between antenna elements without the use of the diversity techniques was only -2.5 dB that is unacceptable for the effective MIMO performance.



(a) Top view (b) Back view

Fig.11 Photo of the fabricated dual element MIMO antenna.

In order to provide good MIMO characteristics, the two monopole antennas were connected to each other by a connection line in low impedance connection points of the monopoles. The main concept of the diversity technique based on a direct connection of the antenna elements is that the current induced from one antenna element flows through the connection to the other antenna element and does not pass through the load. Thus, both antennas form the radiation pattern with some dedicated direction of main radiation. When another antenna element is excited the radiation pattern of the MIMO antenna system has an opposite direction of main radiation. It provides the pattern diversity when different antenna elements are excited and, thus, high port-to-port isolation can be achieved.

The simulated f_c was 2.63 GHz, while the measured one was 2.58 GHz. The simulated -10 dB bandwidth was 480 MHz while the measured one was 430 MHz. This shows a good match between the two, although some discrepancy is expected due to the presence of the GND plane. The MIMO MLA total size is 26.0 X 32.0 mm. The measured results for the dual element antenna are shown in Figures 12-13.

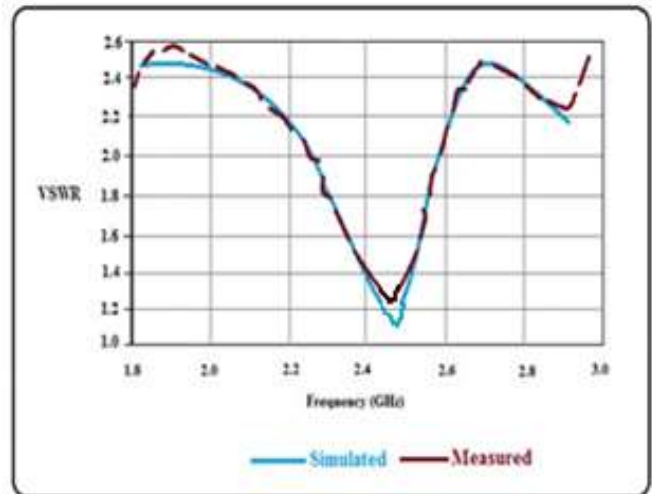


Fig.12 Experimental results of MIMO MLA RL

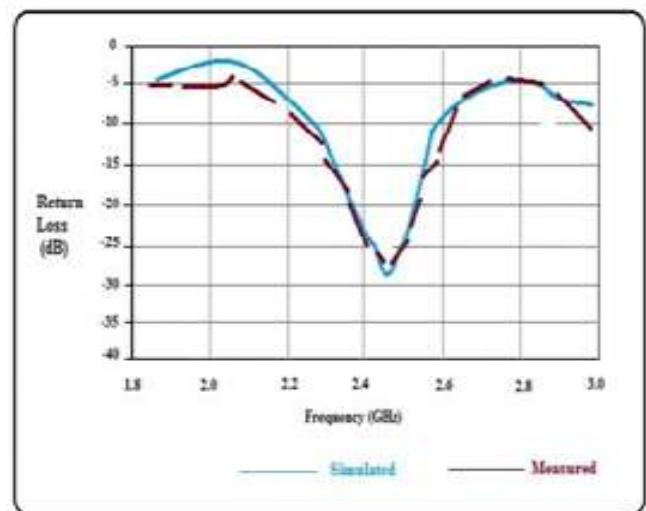


Fig. 13 Experimental results of MIMO MLA VSWR.

V. CONCLUSIONS

MLA has good properties such as small size, light weight, low profile, simple and cheap. These nice features are to make MLA is very popular and usable in many aspects of communication systems such as USB, RFID, WLAN, Mobile phones, Tabs etc.

In this project, a compact electrically small antenna (ESA) design and fabrication that is based on the MLA presented. The SISO MLA antenna is intended for the use in the 2.4-2.7 GHz for USB applications. In addition, a dual element MIMO antenna system is also fabricated to operate in the same band using the same compact element presented. Simulation and measurement results are compared.

The SISO MLA has a measured center frequency of 2.50 GHz, Return loss -39.12, bandwidth of 240 MHz is obtained and total size of antenna is 14.5X26.6 mm, while the dual element MIMO MLA measures center frequency of 2.63 GHz and occupies an area of 26.0 mm X 32.0 mm.

REFERENCES

- [1] MIMO Transmission using parasitic array antenna by Chamath Divarathne chamath@cmu.edu.
- [2] Rashed and C. T. Tai, "An new class of resonant antennas," IEEE Trans. Antennas Propagat., vol. 39, pp. 1428– 1430, Sept. 1991.
- [3] K.L. Wong, Planar antennas for wireless communications, New York, 2003
- [4] C. A. Balanis, Antenna Theory: Analysis and Design. New York: Wiley, Second ed., 1997.
- [5] D. Miron, Small Antenna Design, Newnes 2006.
- [6] H. A. Wheeler, "Fundamental Limits of Small Antennas," Proceedings of The I.R.E., pp. 1479-1484, December 1947.
- [7] J. McLean, "A Re-Examination of the Fundamental Limits on the Radiation Q of Electrically Small Antennas," IEEE Transactions on Antennas and Propagation, Vol. 44, No. 5, pp. 672-675, May 1996.
- [8] Prof. Abhilasha Mishra, Mr. Prakash S. Andhare, Prof. Vidya H. Deshmukh, Design and Fabrication of an Electrically Small Meander Line Structure Antenna System for MIMO Applications, 2nd International Conference on Advances in Engineering and Technology (ICAET-15), ISSN: 2321-8169, Volume: 3 Issue: 2, pp. 101– 105, 25-26 Feb 2015.
- [9] S.R Best and J.D Morrow, "Limitations of Inductive Circuit Model Representations of meander line antennas", vol. 1, pp 852-855, IEEE Trans. Antennas and Propagation Society International Symposium, June 2003.
- [10] O P N Calla, Alok Singh, Amit Kumar Singh, Sandeep Kumar, Triloki Kumar Empirical Relation for Designing the Meander Line Antenna", Int. Conf. on Recent Advances in Microwave Theory and Applications, pp. 695 – 697, 2008.
- [11] Warnagiris, T.J.; Minardo, T.J., "Performance of a meandered line as an electrically small transmitting antenna" Antennas and Propagation, IEEE Transaction on, vol. 46, no. 12, pp. 1797-1801 Dec 1998.
- [12] H. Urabe, et. al., "Design and Performance of an 800MHz/2GHz Dual Band Small Planar Antenna," IEEE Asia Pacific Microwave Conference, pp. 2671-2674, Singapore, December 2009.
- [13] Misman, D., Abd Aziz, M.Z.A. Husain, M.N., Rahim, M.K.A.; Soh, P.J., "Design of dual beam meander line antenna", Proc. 5th International Conf (EUCAP), pp 576-578, 2011.
- [14] Ark Provo Das, Sayantan Dhar and Bhaskar Gupta, "Lumped Circuit Model Analysis of Meander Line Antennas" in Mediterranean Microwave Symposium (MMS), September 2011, pp. 21-24.
- [15] C. Pfeiffer and A. Grbic, "A circuit model for electrically small antennas," IEEE Transactions on Antennas and Propagation, vol. 60, no. 4, pp. 1671-1683, 2012.
- [16] Jun Fan, Zhenya Lei, Yongjun Xie, and Mingyuan Man, "Bandwidth Enhancement for Low Frequency Meander Line Antenna" Progress In Electromagnetics Research C, Vol. 51, 169-177, 2014
- [17] hmed Hamdi Abo absa, Mohamed Ouda, Ammar Abu Hudrouss, "Analysis and Design of E-shape Meander Line Antenna for LTE Mobile Communications" Journal of Engineering Research and Technology, Volume 2, Issue 1, pp. 75-79, 2015.