

107-Gb/s full-ETDM transmission over field installed fiber using vestigial sideband modulation

Citation for published version (APA):

Jansen, S. L., Derksen, R. H., Schubert, C., Zhou, X., Birk, M., Weiske, C. J., Bohn, M., Van Den Borne, D., Krummrich, P. M., Möller, M., Horst, F., Offrein, B. J., De Waardt, H., Khoe, G. D., & Kirstädter, A. (2007). 107-Gb/s full-ETDM transmission over field installed fiber using vestigial sideband modulation. In *Proceedings of the Conference on Optical Fiber Communication and the National Fiber Optic Engineers Conference, (OFC / NFOC 2007) 25-29 March 2007, Anaheim, California, USA* (pp. OWe3-1/3). Article 4348863 Institute of Electrical and Electronics Engineers. <https://doi.org/10.1109/OFC.2007.4348863>

DOI:

[10.1109/OFC.2007.4348863](https://doi.org/10.1109/OFC.2007.4348863)

Document status and date:

Published: 01/12/2007

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

107-Gb/s full-ETDM transmission over field installed fiber using vestigial sideband modulation

S. L. Jansen (1*), R. H. Derksen (2), C. Schubert (3), X. Zhou (4), M. Birk (4), C.-J. Weiske (5), M. Bohn (5), D. van den Borne (1), P. M. Krummrich (5), M. Möller (6), F. Horst (7), B. J. Offrein (7), H. de Waardt (1), G. D. Khoe (1), A. Kirstädter (2)

1: COBRA Institute, Eindhoven University of Technology, The Netherlands,
 2: Siemens Networks GmbH & Co.KG, SN MN PG NT CT, München, Germany,
 3: Fraunhofer Institute for Telecommunications, Heinrich-Hertz-Institut, Berlin, Germany,
 4: AT&T Labs-Research, Middletown, NJ 07748, USA,
 5: Siemens Networks GmbH & Co.KG, SN FN T D HW, München, Germany,
 6: MICRAM Microelectronic GmbH, Bochum, Germany,
 7: IBM Zürich Research Laboratory, Rüschlikon, Switzerland.
 *Author is now with KDDI R&D Laboratories, Saitama, Japan, email: SL-Jansen@kddilabs.jp

Abstract: 107-Gb/s full-ETDM transmission is shown over a 160-km field installed fiber link. A high tolerance towards narrowband optical filtering is demonstrated using vestigial sideband modulation to minimize the spectral width.

©2006 Optical Society of America

OCIS codes: (060.2330) Fiber optics communications; 060.4510 Optical communications.

1. Introduction

Electrical time division multiplexing (ETDM) is the most cost-effective way to increase the capacity of a single wavelength channel. Given the increasing importance of Ethernet-based data traffic there has recently been a strong interest to investigate the feasibility of 107-Gb/s ETDM transmission as a basis for a future 100-Gb/s Ethernet (100GbE) standard [1]. The main challenge to realize 100GbE is the development of cost-effective systems. Full-ETDM based systems that are compatible with today's wavelength division multiplexing (WDM) fiber infrastructure are therefore preferable.

Recently many research groups showed interest in 100GbE and different modulation formats have been proposed, such as NRZ [2, 3], duobinary [2] and DQPSK [4]. The most straightforward implementation for 100GbE that requires the least optical and electrical components is the NRZ modulation format. Many 100GbE papers have been reported using the NRZ modulation format [2, 3, 5], however so far no full 107-Gb/s ETDM transmission experiment has been reported with NRZ.

In this paper we show for the first time full-ETDM 107 Gb/s NRZ transmission. Transmission is reported over 160 km of field installed fiber. The optical bandwidth of the modulator used in this experiment is low compared to the bit rate. Therefore an FIR filter had to be used to compensate for the imperfections of the modulator. The FIR filter used was originally designed for operation at 40-Gb/s and therefore had a small free spectral range of 91 GHz [6]. This put stringent requirements on the available optical bandwidth for the data signal. By using the VSB modulation format, the optical bandwidth of the 107 Gb/s signal is significantly reduced. As a result, the signal becomes extremely tolerant against narrowband optical filtering. Although the VSB modulation format requires a relatively high OSNR, it enables cascaded filtering of the 107-Gb/s data signal with an optical filter having 0.74-nm (92.5 GHz) 3-dB bandwidth.

2. Experimental setup

The experimental setup is depicted in Fig. 1. The data and inverted data outputs of a 53.5-Gb/s pulse pattern generator (PPG, provided by SHF technologies) are fed to a SiGe 2:1 multiplexer (SHF 408). For the experiment a pseudo-random bit sequence (PRBS) with length 2^7-1 is used. The PRBS length is mainly limited by the electrical bandwidth of the receiver. In order to decorrelate the two tributaries, the inverted data output is delayed by 16 bits with respect to the data output. The balanced output of the 107-Gb/s multiplexer provides a peak-to-peak voltage of about 800 mV and is directly fed into a dual-drive Mach-Zehnder modulator with a 3-dB bandwidth of about 30 GHz and $V_\pi = 3$ V at 1.5 GHz. A distributed feedback (DFB) laser provides a continuous wave output signal at 1551.64 nm for modulation. Subsequently, the signal is VSB filtered with a tunable bandpass filter (BPF). The center wavelength of the VSB filter is located at 1550.7 nm and the 3-dB and 20-dB filter bandwidths are 1.0 nm and 2.78 nm, respectively.

The optical equalizer used is a finite impulse response (FIR) lattice filter integrated on a SiON planar lightwave circuit. The filter is a six-tap feed forward filter type and has a free spectral range of 91 GHz. A detailed description of the filter can be found in [6, 7]. Comparing the eye diagrams depicted in Fig. 1 it can be seen that the combination of VSB and FIR filter significantly improves the eye opening. However, note that for clarity the eye diagrams shown are for 100 Gb/s, since the precision timebase of the oscilloscope introduced a large jitter when used at the 13.375-GHz base rate required for measurements at 107 Gb/s.

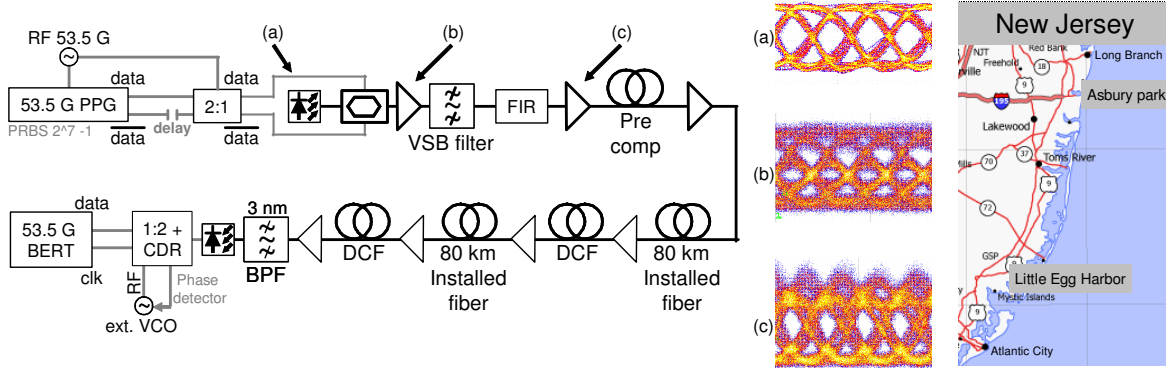


Fig. 1: Experimental setup, map and eye diagrams for (a) Electric back-to-back, (b) After optical modulator and (c) After VSB and FIR filter.

Before transmission, a dispersion compensating module (DCM) with -40 ps/nm is used for pre-compensation. The transmission link consists of two spans of 80-km non-zero dispersion shifted fiber (NZDSF) installed between Asbury Park and Little Egg Harbor (as depicted in the map of Fig. 1). These fibers have an average span loss of 19.7 dB and a dispersion of approximately 4.3 ps/nm/km at 1551.64 nm. After each span a DCM is used to compensate the chromatic dispersion. In front of the receiver the residual dispersion is optimized with additional fiber to obtain the best bit-error ratio (BER) performance. The input power levels into the transmission fiber and DCMs are 7 dBm and 0 dBm, respectively.

The 107-Gb/s signal is detected with a high-speed photodiode (provided by u2t photonics). Subsequently, the electrical 107-Gb/s signal is fed directly into the integrated ETDM receiver chip [3], which consists a 1:2-demultiplexer (DEMUX) and the clock and data recovery (CDR). An external voltage controlled oscillator (VCO, provided by Agilent Technologies) is used, which is controlled by the phase-detector signal generated in the receiver chip. The demultiplexed 53.5-Gb/s tributaries are subsequently detected with a BER tester (provided by SHF technologies) synchronized by the recovered 53.5-GHz clock signal from the receiver chip.

2. Experimental results

Table 1 summarizes the observed Q-factors and optical signal-to-noise ratios (OSNR) before and after transmission over the 160-km installed fiber link. After transmission the Q-factors are about 0.5 dB above the correction limit of a concatenated FEC code with a 7% overhead (Q-factor 9.0 dB). Both the electrical and optical signals are severely band-limited and the amplitude and phase response of the optical equalizer and of the VSB filter have a strong influence on the transmission performance.

	Q-factor Tributary 1 / 2	OSNR
Back-to-back	10.4 dB / 10.5 dB	42 dB
After 160 km	9.6 dB / 9.7 dB	35.6 dB

Table 1: Performance and OSNR before and after transmission.

The amplitude responses of the FIR, VSB and BPF filters are depicted in Fig. 2a, as well as the cumulative amplitude response. An advantage of the VSB filtered signal is the increased resistance to narrowband optical filtering [8], although it requires a higher OSNR. We measured the resistance of the 107-Gb/s signal to narrowband optical filtering using a flat-top narrowband BPF, with a 3-dB bandwidth of 0.74 nm and 20-dB bandwidth of 0.89 nm (shown in Fig. 2a). Fig. 2b depicts the optical spectrum of the 107-Gb/s NRZ signal as well as the VSB signal before and after the narrowband filter. After filtering the 107-Gb/s signal with the narrowband BPF, a negligible increase of the BER was seen. Even for two (identical) cascaded narrowband BPFs no noticeable penalty with

respect to back-to-back was observed. Hence it can be concluded that the 107-Gb/s VSB modulated data signal is sufficiently tolerant towards narrowband optical filtering to be used in an existing 100-GHz WDM infrastructure. In order to avoid possible penalties resulting from linear and nonlinear crosstalk from neighboring channels 200-GHz spaced 107-Gb/s channels can be interleaved with 40/10-Gb/s traffic.

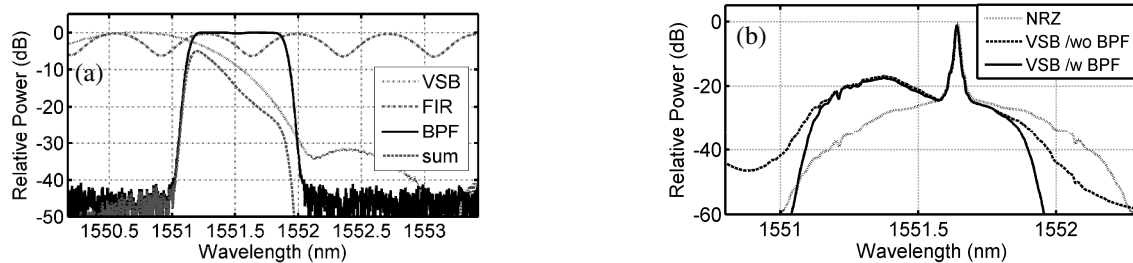


Fig. 2: Optical spectra (0.01-nm resolution bandwidth). a) Filter curves, b) 107-Gb/s NRZ and VSB with and without BPF.

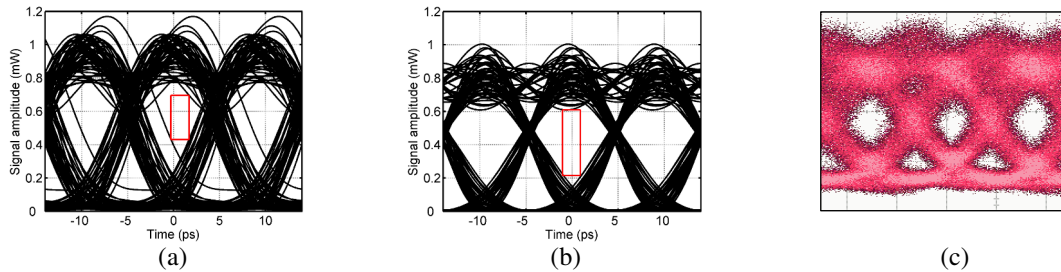


Fig. 3: Eye diagrams at 107-Gb/s after filtering with the narrowband BPF, a) simulation without the VSB filter, b) simulation with the VSB filter, c) experiment with VSB filter.

The VSB filter plays a crucial role in increasing the tolerance of the 107-Gb/s optical signal with respect to narrowband optical filtering. Fig. 3a and 3b show simulated eye diagrams for an ideal 107-Gb/s optically modulated signal after filtering with the narrowband BPF without and with VSB filter, respectively. The center frequency of the narrowband BPF is in both configurations optimized to obtain the smallest eye opening penalty (EOP). The obtained EOP with and without VSB filter is 2.3 dB and 3.8 dB, respectively. Therefore it can be concluded that the resistance to narrowband optical filtering is significantly increased by the VSB filter. The 2.3-dB penalty in the simulation for narrowband BPF and VSB filter was not observed in the experiment. We attribute this to the modulator impairments in combination with the small FSR of the FIR filter, which already reduce the effective optical bandwidth of the signal. Therefore a further bandpass filtering by BPF and VSB, as done in the experiment, did not significantly affect the data signal. Fig. 3c shows the obtained experimental eye diagram of the 107-Gb/s VSB signal after the narrowband BPF. Please note that extra jitter is present in this eye diagram, caused by the precision timebase in the oscilloscope. Simulation and experiment show a similar eye diagram after narrowband filtering.

4. Conclusions

We demonstrated for the first time 107-Gb/s full-ETDM transmission over 160-km field installed fiber. Furthermore, we show a high tolerance towards narrowband optical filtering by using 107-Gb/s vestigial sideband modulation.

We thank Dr. Walther from Infineon Technologies for the support under the MultiTeraNet program. We also thank u2t photonics AG, SHF Communications Technologies AG, and Agilent Technologies for providing some of the measurement equipment.

5. References

- 1 M. Duelk, "Next-Generation 100G Ethernet", ECOC 2005, Tu 3.1.2.
- 2 P. Winzer et al., "107-gb/s optical signal generation using electronic time-division multiplexing", JLT, vol. 24, pp. 3107-3113, 2006.
- 3 C. Schubert et al., "107 Gbit/s Transmission Using An Integrated ETDM Receiver", ECOC 2006, Tu1.5.5.
- 4 M. Daikoku et al., "100Gbit/s DQPSK Transmission Experiment without OTDM for 100G Ethernet Transport", OFC 2006, PDP 36.
- 5 K. Schuh et al., "100 Gbit/s ETDM transmission system based on electronic multiplexing transmitter and demultiplexing receiver", ECOC 2006, We3.P.124.
- 6 F. Horst et al., "Compact Tunable FIR Dispersion Compensator in SiON Technology", PTL, vol. 15, pp. 1570-1572, 2003.
- 7 M. Bohn et al., "Automatic Control of Optical Equalizers", OFC 2005, OW04.
- 8 S. Bigo, "Multiterabit/s DWDM terrestrial transmission with bandwidth-limiting optical filtering", JSTQE, vol. 10, 329-340, 2004.