



ELSEVIER

Available online at www.sciencedirect.com

Nuclear Instruments and Methods in Physics Research A ■ (■■■■) ■■■-■■■

**NUCLEAR
INSTRUMENTS
& METHODS
IN PHYSICS
RESEARCH**
Section Awww.elsevier.com/locate/nima

A DSP equipped digitizer for online analysis of nuclear detector signals

G. Pasquali^{a,*}, R. Ciaranfi^b, L. Bardelli^a, M. Bini^a, A. Boiano^c, F. Giannelli^a, A. Ordine^c,
G. Poggi^a

^a*INFN and Department of Physics, University of Florence, Via G.Sansone 1, Sesto Fiorentino 50019, Italy*^b*INFN - Sezione di Firenze, Via G.Sansone 1, Sesto Fiorentino 50019, Italy*^c*INFN - Sezione di Napoli, Via Cintia, Napoli 80126, Italy*

Received 24 July 2006; received in revised form 27 September 2006; accepted 2 October 2006

Abstract

In the framework of the NUCL-EX collaboration, a DSP equipped fast digitizer has been implemented and it has now reached the production stage. Each sampling channel is implemented on a separate daughter-board to be plugged on a VME mother-board. Each channel features a 12-bit, 125 MSamples/s ADC and a Digital Signal Processor (DSP) for online analysis of detector signals. A few algorithms have been written and successfully tested on detectors of different types (scintillators, solid-state, gas-filled), implementing pulse shape discrimination, constant fraction timing, semi-Gaussian shaping, gated integration.

© 2006 Elsevier B.V. All rights reserved.

PACS: 84.30.Sk; 07.05.Hd; 07.50.Qx

Keywords: Digital sampling; Digital signal processing; Online processing; Data acquisition

1. Introduction

Six years ago the heavy ion group of INFN Florence started the design of a four-channel digitizing board prototype to study the application of digital sampling techniques to energy and time measurement and to particle identification [1–6]. The prototype allowed acquisition and storing of signals, without on-board analysis capability; signal treatment was performed off-line on a dedicated CPU, although the analysis algorithms were studied for an easy on-line implementation. In the following few years we have studied in detail the application of digital sampling techniques to nuclear detector signals. We have found that in several applications the same or better performance can be obtained from digital sampling as from standard analog methods (e.g. in energy and time measurement or in particle identification [1–3,5]). Moreover, using sampling, one can exploit the more detailed information achieved by recording complete signals and implement analysis meth-

ods with no analog counterpart (e.g. fast Fourier transforms, curve fitting, comparison with tabulated data, etc.).

Along with these studies and developments, in the framework of the NUCL-EX collaboration, we started a project for a fast digitizer with on-board processing capabilities. The project has now reached the production stage. The new digitizers are modular in structure, each channel being housed on a separate daughter-board plugged on a main mother-board. Up to eight sampling channels can be plugged on a single mother-board. Each channel is equipped with a 12-bit, 125 MSamples/s ADC and with a Digital Signal Processor (DSP) for on-board signal analysis. The DSP extracts the physically relevant informations from the signal before transferring data to the acquisition system for storage, thus relaxing its bandwidth and mass storage requirements. In fact, transferring complete signals to external (i.e. not on-board) CPUs or to a mass storage device can be cumbersome for the acquisition system, especially when an apparatus with many channels is involved. In our design, we maintained the possibility of transferring the full digitized sequence to the acquisition system in each event (typically we choose to

*Corresponding author. Tel.: +39 55 4572253; fax: +39 55 4572676.

E-mail address: pasquali@fi.infn.it (G. Pasquali).

1 transfer a complete signal only every 256 events to monitor
system performance).

3 We favoured a DSP-based design, with respect to a
FPGA-based one like those proposed in Refs. [7,8], since
5 we were not interested in very high counting rates and we
aimed at flexibility and short software developing times.
7 We also intended to develop a system as general-purpose as
possible because of its expected application to various
9 detectors. The boards described in this paper are currently
employed at the GARFIELD [9] apparatus at Laboratori
11 Nazionali di Legnaro (LNL) to treat about 200 CsI(Tl)
scintillators and in the next future about 200 channels will
13 be added to treat Si detector and gas detector signals.

In Section 2 we briefly present the system in general. In
15 Section 3 a first version of a digitizing channel is described;
Section 4 presents the 6U VME mother-board which can
17 host up to eight digitizing channels and can be read out
either via VME or FAIR [10] bus; the general structure of a
19 DSP algorithm is illustrated in Section 5, while Section 6
presents, as a study case, results obtained from an online
21 analysis algorithm reproducing the behaviour of a standard
semi-Gaussian shaper; an application to digital pulse shape
23 discrimination of light charged particles in CsI(Tl) scintil-
lation detectors is the subject of Section 7.

25

27 2. General description of the system

29 The system was designed to be easily re-configured and
upgraded. We favoured a modular design in which each
31 channel is housed on a small ($140 \times 25 \text{ mm}^2$) piggy back
board, plugged on a main “mother” board (cf. Section 4).
33 The mother-board acts as an interface between the
channels local bus, whose signals are for the greatest part
35 those of the DSP direct memory access interface (IDMA)
[11], and the acquisition readout bus, which in the present
37 boards can be either VME or FAIR bus. The biggest
advantages of such a structure are:

39

- 41 ● Channels with different specifications (e.g. input stage
characteristics, sampling rate) can be plugged on the
43 very same mother-board provided they adhere to the
local bus specifications, making their upgrading an easy
45 task.
- 47 ● Adding support for new readout buses (e.g. PCI [12])
would imply re-designing (in part) the mother-board but
not the channel daughter-board.

49

51

53

55

57

3. The digitizer channel

The present version of the digitizing channel is shown in
Fig. 1. Each channel features an input LEMO connector for
detector signals and an 8 pin connector for the input of
trigger signals (cf. 3.3) and the output of logic signals
generated by the DSP and by the on-board comparators.

Fig. 2 shows a block diagram of a digitizing channel.
Five sections can be identified: the analog input stage
(programmable-gain amplifier and anti-aliasing filter), the
digitizing section (ADC), the temporary storage section
(FIFO memory), the processing section (DSP), the trigger
section (programmable comparators and trigger logic).

3.1. Analog input stage and AD conversion

The analog input stage polarity (positive or negative) can
be selected via a dedicated jumper on the channel board.
The ADC has a fixed input range of 2 V: the full range at
channel input is, therefore, determined by the analog input
gain. The input gain can be set by the on-board DSP to one
out of 255 different values, corresponding to a full range
going from 130 mV (maximum gain value) to 8 V (mini-
mum gain value), allowing the system to adapt to various
detector/preamplifier configurations with no circuit
changes.

The input anti-aliasing filter is a 3-pole active low-pass
filter, whose configuration and behaviour have already
been discussed elsewhere (see Figs. 4 and 5 in Ref. [1]). In
the present design filter attenuation at 62.5 MHz, i.e. the
Nyquist frequency of the digitizer, is $\approx 30 \text{ dB}$.

The on-board DSP also controls an electronic switch (see
Fig. 2) which selects one of two possible ADC input
sources, the detector signal and the time reference (TR)
signal common to all channels (see Section 4). The TR is
provided for timing coincidence and time of flight
measurements (see Refs. [2,6]).

The digitizing section exploits a 12-bit ADC operating at
125 MSamples/s and having an effective number of bits
(ENOB) of about 10.7 [13]. In experimental tests
performed with the prototype described in Ref. [1] (a 12-
bit, 10.8 ENOB, 100 MSamples/s digitizer) we achieved
satisfactory resolutions both in timing measurements
(100 ps FWHM with a Si detector [2]) and energy
measurements over a wide dynamic range (about 15
PSENOB [5,14]). The prototype digitizer also featured
good particle identification capabilities over a wide
dynamic range (see Refs. [3,14]). Therefore, the presently

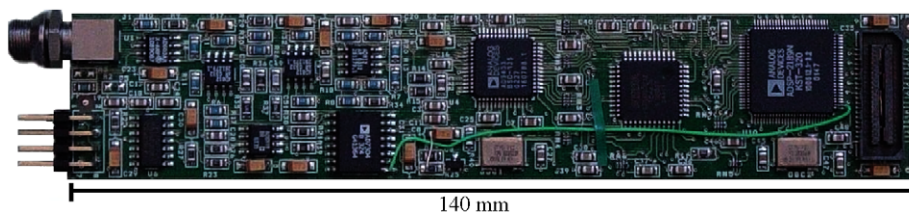


Fig. 1. Digitizing channel.

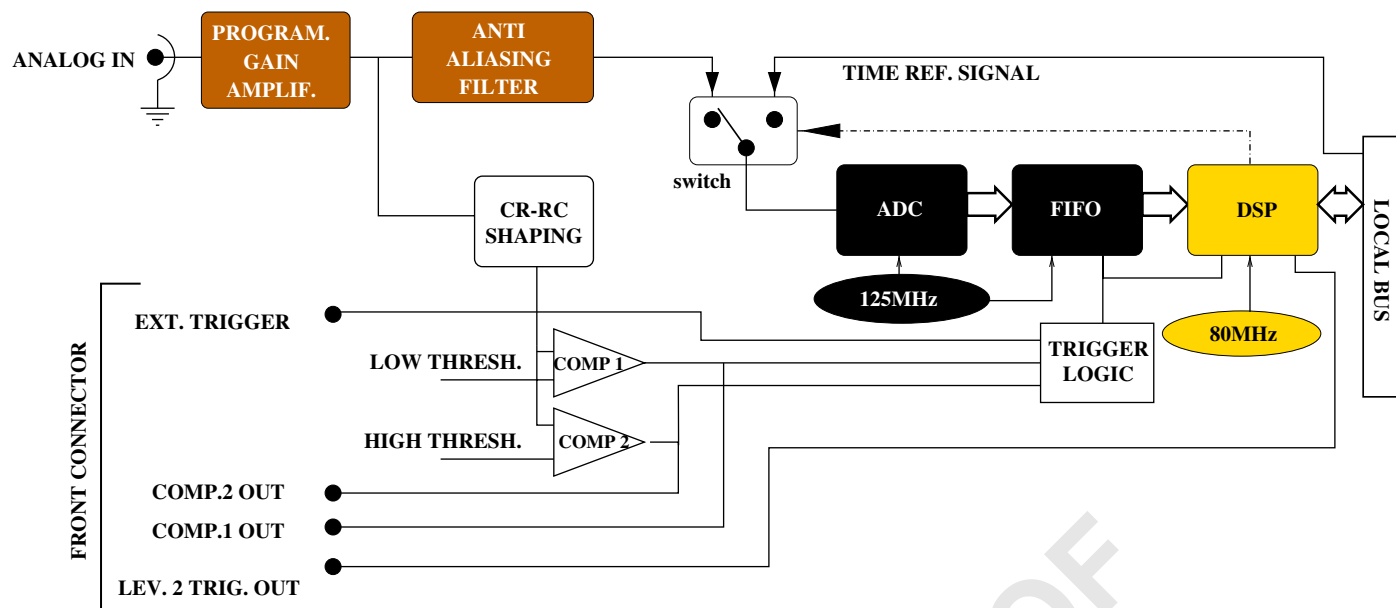


Fig. 2. Digitizing channel block diagram.

employed ADC is an effective choice for a general purpose system.

Typical characteristics of the digitizing channels, in this first version, are:

- 12-bit sampling at 125 MSamples/s.
- For low noise demanding applications, like those involving germanium detectors, 10.5 ENOB are obtained using a fixed-gain input stage. For channels with programmable input gain (like those employed at GARFIELD) 9.7 ENOB are typical.
- 0.25 LSB differential nonlinearity.
- 0.8 LSB integral nonlinearity.

3.2. Storing and processing

The ADC output values are continuously written to a First-In-First-Out (FIFO) memory which stores up to 8192 samples ($\approx 64 \mu\text{s}$ at 125 MSamples/s).

In many applications (e.g. for amplitude measurements) a good estimate of the signal baseline is mandatory [14–16]. In order to get this information, a suitable portion of the baseline preceding the particle signal must be sampled and collected. In our design, the first FIFO locations act as a circular buffer. They are continuously re-written while the channel is waiting for a trigger (see Section 3.3). The length of the circular buffer can be changed by programming the on-board programmable logic device (PLD) which is used mainly for channel's glue logic.

When a trigger signal is received, the trigger logic (see Fig. 2) enables the FIFO memory to be filled up so that the first samples of the stored signal will always correspond to a time interval preceding the trigger (e.g. $\approx 4 \mu\text{s}$ for a 512

samples circular buffer) and can be used to calculate the current signal baseline. In Ref. [14] it has been shown that a baseline of a few μs length is usually adequate to spectroscopy-grade energy measurements.

The DSP can execute up to 80 million multiply-and-accumulate operations per second [11]. Its on-board RAM memory is large enough (192 kB) for signal storing and elaboration, thus no external memory chip is required. The DSP reads sampled data from its I/O port, connected to the FIFO, and stores them in its internal data memory. The acquisition system loads the DSP program in DSP internal memory and starts the program execution through the DSP IDMA interface. The DSP controls the channel hardware (the DACs used for gain and threshold settings, etc.), handles the validation logic of the event, performs signal analysis and prepares readout data in its internal memory. The acquisition system can read/write data from/to the DSP internal memory asynchronously through the DSP IDMA interface during program execution, for instance to read event data or to instruct the DSP to change gain, thresholds, etc.

The acquisition system can check the status of the digitizing channel (idle, analyzing, waiting for readout) by accessing the mother-board local bus and polling a few logic signals controlled by the DSP.

3.3. Trigger

Signal storing in the FIFO and signal processing by the DSP are started by a trigger signal coming either from an external device or from one of the two on-board comparators. There are two external trigger inputs, one located on the 8 pin front connector and one located on the mother-board connector, the latter coming from the ECL input of the mother-board. The comparators thresholds are

1 controlled by the DSP by means of a dedicated program-
 2 mable digital-to-analog converter. The analog input signal
 3 is shaped by a CR-RC filter ($\tau \approx 200$ ns) before being sent
 4 to the comparators, as shown in Fig. 2. Two comparator
 5 ranges are available, both divided into 255 steps: one
 6 comparator can go up to the ADC full range (“high
 7 threshold” in Fig. 2), the other can be adjusted between
 8 zero and 10% of the ADC full range (“low threshold”).
 9 This allows a fine tuning of the channel threshold in order
 10 to better treat low-amplitude signals. Comparators outputs
 11 can also be picked out from the 8 pin front connector (for
 12 instance to build a second level trigger for the experiment)
 13 as shown in Fig. 2.

14 Another logic signal, common to all channels and
 15 connected to all the DSPs, is fed to the mother-board via
 16 one of the user-defined pins on the VME P2 connector and
 17 it is typically employed to validate the digitized events. The
 18 DSP program can test the level of this signal at any time
 19 using a dedicated instruction (see Section 5).

21 4. The main board

22 A 6U VME board (shown in Fig. 3) was the simplest
 23 choice as a first implementation of the mother-board,
 24 though other readout buses (e.g. PCI) can be implemented
 25 without redesigning the digitizing channels, thanks to the
 26 modular design of the system.

27 Actually, an alternative readout bus has already been
 28 implemented on the same VME mother-board, the FAIR
 29 bus developed by LASS laboratory of INFN-Sezione di
 30 Napoli [10]. The FAIR bus exploits the user-defined part of

the VME P2 connector. It can reach a bandwidth of
 180 MB/s in optimal conditions. As usual with FAIR
 modules, the mother-board features a 32-bit multi-event
 FIFO which is written with DSP data and buffers data for
 read-out and event building [10]. The FAIR bus is
 currently employed in a few experimental apparatuses
 (e.g. the GARFIELD [9] apparatus). The mother-board
 can be switched from VME to FAIR mode via a jumper
 placed on the front panel (see Fig. 3).

The mother-board houses the interface from the readout
 bus (VME or FAIR) to the “local” bus of the digitizing
 channels. It also features an 8 input ECL connector for the
 trigger signals of the eight sampling channels (see Section
 3.3). A common TR signal can be connected to a LEMO
 input connector on the mother-board (see Fig. 3) and
 distributed to all the sampling channels as discussed in
 Section 3.1. When the relevant part of the input signal has
 been sampled, the DSP can start sampling the TR by
 controlling the electronic switch shown in Fig. 2. The
 sampled signal thus contains both the detector signal and
 the TR signal. A numerical algorithm extracts the time
 difference between the two, with a sub-nanosecond
 accuracy. Since the same TR signal is distributed to all
 the sampling channels, it is possible to perform timing
 coincidences and time-of-flight measurements (the latter
 may require the TR signal to have a definite relationship to
 the nuclear collision like, e.g. the RF signal of a pulsed
 beam). The basic idea of this method can be found in Ref.
 [2], Section 5, while a more detailed discussion will be
 presented in Ref. [6].

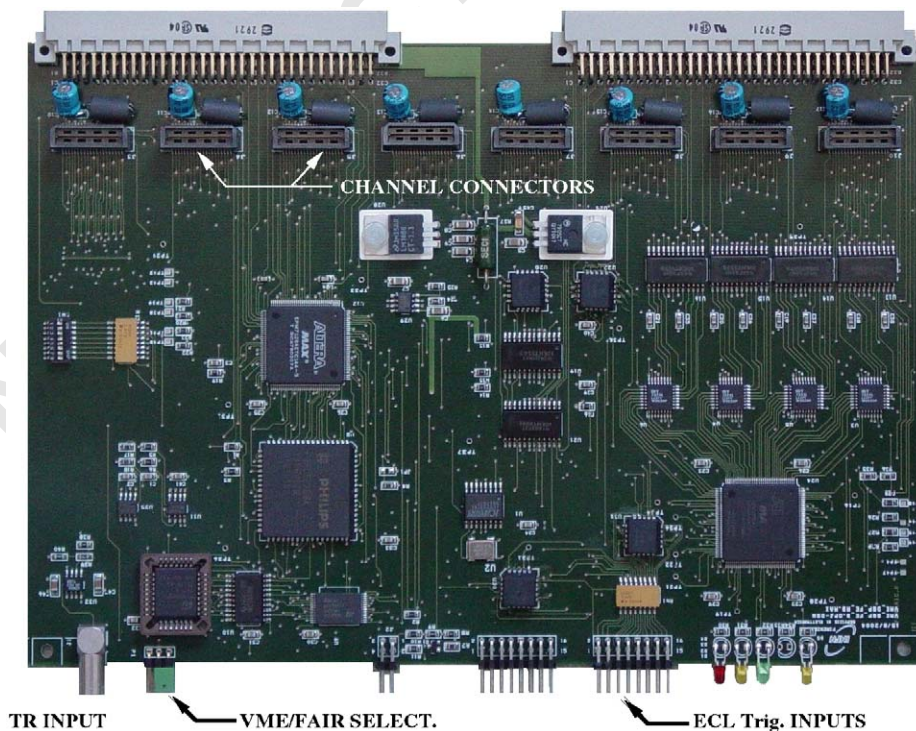


Fig. 3. A 6U VME mother-board.

5. Algorithm structure

The on-board DSP is used both to control the channel hardware and to perform signal analysis. The general structure of a DSP algorithm is shown in Fig. 4. The DSP switches to an idle state after an initialization phase, performed once and for all at bootstrap time, where the DSP sets up its internal registers, channel gain and comparator thresholds, etc. Upon receiving a signal trigger (connected to the interrupt request signal IRQ0) the DSP jumps to an interrupt service routine which spends a few microseconds reading samples from the FIFO (usually corresponding to the baseline), then checks a validation signal (e.g. the general trigger of the experiment). In case of no validation, the DSP rearms the channel for a new trigger and returns to its idle state, otherwise it reads the remaining samples from the FIFO and restarts the circular buffer. The signal analysis phase follows. Since signal analysis lasts much longer than the buffer length expressed in μs , the buffer has been filled completely before a new trigger can be accepted. After the analysis step, the DSP prepares the output data in its internal memory for readout and returns to its idle state. Readout takes place through the IDMA interface with no DSP intervention. After all relevant data have been read, the acquisition system drives the DSP IRQ1 interrupt signal (one of the local bus signals

on the mother-board) thus instructing the DSP to rearm the channel for a new trigger, as shown on the left side of Fig. 4.

Hardware settings and algorithm parameters can be accessed using a dedicated “slow control” interrupt routine associated to the IRQE interrupt signal (see Fig. 4).

6. Semi-Gaussian shaping: a study case

A few analysis routines have been written for the DSP, in ADSP21xx assembler language. At first, work has been done to implement on DSP the calculations previously performed off-line including constant fraction timing (either using linear or cubic interpolation), gated integration, amplitude estimation [1–4].

One peculiar task is to reproduce the behaviour of the standard analog semi-Gaussian shaper employed since a few years at the GARFIELD apparatus for CsI(Tl) signals. The DSP algorithm had to closely reproduce the analog shaper set to the shaping constant and pole zero values employed during measurements. This requirement was called for in order to simplify and speed up the calibration of the data collected with digitizing electronics, expected to substitute the analog shapers.

An Infinite Impulse Response (IIR) filter algorithm [17] has thus been written and tested. A custom fit procedure

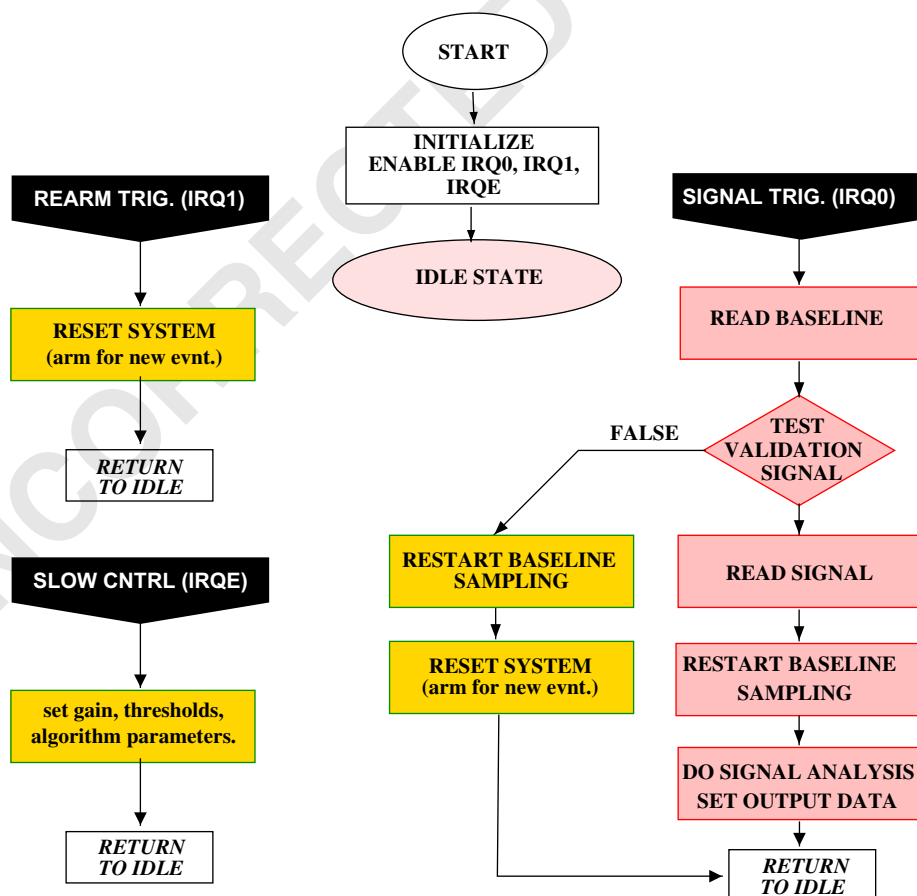


Fig. 4. Flow chart of a DSP algorithm.

1 based on DE (“Differential Evolution”: a population-
 3 model filter response on that of GARFIELD analog
 5 shapers while keeping the calculation time as small as
 7 possible by reducing the number of poles and zeros in
 9 filter’s system function. The filter is implemented as a
 11 constant-coefficients difference equation [17], whose coef-
 13 ficients are determined by the fit. The fit also takes into
 15 account the finite (16-bit) precision of filter coefficient
 17 representation in DSP memory. The calculation is carried
 19 out using 32 bits words (the DSP ALU works on 16-bit
 21 operands) in order to get the desired filter stability and
 23 precision. A satisfactory filter calculation time of about
 25 $50\ \mu\text{s}$ was obtained by performing a moving average on the
 27 signal followed by a decimation by 16 before filtering.
 29 Averaging and decimation do not sensibly worsen the final
 31 resolution. The \mathcal{Z} -transform of the adopted filter has the
 33 form

$$\mathcal{Z}(z) = \frac{b_0 + b_1 z^{-1}}{1 - a_1 z^{-1} - a_2 z^{-2} - a_3 z^{-3}}. \quad (1)$$

To take decimation into account, coefficients had to be
 23 calculated for a 128 ns sampling period. Their values are
 25 shown in Table 1.

27 In order to compare the two filters (analog and digital
 29 IIR), the same “detector-like” pulser signal (a step with
 31 variable rise-time followed by an exponential decay, as
 33 those produced by typical charge sensitive preamplifiers)
 35 was fed to both the analog shaper and the digitizer. The
 37 output of the analog shaper was also sampled and stored.
 39 In Fig. 5 we show the output of the analog shaper (sampled
 41 at 8 ns period and appearing as a continuous line in the
 43 figure) and the output of the IIR filter (appearing as a
 45 stepped line, due to the decimation operated by the DSP,
 47 effectively increasing the sampling period to 128 ns) for a
 49 few values of the input signal’s rise time (ranging from
 51 50 ns to $5\ \mu\text{s}$). The IIR filter closely follows the analog one,
 also for different rise times of the input signal.

7. Pulse shape discrimination in CsI(Tl)

43 The pulse shape discrimination algorithm mimics a well-
 45 known analog method, sketched in the upper half of Fig. 6.

47 The detector signal is fed in parallel to two filters of
 49 different time constants, a “fast” shaper and a “slow”
 51 shaper. The analog chain at the top of Fig. 6 is replaced in
 our case by the much simpler chain sketched in the bottom
 half of the figure and the two filters are calculated by the
 DSP. The calculated “fast” shaper is a semi-Gaussian filter
 with $\tau = 700\ \text{ns}$, the calculated “slow” shaper is the filter

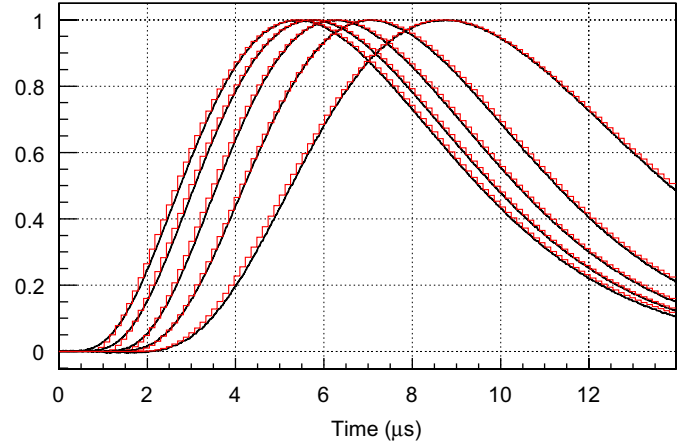


Fig. 5. DSP and analog shaper outputs for different input signal rise times; each signal pair is normalized to unit maximum amplitude.

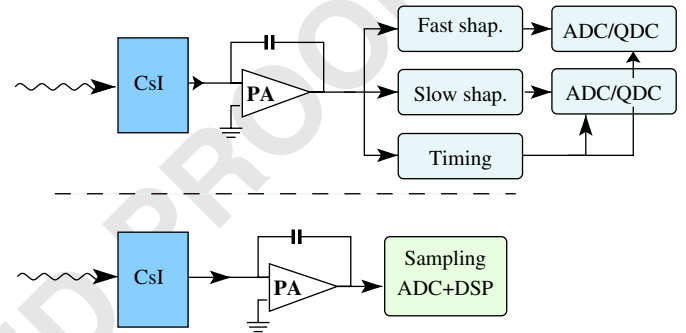


Fig. 6. A typical analog chain for pulse shape discrimination (top) compared to the set-up described in this paper (bottom).

described in Section 6, having a peaking time of about $6\ \mu\text{s}$.
 The amplitudes of the filtered signals (A_f and A_s) are stored
 for the off-line analysis.

A “fast-slow” correlation—actually A_f vs. $(A_s - f \cdot A_f)$
 where $f \approx 4$ —is shown in Fig. 7. Hydrogen and helium
 isotopes are clearly resolved. The data were obtained from
 one of GARFIELD’s CsI(Tl) detectors in a physics run
 recently performed at LNL, exploiting the reaction
 $^{32}\text{S} + ^{56}\text{Fe}$ at 16.5 A MeV (ALPI accelerator). About 200
 digitizing channels have been used in the experiment and a
 PSA quality similar to that of Fig. 5 is obtained for all the
 CsI(Tl) scintillators of GARFIELD. In Fig. 7, the curves
 associated with different light particle isotopes can be
 followed down to the point where they merge (correspond-
 ing, e.g. to $A_f \approx 200$ for hydrogen isotopes). The trigger
 threshold of the digitizer (see Section 3.3) sets a lower limit
 on A_f values at $A_f \approx 80$, as evidenced in the inset.
 Therefore, for GARFIELD’s CsI(Tl) detectors, the region
 where light particle isotopes can be identified is not limited
 by the digitizer threshold.

8. Conclusions and future developments

A VME system aimed at digitizing and processing
 detector signals has been designed and implemented. The

Table 1
 Coefficients of the IIR filter (see Eq. (1))

b_0	b_1	a_1	a_2	a_3
7.86560×10^{-3}	-7.86920×10^{-3}	2.88372	-2.77450	0.890655

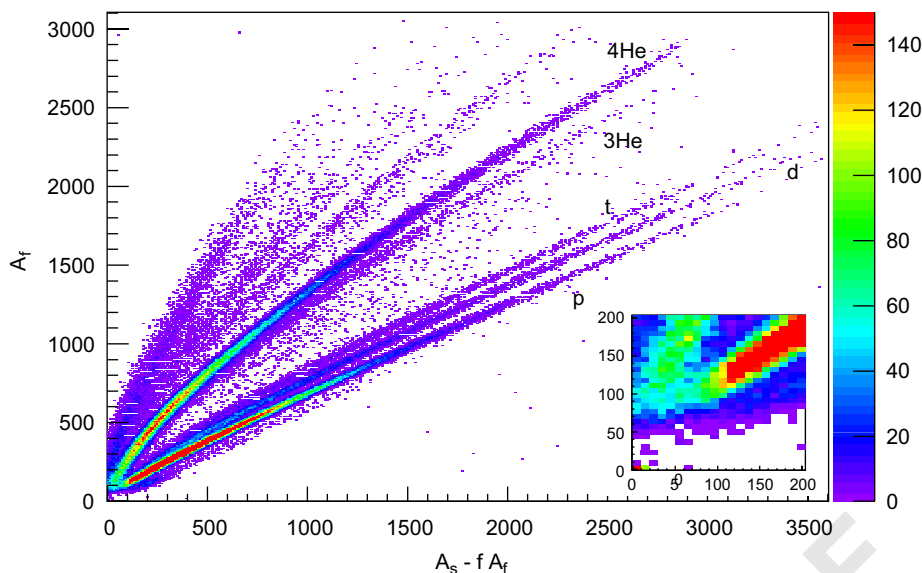


Fig. 7. Pulse shape discrimination of light charged particles in CsI(Tl) performed by the on-board DSP; the reaction was $^{32}\text{S}+^{56}\text{Fe}$ at 16.5 A MeV.

design is modular, consisting in a multi-channel mother-board on which up to eight digitizing daughter-boards can be plugged. Data readout can be performed either via VME bus or via the faster FAIR bus. Each daughter-board is equipped with a 12-bit, 125 MSamples/s ADC and a DSP for on-line processing of detector signals. About 200 channels and 30 mother-boards have already been built and installed and they are presently in use at the GARFIELD apparatus in LNL-Legnano.

Work is currently under way to implement a new type of daughter-board where a FPGA will be used to implement the on-board trigger, instead of the two comparators presently used. The FPGA will continuously receive the samples produced by the ADC, performing filtering and trigger logic on the digitized signal.

A prototype digitizing channel compatible with our mother-boards and including a much faster digitizer based on an analog pipeline [19] is also being developed in collaboration with IN2P3 in the framework of FAZIA [20], a project for R&D of a next generation apparatus for nuclear physics experiments.

References

- [1] L. Bardelli, et al., Nucl. Instr. and Meth. A 491 (2002) 244.

- [2] L. Bardelli, et al., Nucl. Instr. and Meth. A 521 (2004) 480.
 [3] L. Bardelli, et al., Proceedings of RNB6 conference 2003, Nucl. Phys. A 746 (2004) 272.
 [4] L. Bardelli, Ph.D. Thesis, University of Florence, 2005.
 [5] L. Bardelli, G. Poggi, Nucl. Instr. and Meth. A 560 (2006) 517.
 [6] L. Bardelli, et al., Nucl. Instr. and Meth. A, submitted for publication.
 [7] Technical proposal for the “Advanced GAMMA Tracking Array” (AGATA) project, available on (<http://agata.pd.infn.it/>).
 [8] M.A. Deleplanque, et al., Nucl. Instr. and Meth. A 430 (1999) 292.
 [9] F. Gramegna, et al., Nucl. Instr. and Meth. A 389 (1997) 474.
 [10] A. Ordine, et al., IEEE Trans. Nucl. Sci. NS-45 (3) (1998) 873.
 [11] Analog Devices, WEB site (www.analog.com), ADSP-218xN Series datasheet.
 [12] F.A. Danevich, private communication.
 [13] Analog Devices, WEB site (www.analog.com), AD9433 Datasheet.
 [14] L. Bardelli, G. Poggi, Nucl. Instr. and Meth. A 560 (2006) 524.
 [15] V. Radeka, Rev. Sci. Instr. 38 (1967) 1397.
 [16] A. Pullia, G. Ripamonti, Nucl. Instr. and Meth. A 376 (1996) 82.
 [17] A.V. Oppenheim, R.W. Shafer, Digital Signal Processing, Prentice-Hall, Englewood Cliffs, NJ, 1975 ISBN 0-13-214107-8 01.
 [18] R. Storn, et al., Differential Evolution Algorithm, WEB page: (<http://www.icsi.berkeley.edu/~storn/code.html>).
 [19] S. Drouet, J.C. Cuzon, P. Edelbruck, E. Wanlin, submitted for publication.
 [20] (<http://fazia.in2p3.fr/>).