



AALBORG UNIVERSITY
DENMARK

Aalborg Universitet

Bounds on information combining for the accumulator of repeat-accumulate codes without Gaussian assumption

Land, Ingmar Rüdiger; Sayir, Jossy; Peter A., Hoehner

Published in:

Proceedings on the international symposium of information theory, 2004

DOI (link to publication from Publisher):

[10.1109/ISIT.2004.1365480](https://doi.org/10.1109/ISIT.2004.1365480)

Publication date:

2004

Document Version

Publisher's PDF, also known as Version of record

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Land, I., Sayir, J., & Peter A., H. (2004). Bounds on information combining for the accumulator of repeat-accumulate codes without Gaussian assumption. In Proceedings on the international symposium of information theory, 2004 (pp. 443). SPIE - International Society for Optical Engineering. DOI: 10.1109/ISIT.2004.1365480

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- ? Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- ? You may not further distribute the material or use it for any profit-making activity or commercial gain
- ? You may freely distribute the URL identifying the publication in the public portal ?

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

Bounds on Information Combining for the Accumulator of Repeat-Accumulate Codes without Gaussian Assumption

Ingmar Land, Peter A. Hoeher
 Information and Coding Theory Lab
 University of Kiel, Germany
 {il,ph}@tf.uni-kiel.de
 www.tf.uni-kiel.de/ict

Josy Sayir
 Telecom. Research Centre (ftw.)
 Vienna, Austria
 josy@ftw.at
 www.ftw.at

Abstract — Information combining is applied to an accumulator to obtain bounds on the extrinsic information transfer (EXIT) functions without relying on Gaussian or other approximations for the distribution of the a-priori messages.

I. INTRODUCTION

In [1], information combining was introduced to provide bounds on the mutual information of coupled channels expressed solely as a function of the mutual informations of the single channels. This method was extended in [2, 3] to bound the extrinsic information of repetition codes and single parity-check codes. Using this approach, bounds on extrinsic information transfer (EXIT) functions of low-density parity-check (LDPC) codes were computed without assuming a specific a-priori channel, i.e., without Gaussian or equivalent approximations.

In this paper, information combining is applied to an accumulator, i.e., a rate-1 recursive convolutional encoder defined by the generator function $g(D) = 1/(1 + D)$. Bounding the EXIT function for an accumulator is interesting in itself because the accumulator is a component of repeat-accumulate (RA) codes. Furthermore, our analysis provides an indication of how information combining may be applied to general convolutional codes, opening the way to bound the EXIT functions of turbo codes.

II. INFORMATION COMBINING

Figure 1 shows the factor graph of an accumulator whose output X_1, X_2, \dots is transmitted over a noisy communication channel to yield observations Y_1, Y_2, \dots . The observations of the encoded digits U_1, U_2, \dots obtained from previous iterations are modeled as outputs of V_1, V_2, \dots of an “a-priori” channel. No specific assumption on the a-priori channel is made.

We define $f_2(x_1, x_2) := 1 - h((1 - \epsilon_1)\epsilon_2 + \epsilon_1(1 - \epsilon_2))$ with $\epsilon_1 = h^{-1}(1 - x_1)$, $\epsilon_2 = h^{-1}(1 - x_2)$, $h(\cdot)$ is the binary entropy function and $h^{-1}(\cdot)$ is its inverse over $[0, 1/2]$. The following theorem bounds the extrinsic information for the accumulator using information combining:

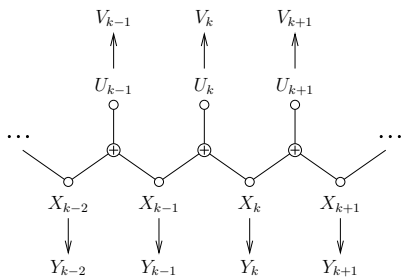


Figure 1: Part of the factor graph of the accumulator.

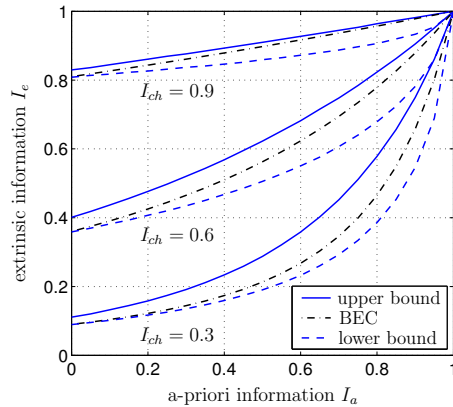


Figure 2: Bounds on the EXIT functions of the accumulator and exact EXIT functions for the BEC-case.

Theorem 1 The extrinsic information $I_{e,k} = I(U_k; \mathbf{YV}_{\setminus k})$ is bounded as

$$I_{\min} \cdot I_{\min} \leq I_e \leq f_2(I_{\max}, I_{\max}),$$

where I_{\min} is the minimum value and I_{\max} is the maximum value $I \in [0, 1]$ fulfilling simultaneously

$$I \geq I_{ch} + I_a \cdot I - f_2(I_{ch}, I_a \cdot I) \text{ and}$$

$$I \leq I_{ch} + f_2(I_a, I) - I_{ch} \cdot f_2(I_a, I),$$

with $I_{ch} = I(X_k; Y_k)$ and $I_a = I(U_k; V_k)$.

The theorem is proved by applying Theorem 1 from [1] and Theorem 1 from [3] recursively and assuming that stationarity conditions on mutual informations hold for sufficiently long encoded sequences.

The resulting bounds on the EXIT functions are depicted in Figure 2, along with the exact EXIT curves for binary erasure channels (BECs). The bounds are close to each other only for small and for large values of the a-priori information. This is due to the fact that the upper and lower bounds in Theorem 1 from [1] and Theorem 1 from [3] are tight for BECs and for binary symmetric channels (BSCs) respectively, but the lower and the upper bounds are applied recursively in the proof of Theorem 1 in the present paper.

REFERENCES

- [1] I. Land, S. Huettinger, P. A. Hoeher, and J. Huber, “Bounds on Information Combining,” in *Proc. Int. Symp. on Turbo Codes and Rel. Topics*, Brest, France, Sept. 2003, pp. 39-42.
- [2] I. Sutsuover, S. Shamai (Shitz), and J. Ziv, “Extremes of information combining,” in *Proc. Allerton Conf. on Communications, Control and Computing*, Monticello, Illinois, USA, Oct. 2003.
- [3] I. Land, P. A. Hoeher, and J. Huber, “Bounds on information combining for parity-check equations,” in *Proc. Int. Zurich Seminar on Communications (IZS)*, Zurich, Switzerland, Feb. 2004.