

Additive Continuous-time Identification

Citation for published version (APA):

González, R., Classens, K. H. J., Rojas, C. R., Welsh, J. S., & Oomen, T. A. E. (2024). *Additive Continuous-time Identification: With Application to Modal Mechanical Systems*. 263. Abstract from 43rd Benelux Meeting on Systems and Control 2024, Blankenberge, Belgium.

Document status and date:

Published: 28/03/2024

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Additive Continuous-time Identification: With Application to Modal Mechanical Systems

Rodrigo A. González^{i,*}, Koen Classensⁱ, Cristian R. Rojasⁱⁱ, James S. Welshⁱⁱⁱ and Tom Oomen^{i,iv¹}

1 Background

Parametric continuous-time identification applied to mechanical or biological systems yields interpretable models when the model structure aligns with the physical properties of the system. Traditional system identification may not consider the most parsimonious model structure when relying only on unfactored transfer functions, which result from standard direct approaches.

2 Problem Formulation

Consider the single-input single-output, linear and time-invariant, continuous-time system in additive form

$$x(t) = \sum_{i=1}^K G_i^*(p)u(t), \quad y(t_k) = x(t_k) + v(t_k),$$

where the numerator and denominator of each sub-model $G_i^*(p)$ is described by the parameter vector θ_i^* . We are concerned with designing data-driven methods to obtain estimates of $\beta^* := [\theta_1^{*\top}, \theta_2^{*\top}, \dots, \theta_K^{*\top}]^\top$ for the open- and closed-loop settings in Figure 1.

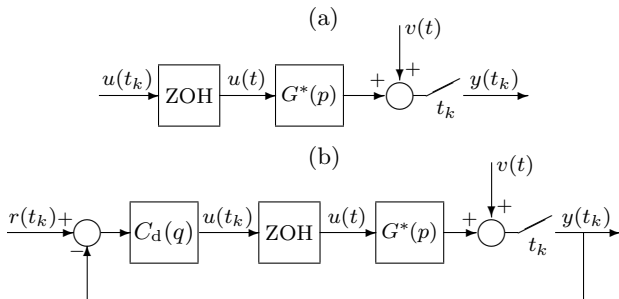


Figure 1: Block diagrams for the open (a) and closed-loop (b) settings studied in this work.

3 Approach: A Unified Estimator

In open-loop, identification can be posed as a first-order optimality condition; in closed loop, we employ an instrumental variable framework. Either way, these approaches can be shown to lead to

$$\hat{\beta} \in \operatorname{sol}_{\beta \in \Omega} \left\{ \frac{1}{N} \sum_{k=1}^N \hat{\varphi}(t_k) \left(y(t_k) - \sum_{i=1}^K G_i(p, \theta_i) u(t_k) \right) = \mathbf{0} \right\},$$

where $\hat{\varphi}(t_k)$ is uncorrelated with the output noise $v(t_k)$.

¹This work was supported by the research program VIDI with project number 15698, with is (partly) financed by NWO.

ⁱControl Systems Technology Section, Eindhoven University of Technology, The Netherlands. ⁱⁱKTH Royal Institute of Technology, Stockholm, Sweden. ⁱⁱⁱUniversity of Newcastle, NSW, Australia. ^{iv}Delft University of Technology, The Netherlands.

*Email: r.a.gonzalez@tue.nl.

This work derives a vector $\hat{\varphi}(t_k)$ that minimizes the asymptotic covariance of the estimators in additive form for both open and closed-loop settings, and proposes an extension of refined instrumental variables for computing $\hat{\beta}$. The proposed iterations are given by

$$\mathcal{B}^{j+1} = \left[\frac{1}{N} \sum_{k=1}^N \hat{\varphi}(t_k, \beta^j) \varphi^\top(t_k, \beta^j) \right]^{-1} \times \left[\frac{1}{N} \sum_{k=1}^N \hat{\varphi}(t_k, \beta^j) \Upsilon^\top(t_k, \beta^j) \right],$$

where the next iteration β^{j+1} is extracted from the block diagonal coefficients of \mathcal{B}^{j+1} , the regressor φ is formed by the gradient of the model output with respect to β , and the instrument vector is the current estimate of the noise-free component of φ .

This estimator is shown to be generically consistent for both open and closed-loop settings, and can admit the identification of marginally stable additive systems.

4 Experimental Validation

We apply the proposed method to a slender and flexible steel beam suspended by wire flexures. The first four modes of the system are estimated (i.e., four second-order systems without zeros), see Figure 2. The proposed method converges to a parametric additive model closely aligned with the first four modes of the system.

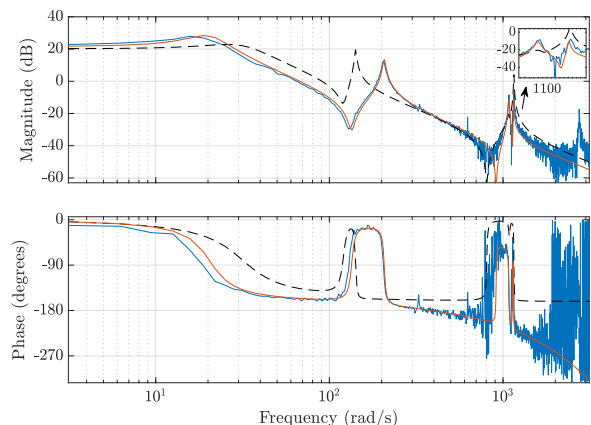


Figure 2: Estimation of the frequency response function of the flexible beam. Nonparametric (—), parametric modal (---), and initial (· · ·) estimates.

References

- [1] R.A. González, K. Classens, C.R. Rojas, J.S. Welsh and T. Oomen. “Identification of Additive Continuous-time Systems in Open and Closed-loop”, *arXiv preprint 2401.01263*, 2024.