

DEWEK 2008

LIDAR TECHNOLOGY FOR THE GERMAN OFFSHORE TEST SITE "ALPHA VENTUS"- JOINT PROJECT IN MEASUREMENT DEVELOPMENT

A. Rettenmeier¹, D. Schlipf¹, M. Wächter², Y. Käsler³, H. Mellinghoff⁴, B. Siegmeier⁵, L. Reeder⁶, M. Kühn¹
¹Stiftungslehrstuhl Windenergie (SWE), Universität Stuttgart, +49711/6856-8325, rettenmeier@ifb.uni-stuttgart.de
²ForWind, Carl von Ossietzky Universität, Oldenburg
³Institut für Physik der Atmosphäre, DLR, Wessling
⁴Deutsches Windenergie Institut (DEWI), Wilhelmshaven
⁵AREVA-Multibrid GmbH, Bremerhaven
⁶Fördergesellschaft Windenergie e.V. (FGW), Kiel

Summary

This paper describes the content of the joint research project "Development of LiDAR measurement techniques for the German offshore test site" and its first results. The objective is to develop reliable and standardised remote sensing techniques for various new applications in the wind energy community and to support other RAVE¹ projects at the German offshore test site "alpha ventus". The first measurement campaign dealt with the comparison of wind parameters measured by common anemometry in a height of up to 103 m and LiDAR data measured up to 220 m height. The first results show very good agreement when the two techniques are compared as to wind speed, wind direction and power curve determination at a 5 MW wind turbine. The status of the development of a wind field scanner for nacelle-based LiDAR measurements is described and an outlook to the forthcoming work is given.

1. Introduction

LiDAR, as a remote sensing technique with high spatial and temporal resolution, presents a great advantage for offshore wind energy developments [1], [2]. The measurement techniques to be developed in the LiDAR project will have direct applications for the measurement of power curve and nacelle-based inflow and wake wind fields. Moreover, research-oriented work is done with regard to wake loading simulation and loading control strategies based on inflow measurements [3]. The previously mentioned nacelle-based wind field measurements are used to verify the findings in these applications.

The project lasting from August 2007 to March 2010 is coordinated by the Endowed Chair of Wind Energy (SWE) at Universität Stuttgart, Germany, and is conducted in four work packages: the first work package "LiDAR technology" deals with the specification, acquisition, calibration and adaptation for nacelle-based measurements of a commercial LiDAR system. Work package "Power curve measurement" is dedicated to power curve assessment with ground-based LiDAR using standard statistical methods. Additionally, new methods are developed to analyze the dynamics of the power conversion process and derive a power curve from high frequency measurement data. The third work package "Wind field research" aims at the development of wake loading simulation methods for wind turbines and the exploration of loading control strategies, both assisted by nacelle-based wind field measurement techniques. Finally, dissemination of results to the industry takes place in work package 4 "Technology transfer".

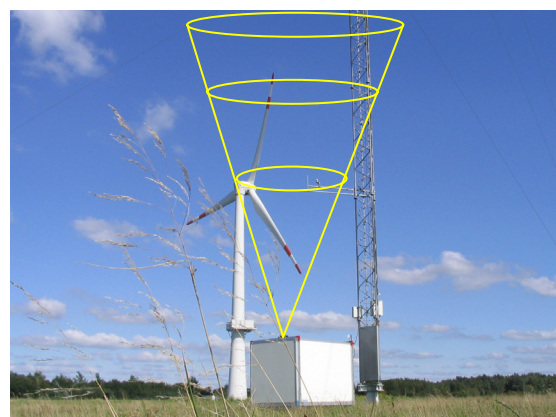


Fig. 1: Ground-based LiDAR comparison measurements with a met mast of 103 m height at the Multibrid M5000 prototype

2. LiDAR system and its technology

The first step was to describe the specification of the LiDAR system which has to fulfil the needs of the first measurement campaign: the ground-based vertical measurements had to be compared with standardized met mast signals. An additional CAN-bus interface had to be introduced to the LiDAR system which is needed for parallel data acquisition from the already existing SWE measurement infrastructure.

Together with the DLR (German Aerospace Center), which has been gaining experience in long-range LiDAR systems for several years, the requirements and comparisons were specified and the decision was made to use the pulsed LiDAR system WindcubeTM of the French company

¹ RAVE: research at alpha ventus (www.rave-offshore.de)

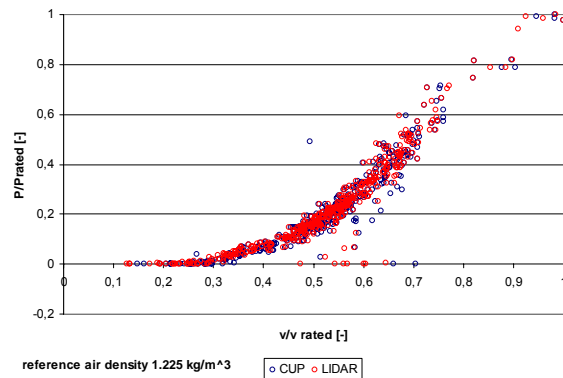


Fig. 5: Power curve raw data as evaluated by Windcube™ and cup anemometers. Each point represents a 10-minute period [7].

Further power curve evaluation methods

Another aim of the research is to investigate whether LiDAR systems can be used with a new method of dynamic power curve determination utilizing the time series information of the measured data set. The typical time increment is in the order of one second or less. For this method, sonic anemometers are installed in addition to the LiDAR system and the met mast with its standard anemometry.

At ForWind, new methods are developed to analyze the dynamics of the power conversion process and derive a power curve from high-frequency measurement data. From the LiDAR technology, with its advantageous high spatial and temporal resolution, new insights are expected on how yawed flow, turbulence and wind shear have to be taken into account in the determination of power curves of multi-megawatt wind turbines [8].

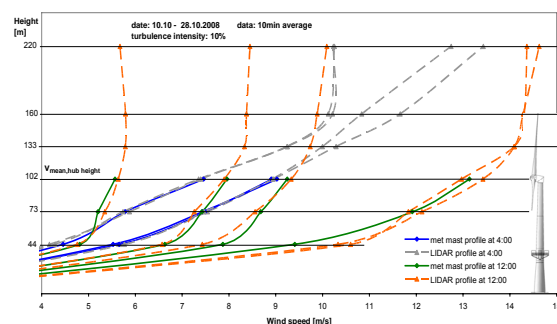


Fig. 6: 10-minutes wind profiles measured at the Bremerhaven test site at different atmospheric stratification

The LiDAR technology allows measuring the wind speed in much greater height than would be possible with the met mast. A significant difference in wind shear from day to night times due to roughness change from sea to land and thermal effects can be seen in Fig. 6. Regarding the large shear, the definition of the wind speed for power curve determination of multi-MW turbines should be revised, e.g. by measuring the wind speed at several positions of the whole swept rotor area with

a LiDAR device and average it to an equivalent wind speed [9]. Measuring the wind speed from the nacelle would allow carrying out load and power curve measurements without an expensive met mast on- and offshore. A wider free and undisturbed sector would reduce the duration of the measurement campaign.

4. Wind field research

The LiDAR technology offers great prospects for wind field analysis. The idea to measure horizontally from the nacelle could give lots of different information on the incoming wind field as well as the wake of the turbine. This information is used for the development of predictive control strategies and for the development of a physical model for the simulation of dynamic wake loading. This model aims at the development of wind field simulation tools which allow for the complex inflow conditions of huge onshore and offshore wind farms [10], [11].

So far, different horizontal scanning modes are simulated to look for the most promising shape to scan the wind field with the LiDAR technology in the most accurate way. The software WITLIS² simulates the scan of a modelled wind field by a LiDAR system. Afterwards the scanned points are interpolated to a wind field which can be compared with the original one. Figure 7 shows the scanning shape (lower part) and the error between the modelled wind field and the interpolated wind field of the scan simulation (upper part).

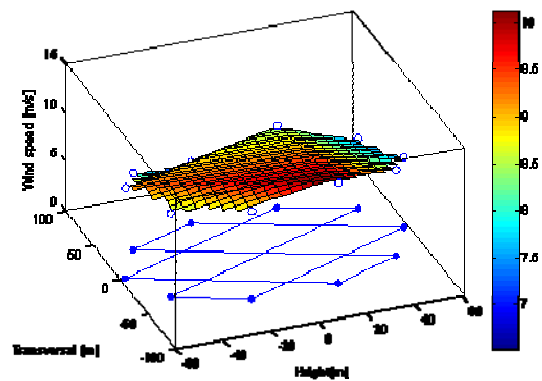


Fig. 7: Snapshot of turbulent wind field interpolated from a LiDAR scan at various positions.

The standard Windcube™ system has to be upgraded with a scanning device to fulfil the specification of the scanning shape. Either a galvanometer scanner with two mirrors or a pair of rotating Risley prisms will be used.

The project participant DLR does research in connection with turbulence of aircraft wake vortices supported by airborne coherent Doppler LiDAR. DLR will assist measurements in Bremerhaven with a long-range LiDAR system [12]. Their instrument is going to be used for measurements of the far-wake of the Multibrid M5000 which will then be used for

² WITLIS: WInd Turbine Lidar Simulator from SWE

the validation of wake models describing the stationary and dynamic characteristics of the flow behind wind turbines. For near-wake determination, the horizontally scanning Windcube™ LiDAR will be used.

5. Technology transfer

The establishment of LiDAR wind measurements for onshore and offshore purposes critically depends on the development of new guidelines. In the field of power curve measurements with common anemometry the Federation of German Windpower (FGW) possesses a huge know-how due to the number of members from accredited measurement institutes. This knowledge will be used to evaluate the results of the project and will eventually lead to a revision of FGW's "Technical Guideline for Wind Turbines Part 2: Determining the Power Performance and Standardised Energy Yields". Moreover FGW will facilitate the scientific exchange with the national and international wind energy community through publications and contributions to trade fairs and conferences.

6. Conclusions

The objective of the LiDAR project is to further develop this novel remote sensing technique for wind energy applications in the German offshore test site "alpha ventus" and other onshore and offshore sites. First results on the application of a ground-based pulsed LiDAR device for wind speed measurements up to 220m height and power curve measurements at a 5MW onshore wind turbine show good agreement with standard cup anemometry mounted at a 103 m met mast.

A scanner device for nacelle-based LiDAR measurements is under development and will be used for wind field analyses required for improved simulation of wake loading and advanced control strategies assisted by inflow measurements. Moreover, LiDAR measurements will be used for the development of a new method for fast power curve measurements using high-frequency unsteady wind speed measurements.

Acknowledgements

The LiDAR project is carried out in the RAVE framework program and is funded under contract No. 0327642 by the German Federal Environment Ministry (BMU).

References

- [1] C. B. Hasager, A. Peña, T. Mikkelsen, M. Courtney, I. Antoniou, S.-E. Gryning, P. Hansen, P.B. Sørensen, "12MW Horns Rev experiment". Risø-R-1506(EN) (2007) 83 p.
- [2] D.A. Smith, M. Harris, A.S. Coffey, T. Mikkelsen, H.E. Jørgensen, J. Mann, G. Danielian, "Wind lidar evaluation at the Danish wind test site in Høvsøre". Wind Energy (2006) 9, p. 87-93
- [3] M. Harris, M. Hand, A. Wright, "Lidar for Turbine Control", Technical Report NREL/TP-500-39154, January 2006
- [4] C. Weitkamp, "Lidar, range-resolved optical remote sensing of the atmosphere", Springer, 2005
- [5] M. Wächter, A. Rettenmeier, J. Peinke, "Wind velocity measurements using a pulsed LIDAR, system: first results", ISARS, Risoe, 2008
- [6] International standard, IEC 61400-12 "Wind turbines: Part 12-1, Power performance measurements of electricity producing wind turbines, First edition 2005"
- [7] E. Berthaud, Data Analysis of Wind Speed and Power-Performance Measurements at a 5 MW Wind Turbine Using a Ground Based LIDAR Systems, Junior Internship Training, SWE, 2008
- [8] M. Wächter, "Dynamical Power Curve Estimation Using Different Anemometer Types", DEWEK, Bremen, 2008
- [9] R. Wagner, H.E. Jørgensen, J. Mann, M.S. Courtney, I. Antoniou, "Wind characteristic measurement for large wind turbine power curve", EWEC, 2008
- [10] D. Schlipf, "Prospects of Predictive Disturbance Compensation for Collective Pitch Control", DEWEK, Bremen, 2008
- [11] J.J. Trujillo, M. Kühn, "Aeroelastic Simulation of a Multi-MW Wind Turbine Operating in Wake", DEWEK, Bremen, 2006
- [12] S. Rahm, I. Smalikho, F. Köpp. "Characterization of aircraft wake vortices by airborne coherent Doppler LiDAR", Journal of Aircraft 44:799 – 805, 2007 doi: 10.2514/1.24401.