



Rawa, M.J.H. and Thomas, David W.P. and Sumner, M. (2014) Background voltage distortion and percentage of nonlinear load impacts on the harmonics produced by a group of personal computers. In: 2014 International Symposium on Electromagnetic Compatibility (EMC Europe 2014, 1-4 Sep 2014, Gothenburg, Sweden.

Access from the University of Nottingham repository:

<http://eprints.nottingham.ac.uk/44027/1/Background%20voltage%20distortion%20and%20percentage%20of%20nonlinear%20load%20impacts%20on%20the%20harmonics%20produced%20by%20a%20group%20of%20personal%20computers.pdf>

Copyright and reuse:

The Nottingham ePrints service makes this work by researchers of the University of Nottingham available open access under the following conditions.

This article is made available under the University of Nottingham End User licence and may be reused according to the conditions of the licence. For more details see:

http://eprints.nottingham.ac.uk/end_user_agreement.pdf

A note on versions:

The version presented here may differ from the published version or from the version of record. If you wish to cite this item you are advised to consult the publisher's version. Please see the repository url above for details on accessing the published version and note that access may require a subscription.

For more information, please contact eprints@nottingham.ac.uk

Background Voltage Distortion and Percentage of Nonlinear Load Impacts on the Harmonics Produced by a Group of Personal Computers

Muhyaddin J. H. Rawa, David W. P. Thomas, Mark Sumner

Electrical Systems and Optics Research Division
The University of Nottingham
Nottingham, NG7 2RD, UK

mrawa@kau.edu.sa, dave.thomas@nottingham.ac.uk, mark.sumner@nottingham.ac.uk

Abstract—The penetration of nonlinear loads on power systems increases distortion levels and can cause severe problems to power systems. Many factors affect the degree of generated harmonics including the background voltage distortion and percentage of nonlinear load to the total load. Hence, the purpose of this paper is to investigate and accurately quantify the effects of these two factors on the harmonics produced by a group of Personal Computers (PCs). Experimental measurements and computer simulations are performed to confirm the observations.

Index Terms— *Distortion; Harmonics; Power Quality; Personal Computer; THD.*

I. INTRODUCTION

Residential customer's input voltages are increasingly becoming more distorted due to the recent proliferation of nonlinear loads within power systems such as Personal Computers (PCs). It has been estimated that by 2012, 60% of the loads on power systems will be nonlinear [1]. The penetration of these loads increases the harmonic level in power system networks and can cause severe problems such as an increase in voltage distortion, decrease in Power Factor (PF), system resonance, equipment failure, impact energy metering, thermal effects on rotating machines, increase system losses, malfunction of electronic devices and decrease in the overall system efficiency [2-7].

PCs are among the most commonly used nonlinear loads in residential and commercial buildings nowadays. Although their rated powers are quite small to individually pollute the quality of power systems, their accumulated effects can be significant especially if they are connected to weak systems.

A number of studies have been conducted to investigate the factors that can affect the harmonics produced by nonlinear loads. In [8-14], attenuation, which refers to the interaction of voltage and current distortions due to shared system impedance, and diversity, which refers to the partial cancellation of harmonic currents due to phase angle diversity, are discussed. The effects of mixing single and three phase

nonlinear loads on harmonic cancellation are also quantified in [15]. Harmonic cancellation due to different single-phase nonlinear loads is illustrated in [16]. It is also proven by simulation in [8, 14, 17] that background voltage distortion affects current harmonics. In [18], voltage, impedance and frequency variations effects on the harmonics generated from a single PC are discussed. Attempts to quantify the effect of linear loads on the generated harmonics are given in [19].

However, all previously mentioned experimental studies, except [18, 19], have not employed purely sinusoidal power supplies. Hence, harmonics quantification due to a particular factor is not fully assessed. One of the key objectives of this research study is to evaluate the effects of the background voltage distortion and percentage of nonlinear load to the total load individually and precisely. This is achieved by controlling the input voltage magnitude, frequency, source impedance and background voltage distortion using a programmable AC source ChromaTM 61511 [20]. The Chroma helps in isolating the test rig and filtering out harmonics and fluctuations from the mains. Also, a high accuracy KinetiQ PPA1530 Power Analyzer was used to monitor the input voltage and current of the PCs [21]. This research study considers a group of 20 PCs.

The effects of the background voltage distortion on the harmonics generated by the PCs are assessed by experimental measurements and simulation using Matlab Simulink [22]. Both measurements and simulations give close results to each other and hence to be succinct only measurement results are presented here unless otherwise stated.

The paper is organized as follows. Section II introduces the most commonly used indices for harmonics quantification. Section III discusses the effects of background voltage distortion on the produced harmonics. Then, the impact of the nonlinear load percentage to the total load is introduced in section IV. Finally, section V presents the summary and conclusions.

II. HARMONIC INDICIES CALCULATIONS

The presence of harmonics makes waveforms to be nonsinusoidal. The most commonly used indices to quantify voltage and current distortions are Voltage and Current Total Harmonic Distortion that can be calculated as follows.

$$THD_v = \frac{V_H}{V_1} = \sqrt{\left(\frac{V}{V_1}\right)^2} - 1 \quad (1)$$

$$THD_i = \frac{I_H}{I_1} = \sqrt{\left(\frac{I}{I_1}\right)^2} - 1 \quad (2)$$

where:

V , V_1 and V_H represent the total, fundamental and harmonic voltages.

I , I_1 and I_H denote the total, fundamental and harmonic currents.

III. BACKGROUND VOLTAGE DISTORTION

Although many papers have discussed the effects of background voltage distortion and flattened tops voltage sources on THD_i [12, 17, 23], no experimental measurements have been done to draw the relation between the background voltage distortion with THD_i and individual harmonic currents under different distortion conditions for a group of nonlinear loads. According to [3], the IEEE recommended voltage distortion in distribution systems should not exceed 5%. Hence, the background voltage distortion varies from 0% (sinusoidal waveform) to 5%. Figs. 1 and 2 show that increasing the voltage distortion from 0% to 5%, increases THD_v of 20 PCs from 1.3 to 5.5% while THD_i decreases by about 29%. Also, increasing the connected loads to 20 PCs at 5% voltage distortion increases THD_v and decreases THD_i by approximately 10.5% and 5.8%, respectively.

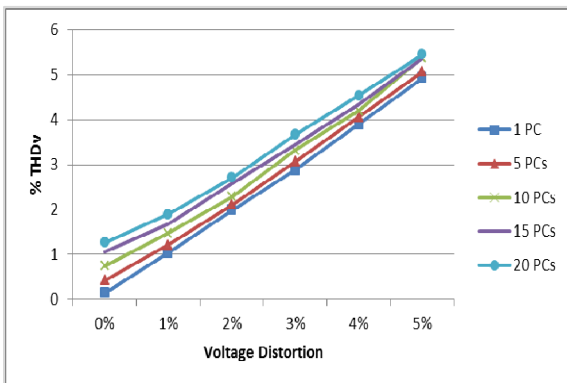


Figure 1. THD_v vs. background voltage distortion

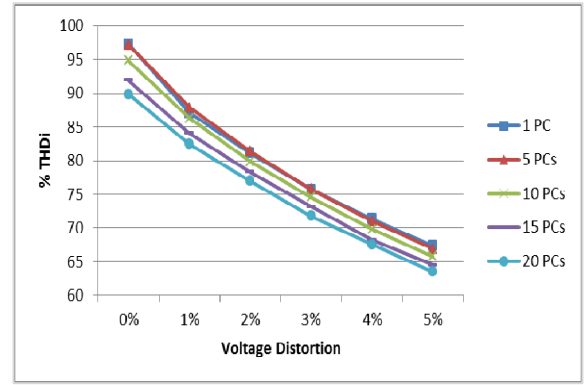


Figure 2. THD_i vs. background voltage distortion

For predicting individual harmonics behaviors to perform a resonance study or calculating harmonic losses, assessing the effects of background voltage distortion on individual harmonics is required. Figs. 3 and 4 illustrate that increasing voltage distortion to 5% increases the 3rd harmonic voltage magnitude about five times, while decreases the 3rd harmonic current magnitude by 28% when a group of 20 PCs is considered.

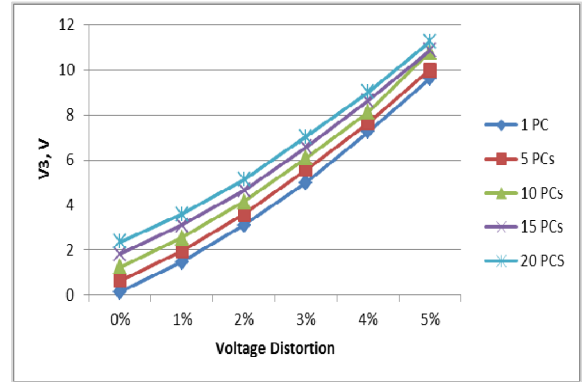


Figure 3. 3rd harmonic voltage vs. background voltage distortion

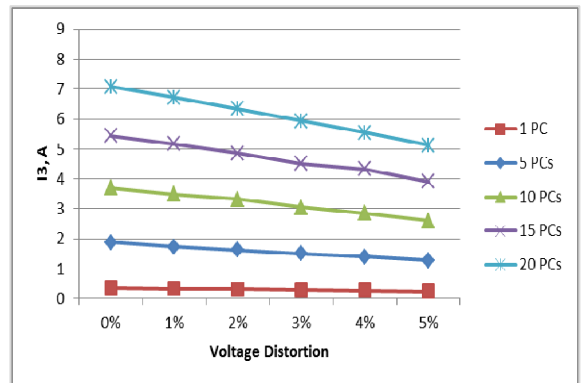


Figure 4. 3rd harmonic current vs. background voltage distortion

The same analysis is repeated again considering the 5th harmonic that follows the same behavior as the 3rd harmonic as shown in Figs. 5 and 6.

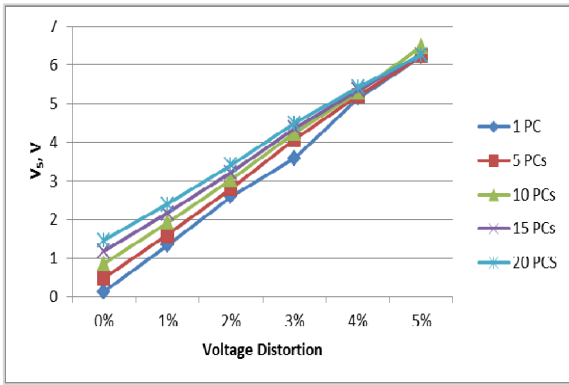


Figure 5. 5th harmonic voltage vs. background voltage distortion

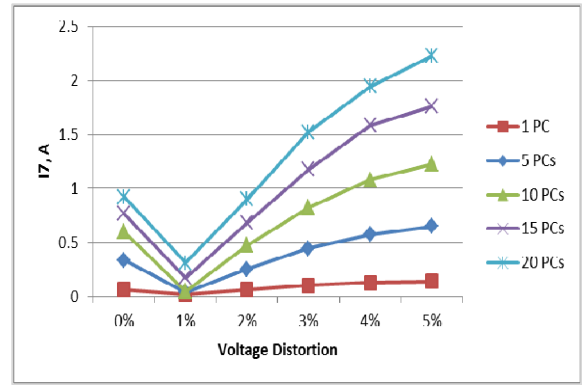


Figure 8. 7th order harmonic current vs. background voltage distortion

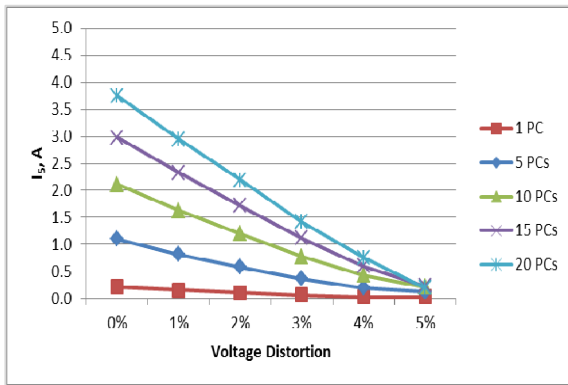


Figure 6. 5th harmonic current vs. background voltage distortion

The analysis of the 7th harmonic illustrated in Figs. 7 and 8 show that the 7th order voltage harmonic increases until the background voltage distortion becomes 4% after which it decreases. Regarding the 7th harmonic currents, they decrease when the background voltage distortion is 1% and increase 5 times when the background voltage distortion increases from 1% to 5%.

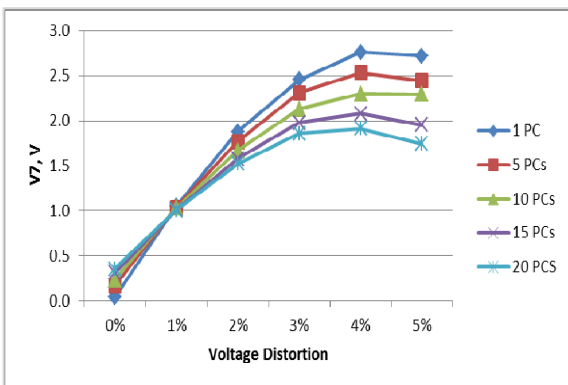


Figure 7. 7th order harmonic voltage vs. background voltage distortion

Another set of measurements were carried out to evaluate the effects of varying the 3rd harmonic background voltage percentage (% of V_3/V_1) from 17.75% to 24.50% on the harmonics generated by a single PC. Fig. 9 shows that THD_v , THD_i and $\%I_5$ increase with increasing the 3rd harmonic voltage distortion while $\%I_3$ and $\%I_7$ decrease then increase. This proves that under certain conditions, some sort of current harmonics amplification can occur [14, 17]. However, if the results presented in Fig. 9 are compared with those of Fig. 2, it can be noticed that when $\%V_3$ is zero (corresponds to sinusoidal wave), THD_i is about 97%, while when $\%V_3$ is 17.75%, THD_i is 62%.

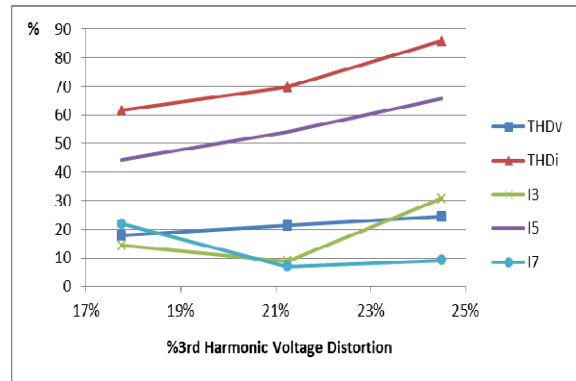


Figure 9. PC Harmonic indices vs. %3rd background voltage distortion

When the effects of the background voltage distortion on THD_v , THD_i , 3rd and 5th voltage and current harmonics are simulated, they follow the same trend as in Figs. 1-6 with slight differences in the percentages and magnitudes. However, the 7th harmonic voltage and current behave differently as shown in Figs. 10 and 11.

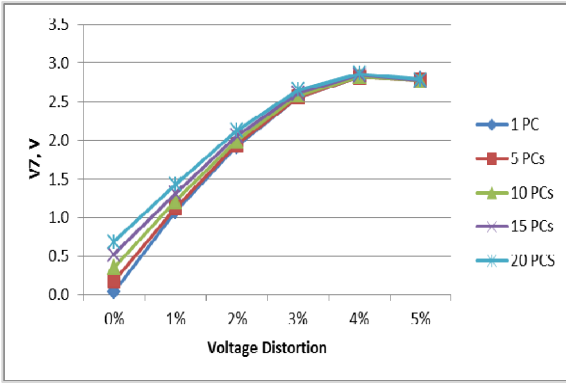


Figure 10. 7th harmonic voltage vs. background voltage distortion (simulation)

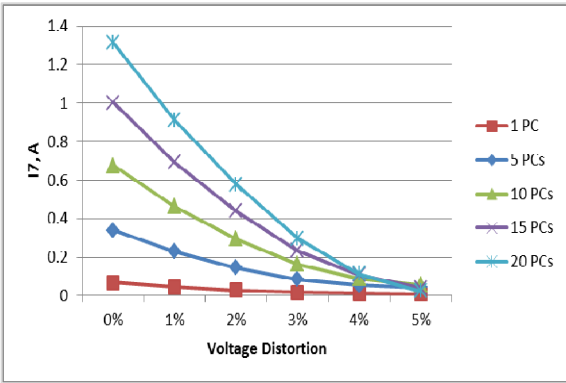


Figure 11. 7th harmonic current vs. background voltage distortion (simulation)

These different behaviors may be due to the fact that the 7th harmonic filter design used in the PC modeling is not exactly the same as that of the actual PCs. Because, when different 7th harmonic filter designs are used, closer results to measurements are obtained, but at the expense of worsening other indices like THD_v, THD_i and other individual harmonics. It should be noted that the full and constant load power models presented in [24, 25] are used in this paper to perform the simulations.

IV. PERCENTAGE OF NONLINEAR LOAD TO THE TOTAL LOAD

One of the most important factors that affect THD_i and other individual current harmonic indices is the percentage of nonlinear load to the total load. As more linear loads are connected to the same supply, harmonic indices decrease. However, the distortion current ($\sqrt{\sum I_n^2}$) is constant. Fig. 12 illustrates the percentage decrease in THD_i as the linear load increases.

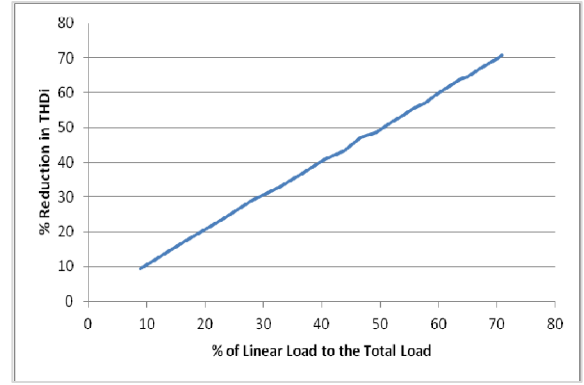


Figure 12. Reduction of THD_i as a function of linear load percentage

This can also be proven by referring to the following equation.

$$\Delta THD_i \% = \frac{\frac{\sqrt{\sum I_n^2}}{I_{1PC}} - \frac{\sqrt{\sum I_n^2}}{I_{1Total}}}{\frac{\sqrt{\sum I_n^2}}{I_{1PC}}} \times 100 = \left[1 - \frac{I_{1PC}}{I_{1Total}} \right] \times 100 \quad (3)$$

where:

I_{1PC} is the fundamental current drawn by the PC only.

I_{1Total} is the fundamental current drawn by the PC and linear load.

Fig. 13 illustrates that with the same nonlinear load (PC), %THD_i decreases rapidly from more than 96% (corresponds to when the PC load is the only load) to below 30% (corresponds to about a 30% the PC load to the total load). %I₃, %I₅ and %I₇ also decline, although their absolute values are almost constant. This means that these distortion indices could sometimes mislead and magnitudes in amperes or voltages should also be monitored and analyzed.

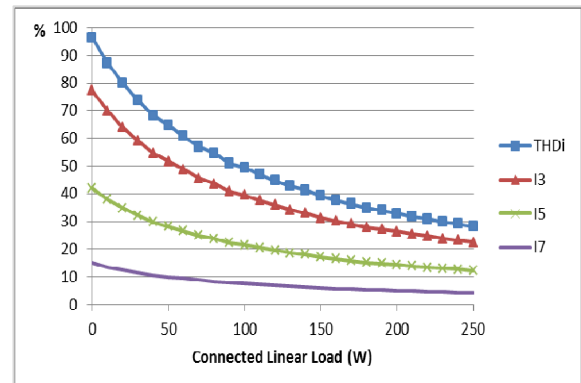


Figure 13. %THD_i and %I_s with the increasing of the connected linear load.

%I₃, %I₅ and %I₇ are the percentages of the 3rd, 5th and 7th harmonic currents to the fundamental current. Recall from equation (2), as more linear loads are connected to the same supply, the fundamental current increases and THD_i decreases. %I₃, %I₅ and %I₇ also decrease with increasing I_1 .

V. CONCLUSION

Power systems harmonics are continuously varying due to many factors including the variation in the background voltage distortion and percentage of nonlinear loads connected to the same supply. Background voltage distortion affects THD_i , THD_v and individual harmonics significantly as THD_v increases about 5 times while THD_i can be reduced by about one third when the background voltage distortion varies within IEEE recommended limits. Individual harmonics tend to behave differently with increasing background voltage distortion as 3rd and 5th harmonic voltages increase while harmonic currents decrease, whereas the 7th harmonic voltage initially increases then decreases while the 7th harmonic current decreases then increases. Percentage of nonlinear load to the total loads does not affect the harmonics' magnitudes, but reduces the harmonic indices sharply if a bulky linear load is connected to the same source supplying the nonlinear loads.

ACKNOWLEDGMENT

The authors would like to acknowledge King Abdulaziz University for their financial support of this PhD study.

REFERENCES

- [1] J. C. Das, "Power System Analysis: Short-Circuit Load Flow and Harmonics", Marcel Dekker, 2002.
- [2] E. F. Fuchs and M. A. S. Masoum "Power Quality in Power Systems and Electrical Machines", Academic Press, 2008.
- [3] IEEE Standard 519-1992, "IEEE Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems".
- [4] F. C. De La Rosa, "Harmonics and Power Systems", CRC Press, 2006.
- [5] N. Mohan, T. M. Undeland, and W. P. Robbins, "Power Electronics: Converters, Applications and Design", 3rd ed., New York: John Wiley & Sons, 2003.
- [6] R. C. Dugan, M. F. McGranaghan, S. Santoso, and H. Wayne Beaty, "Electrical Power System Quality", McGraw-Hill Professional, 3rd ed., 2012.
- [7] A. Ghosh and G. Ledwich, "Power Quality Enhancement Using Custom Power Devices", Kluwer Academic, Dordrecht, 2002.
- [8] A. Mansoor, W. M. Grady, A. H. Chowdhury, and M. J. Samotyj, "An investigation of harmonics attenuation and diversity among distributed single-phase power electronics loads," IEEE Trans. Power Delivery, vol. 10, pp. 467-473, Jan. 1995.
- [9] A. Mansoor, W. M. Grady, P. T. Staats, R. S. Thallam, M. T. Doyle, and M. J. Samotyj, "Predicting the net harmonic currents produced by large numbers of distributed single-phase computer loads," IEEE Trans. Power Delivery, vol. 10, pp. 2001-2006, Oct. 1995.
- [10] P. J. Moore and I.E. Portugués, "The influence of personal computer processing modes on line current harmonics", IEEE Transactions on power delivery, vol. 18, no. 4, October 2003.
- [11] A. I. Maswood and J. Zhu, "Attenuation and Diversity Effect in Harmonic Current Propagation Study", Proc. 2003 IEEE Power Engineering Society (PES) General Meeting, Toronto, Canada, 2003.
- [12] Nassif, A.B.; Acharya, J., "An investigation on the harmonic attenuation effect of modern compact fluorescent lamps," Harmonics and Quality of Power, 2008. ICHQP 2008. 13th International Conference on , vol., no., pp.1-6, Sept. 28 2008-Oct. 1 2008.
- [13] Nassif, A.B.; Wilsun Xu; , "Characterizing the Harmonic Attenuation Effect of Compact Fluorescent Lamps," Power Delivery, IEEE Transactions on , vol.24, no.3, pp.1748-1749, July 2009.
- [14] Nassif, A.B, "Modeling, Measurement and Mitigation of Power System Harmonics", PhD Thesis, University of Alberta, 2009.
- [15] S. Hansen, P. Nielsen, and F. Blaabjerg, "Harmonic cancellation by mixing nonlinear single-phase and three-phase loads" IEEE Trans. Ind. Applicat., vol. 36, pp. 152-159, Jan./Feb. 2000.
- [16] W. M. Grady, A. Mansoor, E. F. Fuchs, P. Verde and M. Doyle, "Estimating the Net Harmonic Currents Produced by Selected Distributed Single-Phase Loads: Computers, Televisions, and Incandescent Light Dimmers", Power Engineering Society, Winter Meeting, IEEE, 2, 1090-1094, 2002.
- [17] Mansoor, A.; Grady, W.M.; Thallam, R.S.; Doyle, M.T.; Krein, S.D.; Samotyj, M.J.; , "Effect of supply voltage harmonics on the input current of single-phase diode bridge rectifier loads," Power Delivery, IEEE Transactions on , vol.10, no.3, pp.1416-1422, Jul 1995
- [18] Rawa, M. J. H.; Thomas, D. W. P.; Sumner, M.; Chin, J. X.; , "Source voltage, frequency and impedance variation effects on the harmonics generated from a Personal Computer," Power Electronics, Machines and Drives (PEMD 2012), 6th IET International Conference on , vol., no., pp.1-6, 27-29 March 2012.
- [19] Rawa, M.J.H.; Thomas, D.W.P.; Sumner, M.; , "Harmonics attenuation of nonlinear loads due to linear loads," Electromagnetic Compatibility (APEMC), 2012 Asia-Pacific Symposium on , vol., no., pp.829-832, 21-24 May 2012.
- [20] Programmable AC Source 61511/61512 User's Manual (Chroma), Chroma ATE INC., Version 1.1, 2009, P/N A11 001293.
- [21] PPA1500 KinetiQ User Manual, Newtons4th Ltd, 2010.
- [22] MATLAB 7.10 (R2010a), MathWorks, Inc., 2010.
- [23] M. Bollen and I. Gu "Signal Processing of Power Quality Disturbances", IEEE Press, 2006.
- [24] Rawa, M. J H; Thomas, D.W.P.; Sumner, M., "Simulation of non-linear loads for harmonic studies," Electrical Power Quality and Utilisation (EPQU), 2011 11th International Conference on , vol., no., pp.1,6, 17-19 Oct. 2011.
- [25] Rawa, M.J.H.; Thomas, D.W.P.; Sumner, M., "Power quality monitoring and simulation of a personal computer based on IEEE 1459-2010," Electromagnetic Compatibility (EMC EUROPE), 2013 International Symposium on , vol., no., pp.671,675, 2-6 Sept. 2013.