



POLITECNICO DI TORINO
Repository ISTITUZIONALE

Processing of (BaSr)Fe₁₂O₁₉ for antenna miniaturization

Original

Processing of (BaSr)Fe₁₂O₁₉ for antenna miniaturization / Galassi, C.; Capiani, C.; Galizia, P.; Baldisserrri, C.. - (2015).
((Intervento presentato al convegno EMF 2015.

Availability:

This version is available at: 11583/2646555 since: 2016-08-24T16:35:19Z

Publisher:

Published

DOI:

Terms of use:

openAccess


This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

Abstract


Hexaferrites of M-type at high-frequency are investigated, owing to their higher ferromagnetic resonances as compared to traditional magnetic materials, thus ensuring a less dispersive behavior of the material at microwaves frequencies. Here we present the experimental work concerned with the ceramic process for the production of the barium-strontium hexaferrite (BSFO). The critical issue in the production of this material is to obtain a fully dense and homogeneous microstructure. These aspects have been addressed by introducing powder grinding processes, and by varying the cold consolidation conditions of the powders. A number of samples of the material have been produced, both for morphological and microstructural characterization and a demonstrator antenna, onto which conductive patches were applied, and the radiating properties of which were tested. Barium-strontium hexaferrite as supporting material for antennas - while allowing substantial device miniaturization - displays relatively high dielectric and magnetic losses.

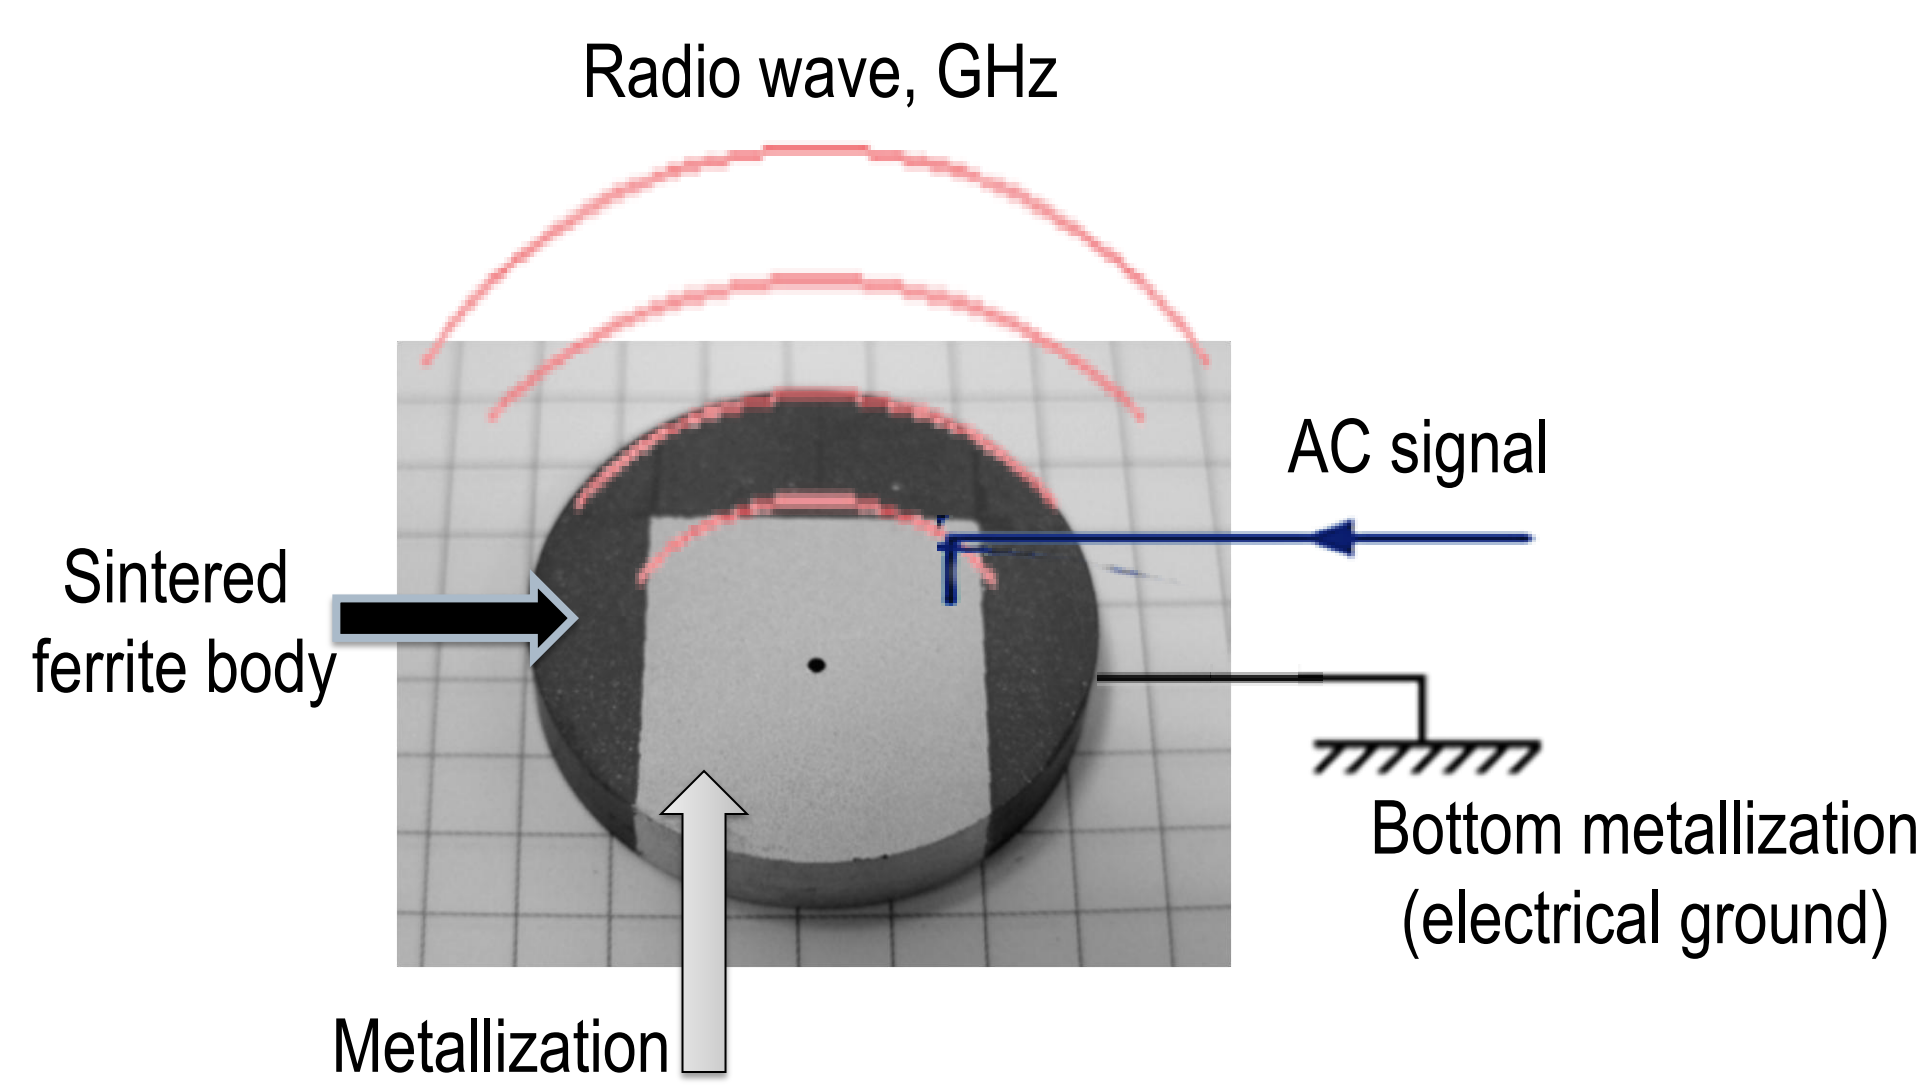

Printed antenna with diameter 31.5 mm

Material synthesis

Barium-Strontium M-type hexaferrites: $\text{Ba}_{0.75}\text{Sr}_{0.25}\text{Fe}_{12}\text{O}_{19}$ (BSFO)

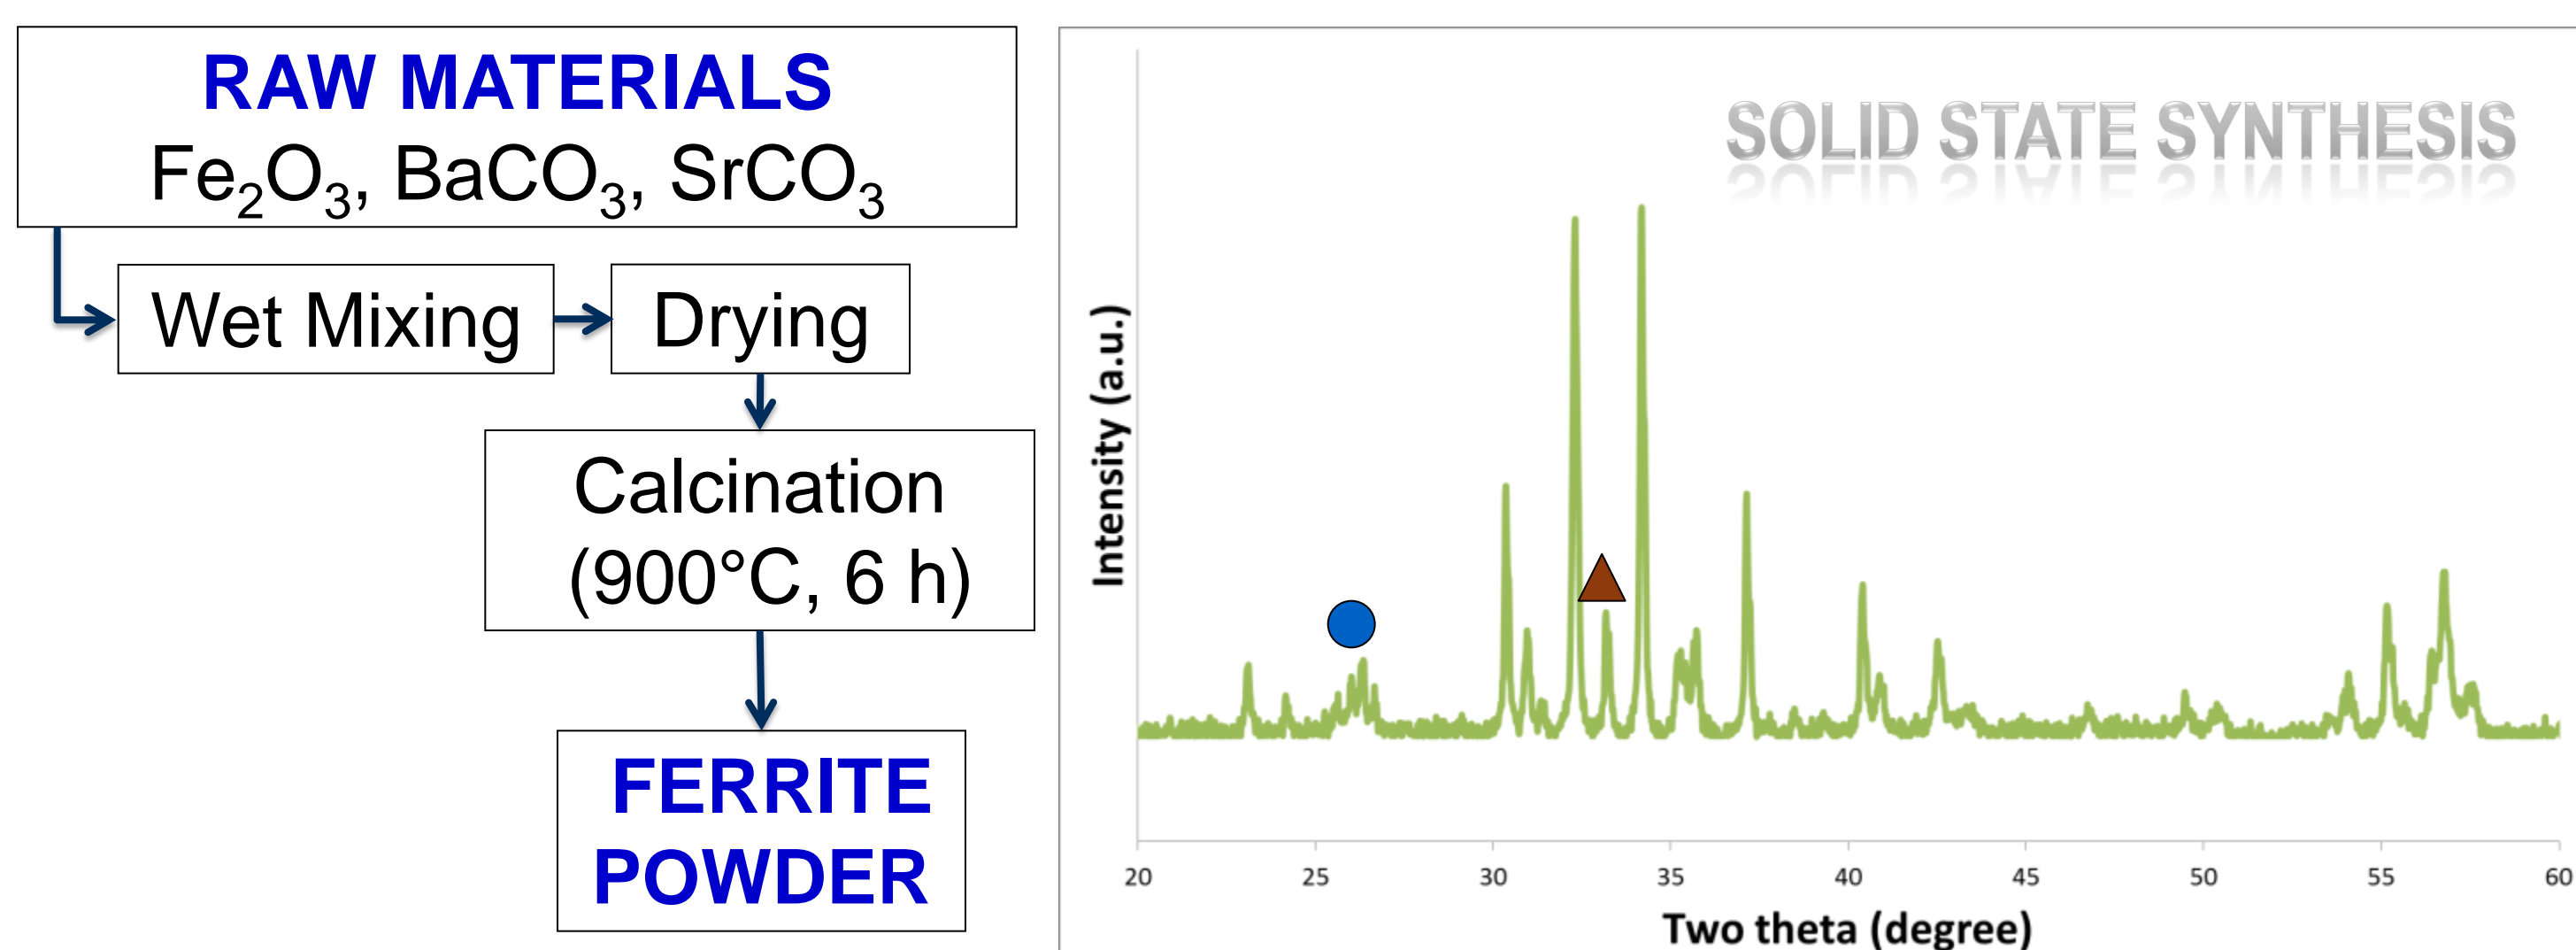


The powders after calcination doesn't show a pure M-type hexaferrite phase, but some intermediate phase, such as BaO (●) and Fe_2O_3 (▲), are still presented

Key step: Powders Milling

The wet Planetary Milling (PM) has the double scope of:

- increase the powders homogeneity in terms of particle size and shape
- increase the powders reactivity reducing the average particle size

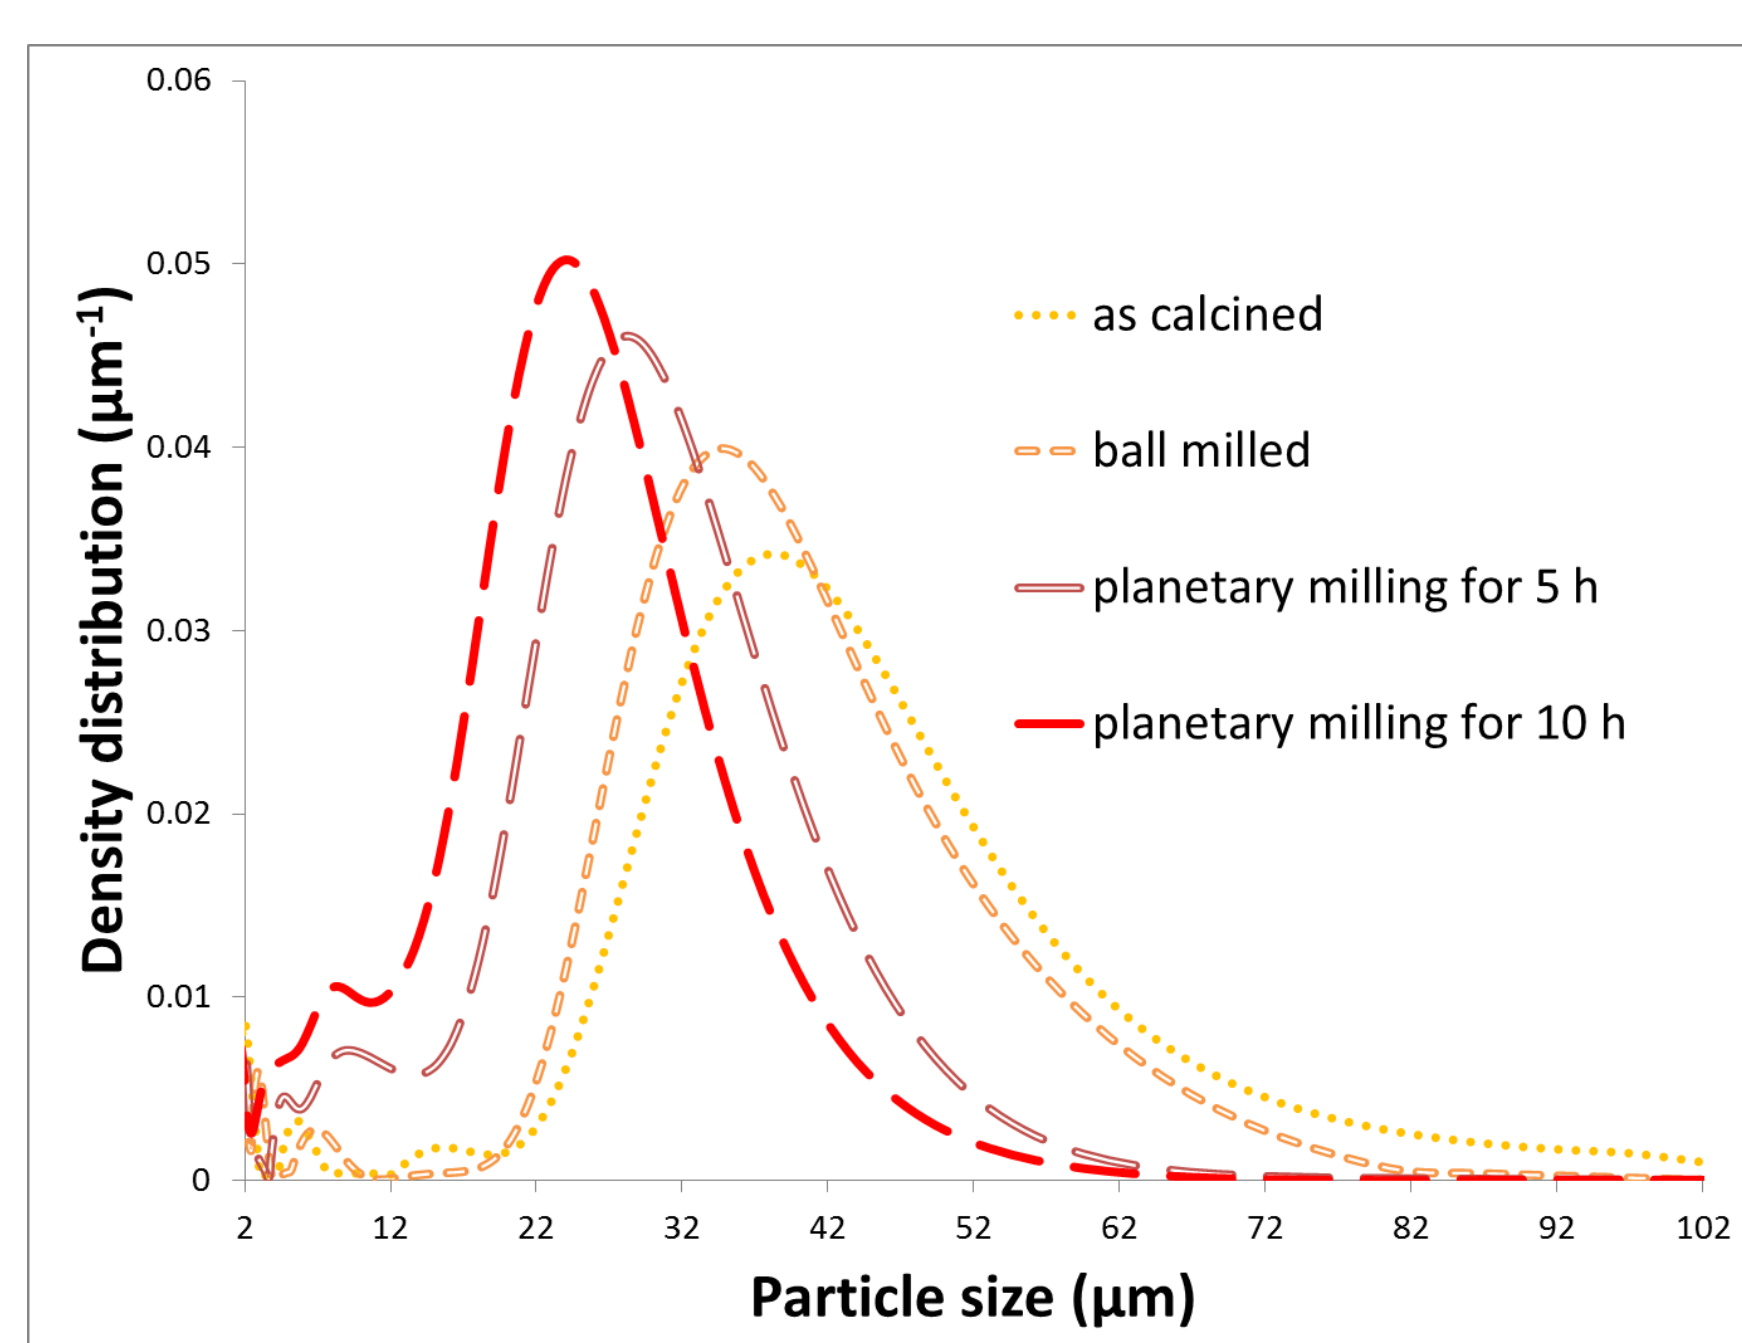

Powders	as calcined	ball milled	PM 5 h	PM 10 h
Mean particle size (µm) weighted on number	45	40	30	26
Mean particle size (µm) weighted on volume	51	44	33	28

Densification

Forming :


- linear pressing into disk
- cold isostatic pressing at 300 MPa

$$\rightarrow \rho \% \approx 56 \%$$

Sintering :

- Heating at 10 °C/min up to 1200 °C
- 1' soaking time







$$\rightarrow \rho \% > 90 \%$$

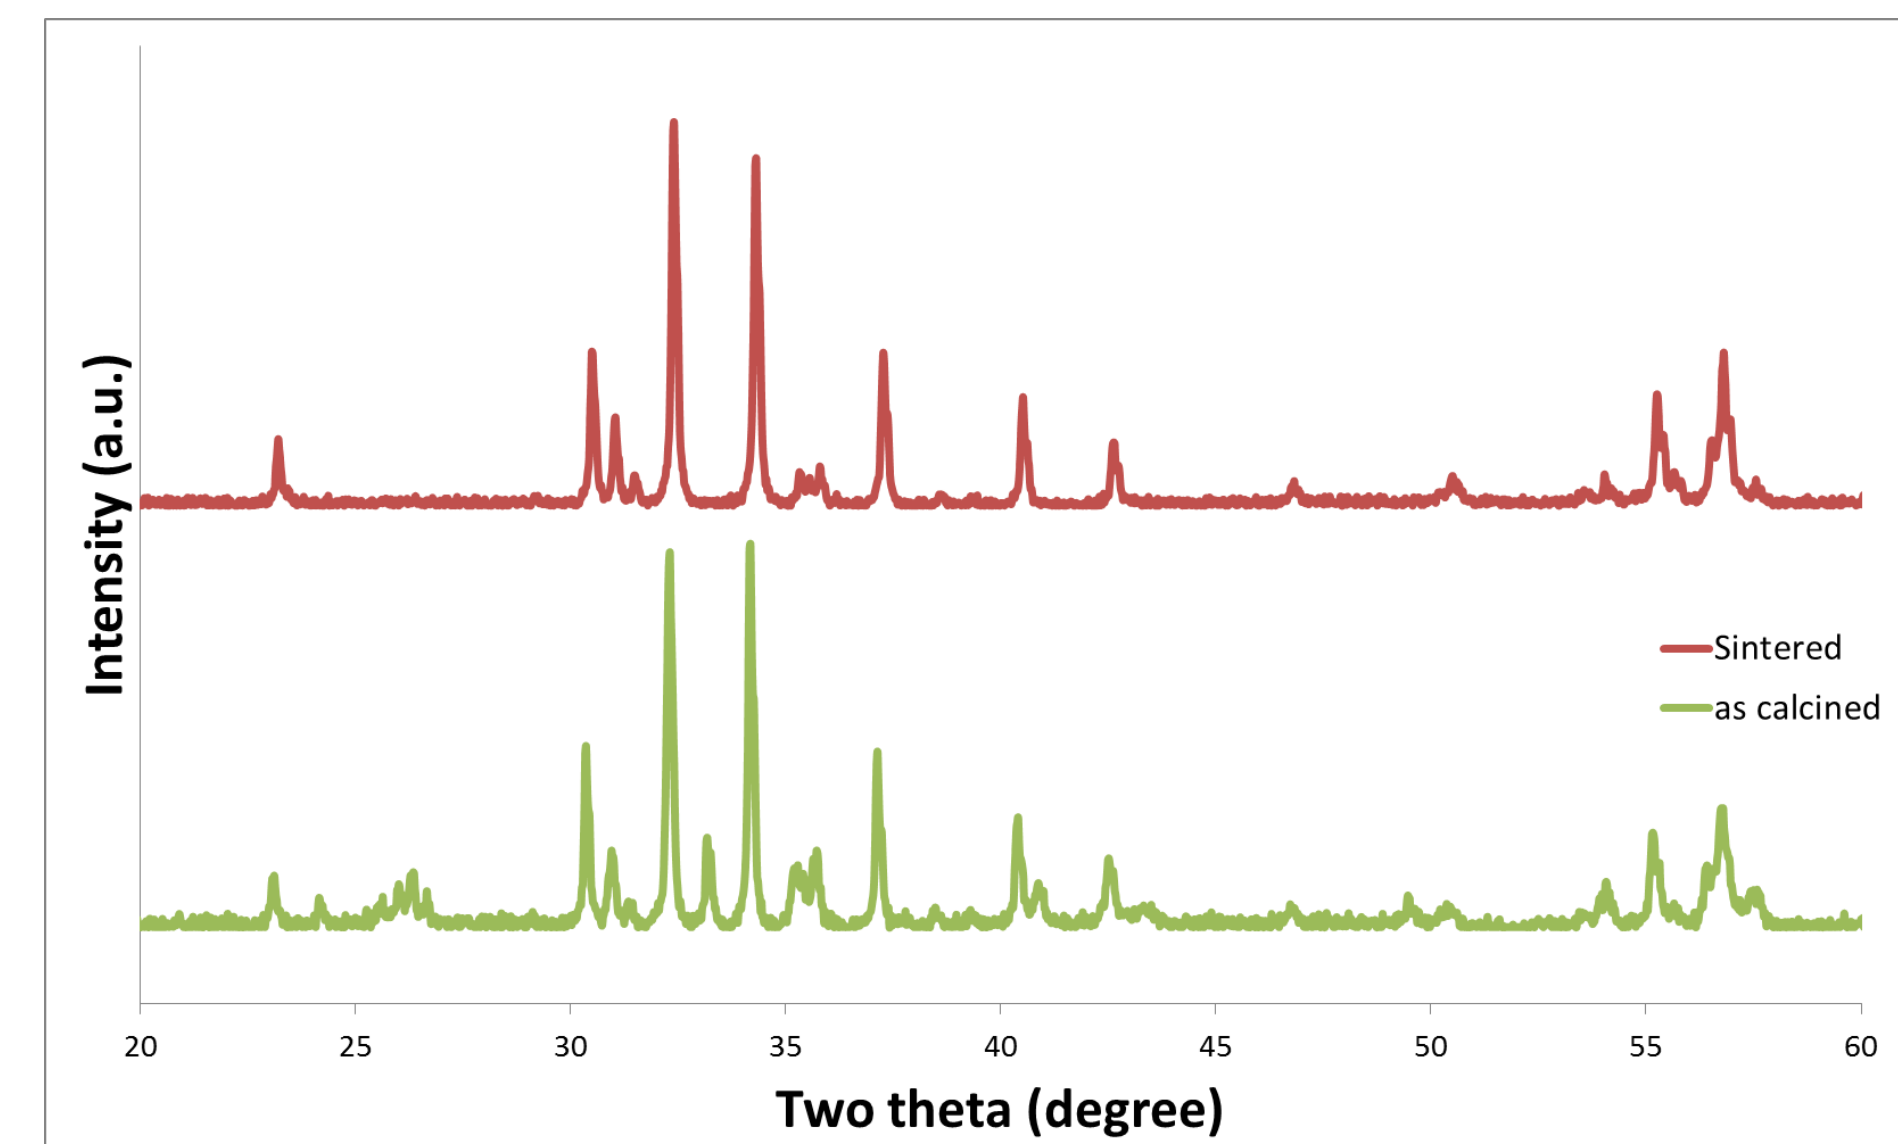

Microstructure

$\text{Ba}_{0.75}\text{Sr}_{0.25}\text{Fe}_{12}\text{O}_{19}$ powder
calcined at 900°Cx 6 h
sintered at 1200°Cx1min

$\text{Ba}_{0.75}\text{Sr}_{0.25}\text{Fe}_{12}\text{O}_{19}$ powder
calcined at 900°Cx 6 h
milled for 10 h
sintered at 1200°Cx1min

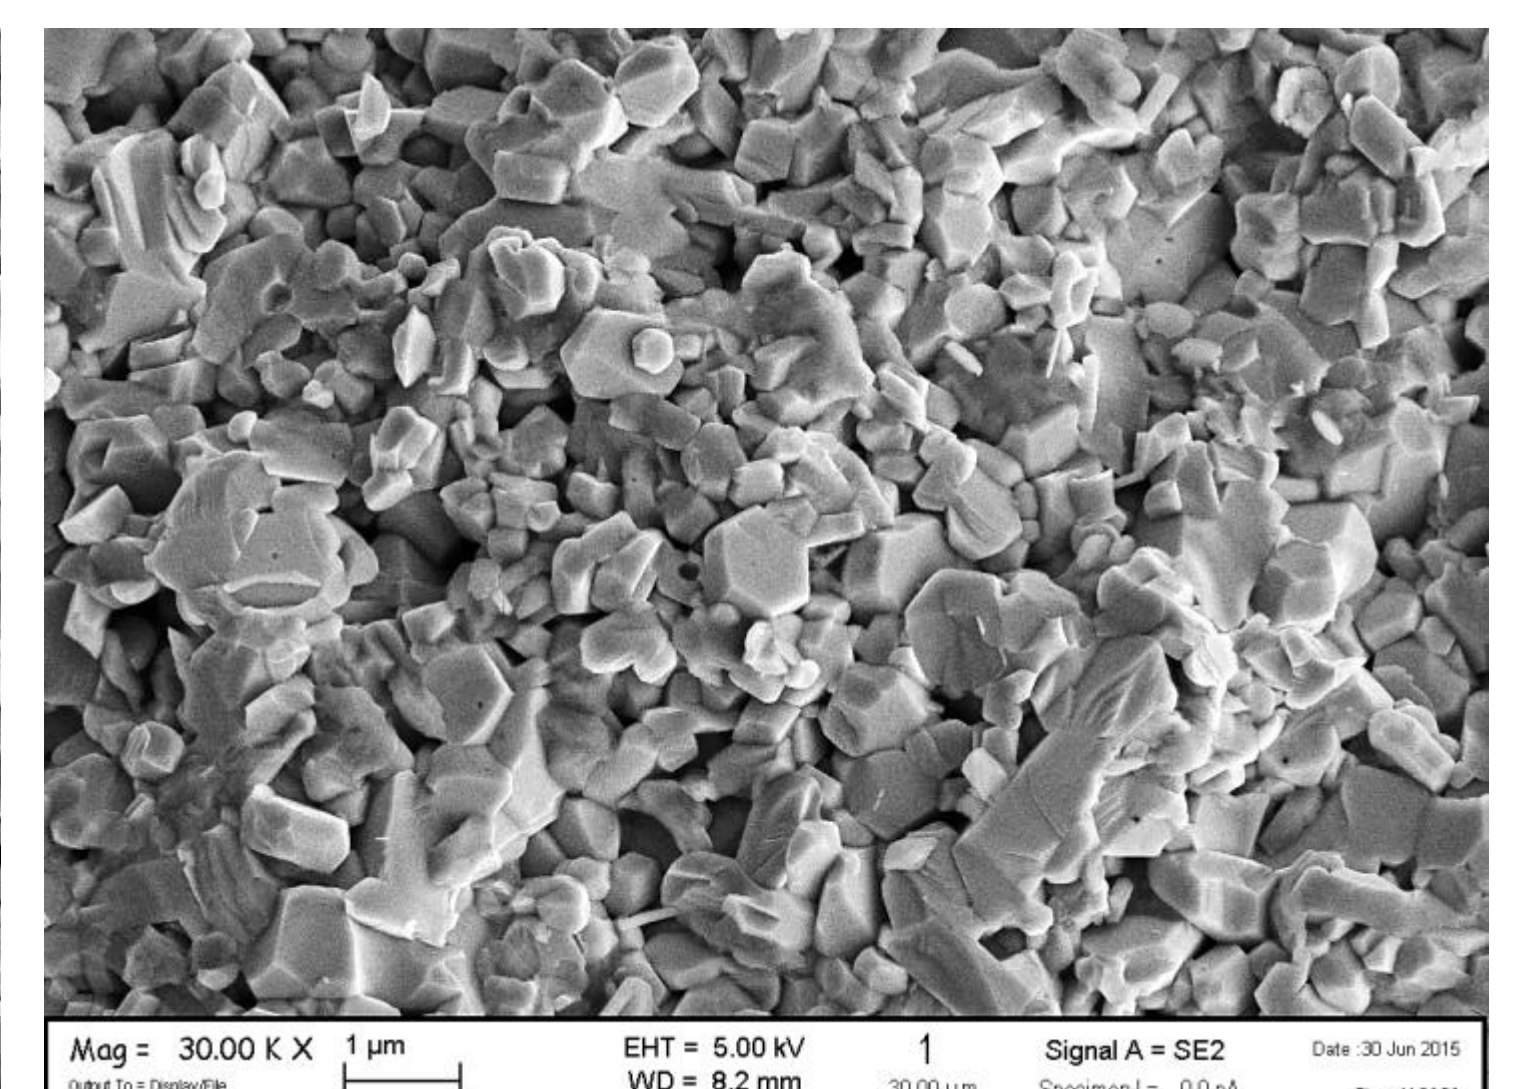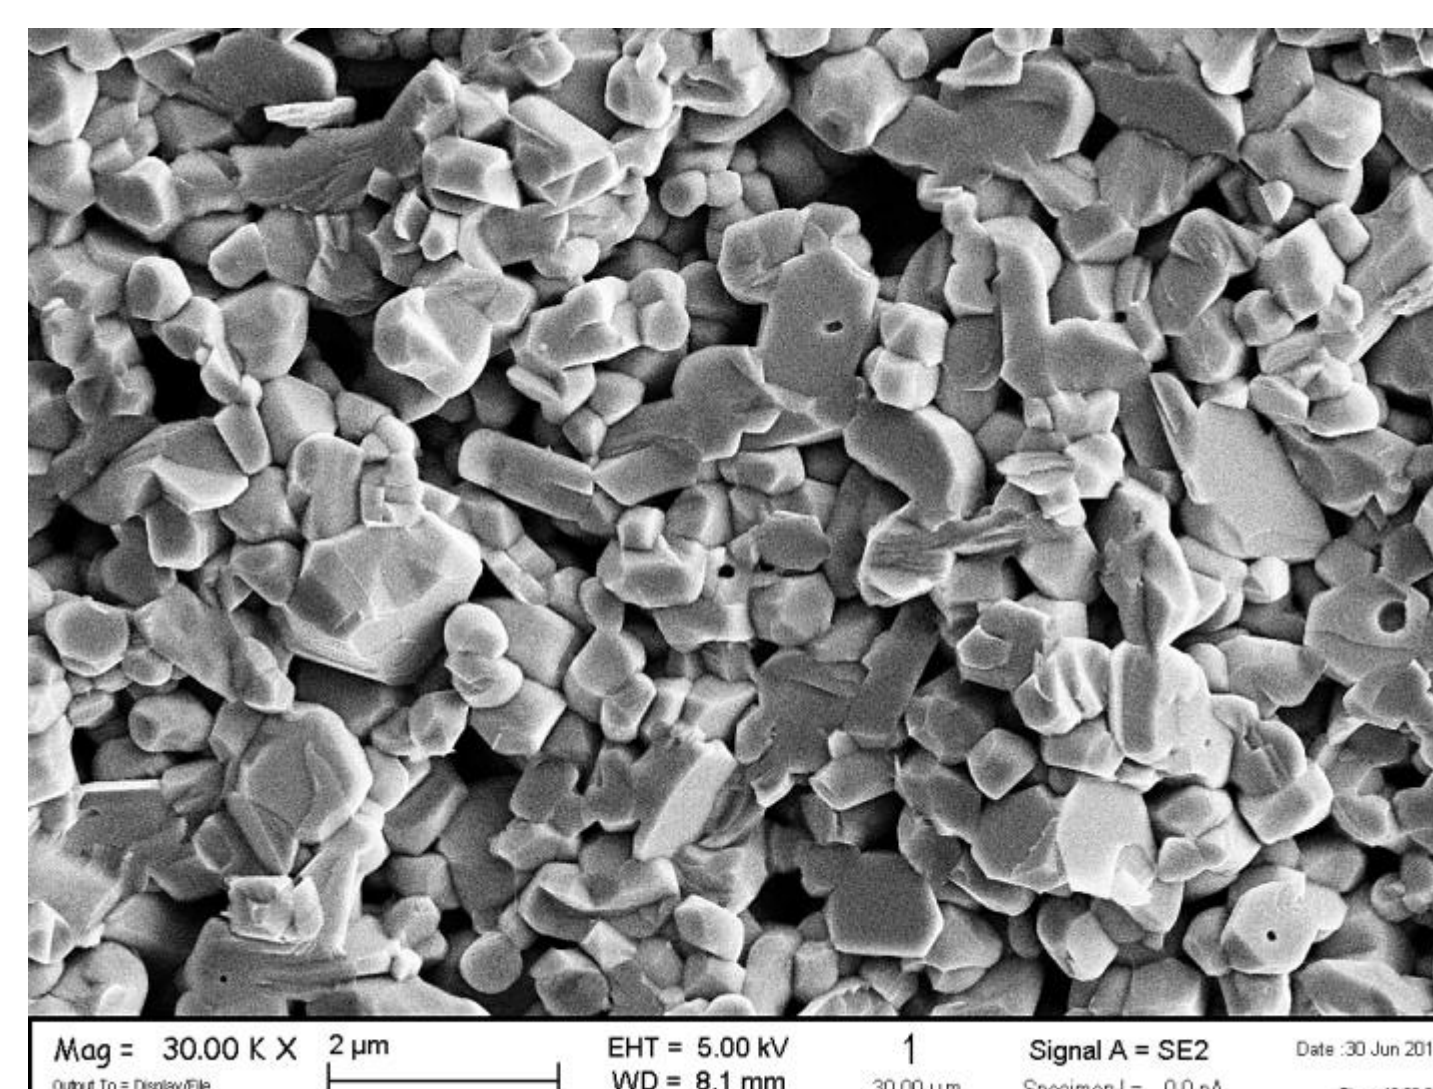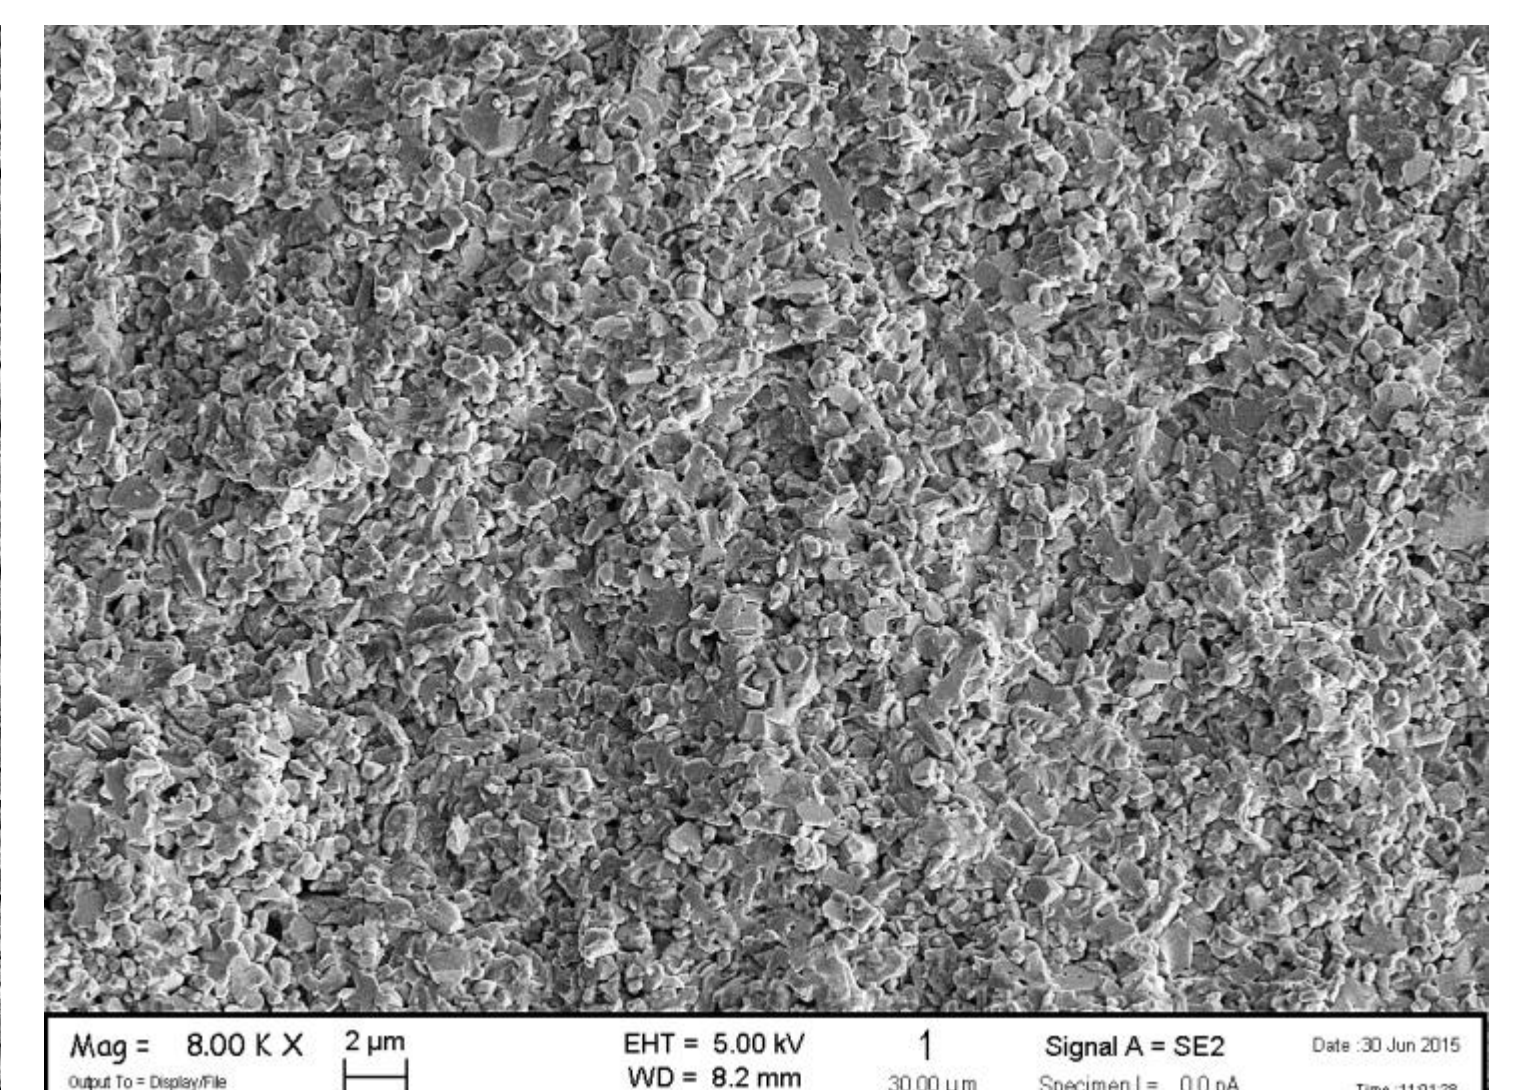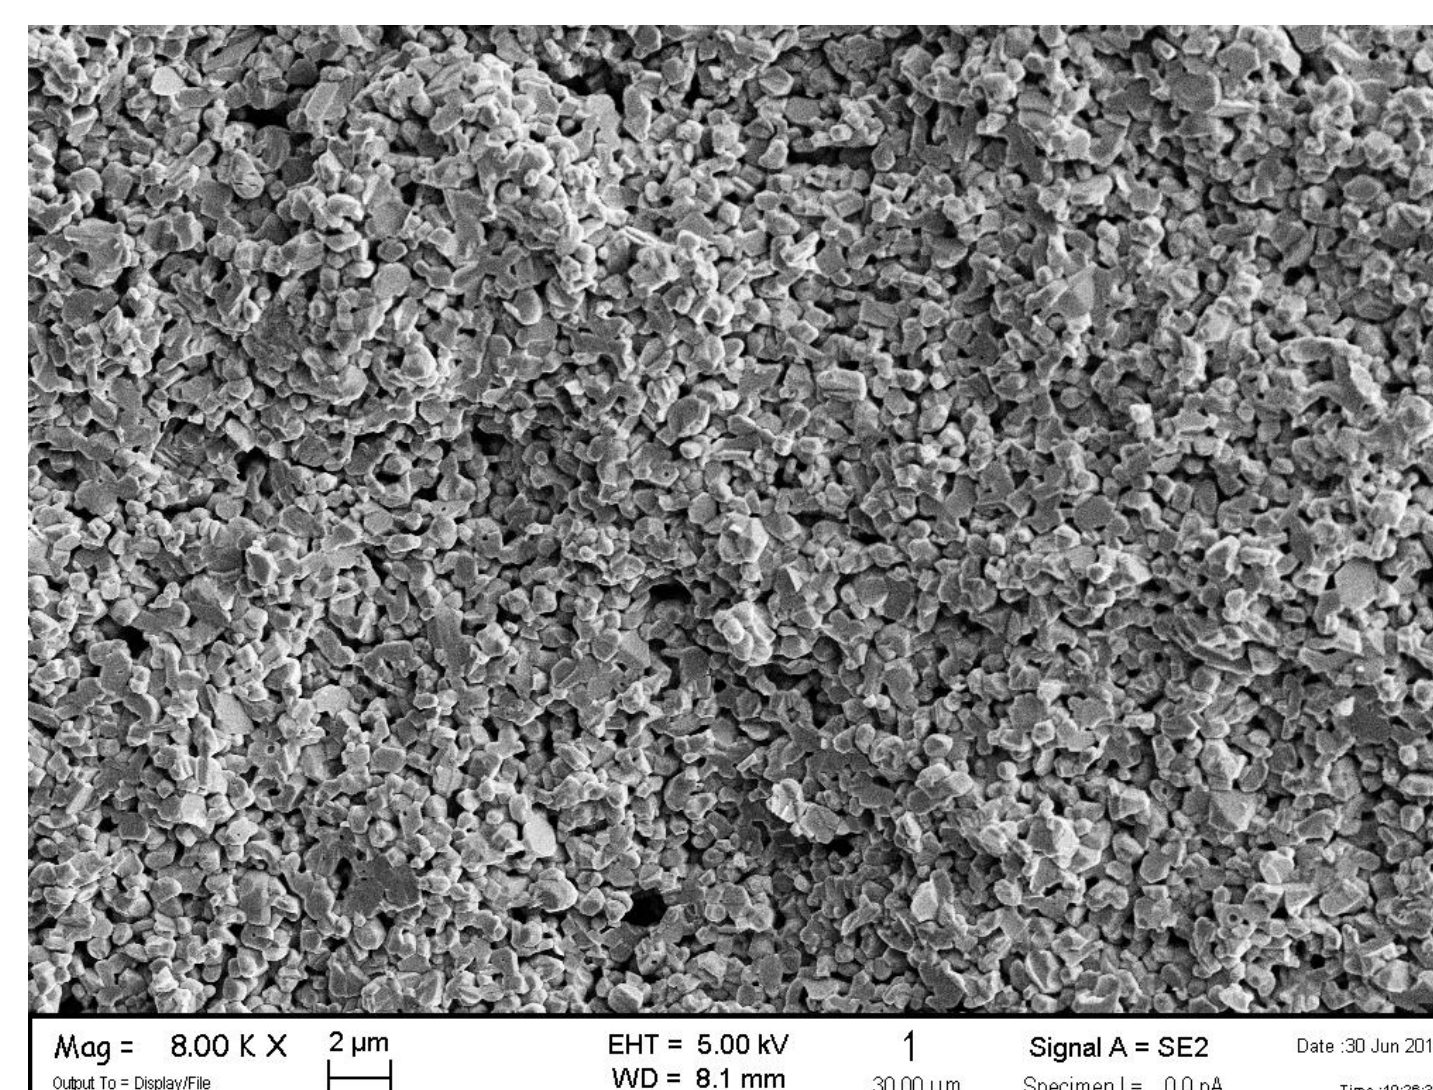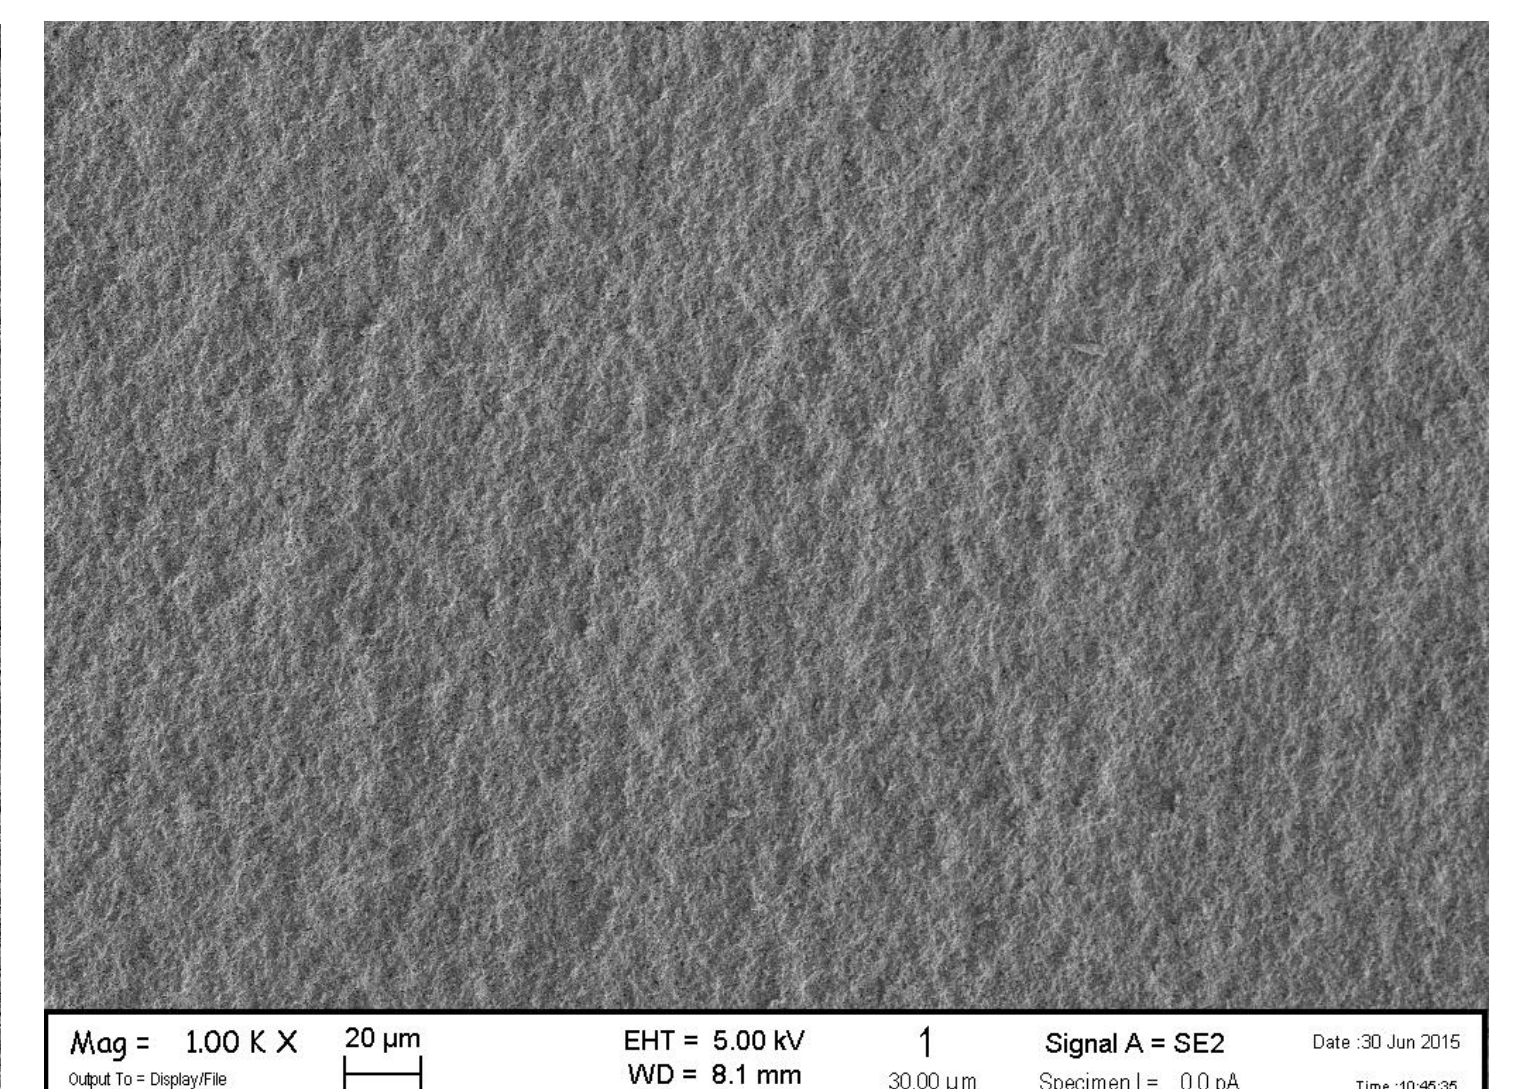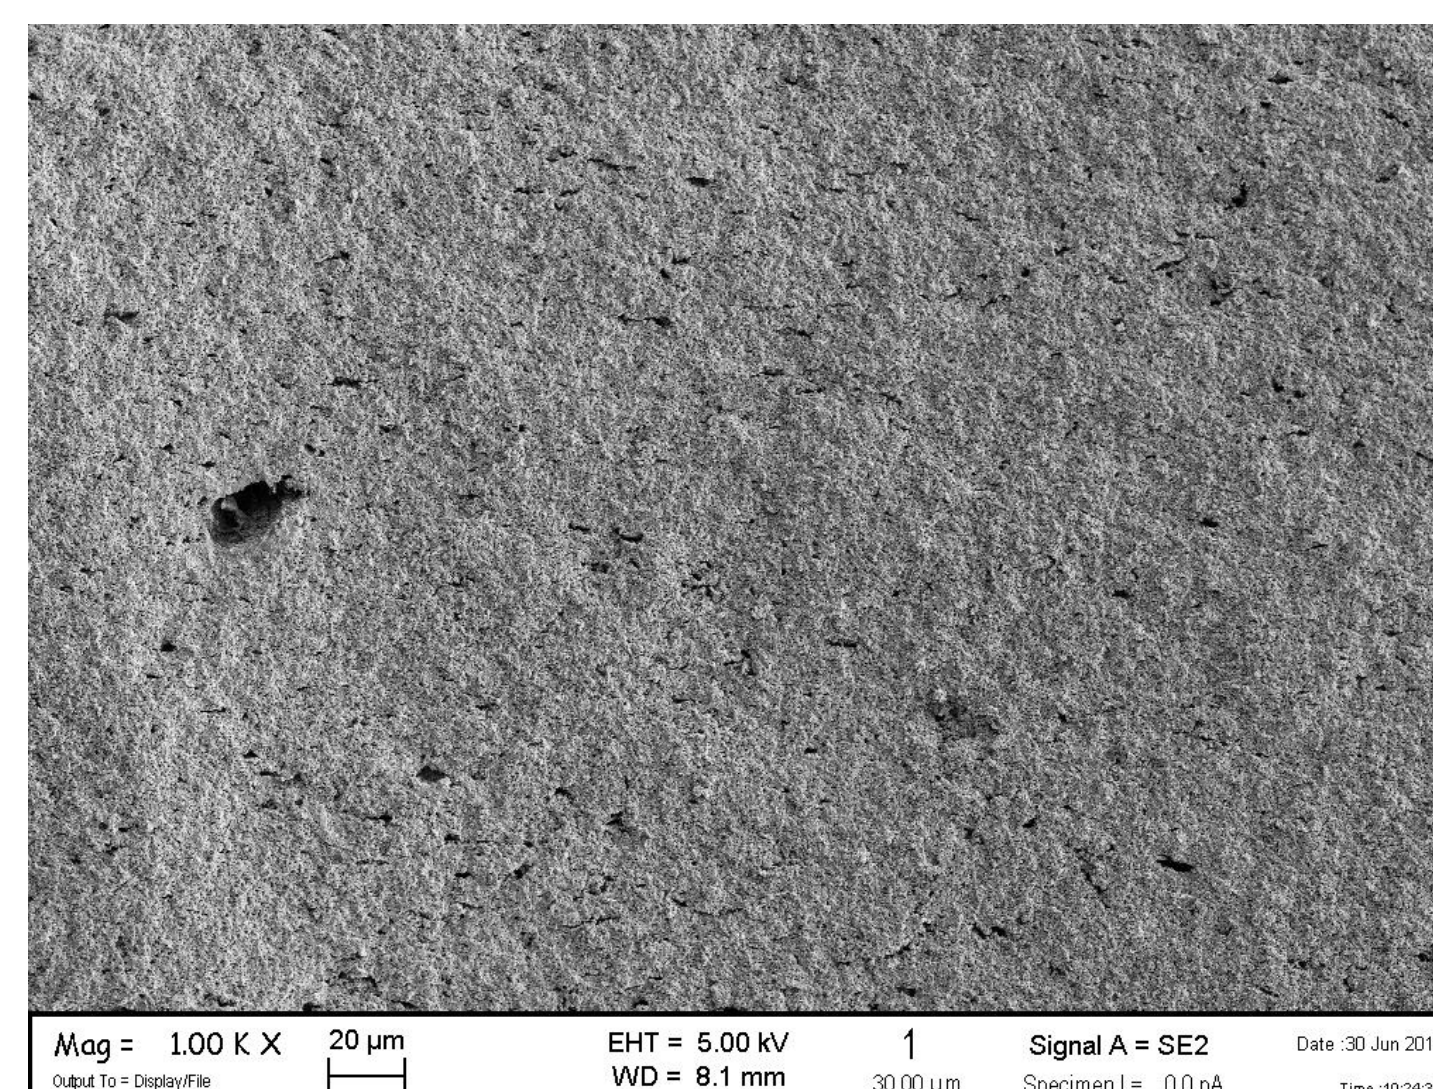

$$\rho \% = 90 \%$$

$$\rho \% = 94 \%$$

Conclusion

Pure M-type hexaferrite was produced by conventional ceramic process.

The quite dense microstructures don't show abnormal grains and the fine microstructures are characterized by a grain size distribution lower than 2 µm.

The milling treatment allows to avoid macropores and get a slightly finer microstructure