

Technical University of Denmark



Loads in wind farms under non-neutral ABL stability conditions: A full-scale validation study of the DWM model.

Larsen, Gunner Chr.; Larsen, Torben J.; Hansen, Kurt Schaldemose

Publication date:
2017

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):

Larsen, G. C., Larsen, T. J., & Hansen, K. S. (2017). Loads in wind farms under non-neutral ABL stability conditions: A full-scale validation study of the DWM model.. Abstract from International Conference on Future Technologies for Wind Energy WindTech 201724-26 Oct. 2017, Boulder, United States.

DTU Library

Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Loads in wind farms under non-neutral ABL stability conditions – a full-scale validation study of the DWM model.

G.C. Larsen, T.J. Larsen and K.S. Hansen

Technical University of Denmark, Department of Wind Energy, Roskilde, Denmark, gula@dtu.dk

Abstract

The purpose of this study is twofold: To validate a generalized version of the DWM approach for load prediction under non-neutral atmospheric stability conditions, and to demonstrate the importance of atmospheric stability for wind turbines operating in wind farm conditions.

Keywords: *Wind farm, Wakes, Loads, Atmospheric stability*

Introduction

For wind farm (WF) *production estimation stationary* WF flow field modeling as provided by e.g. full CFD RANS models or fast linearized CFD RANS models [1] may suffice. However, for *load estimation* of wind turbines (WT's) exposed to wake affected inflow conditions, a *non-stationary* WF flow field description is inevitable. Insisting on models reflecting the basic physics of the problem, high-fidelity DNS or LES CFD type of simulations are valid approaches. In a WF design context these are, however, presently excluded due to their excessive computational demand, and for such purposes we therefore have to resort to medium-fidelity type of simulations. One such approach is the Dynamic Wake Meandering (DWM) model [2] which, coupled with an aeroelastic model, previously has been validated against full-scale WT load data [3], [4] for neutral atmospheric boundary layer (ABL) conditions.

The DWM model has recently been generalized to non-neutral ABL stability conditions [5], [6], and its capability regarding WT load predictions in turn used to obtain insight in fundamentals of WF loading under such conditions [7]. However, a proper validation still remains. The purpose of the present work is thus to validate the generalized DWM model regarding load prediction under non-neutral ABL conditions, and at the same time demonstrate the importance of ABL stability with regard to loading of WTs operating in WF conditions.

Approach and results

The study utilizes the Lillgrund off-shore WF as validation case. The Lillgrund WF constitute an interesting case study for WF model validation, because the WT interspacing is small, which in turn means that wake effects are significant. The Lillgrund WF consists of 48 Siemens SWT-2.3-93 WT's, and one of these is instrumented with strain gauges resolving blade, main shaft and tower loads, respectively. These measurements have been made available by Siemens Wind Power, and they constitute probably one of the most comprehensive sets of wake affected wind turbine load measurements ever recorded. The measurement period extends from 2008-06-03 to 2013-03-19 – i.e. over a period of almost 5 years. Unfortunately, these measurements are not accompanied with meteorological mast measurements allowing for ABL stability classification. To compensate for this shortcoming, we have obtained access to meteorological measurements from the nearby Drogden off-shore light tower, which allows for ABL stability classification. We will assume that the proximity of the Drogden light tower to the Lillgrund WF, which is of the order of the extent of the WF, justify the use of these data to quantify the ABL stability at the Lillgrund site.

Classifying the load data according to ABL stability conditions allows for a one-to-one comparison of WT load simulations and measurements *conditioned on ABL stability condition*. The simulations are performed using the generalized DWM approach coupled to the state-of-the-art aeroelastic code HAWC2. As for the generalized DWM model, a spectral tensor including the effect of buoyancy [8] is used to drive the stochastic wake meandering.

For a multitude of wake situations (i.e. a variety of mean wind speeds and mean wind directions) the measured data set displays a considerable scatter as illustrated in Figure 1. The study will illuminate to

which degree this scatter can be attributed to ABL stability effects, and at the same time serve as a full-scale validation study of the coupled DWM/HAWC2 approach. Both blade and tower fatigue loads are analyzed, and important differences between rotating and non-rotating WT component loading will be touched on regarding the impact of ABL stability.

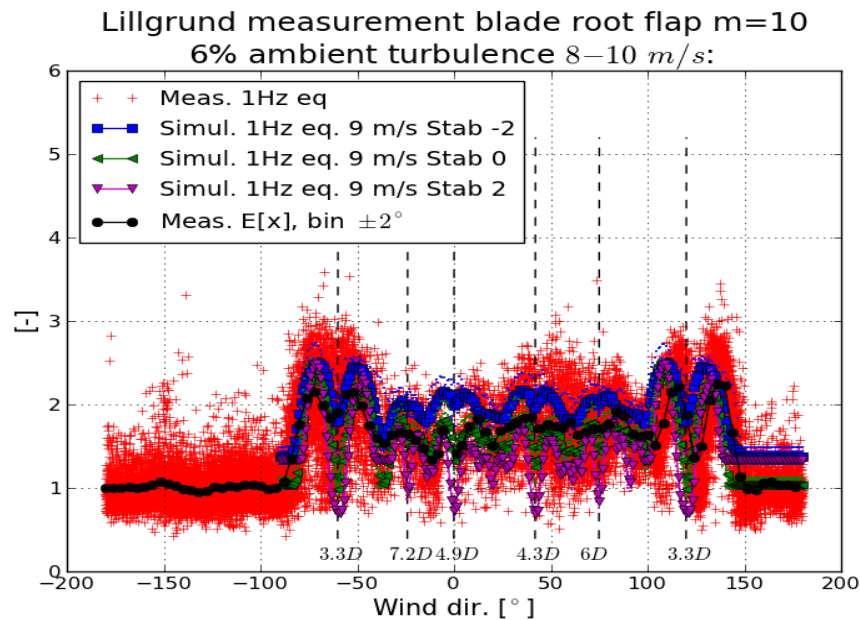


Figure 1: Normalized predicted and measured fatigue blade root flap moments from the Lillgrund WF for a complete 360 deg. polar. The simulations are performed for an ambient mean wind speed equal to 9m/s, and the measurements are associated with the mean wind speed bin interval [8m/s; 10m/s].

References

- [1] Ott S, Berg J and Nielsen M (2011). Linearised CFD Models for Wakes, Risoe-R-1772(EN).
- [2] Larsen GC, Madsen HAa, Thomsen K and Larsen TJ (2008). Wake meandering - a pragmatic approach. *Wind Energy*, **11**, pp. 377–395.
- [3] Larsen TJ, Madsen HAa, Larsen GC and Hansen KS (2012). Verification of the Dynamic Wake Meander Model for Loads and Power Production in the Egmond aan Zee Wind Farm. *Wind Energy*, **16**, pp. 605–624.
- [4] Larsen TJ, Larsen GC, Madsen HAa, Thomsen K and Pedersen SM (2015). Wake effects above rated wind speed - An overlooked contributor to high loads in wind farms. Scientific Proceedings, EWEA Annual Conference and Exhibition 2015, pp. 95-99.
- [5] Larsen GC, Machefaux E and Chougule A (2015). Wake meandering under non-neutral atmospheric stability conditions – theory and facts. *Journal of Physics: Conference Series (Online)*, **625**, 012036.
- [6] Machefaux E, Larsen GC, Tilman K, Troldborg N, Kelly MC, Chougule A, Hansen KS and Rodrigo JS (2016). An experimental and numerical study of the atmospheric stability impact on wind turbine wakes. *Wind Energy*, **19**, pp. 1785–1805.
- [7] Larsen GC, Larsen TJ and Chougule A. Medium fidelity modeling of loads in wind farms under non-neutral ABL stability conditions – a full-scale validation study. *Journal of Physics: Conference Series (Online)*, **854**, 012026.
- [8] Chougule A, Mann J, Kelly MC and Larsen GC (2016). Modeling atmospheric turbulence via rapid-distortion theory: spectral tensor of velocity and buoyancy. *Journal of the Atmospheric Sciences*, Vol. **74**, Issue 4, pp. 949–974.