

NASA Technical Memorandum 102562

Intensity to Frequency Conversion Technique in Intensity Modulated Fiber Optic Sensing Systems

G. Adamovsky
Lewis Research Center
Cleveland, Ohio

and

T.W. Carr
Case Western Reserve University
Cleveland, Ohio


March 1990

(NASA-TM-102562) INTENSITY TO FREQUENCY
CONVERSION TECHNIQUE IN INTENSITY MODULATED
FIBER OPTIC SENSING SYSTEMS (NASA) 7 p
CSCL 09C

N90-21277

63/33 0275327
Unclas

NASA

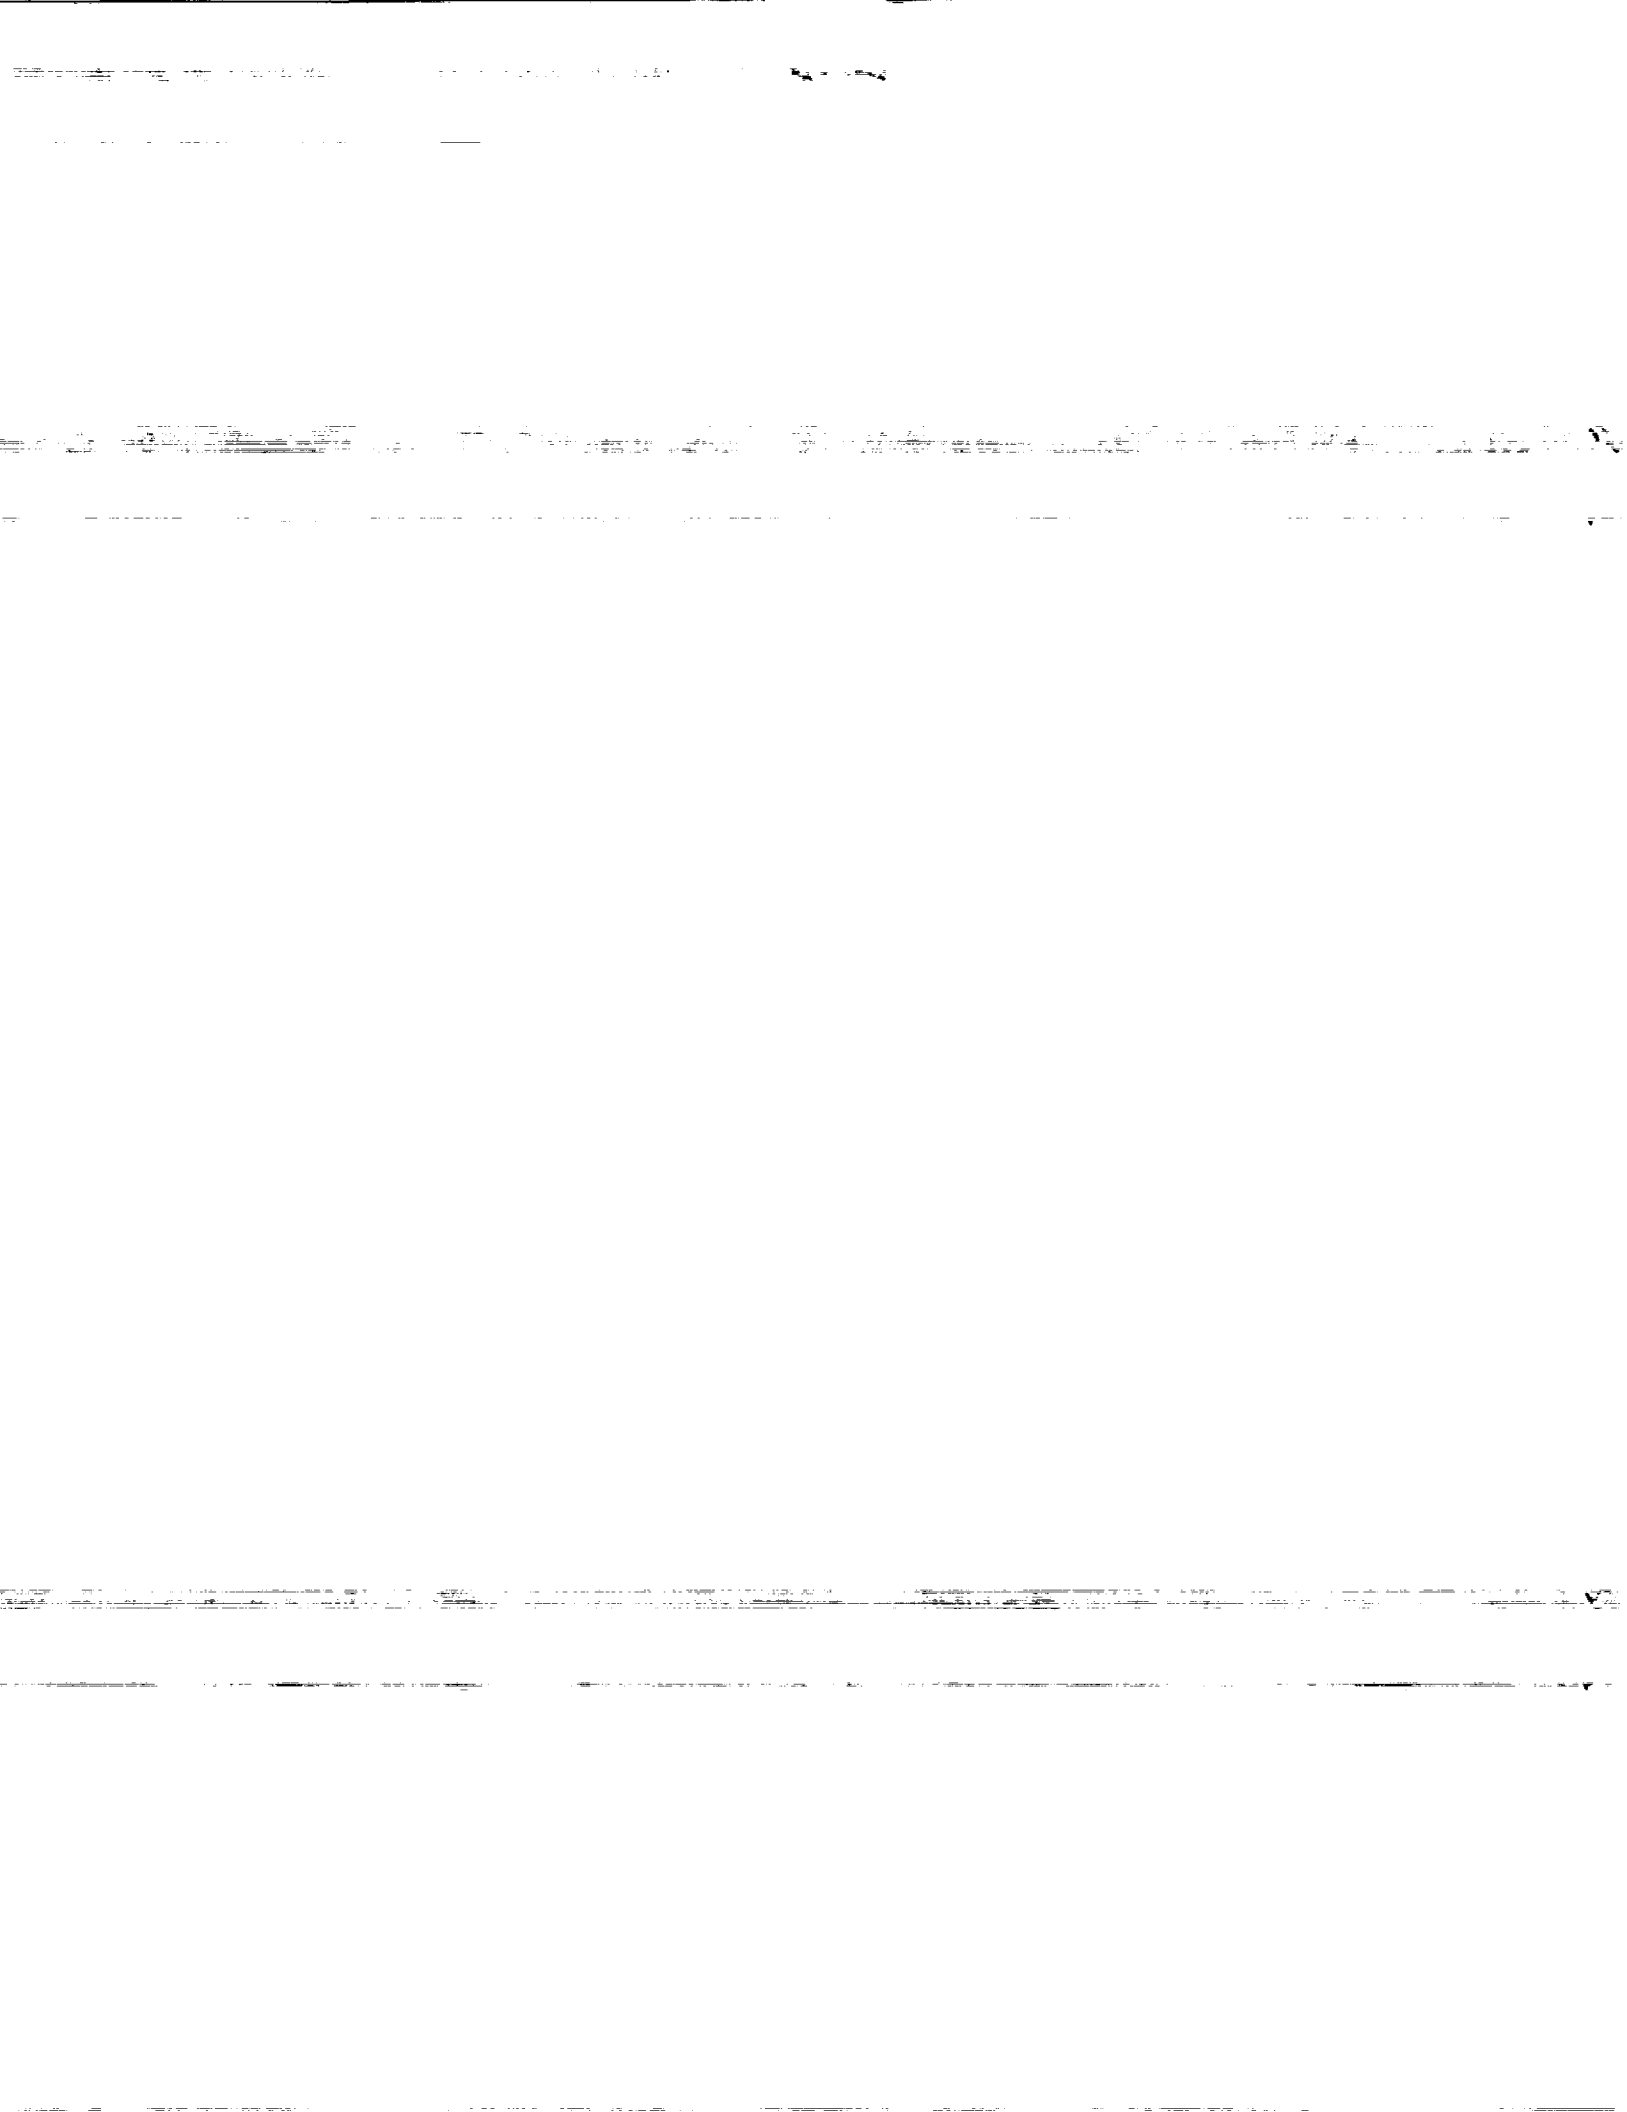

INTENSITY TO FREQUENCY CONVERSION TECHNIQUE IN INTENSITY
MODULATED FIBER OPTIC SENSING SYSTEMS

G. Adamovsky
National Aeronautics and Space Administration
Lewis Research Center
Cleveland, Ohio 44135, U.S.A.

and

T.W. Carr*
Case Western Reserve University
Cleveland, Ohio 44106, U.S.A.

ABSTRACT

A novel sensing technique based on intensity-to-frequency conversion is explained and demonstrated. Experimental data are presented and a comparison with a theoretical model is made.

Among different configurations of intensity modulated fiber optic sensing systems, those with the signal and reference channels separated in the time domain are the most commonly used. Such a configuration has been already discussed.¹ The configuration involves a short duration pulse sent towards a sensing element through a delay line. The resultant signal consists of two pulses, signal and reference. The measurand affects the amplitude of the signal pulse. The amplitude of the reference pulse remains unchanged. The information about the measurand is then retrieved from the relative amplitudes of the pulses in the signal and reference channels. Several techniques have been proposed to do this.^{2,3} These techniques are based on measuring either the relative amplitude of the pulses in the time domain directly or the strength of the resultant signal at particular frequencies in the frequency domain.

*Summer intern at NASA Lewis Research Center. Present address:
Northwestern University, Evanston, Illinois 60201, U.S.A.

The technique described in this paper employs a conversion from the relative intensity to a frequency value. To achieve the conversion, a signal in the reference channel consists of two pulses of the same amplitude V and duration t . The time delay between the first and second pulse in the reference double pulse is 2Δ . The signal channel consists of a single pulse of the same duration as the pulses in the reference channel. The signal pulse is delayed from the first reference pulse by Δ . Thus the signal pulse occurs in the middle of two reference pulses and forms a triple pulse. Assume that the pulses in this triple pulse have a rectangular shape and the triple pulse itself is periodic with a period T . Then, using Fourier analysis⁴ the amplitude spectrum of such a triple pulse can be written as:

$$|F(\omega_m)| = \frac{Vt}{T} \left| \frac{\sin(\omega_m t/2)}{\omega_m t/2} \right| \left[2 + a^2 + 4a \cos(\omega_m \Delta) + 2 \cos(2\omega_m \Delta) \right]^{0.5} \quad (1)$$

where ω_m is the angular frequency, $\omega_m = 2\pi m/T$, m is an integer, and a is a ratio of the amplitude of the second (signal) pulse to the amplitude of any other (reference) pulse in the triple pulse. Analyzing the last term in Eq. (1), the modulating factor S ,

$$S = \left[2 + a^2 + 4a \cos(\omega_m \Delta) + 2 \cos(2\omega_m \Delta) \right]^{0.5} \quad (2)$$

it is easy to show that the function $|F(\omega_m)|$ equals zero if the following relationship between frequency $f_m = \omega_m/2\pi$ and the coefficient a is satisfied:

$$a = -2 \cos(2\pi \Delta f_m) \quad (3)$$

Thus for any value of a from $0 \leq a \leq 2$ there is a frequency at which the function $|F(\omega_m)|$ goes to zero. A change in the value of a is reflected as a change in the value of the frequency at which the amplitude vanishes. This frequency will be referred to as the "zero" frequency f_0 . Figure 1 shows calculated plots of the modulating factor S described by Eq. (2) as a

function of the frequency $f_m = \omega_m/2\pi$ for three different values of a , $a = 1$, $1/2$, and 0 .

The experimental setup is shown in Fig. 2. An 18 ns duration repetitive light pulse from a light emitting diode (LED) enters a 1 by 3 optical coupler and is sent into three fiber ports. The repetition rate of the initial light pulse is 10 μ s. The ports are connected to fibers of different lengths to generate delays of approximately 36 and 72 ns for the second and the third pulses with respect to the first one. Another 3 by 1 optical coupler combines the three pulses into one triple pulse. To imitate a change in the amplitude of the second pulse, a variable attenuator (VA) with a readout (RO) is placed in the port used to generate this pulse. The triple pulse is then received by the photodetector (PD) and sent to the signal analyzer (SA). The position of the "zero" frequency on the displayed spectrum is observed and detected as a function of the ratio a , the relative intensity of the light pulse in the signal channel.

To obtain the experimental data, readings from the attenuator were used to calibrate the position of the "zero" frequency f_0 against the ratio a . This was done in three steps. In the first step, measurements were made to determine the relationship between a and the attenuator readings. The second set of data taken was to determine the relationship between the attenuator readings and the "zero" frequency. Finally, the relationship between a and f_0 was established. Data was taken 10 times at each datapoint and their average values were used later. During collection of the first set of measurements the standard deviation from the average of a at each datapoint did not exceed 0.015. At the second stage the maximum deviation of the average value of the "zero" frequency from the predicted one at each datapoint did not exceed 1 percent of the average value at that datapoint. The theoretical and experimental data for the "zero" frequency tracking is presented in Fig. 3.

The technique described is inherently independent of the reference pulse amplitude. A system based on this technique performs the intensity to frequency conversion and determines the relative intensity of the light pulse in the signal channel without actually measuring the intensity. Thus, a novel sensing technique has been demonstrated. The experimental results match closely with that predicted. The accuracy and repeatability of the measurements could be improved by choosing an appropriate repetition rate and by improving the "zero" frequency detection technique.

REFERENCES

- 1 SPILLMAN, W.B., and LORD, J.R.: 'Self-referencing multiplexing technique for fiber-optic intensity sensors', J. Lightwave Technol., 1987, LT-5, pp. 865-869
- 2 ADAMOVSKY, G., and PILTCH, N.D.: 'Fiber-optic thermometer using temperature dependent absorption, broadband detection, and time domain referencing', Appl. Opt., 1986, 25, pp. 4439-4443
- 3 ADAMOVSKY, G.: 'Fiber-optic displacement sensor with temporally separated signal and reference channels', Appl. Opt., 1988, 27, pp. 1313-1315
- 4 SCHWARTZ, M.: 'Information, transmission, modulation, and noise' (McGraw-Hill, 1980), 3rd ed.

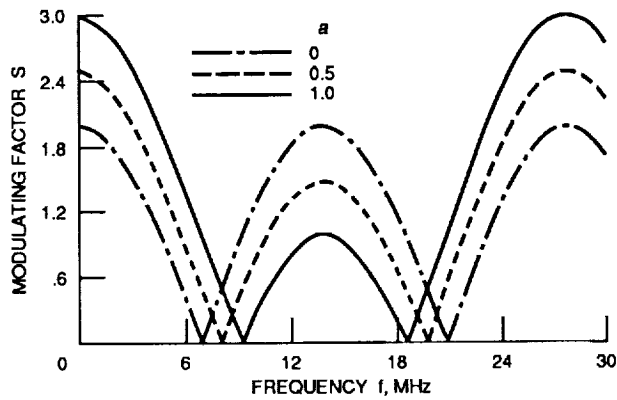


Figure 1. - Calculated plots of the modulating factor S described by Eq. (2) for three values of a , $a = 1, 1/2$, and 0 .

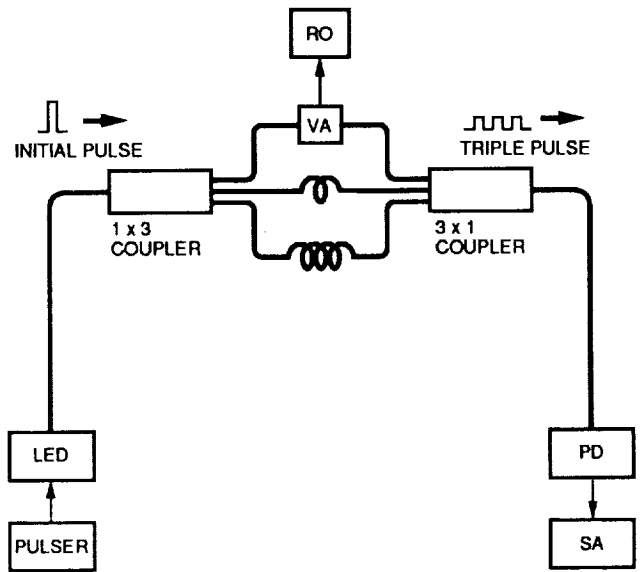


Figure 2. - Schematic of experimental setup LED = light emitting diode, VA = variable attenuator, RO = readout, PD = photodetector, SA = signal analyzer.

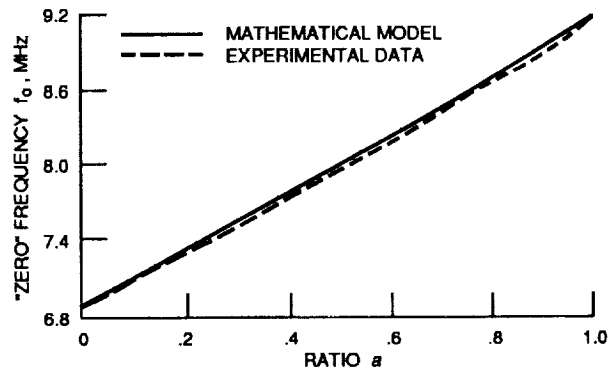


Figure 3. - Theoretical and experimental plots of the "zero" frequency f_0 as function of the ratio a .



Report Documentation Page

1. Report No. NASA TM-102562	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Intensity to Frequency Conversion Technique in Intensity Modulated Fiber Optic Sensing Systems		5. Report Date March 1990	6. Performing Organization Code
		8. Performing Organization Report No. E-5376	
7. Author(s) G. Adamovsky and T.W. Carr		10. Work Unit No. 505-62-01	
		11. Contract or Grant No.	
9. Performing Organization Name and Address National Aeronautics and Space Administration Lewis Research Center Cleveland, Ohio 44135-3191		13. Type of Report and Period Covered Technical Memorandum	
		14. Sponsoring Agency Code	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D.C. 20546-0001		15. Supplementary Notes G. Adamovsky, NASA Lewis Research Center. T.W. Carr, Case Western Reserve University, Cleveland, Ohio 44106 and Summer Intern at NASA Lewis Research Center; present address: Northwestern University, Evanston, Illinois 60201.	
16. Abstract A novel sensing technique based on intensity-to-frequency conversion is explained and demonstrated. Experimental data are presented and a comparison with a theoretical model is made.			
17. Key Words (Suggested by Author(s)) Fiber optics Sensing Referencing		18. Distribution Statement Unclassified - Unlimited Subject Category 33	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of pages 6	22. Price* A02