



University of HUDDERSFIELD

University of Huddersfield Repository

Yang, Shuming and Jiang, Xiang

The beam propagation method used for the design of an integrated optical coupler

Original Citation

Yang, Shuming and Jiang, Xiang (2007) The beam propagation method used for the design of an integrated optical coupler. In: Proceedings of Computing and Engineering Annual Researchers' Conference 2007: CEARC'07. University of Huddersfield, Huddersfield, pp. 1-6.

This version is available at <http://eprints.hud.ac.uk/3701/>

The University Repository is a digital collection of the research output of the University, available on Open Access. Copyright and Moral Rights for the items on this site are retained by the individual author and/or other copyright owners. Users may access full items free of charge; copies of full text items generally can be reproduced, displayed or performed and given to third parties in any format or medium for personal research or study, educational or not-for-profit purposes without prior permission or charge, provided:

- The authors, title and full bibliographic details is credited in any copy;
- A hyperlink and/or URL is included for the original metadata page; and
- The content is not changed in any way.

For more information, including our policy and submission procedure, please contact the Repository Team at: E.mailbox@hud.ac.uk.

<http://eprints.hud.ac.uk/>

THE BEAM PROPAGATION METHOD USED FOR THE DESIGN OF AN INTEGRATED OPTICAL COUPLER

S. Yang, X. Jiang

Centre for Precision Technologies, University of Huddersfield, Huddersfield, HD1 3DH, UK

ABSTRACT

The beam propagation method (BPM) used for the design of an integrated optical (IO) coupler was proposed in this paper. A modal of the IO coupler was set up in BeamPROP software that is based on the BPM, and then the modes and the bi-directional propagation in the proposed coupler were investigated. Finally, the structure and dimension of the coupler was determined.

Keywords: IO coupler, BPM, BeamPROP

1 INTRODUCTION

The techniques for handling both uniform and nonuniform structures include beam propagation method (BPM), the method of lines (MoL) and the coupled mode theory etc [1]. In these techniques, the BPM is the most widely used propagation technique for modelling integrated and fibre optic photonic devices, and most commercial software for such modelling is based on it. This method is conceptually straightforward, efficient, flexible and extensible.

There are already many applications of the BPM to modelling different aspects of photonic devices or circuits, such as passive waveguiding devices [2], channel-dropping filters [3], electro-optic modulators [4], multimode waveguide devices [5,6], ring lasers [7], optical delay line circuits [8,9], novel y-branches [10], optical interconnects [11], polarization splitters [12], multimode interference devices [13,14], adiabatic couplers [15], waveguide polarizers [16], polarization rotators [17] etc. In this paper, the BPM will be used for the design of an integrated optical (IO) coupler.

2 METHODOLOGY

The BPM is a particular approach for approximating the exact wave equation for monochromatic waves and solving the resulting equations numerically. The wave equation can be written in the form of the well-known Helmholtz equation based on the scalar field assumption

$$\frac{\partial^2 \phi}{\partial x^2} + \frac{\partial^2 \phi}{\partial y^2} + \frac{\partial^2 \phi}{\partial z^2} + k(x, y, z)^2 \phi = 0 \quad (1)$$

where $\phi(x, y, z)$ is the phase field and it can be obtained by $E(x, y, z, t) = \phi(x, y, z)e^{-i\omega t}$; $E(x, y, z, t)$ is the scalar electric field. The notation $k(x, y, z) = k_0 n(x, y, z)$ has been introduced for the spatially dependent wavenumber, where $k_0 = 2\pi / \lambda$.

Considering that in typical guided-wave problems the most rapid variation in the field ϕ is the phase variation due to propagation along the guiding axis, and assume that axis is predominantly along the z direction, it is beneficial to factor this rapid variation out of the problem by introducing a so-called slowly varying field u via the ansatz

$$\phi(x, y, z) = u(x, y, z)e^{i\bar{k}z} \quad (2)$$

where \bar{k} is a constant number to be chosen to represent the average phase variation of the field ϕ . It is also referred to the reference wavenumber, $\bar{k} = k_0 \bar{n}$ (\bar{n} is the reference refractive index). Introducing the above expression into the Helmholtz equation yields the following equation for the slowly varying field

$$\frac{\partial^2 u}{\partial z^2} + 2i\bar{k} \frac{\partial u}{\partial z} + \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} + (k^2 - \bar{k}^2)u = 0 \quad (3)$$

At this point the above equation is completely equivalent to the exact Helmholtz equation, except that it is expressed in terms of u . It is now assumed that the variation of u with z is sufficiently slow so that the first term above can be neglected with respect to the second; this is the familiar slowly varying envelope approximation and in this context it is also referred to as the paraxial or parabolic approximation. With this assumption and after slight rearrangement, the above equation reduces to

$$\frac{\partial u}{\partial z} = \frac{i}{2k} \left(\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} + (k^2 - \bar{k}^2) u \right) \quad (4)$$

This is the basic BPM equation in three dimensions (3D); simplification to two dimensions (2D) is obtained by omitting any dependence on y . Given an input field, $u(x, y, z = 0)$, the above equation determines the evolution of the field in the space $z > 0$.

3 SIMULATION AND RESULTS

For the proposed IO coupler, single mode and low propagation loss are basic requirements. In order to determine the structure and dimensions of the IO coupler, a modal is set up in BeamPROP software as shown in Figure 1, and then the mode and bi-directional propagation in the IO coupler modal are investigated. In this modal, the proposed IO coupler is designed to be composed of two identical square-cross-section channel waveguides. It is supposed that the coupler divides the light entering one of the input ports about equally over both output ports. The free space wavelength is $1.55\mu\text{m}$; the background index is 1.46; the index difference between the core and the claddings is 0.75%; waveguide width is $6\mu\text{m}$; the output waveguide pitch is approximately 0.25mm, which is dependent on the chip packaging; the bend radii of waveguide are 5mm, which can ensure that bending loss is very low [18]; the coupling length is 1mm. The size of the whole coupler is proposed to be $12\text{mm} \times 16\text{mm}$.

3.1 MODE SOLVING

There are several mode-solving techniques based on BPM have been developed. The earliest one is the correlation method, and it was used to calculate modes and dispersion characteristics of multimode fibres [19]. Recently, a technique referred to as the imaginary distance BPM has been developed which is generally significantly faster [20]. In both BPM-based mode-solving techniques a given incident field is launched into a geometry with z -invariant. Since the structure is uniform along z , the propagation can be equivalently described in terms of the modes and propagation constants of the structure. Considering 2D propagation of a scalar field for simplicity, the incident field, $\phi_{in}(x)$, can be expanded in the mode of the structure as

$$\phi_{in}(x) = \sum_m c_m \phi_m(x) \quad (5)$$

Then the propagation through the structure can be expressed as

$$\phi(x, z) = \sum_m c_m \phi_m(x) e^{i\beta_m z} \quad (6)$$

In this paper, the imaginary distance BPM is used. As the name implies, in the imaginary distance BPM the longitudinal coordinate z is replaced by $z' = iz$, so that propagation along this imaginary axis should follow

$$\phi(x, z') = \sum_m c_m \phi_m(x) e^{\beta_m z'} \quad (7)$$

The essential idea of the method is to launch an arbitrary field and propagate the field through the structure along the imaginary axis.

At the input side, a Gaussian pulse of the form $\exp(-x^2/a^2)$ is used, where $a = w/2$ and w is the width of the input waveguide. The full transparent boundary condition (TBC) is applied to determine the boundary conditions because it effectively lets radiation pass through the boundary and leave the computational domain. Figure 2 shows the mode profile. In Figure 2, the fundamental mode ($m=0$) has the highest propagation constant, and its contribution to the field has the highest growth rate and dominates all other modes after a certain distance, leaving only the field pattern $\phi_0(x)$. Higher order modes can be obtained by using an orthogonalization procedure to subtract contributions from lower order modes while performing the propagation [21]. Figure 3 shows the mode spectrum. The mode

spectrum represents the fast Fourier transform (FFT) of the correlation function. The frequency axis in these graphs is defined by the mode effective index minus the reference index.

3.2 BI-DIRECTIONAL PROPAGATION

If the coupler waveguides have a good uniformity, the loss caused by bi-directional propagation will be small and the guided wave propagation in the proposed waveguides will be very smooth. Various bi-directional BPM techniques have been considered to address backward travelling waves as a separate, though coupled, part of the problem [22], with most focusing on the coupling that occurs through reflection of a wave incident on an interface along z . The guided wave propagation is divided into regions that are uniform along z , and the interfaces between these regions. At any point along the structure it is considered that both forward and backward waves can exist, which are denoted by $u^+(x, y, z)$ and $u^-(x, y, z)$, respectively. In the uniform regions the forward and backward waves are decoupled, while the interfaces between these regions couple the forward and backward waves due to reflection. The essential idea is to employ a transfer matrix approach in which the individual matrices are differential operators [23]. The physical problem generally has the incident (forward) field given at the input of the structure, and the goal is to determine the reflected (backward) field at the beginning and the transmitted (forward) field at the output. The transfer matrix problem, however, is formulated by assuming that both the forward and backward fields are known at the input of the structure, and an overall transfer matrix, M , then describes the system as follows

$$\begin{pmatrix} u_{out}^+ \\ u_{out}^- \end{pmatrix} = M \begin{pmatrix} u_{in}^+ \\ u_{in}^- \end{pmatrix} \quad (8)$$

Given incident field (u_{in}^+), the above is solved iteratively for reflected field (u_{in}^-) such that the backward field at the output is zero ($u_{out}^- = 0$). The transfer matrix M describing the entire structure is composed of successive applications of propagation and interface matrices.

The simulation results of the single and bi-directional propagations are shown in Figures 4 and 5 respectively. It is obvious that the propagation in Figure 5 is not as smooth as the one in Figure 4; there are some drift produced during the bi-directional propagation that is mainly caused by the nonuniform waveguide geometry. Therefore, In order to reduce the influence caused by bi-directional propagation, the waveguides should have a good uniformity.

4 CONCLUSIONS

The BeamPROP software based on BPM was used for the proposed IO coupler design. A modal of the IO coupler was built up, and then the modes in the coupler waveguides and the bi-directional propagation were investigated. It was found that only one mode existed in the proposed IO coupler and the bi-directional propagation produced some loss; however, the influence of bi-directional propagation can be reduced if the uniformity of the coupler waveguides is good enough. After carefully considering the application requirements and the simulation results, the dimension and structure of the proposed IO coupler was determined. They were shown in Figures 6 and 7 respectively. The size of the whole coupler was 12mm×16mm; the output waveguide pitch was approximately 0.25mm; the bend radii of waveguide were 5mm; the coupling length was 1mm. The proposed IO coupler was designed to be composed of two identical square-cross-section channel waveguides. The core was doped with Germanium (Ge) while the lower and upper cladding layers were both co-doped with boron (B) so as to realise a low refractive index contrast of 0.75% between the core and cladding layers; the core width and height were both 6μm; the heights of the upper and lower cladding layers were both 15μm.

REFERENCES

- [1] SCARMOZZINO R., GOPINATH A., PREGLA R., HELFERT S. (2000), *Numerical Techniques for Modeling Guided-Wave Photonic Devices*, IEEE J. Quantum Elect., Vol. 6, No.1, pp.150-162.
- [2] ELDADA L., RUBERTO M.N., SCARMOZZINO R., LEVY M., OSGOOD R.M. (1992), *Laser-Fabricated Low-Loss Single-Mode Waveguiding Devices in GaAs*, J. Lightwave Tech., Vol.10, pp. 1610.

- [3] LEVY M., ELDADA L., SCARMOZZINO R., OSGOOD R.M., LIN P.S.D., TONG F. (1992), *Fabrication of Narrow-Band Channel-Dropping Filters*, *Photon. Tech. Lett.*, Vol.4, pp.1378.
- [4] ELDADA L., RUBERTO M.N., LEVY M., SCARMOZZINO R., OSGOOD R.M. (1994), *Rapid Direct Fabrication of Active Electro-Optic Modulators in GaAs*, *J. Lightwave Tech.*, Vol.12, pp.1588.
- [5] LLIC I., SCARMOZZINO R., OSGOOD R.M., YARDLEY J.T., BEESON K.W. MCFARLAND M.J. (1994), *Modeling Multimode-Input Star Couplers in Polymers*, *J. Lightwave Tech.*, Vol. 12, pp.996.
- [6] LLIC I., SCARMOZZINO R., OSGOOD R.M., YARDLEY J.T., BEESON K.W. MCFARLAND M.J., SCHWEYEN J. (1997), *Photopatterned Polymer Multimode 8x8 Star Couplers: Comparative Design Methodologies and Device Measurements*, *IEICE Trans. Commun.*, Vol. E80-B.
- [7] SHIH M.C., HU M., FREILER M.B., LEVY M., SCARMOZZINO R., OSGOOD R.M., TAO I.W., WANG W.I.(1995), *Fabrication of an InGaAs SQW Circular Ring Laser By Direct Laser Patterning*, *Appl. Phys. Lett.*, Vol. 66, pp.2608.
- [8] ELDADA L., SCARMOZZINO R., OSGOOD R.M., SCOTT D.C., CHANG Y., FETTERMAN H.R. (1995), *Laser-Fabricated Delay Lines in GaAs for Optically-Steered Phased-Array Radar*, *J. Lightwave Tech.*, Vol. 13, pp.2034.
- [9] HU M.H., HUANG Z., HALL K.L., SCARMOZZINO R., OSGOOD R.M. (1998), *An Integrated Two-Stage Cascaded Mach-Zehnder Device in GaAs*, *J. Lightwave Tech.*, Vol. 16, pp.1447-1455.
- [10] HU M. H., SCARMOZZINO R., LEVY M., OSGOOD R.M. (1997), *A low-loss and compact waveguide y-branch using refractive index tapering*, *Photon. Tech. Lett.*, Vol.9, pp.203-205.
- [11] SCARMOZZINO R., OSGOOD R.M., ELDADA L., YARDLEY J.T., LIU Y., BRISTOW J., STACK J., ROWLETTE J. LIU Y.S.(1997), *Design and Fabrication of Passive Optical Components for Multimode Parallel Optical Links*, *SPIE Photonic West Meeting*, San Jose, CA, Vol. 3005, pp.257.
- [12] HU M., HUANG J.Z., SCARMOZZINO R., LEVY M., OSGOOD R.M. (1997), *Tunable Mach-Zehnder polarization splitter using height-tapered y-branches*, *Photon. Tech. Lett.*, Vol. 9, pp.773-775.
- [13] LEVY D.S., LI Y.M., SCARMOZZINO R., OSGOOD R.M. (1997), *A Multimode Interference-Based Variable Power Splitter in GaAs-AlGaAs*, *Photon. Tech. Lett.*, Vol. 9, pp.1373-1375.
- [14] LEVY D.S., PARK K.H., SCARMOZZINO R., OSGOOD R.M., DRIES C., STUDENKOV P.,FORREST S.(1999), *Fabrication of ultracompact 3-dB 2x2 MMI power splitters*, *Photon. Tech. Lett.*, Vol 11, pp.1009-1011.
- [15] RAMADAN T.A., SCARMOZZINO R., OSGOOD R.M.(1998), *Adiabatic Couplers: Design Rules and Optimization*, *J. Lightwave Tech.*, Vol. 16, pp.277-283.
- [16] FUJITA J., LEVY M., SCARMOZZINO R., OSGOOD R.M., ELDADA L., YARDLEY J.T. (1998), *Integrated Multistack Waveguide Polarizer*, *Photon. Tech. Lett.*, Vol. 10, pp.93-95.
- [17] HUANG J. Z., SCARMOZZINO R., NAGY G., STEEL M. J., OSGOOD R. M.(2000), *Realization of a compact and single-mode optical passive polarization converter*, *Photon. Tech. Lett.*, Vol. 12, pp.317-319.
- [18] HUNSPERGER R. G. (1995), *Integrated Optics Theory and Technology*, Fourth Edition, Springer-Verlag Berlin Heidelberg, pp.83-87.
- [19] FEIT M.D., FLECK J.A. (1980), *Computation of mode properties in optical fiber waveguides by a propagating beam method*, *Appl. Optics*, Vol. 19, pp.1154.
- [20] JUNGLING S., CHEN J.C.(1994), *A study and optimization of eigenmode calculations using the imaginary-distance beam-propagation method*, *J. Quantum Electron.*, Vol. 30, pp.2098.
- [21] CHEN J.C., JUNGLING S.(1994), *Computation of higher-order waveguide modes by the imaginary-distance beam propagation method*, *Optical and Quantum Electron.*, Vol. 26, pp.S199-S205.
- [22] CHUNG Y., DAGLI N. (1992), *Modeling of guided-wave optical components with efficient finite-difference beam propagation methods*, *Tech. Dig. IEEE AP-S Int. Symp.*, Vol. 1, pp.248-251.
- [23] RAO H., SCARMOZZINO R., OSGOOD R.M.(1999), *A bidirectional beam propagation method for multiple dielectric interfaces*, *Photon. Technol. Lett.*, Vol. 11, pp.830-832.

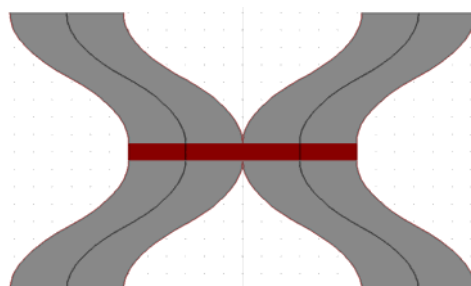


Figure 1: The IO coupler modal

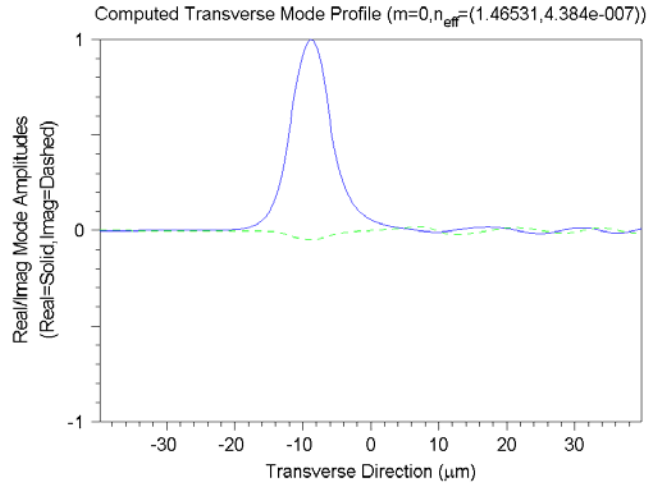


Figure 2: The mode profile

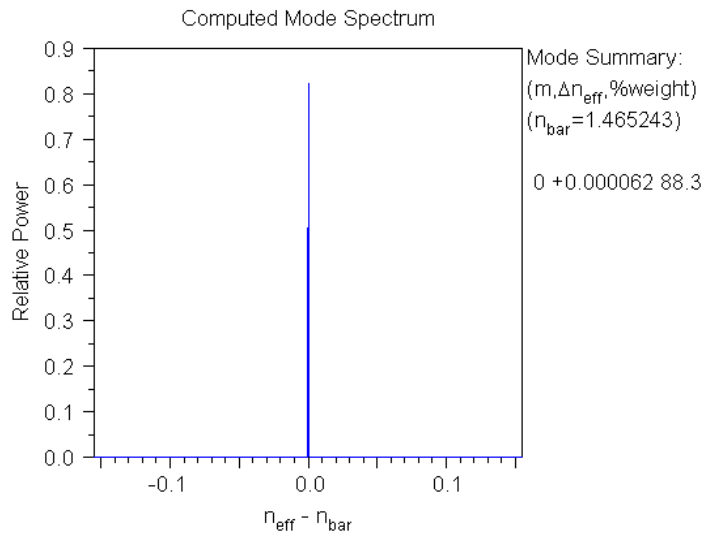


Figure 3: The mode spectrum

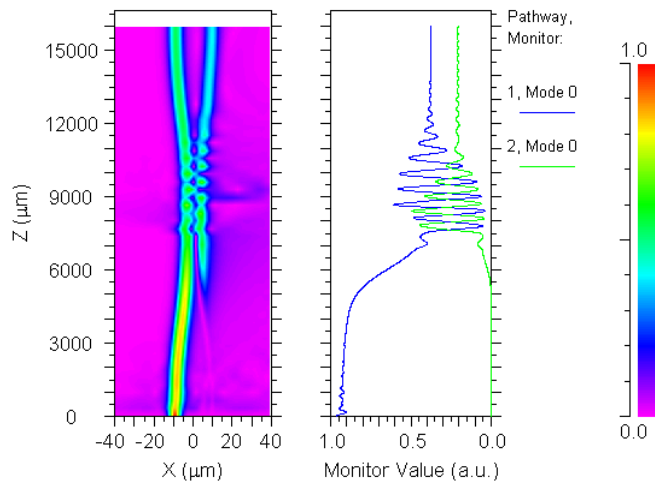


Figure 4: The single direction simulation results

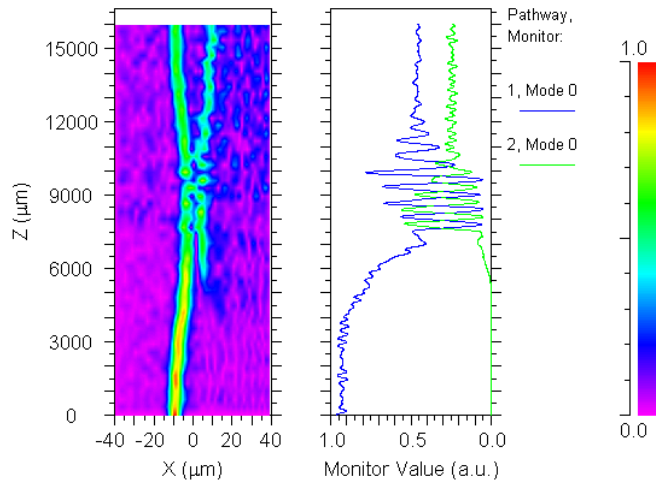


Figure 5: The bi-directional simulation results

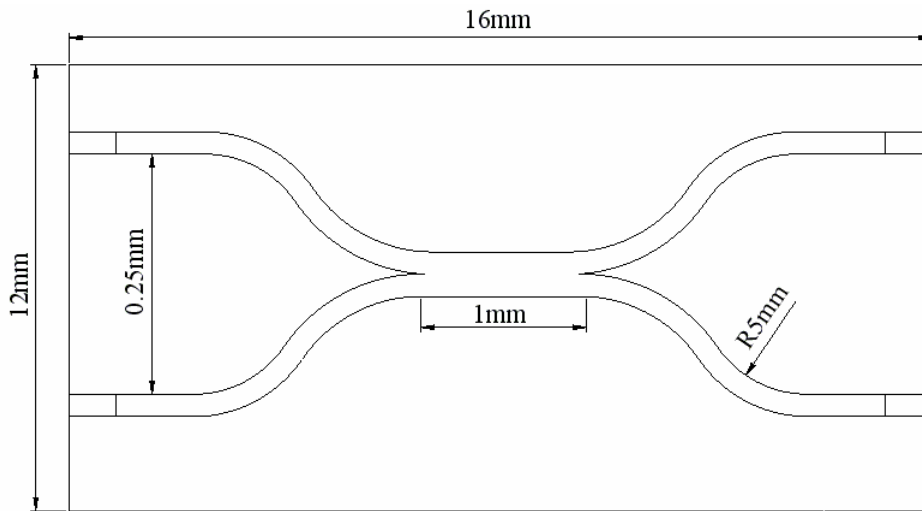


Figure 6: The dimension of the IO coupler

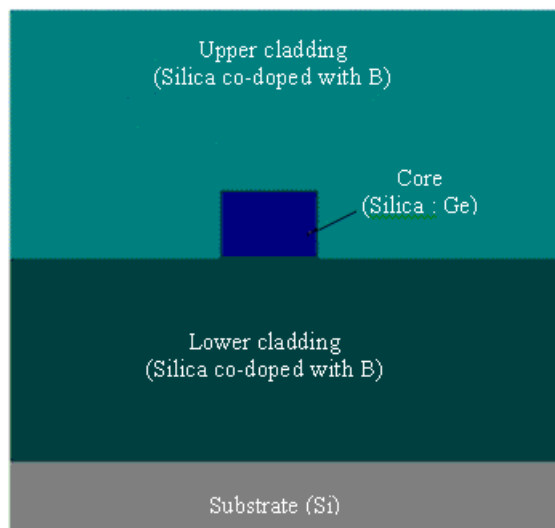


Figure 7: The structure of the coupler waveguide