


1001-10100  
NASA CR-99492

Office of Naval Research  
Contract N00014-67-A-0298-0006 NR-372-012  
NATIONAL AERONAUTICS AND SPACE ADMINISTRATION  
Grant NGR 22-007-068

**COMPUTATION OF OPTIMAL SINGULAR CONTROLS**

**CASE FILE  
COPY**



By

**D. H. Jacobson, S. B. Gershwin and M. M. Lele**

**January 1969**

**Technical Report No. 580**

This document has been approved for public release and sale; its distribution is unlimited. Reproduction in whole or in part is permitted by the U. S. Government.

**Division of Engineering and Applied Physics  
Harvard University • Cambridge, Massachusetts**

Office of Naval Research

Contract N00014-67-A-0298-0006

NR-372-012

National Aeronautics and Space Administration

Grant NGR 22-007-068

COMPUTATION OF OPTIMAL SINGULAR CONTROLS

By

D. H. Jacobson, S. B. Gershwin and M. M. Lele

Technical Report No. 580

This document has been approved for public release and sale; its distribution is unlimited. Reproduction in whole or in part is permitted by the U. S. Government.

January 1969

The research reported in this document was made possible through support extended the Division of Engineering and Applied Physics, Harvard University by the U. S. Army Research Office, the U. S. Air Force Office of Scientific Research and the U. S. Office of Naval Research under the Joint Services Electronics Program by Contracts N00014-67-A-0298-0006, 0005, and 0008 and by the National Aeronautics and Space Administration under Grant NGR 22-007-068.

Division of Engineering and Applied Physics

Harvard University · Cambridge, Massachusetts

# COMPUTATION OF OPTIMAL SINGULAR CONTROLS

By

D. H. Jacobson, S. B. Gershwin and M. M. Lele

Division of Engineering and Applied Physics

Harvard University · Cambridge, Massachusetts

## ABSTRACT

A class of singular control problems is made non-singular by the addition of an integral quadratic functional of the control to the cost functional; a parameter  $\epsilon > 0$  multiplies this added functional. The resulting non-singular problem is solved for a monotone decreasing sequence of  $\epsilon$ 's;  $\epsilon_1 > \epsilon_2 \dots > \epsilon_k > 0$ . As  $k \rightarrow \infty$ , and  $\epsilon_k \rightarrow 0$ , the solution of the modified problem tends to the solution of the original singular problem. A variant of the method which does not require that  $\epsilon \rightarrow 0$  is also presented. Four illustrative numerical examples are described.

## 1. Introduction

In recent years singular control problems have received attention [1]-[8].<sup>†</sup> However, researchers have concerned themselves mainly with necessary conditions of optimality, and the computation of singular extremals appears to have been ignored except for the experiments of Bass [4], Kelley [9], Johansen [10] and Pagurek [11]. Johansen has pointed out that the convergence of the gradient method on singular control problems is slow indeed. Jacobson and Lele solved singular problems arising in [12] by using the conjugate gradient method [13]; the convergence rate was acceptable, but in that class of problems no control constraints are present, so that the conjugate gradient method can be applied without modification. When control constraints are present, the conjugate gradient method should be modified<sup>‡</sup>; one possible modification has been suggested [11].

In [15] a second-order algorithm is described for solving optimal, non-singular, control problems with control variable inequality constraints. Being second-order, the algorithm exhibits quadratic convergence when the priming trajectory is sufficiently close to the optimal. In this paper, a class of singular control problems is made non-singular by the addition of an integral quadratic functional of the control to the cost functional; a parameter  $\epsilon > 0$  multiplies this added functional. The algorithm of [15]<sup>‡</sup> is then used to successively solve

---

† Many additional references are given in [3], [5] and [6].

‡ Alternatively, the control constraints can be transformed away, using Valentine's device [14].

‡ The control inequality constraints could be transformed away, using Valentine's device; this would allow one to use an algorithm for unconstrained problems which is also described in [15].

this modified problem for a monotone decreasing sequence of  $\epsilon$ 's;  $\epsilon_1 > \epsilon_2 \dots > \epsilon_k > 0$ . As  $k \rightarrow \infty$ , and  $\epsilon_k \rightarrow 0$ , the solution of the modified problem tends to the solution of the original singular problem. A proof of convergence of the method is given in Section 5. The method is similar to the penalty function techniques of solving state variable constrained problems [16], [17] and [18]. However, here the 'penalty' is successively reduced rather than increased. As  $\epsilon$  tends to zero, so the modified problem tends to become singular, which may result in computational sensitivity. A variant<sup>†</sup> of the modified problem is described which allows the use of a small value of  $\epsilon$ , which is not made to approach zero whilst still ensuring convergence to the required singular control. A proof of convergence of this variant is given in Section 5. The techniques described in this paper are equally applicable to purely bang-bang control problems, and provide alternatives to the methods described in [21] and [22]. Four small control problems are solved to illustrate the usefulness of the methods. It is hoped that in a future paper, the computation of a seven state variable, three control, nearly singular, model of a binary distillation column will be described.

## 2. Preliminaries

Consider a dynamical system described by the differential equation:

$$\dot{x} = f_1(x, t) + f_u(x, t)u \quad ; \quad x(t_0) = x_0 \quad (1)$$

Here,  $x$  is an  $n$ -dimensional state vector and  $u$  is a scalar control.  $f_1$  and  $f_u$  are  $n$ -dimensional vector functions. The control  $u$  is constrained in the following way:

---

<sup>†</sup> Similar notions have been used by Ho [19] and Powell [20] in penalty function methods.

$$|u(t)| \leq 1 \quad ; \quad t \in [t_0, t_f] \quad (2)$$

The performance index, or cost functional, is:

$$\hat{V}[u(\cdot)] = \int_{t_0}^{t_f} L(x, t) dt + F(x(t_f)) \quad (3)$$

where the final time  $t_f$  is given explicitly. The functions  $f_1$ ,  $f_u$ ,  $L$  and  $F$  are assumed to be three times continuously differentiable in each argument.

The object of the control problem is to choose the control function  $u(\cdot)$  to satisfy (2) and minimize  $\hat{V}[u(\cdot)]$ . It is well known that the optimal control function for this class of problems consists, in general, of bang-bang and singular sub-arcs. Whilst purely bang-bang optimal controls can be calculated, using, for example, the methods described in [21] and [22], determination of optimal controls consisting of both bang-bang and singular sub-arcs is not straightforward.

### 3. The $\epsilon$ -Algorithm

In place of (3), consider the modified cost functional

$$V[u(\cdot), \epsilon_k] = \int_{t_0}^{t_f} [L(x, t) + \frac{\epsilon_k}{2} u^2] dt + F(x(t_f)) \quad (4)$$

where

$$\epsilon_k > 0 \quad (5)$$

Define the following as the " $\epsilon$ -problem": minimize (4) subject to (1), (2). The  $\epsilon$ -problem is non-singular, and can be solved using, say, the second-order algorithm described in [15].

#### Description of the $\epsilon$ -Algorithm:

1) Choose a starting value  $\epsilon_1 > 0^\dagger$ , and a nominal control function  $\bar{u}_1(\cdot)$ .

---

$\dagger$  The starting value  $\epsilon_1$  may be chosen heuristically.

- 2) Solve the resulting  $\epsilon_k$ -problem ( $k = 1$ , initially) using the algorithm of [15]; this yields a minimizing control function  $u_k(\cdot)$ .
- 3) Choose  $\epsilon_{k+1} < \epsilon_k^\dagger$ , and set  $\bar{u}_{k+1}(\cdot) = u_k(\cdot)$ ,  $k = k + 1$  and go to 2).
- 4) Computation is terminated when:

- either, a)  $\epsilon_k$  is so small that numerical instability occurs
- or, b)  $\epsilon_k < \sigma$ ,  $\sigma$  a small, pre-determined positive quantity.

In Section 5 it is proved that as  $k \rightarrow \infty$ , so  $u_k(\cdot) \rightarrow u^0(\cdot)$  -- the optimal control function of the original problem.

In the above algorithm, as  $k \rightarrow \infty$ , so the modified problem tends to become singular; this can lead to numerical difficulties<sup>‡</sup> when using the algorithm of [15] to solve the modified problem. A variant of the ' $\epsilon$ -Algorithm' which overcomes these difficulties is described in the next section.

#### 4. The $\epsilon$ - $a(\cdot)$ -Algorithm

The algorithm of Section 3 is used until  $\epsilon$  is reduced to a small value.<sup>‡</sup> Let this value of  $\epsilon$  be denoted  $\epsilon_N$ .

Consider the cost functional:

$$W[u(\cdot), \epsilon_N, a_s(\cdot)] = \int_{t_0}^{t_f} [L(x, t) + \frac{\epsilon_N}{2} (u - a_s)^2] dt + F(x(t_f)) \quad (6)$$

Define the following as the " $\epsilon$ - $a(\cdot)$ -problem": minimize (6) subject to (1), (2), where  $a(\cdot)$  is some piecewise continuous function defined on  $t_0 \leq t \leq t_f$ .

---

<sup>†</sup> The amount by which  $\epsilon$  is reduced at each step 3) depends on the particular problem; setting  $\epsilon_{k+1} = \epsilon_k/10$  was found to be adequate in the problems tried (Section 6).

<sup>‡</sup> Similar difficulties occur when using penalty functions [16]-[19].

<sup>‡</sup> Two possible criteria for deciding the smallness of  $\epsilon$  are given in Section 6.

Description of the  $\epsilon$ - $\alpha(\cdot)$ -Algorithm:

- 1) Set  $\alpha_1(\cdot) = u_N(\cdot)$  and  $\bar{u}_1(\cdot) = u_N(\cdot)$ .
- 2) Solve the resulting  $\epsilon_N$ - $\alpha_s(\cdot)$ -problem ( $s = 1$  initially) using the algorithm of [15]. This yields a minimizing control function  $u_s(\cdot)$ .
- 3) Set  $\bar{u}_{s+1} = u_s(\cdot)$ ,  $\alpha_{s+1}(\cdot) = u_s(\cdot)$ , and  $s = s + 1$  and go to 2).
- 4) Computation is terminated when:

$$\int_{t_0}^{t_f} (u_s - \alpha_s)^2 dt < \sigma \quad ; \quad \sigma \text{ a small positive quantity.}$$

In Section 5 it is proved that as  $s \rightarrow \infty$ , so  $u_s(\cdot) \rightarrow u^0(\cdot)$ , provided that  $\epsilon_N$  is sufficiently small.

5. Proofs of Convergence

a)  $\epsilon$ -Algorithm

Minimize:  
 $u(\cdot)$

$$V[u(\cdot), \epsilon_k] = \int_{t_0}^{t_f} [L(x, t) + \frac{\epsilon_k}{2} u^2] dt + F(x(t_f)) \quad (7)$$

where:

$$\dot{x} = f_1(x, t) + f_u(x, t)u \quad (8)$$

and:

$$|u(t)| \leq 1 \quad ; \quad t \in [t_0, t_f] \quad (9)$$

for:

$$\epsilon_k > \epsilon_{k+1} > 0 \quad \text{and} \quad \lim_{k \rightarrow \infty} \epsilon_k = 0 \quad (10)$$

Assumptions i)-ii)

Let R be the set of piecewise continuous control functions in the interval  $[t_0, t_f]$  which satisfy inequality (9).



i)  $\hat{V}[u(\cdot)]$  is a continuous functional of  $u(\cdot) \quad \forall u(\cdot) \in R$ .

ii)  $\inf_R \hat{V}[u(\cdot)] = \min_R \hat{V}[u(\cdot)] = v_0 > -\infty$ .

Lemma 1:  $\inf_R V[u(\cdot), \epsilon_k] > \inf_R \hat{V}[u(\cdot)] = v_0 \quad \dagger$

Proof:  $\inf_R V[u(\cdot), \epsilon_k] \geq \inf_R \hat{V}[u(\cdot)] + \inf_R \frac{\epsilon_k}{2} \int_{t_0}^{t_f} u^2(t) dt$   
 $> v_0 \quad \dagger$

Assumption iii)  $\inf_R V[u(\cdot), \epsilon_k] \equiv V[u_k(\cdot), \epsilon_k]$  is obtained in  $R \quad \forall k$ .

i. e.,  $u_k(\cdot) \in R \quad \forall k$ .

Lemma 2: For  $k > l$  ( $\epsilon_k < \epsilon_l$ ):

$$V[u_k(\cdot), \epsilon_k] < V[u_l(\cdot), \epsilon_l] \quad .$$

Proof:  $V[u_k(\cdot), \epsilon_k] = \min_R V[u(\cdot), \epsilon_k] \leq V[u_l(\cdot), \epsilon_k]$

$$< V[u_l(\cdot), \epsilon_l] \quad , \quad \text{as } \epsilon_l > \epsilon_k$$

Theorem 1: For a positive sequence  $\{\epsilon_k\} : \epsilon_k > \epsilon_{k+1} > 0$  and  $\lim_{k \rightarrow \infty} \epsilon_k = 0$  and under conditions i)-iii);

$$\lim_{k \rightarrow \infty} V[u_k(\cdot), \epsilon_k] = v_0$$

Corollary:

$$1) \lim_{k \rightarrow \infty} \epsilon_k \int_{t_0}^{t_f} u_k^2(t) dt = 0 \quad .$$

$$2) \lim_{k \rightarrow \infty} \hat{V}[u_k(\cdot)] = v_0$$

$\dagger$  If the minimizing  $u(\cdot)$  for the  $\epsilon$ -problem is identically zero then these strict inequalities become equalities; however an identically zero minimizing  $u(\cdot)$  for the  $\epsilon$ -problem would also be the optimal solution of the original singular control problem, so that there is no loss of generality in considering  $u(\cdot) \neq 0$ . In the following proofs we assume that  $u(\cdot) \neq 0$ .

Proof: Given any  $\eta > 0$ ; by assumption i) and Lemma 1,  $\exists u^*(\cdot) \in R$  such that:

$$\hat{V}[u^*(\cdot)] < v_0 + \frac{\eta}{2}$$

Choose  $\epsilon_\ell$  such that:

$$\frac{\epsilon_\ell}{2} \int_{t_0}^{t_f} [u^*(t)]^2 dt < \frac{\eta}{2}$$

Then for  $k > \ell$  ( $\epsilon_k < \epsilon_\ell$ );

$$\begin{aligned} V[u_k(\cdot), \epsilon_k] &< V[u_\ell(\cdot), \epsilon_\ell] && \text{by Lemma 2} \\ &\leq V[u^*(\cdot), \epsilon_\ell] \\ &< v_0 + \frac{\eta}{2} + \frac{\eta}{2} = v_0 + \eta \end{aligned}$$

Also:

$$V[u_k(\cdot), \epsilon_k] > \hat{V}[u_k(\cdot)] \geq v_0 > v_0 - \eta$$

Therefore for any  $\eta > 0$ :

$$|V[u_k(\cdot), \epsilon_k] - v_0| < \eta \quad \forall k > \ell$$

### b) $\epsilon$ - $\alpha(\cdot)$ -Algorithm

Minimize:

$$u(\cdot)$$

$$W[u(\cdot), \epsilon_N, \alpha_s(\cdot)] = \int_{t_0}^{t_f} [L(x, t) + \frac{\epsilon_N}{2} (u - \alpha_s)^2] dt + F(x(t_f)) \quad (11)$$

where:

$$\left. \begin{aligned} \bar{u}(\cdot) &= u_N(\cdot) \\ \alpha_1 &= u_N(\cdot) \\ \alpha_{s+1} &= u_s(\cdot) \quad , \quad s \geq 1 \end{aligned} \right\} \quad (12)$$

and:

$$s = 1, 2, \dots \quad (13)$$

Lemma 3:

$$v_0 \leq W[u_s(\cdot), \epsilon_N, a_s(\cdot)] < W[u_{s-1}(\cdot), \epsilon_N, a_{s-1}(\cdot)]$$

for  $a_s(\cdot) \neq a_{s-1}(\cdot)$ .

Proof:

$$\begin{aligned} W[u_s(\cdot), \epsilon_N, a_s(\cdot)] &\equiv \min_R [\hat{V}[u(\cdot)] + \frac{\epsilon_N}{2} \int_{t_0}^{t_f} (u - a_s)^2 dt] \\ &\geq \min_R \hat{V}[u(\cdot)] + \min_R \left[ \frac{\epsilon_N}{2} \int_{t_0}^{t_f} (u - a_s)^2 dt \right] \geq v_0 \end{aligned}$$

Also:

$$\begin{aligned} W[u_s(\cdot), \epsilon_N, a_s(\cdot)] &\equiv \min_R W[u(\cdot), \epsilon_N, a_s(\cdot)] \\ &\leq W[u_{s-1}(\cdot), \epsilon_N, a_s] \\ &< W[u_{s-1}(\cdot), \epsilon_N, a_{s-1}] \end{aligned}$$

It must be noted that to guarantee that the right hand inequality is strict,  $\epsilon_N$  must be sufficiently small so that all the  $u_s(\cdot)$ 's fall in some neighbourhood of the optimal control  $u^0(\cdot)$ .<sup>†</sup> Theorem 1 guarantees this for  $\epsilon_N$  sufficiently small. This leads to:

Assumption iv)  $\epsilon_N$  is sufficiently small so that all the  $u_s(\cdot)$ 's lie in some neighbourhood of  $u^0(\cdot)$ .

Theorem 2: Under assumptions i)-iv),

$$\lim_{s \rightarrow \infty} W[u_s(\cdot), \epsilon_N, a_s(\cdot)] = v_0$$

---

<sup>†</sup> Otherwise the algorithm may converge to a stationary, non-optimal, solution of the singular problem.

Corollary:

$$1) \text{ Limit}_{s \rightarrow \infty} \epsilon_N \int_{t_0}^{t_f} (u_s - a_s)^2 dt = 0$$

$$2) \text{ Limit}_{s \rightarrow \infty} \hat{V}[u_s(\cdot)] = v_0$$

Proof: For any  $\eta > 0$ , by assumption i) and Lemma 3,  $\exists u_{\ell-1}(\cdot)$  such that:

$$\hat{V}[u_{\ell-1}(\cdot)] < v_0 + \eta \quad .$$

Then, for  $s > \ell$ ,

$$\begin{aligned} W[u_s(\cdot), \epsilon_N, a_s(\cdot)] &< W[u_\ell(\cdot), \epsilon_N, a_\ell(\cdot)] \quad \text{for } a_s(\cdot) \neq a_\ell(\cdot) \\ &\leq W[u_{\ell-1}(\cdot), \epsilon_N, a_\ell(\cdot)] \\ &= \hat{V}[u_{\ell-1}(\cdot)] + \frac{\epsilon_N}{2} \int_{t_0}^{t_f} (u_{\ell-1} - a_\ell)^2 dt \\ &= v_0 + \eta \quad , \quad \text{since } a_\ell = u_{\ell-1} \end{aligned}$$

Also:

$$W[u_s(\cdot), \epsilon_N, a_s(\cdot)] > \hat{V}[u_s(\cdot)] \geq v_0 > v_0 - \eta \quad .$$

Therefore for any  $\eta > 0$ ,

$$|W[u_s(\cdot), \epsilon_N, a_s(\cdot)] - v_0| < \eta \quad , \quad \forall s > \ell$$

## 6. Computed Examples

Four numerical examples were solved using the  $\epsilon$ - and  $\epsilon$ - $a(\cdot)$ -algorithms. Several important numerical-analysis details had to be resolved. These were:

- i) the choice of the sequence  $\epsilon_1, \epsilon_2, \dots, \epsilon_k$ ,
- ii) the choice of  $\epsilon_N$ ,
- iii) the choice of an adequate 'convergence criterion.'

The first three control problems are known to have singular arcs in their optimal solutions, whilst the optimal control function of the fourth problem is known to be bang-bang.

The non-singular  $\epsilon$ - and  $\epsilon$ - $\alpha(\cdot)$ -problems were solved using the Differential Dynamic Programming algorithms described in [15]. The differential equations arising in the algorithms were solved using a simple Euler integration scheme. One hundred integration steps were employed in the solution of the first three problems, whilst the fourth problem was solved using four hundred integration steps. Details of the numerical solution of the four problems are given in the following pages. Graphs which display the results of using the  $\epsilon$ -algorithm and the  $\epsilon$ - $\alpha(\cdot)$ -algorithm are presented. Each graph depicts  $u(\cdot)$  computed by the two algorithms and, where possible,  $H_u(\cdot)$  is displayed ( $H$  is the Hamiltonian of the original  $\hat{V}[u(\cdot)]$  problem). In the cases where  $H_u(\cdot)$  is not displayed, it is indistinguishable from zero on the singular control segments.

Problem 1:

Minimize:  
 $u(\cdot)$

$$\hat{V}[u(\cdot)] = \int_0^2 x^2 dt \quad (14)$$

where:

$$\dot{x} = u \quad ; \quad x(0) = 1 \quad (15)$$

and:

$$|u| \leq 1 \quad (16)$$

The  $\epsilon$ - $a(\cdot)$ -problem is: Minimize  
 $u(\cdot)$

$$W[u(\cdot), \epsilon, a(\cdot)] = \int_0^2 x^2 dt + \frac{\epsilon}{2} \int_0^2 (u - a)^2 dt \quad (17)$$

subject to (15) and (16).

Using the second-order control inequality constraint algorithm of [15] to solve the  $\epsilon$ - $a(\cdot)$ -problem (for  $\epsilon$  and  $a(\cdot)$  assumed known), the following equations must be solved iteratively:

$$-\dot{a} = W_x(u - \bar{u}) + \frac{\epsilon}{2} [(u - a)^2 - (\bar{u} - a)^2] \quad ; \quad a(t = 2) = 0 \quad (18)$$

$$-\dot{W}_x = 2\bar{x} + W_{xx}(u - \bar{u}) \quad ; \quad W_x(t = 2) = 0 \quad (19)$$

$$-\dot{W}_{xx} = \begin{cases} 2 - \frac{1}{\epsilon} W_{xx}^2 & \text{if } |u| < 1 \\ 2 & \text{if } |u| = 1 \end{cases} \quad ; \quad W_{xx}(t = 2) = 0 \quad (20)$$

The new control function is obtained (see [15]) from  $\bar{u}(\cdot)$  and

$$u(t) = \text{sat}[a - W_x/\epsilon] \quad (21)$$

If  $|a(t = 0)|$  is zero (or, in practice, 'sufficiently small') then  $\bar{u}(\cdot)$  is the solution of the  $\epsilon$ - $a(\cdot)$ -problem [15]. If  $|a(t = 0)|$  is not zero then the above equations are used to produce a new improved control function  $u(\cdot)$  (see [15] for details).

The initial  $\bar{u}(\cdot)$  and  $a(\cdot)$  were chosen to be identically zero; thus, initially, the  $\epsilon$ -problem was solved. The initial value of  $\epsilon$  was 0.5. Whenever  $|a(t = 0)|$  became less than  $10^{-4}$ ,  $\epsilon$  was replaced by its value divided by 5; that is,  $\epsilon_1 = 0.5$ ,  $\epsilon_k = \epsilon_{k-1}/5$ .

The  $\epsilon$ -algorithm was used until it was found that for both  $\epsilon_{N-1}$  and  $\epsilon_N$ , the same  $\bar{u}(\cdot)$  caused  $|a(t = 0)|$  to be less than  $10^{-4}$ ; this  $\bar{u}(\cdot)$  was then considered to be the solution of the  $\epsilon$ -problem.  $a(\cdot)$  was then set

equal to  $\bar{u}(\cdot)$  and the  $\epsilon$ - $\alpha(\cdot)$ -algorithm was invoked. After only one iteration, the optimal control function of the original  $\hat{V}$  problem was obtained (to four decimal places). The result of this iteration as well as the output of the  $\epsilon$ -algorithm are shown in Fig. 1. The value of  $\hat{V}$  that was produced by the  $\epsilon$ -algorithm was 0.3434. After the one iteration of the  $\epsilon$ - $\alpha(\cdot)$ -algorithm this was reduced to 0.3234.

Problem 2: Minimize:

$$\hat{V}[u(\cdot)] = \int_0^5 (x_1^2 + x_2^2) dt \quad (22)$$

where:

$$\begin{aligned} \dot{x}_1 &= x_2 & ; & & x_1(0) &= 0 \\ \dot{x}_2 &= u & ; & & x_2(0) &= 1 \end{aligned} \quad (23)$$

and:

$$|u| \leq 1 \quad . \quad (24)$$

The equations to be solved for the  $\epsilon$ - $\alpha(\cdot)$ -algorithm are:

$$-\dot{a} = W_{x_2} (u - \bar{u}) + \frac{\epsilon}{2} [(u - \alpha)^2 - (\bar{u} - \alpha)^2] ; \quad a(t = 5) = 0 \quad (25)$$

$$-\dot{W}_{x_1} = 2\bar{x}_1 + W_{x_1 x_2} (u - \bar{u}) \quad ; \quad W_{x_1}(t = 5) = 0 \quad (26)$$

$$-\dot{W}_{x_2} = 2\bar{x}_2 + W_{x_1} + W_{x_2 x_2} (u - \bar{u}) \quad ; \quad W_{x_2}(t = 5) = 0 \quad (27)$$

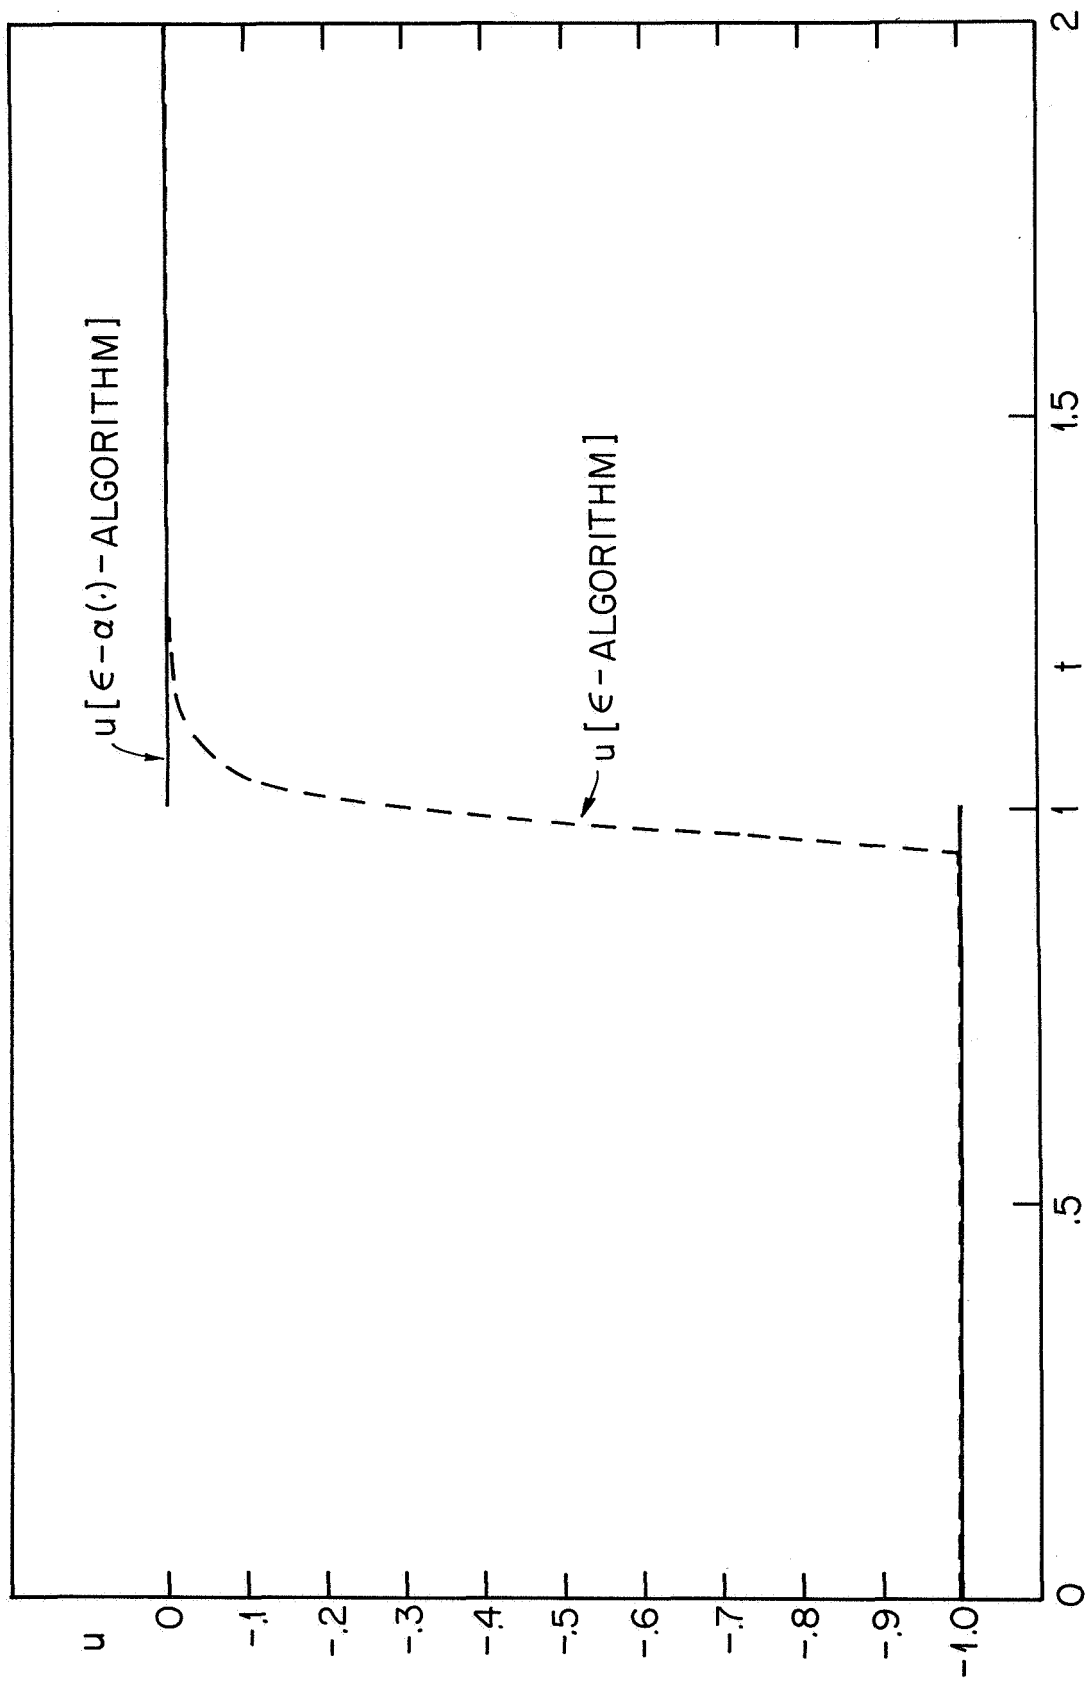


FIG. 1  $u$  vs.  $t$



$$\left. \begin{aligned}
 -\dot{W}_{x_1 x_1} &= 2 - W_{x_1 x_2}^2 / \epsilon \\
 -\dot{W}_{x_1 x_2} &= W_{x_1 x_1} - W_{x_1 x_2} W_{x_2 x_2} / \epsilon \\
 -\dot{W}_{x_2 x_2} &= 2 + 2W_{x_1 x_2} - W_{x_2 x_2}^2 / \epsilon
 \end{aligned} \right\} \text{if } |u| < 1$$

$$\left. \begin{aligned}
 -\dot{W}_{x_1 x_1} &= 2 \\
 -\dot{W}_{x_1 x_2} &= W_{x_1 x_1} \\
 -\dot{W}_{x_2 x_2} &= 2 + 2W_{x_1 x_2}
 \end{aligned} \right\} \text{if } |u| = 1$$

$$\left. \begin{aligned}
 W_{x_1 x_1}(t=5) &= 0 \\
 W_{x_1 x_2}(t=5) &= 0 \\
 W_{x_2 x_2}(t=5) &= 0
 \end{aligned} \right\} \quad (28)$$

The new control function is obtained (see [15]) from  $\bar{u}(\cdot)$  and

$$u(t) = \text{sat}[a - W_{x_2} / \epsilon] \quad (29)$$

Implementation of the algorithms was similar to that used for Problem 1; however, there were minor differences. Here,  $\epsilon_1 = 5.$ , and  $\epsilon_k = \epsilon_{k-1}/10$ . Moreover, N was found by reducing  $\epsilon$  until the differential equations for the components of  $W_{xx}$  become ill behaved; the last value of  $\epsilon$  for which these equations were well behaved was selected to be  $\epsilon_N$ , its value being 0.005.

$\hat{V}$  after using the  $\epsilon$ -algorithm was 0.828517, and this was reduced to 0.828514 by the  $\epsilon$ - $\alpha(\cdot)$ -algorithm. The  $\epsilon$ -algorithm required 16 iterations including 4 reductions of  $\epsilon$  and one increase (when  $\epsilon = .0005$  was found to be too small). The  $\epsilon$ - $\alpha(\cdot)$ -algorithm required 3 iterations and two changes of  $\alpha(\cdot)$ .<sup>†</sup> Not much is gained by using the  $\epsilon$ - $\alpha(\cdot)$ -algorithm except for a slight sharpening of the switching in the control function (see Fig. 2).

<sup>†</sup> An "iteration" is one iteration of the second-order algorithm of [15].

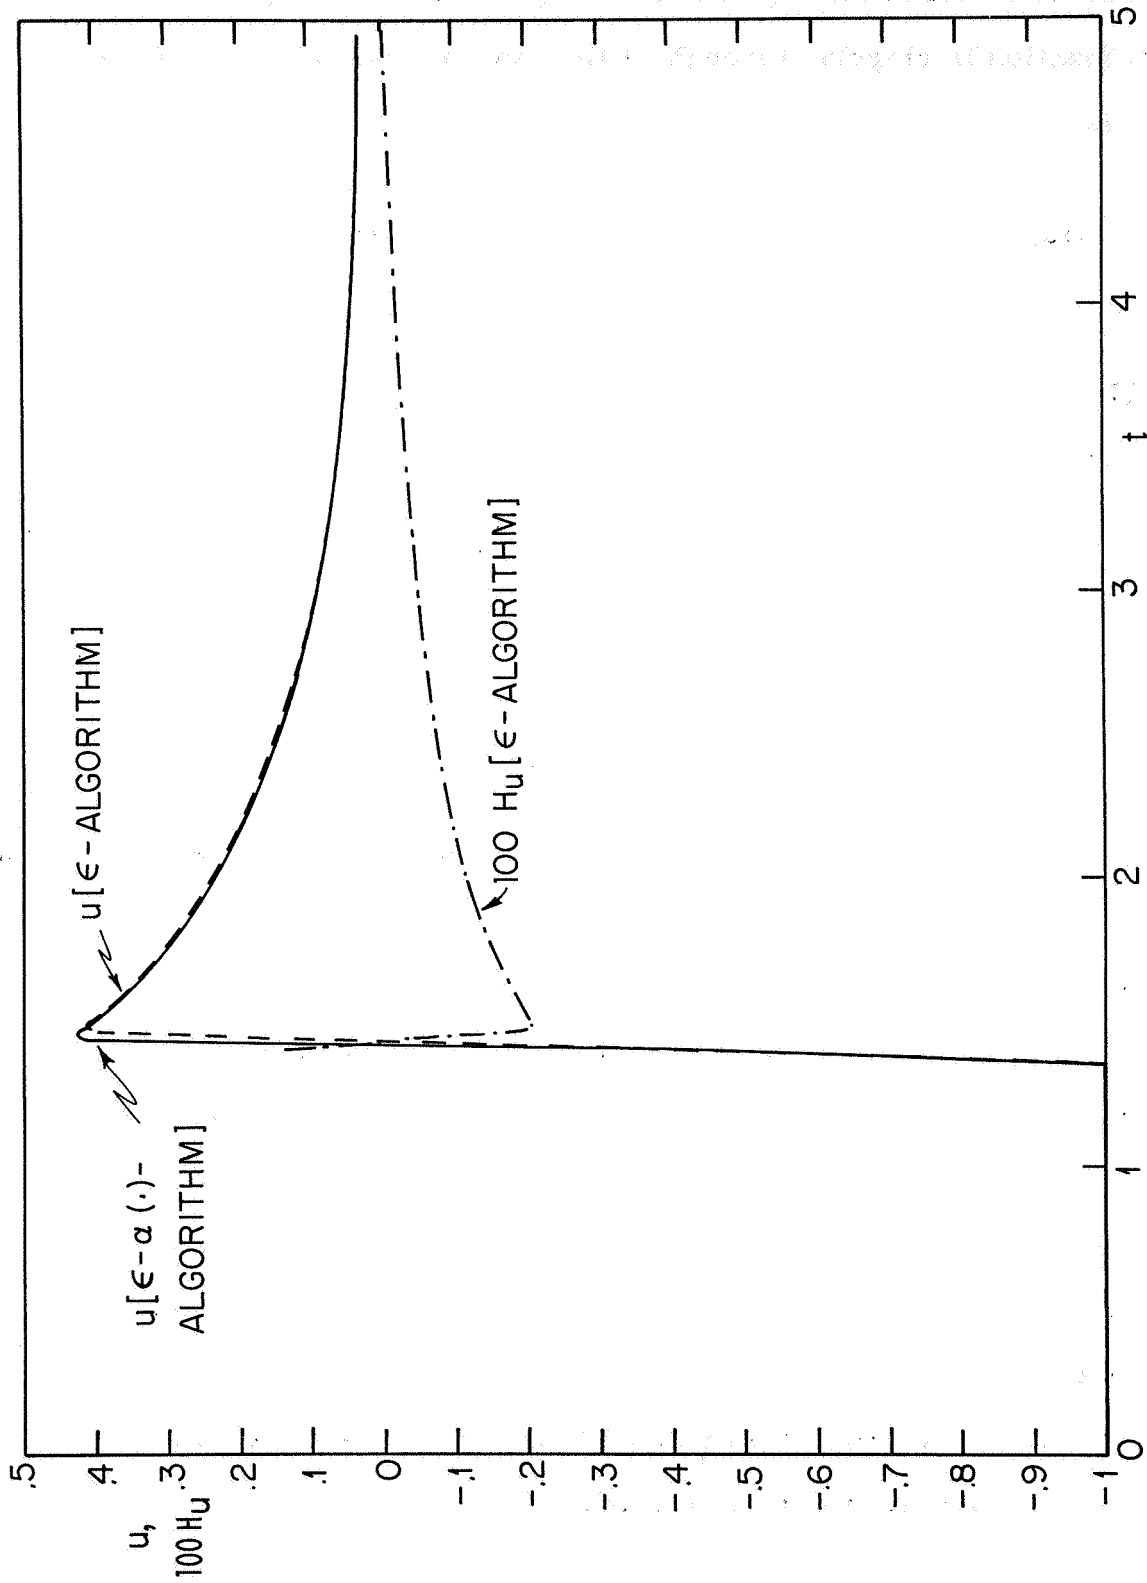


FIG. 2 u AND 100 H<sub>u</sub> vs. t

Problem 3:

This is a test of the algorithms on a problem whose optimal control function is singular throughout the time interval over which the system is run. Minimize:

$$\hat{V}[u(\cdot)] = \int_0^5 \{ [x_2 - (\frac{3}{4}t + 1)]^2 + [x_1 - (\frac{3}{8}t^2 + t)]^2 \} dt \quad (30)$$

subject to (23) and (24).

Clearly the solution is  $u(t) = \frac{3}{4}$ ;  $t \in [0, 5]$  and the optimum  $\hat{V} = 0$ .

The relevant equations are:

$$-\dot{a} = W_{x_2} (u - \bar{u}) + \frac{\epsilon}{2} [(u - a)^2 - (\bar{u} - a)^2] \quad ; \quad a(t = 5) = 0 \quad (31)$$

$$-\dot{W}_{x_1} = 2(\bar{x}_1 - \frac{3}{8}t^2 - t) + W_{x_1 x_2} (u - \bar{u}) \quad ; \quad W_{x_1} (t = 5) = 0 \quad (32)$$

$$-\dot{W}_{x_2} = 2(\bar{x}_2 - \frac{3}{4}t - 1) + W_{x_2 x_2} (u - \bar{u}) + W_{x_1} \quad ; \quad W_{x_2} (t = 5) = 0 \quad (33)$$

where the components of  $W_{xx}$  satisfy (28), and  $u(t)$  is given by (29).

The criterion of optimality was taken to be  $|a(t = 0)| \leq 2 \times 10^{-5}$ , and  $\epsilon_1$  was set as 0.5. In 21 iterations the  $\epsilon$ -algorithm yielded  $\hat{V} = 0.0025$ , which was reduced to 0.00152 by the  $\epsilon$ - $\alpha(\cdot)$ -algorithm. The latter algorithm required two iterations and one change of  $\alpha(\cdot)$ . After another change of  $\alpha(\cdot)$  and another two iterations,  $\hat{V} = .00147$ . The results of this last iteration and of the  $\epsilon$ -algorithm are shown in Fig. 3. Evidently the  $\epsilon$ - $\alpha(\cdot)$ -algorithm seems to contribute more to sharpening the control function than to reducing the cost. The deviation of the control function from  $\frac{3}{4}$  at  $t \cong 0$  and  $t \approx 5$  is attributed to the crude Euler integration routine used.

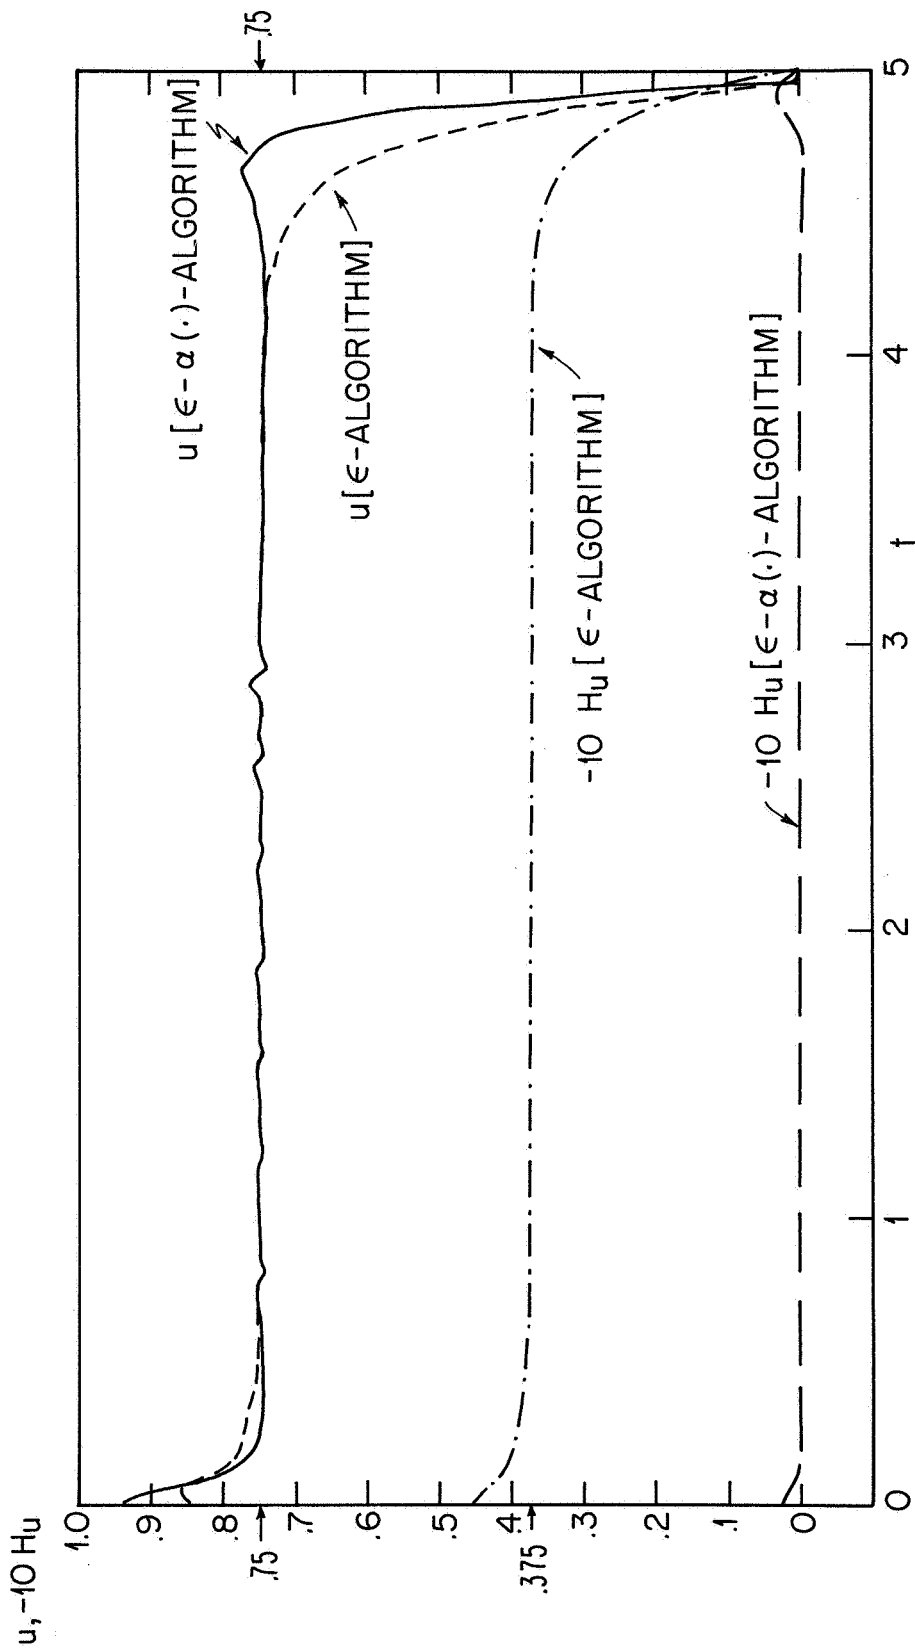


FIG. 3  $u$  AND  $-10H_u$  vs.  $t$

Problem 4: Minimize:  
 $u(\cdot)$

$$\hat{V}[u(\cdot)] = \int_0^5 x_1^2 dt \quad (34)$$

subject to (23) and (24).

The relevant equations are (31), (32) and (28) and

$$-\dot{W}_{x_2} = W_{x_1} + W_{x_2 x_2} (u - \bar{u}) \quad ; \quad W_{x_2} (t = 5) = 0 \quad (35)$$

Here,  $\epsilon_1$  was set as 2., and  $\epsilon_k = \epsilon_{k-1}/10$ . From previous experience (Problems 1 to 3) a value of .02 was chosen for  $\epsilon_N$ . The criterion of optimality was chosen as  $|a(t = 0)| < 10^{-4}$ .

It is known that the optimal solution to (34) is bang-bang (for an infinite upper limit of integration, the optimal control function exhibits an infinite number of switchings and the state  $x$  of the system tends to zero. Fuller [23] gives expressions for the optimal cost function for the infinite time case, and because  $x$  tends rapidly to zero, these expressions are useful for predicting the optimal value of  $\hat{V}$ .)

A guess of the form of the optimal control function was made, and  $a_o(\cdot)$  was set equal to this guess, i. e.:

$$\begin{aligned} a_o(t) &= -1 \quad , \quad 0 \leq t < 1.7 \\ a_o(t) &= 0 \quad , \quad 1.7 \leq t \leq 5 \end{aligned} \quad (36)$$

Seven iterations and two reductions of  $\epsilon$  were required by the  $\epsilon$ -algorithm<sup>†</sup>; the results are shown in Fig. 4. The minimum value of  $\hat{V}$  is 0.2777. After 5 more iterations and 3 changes of  $a(\cdot)$  in the  $\epsilon$ - $a(\cdot)$ -algorithm,  $\hat{V}$  was reduced to 0.2771. The resulting control

---

<sup>†</sup> Note that in this variant of the  $\epsilon$ -algorithm,  $a(\cdot)$  is non-zero and is given by (36).

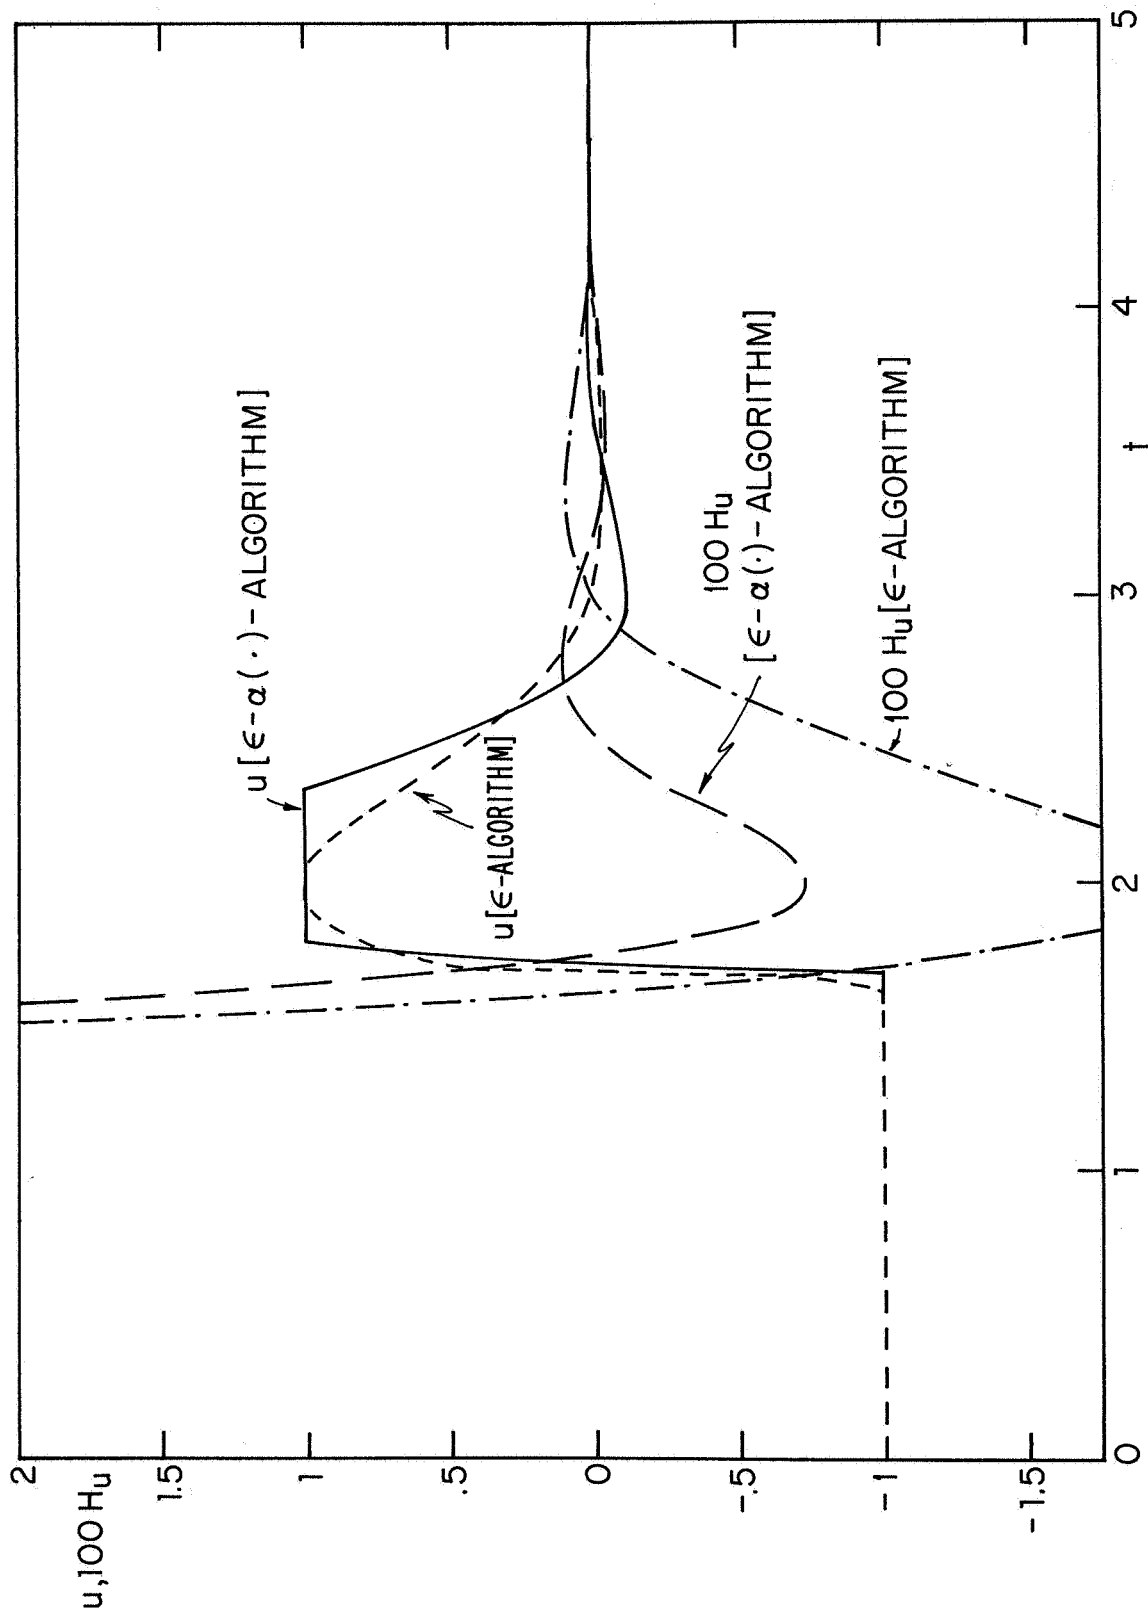


FIG. 4 u AND 100 H<sub>u</sub> vs. t

function and  $H_u$  as a function of time are also shown in Fig. 4. Note that the  $\epsilon$ - $\alpha(\cdot)$ -algorithm sharpens considerably the switchings of the control function, but does not affect markedly the cost  $\hat{V}$ .

The final control function shown in Fig. 4 is clearly not bang-bang; however in the non-bang-bang region,  $H_u(t)$  is extremely small, indicating that the Pontryagin Principle is very nearly satisfied by this non-bang-bang control function. This suggests that the optimal bang-bang control should not produce a  $\hat{V}$  which differs much from the  $\hat{V}$  obtained using our approximately optimal control (i. e.  $\hat{V}[u(\cdot)]$  is very 'flat' as a functional of  $u(\cdot)$  in the neighbourhood of the optimum). The above conjecture is confirmed by the fact that, for the given initial conditions, the analytic expressions, given in [23], yield the optimal cost for the infinite time problem as 0.278 which is not very different from that obtained by the  $\epsilon$ - $\alpha(\cdot)$ -algorithm.

## 7. Conclusion

The addition of a quadratic functional of the control  $u(\cdot)$  to the performance index (cost functional) of a certain class of singular control problems, results in a non-singular control inequality constrained problem which can be solved by an existing second-order successive approximation method. A parameter  $\epsilon > 0$ , multiplying the additional quadratic functional, is allowed to tend to zero, whilst the optimality of the non-singular problem is maintained. In the limit as  $\epsilon \rightarrow 0$ , the solution of the original singular control problem is approached. A variant of the  $\epsilon$ -problem is described which allows the use of a small value of  $\epsilon$  which is not required to approach zero, whilst still ensuring convergence to the required singular control function. Four illustrative numerical examples are presented to demonstrate the usefulness of the proposed algorithms.

It is believed that, except for the gradient and a modified conjugate gradient algorithm, the proposed algorithms are the only ones currently available for computing optimal singular controls.





## References

- [1] Johnson, C. D., and Gibson, J. E., Singular Solutions in Problems of Optimal Control, IEEE Trans. Aut. Control, AC-8, 1963, pp. 4-15.
- [2] Wonham, W. M., and Johnson, C. D., Optimal Bang-Bang Control with Quadratic Performance Index, ASME Trans. J. Basic Eng., 86, 1964, pp. 107-115.
- [3] Johnson, C. D., Singular Solutions in Optimal Control Problems, Advances in Control Systems (C. T. Leondes ed.) Vol. 2, Academic Press, New York, 1965.
- [4] Bass, R. W., and Weber, R. F., On Synthesis of Optimal Bang-Bang Feedback Control Systems with Quadratic Performance Criterion, Proc. 6th Joint Autom. Control Conf., Troy, New York, 1965, pp. 213-219.
- [5] Kelley, H. J., Kopp, R. E., Moyer, H. G., Singular Extremals, in Topics in Optimization (G. Leitman ed.), Academic Press, 1968.
- [6] Robbins, H. M., A Generalized Legendre-Clebsch Condition for the Singular Cases of Optimal Control, IBM, Federal Systems Division, Owego, New York, Report No. 66-825 2043, 1966.
- [7] Pfeiffer, C. G., Some New Results in Optimal Final Value Control Theory, J. Franklin Inst., 283, No. 5, 1967, pp. 204-425.
- [8] Jacobson, D. H., A New Necessary Condition of Optimality for Singular Control Problems, Harvard University Technical Report, No. 576, November 1968.
- [9] Private Communication with H. J. Kelley.
- [10] Johansen, D. E., Convergence Properties of the Method of Gradients, Advances in Control Systems (C. T. Leondes ed.) Vol. 4, Academic Press, New York, 1966.
- [11] Pagurek, B., and Woodside, M., The Application of Conjugate Gradient Methods to Optimal Control Problems with Bounded Control Variables, Automatica, 1968.
- [12] Jacobson, D. H., and Lele, M. M., A Transformation Technique for Optimal Control Problems with a State Variable Inequality Constraint, Harvard University Technical Report No. 574, October 1968.
- [13] Lasdon, L. S., Mitter, S. K., Waren, A. D., The Method of Conjugate Gradients for Optimal Control Problems, IEEE Trans. Auto. Control, AC-12, April 1967, p. 132.
- [14] Valentine, F. A., The Problem of Lagrange with Differential Inequalities as Added Side Conditions, in Contributions to the Calculus of Variations, Chicago University Press, Chicago, 1933-1937, pp. 407-448.

- [15] Jacobson, D. H., New Second-Order and First-Order Algorithms for Determining Optimal Control: A Differential Dynamic Programming Approach, J. Optimization Theory and Applications, Vol. 2, No. 6, 1968; also Harvard Technical Report No. 551, February 1968.
- [16] Kelley, H. J., Method of Gradients, in Optimization Techniques (G. Leitman ed.), Academic Press, New York, 1962.
- [17] Lasdon, L. S., Waren, A. D., and Rice, R. K., An Interior Penalty Function Method for Inequality Constrained Optimal Control Problems, IEEE Trans. Auto. Control, AC-12, 1967, p. 388.
- [18] Lele, M. M., and Jacobson, D. H., A Proof of the Convergence of the Kelley-Bryson Penalty Function Technique for State-Constrained Control Problems, J. Math. Anal. Appl., to appear.
- [19] Ho, Y. C., On Computing Minima by the Penalty Function Approach, Cruft Laboratory, Technical Report 347, Harvard University, 1961.
- [20] Powell, M. J. D., A Method for Non-Linear Constraints in Minimization Problems, T. P. 310, Mathematics Branch, AERE, Harwell, Berkshire, England, 1967.
- [21] Dyer, P., and McReynolds, S. R., On Optimal Control Problems with Discontinuities, J. Math. Anal. Appl., 23, 1968, p. 585.
- [22] Jacobson, D. H., Differential Dynamic Programming Methods for Solving Bang-Bang Control Problems, IEEE Trans. Auto. Control, AC-13, December, 1968.
- [23] Fuller, A. T., Further Study of an Optimum Non-Linear Control System, Int. J. Control, 17, September 1964, pp. 283-300..

Joint Services Electronics Program  
NO0014-67-A-0278-0006, 0005, and 0008

**Academy Library (DFSLB)**  
U. S. Air Force Academy  
Colorado Springs, Colorado 80912

**AEDC (ARC, DMC)**  
Attn: Library/Document  
Arnold AFB, Texas 77830

**Aeronautics Library**  
Cessna Aeronautical Laboratories  
California Institute of Technology  
1281 E. California Blvd  
Pasadena, California 91109

**Aerospace Corporation**  
P. O. Box 1908  
Los Angeles, Calif. 90045  
Attn: Library Acquisitions Group

**Albion Instruments Laboratory**  
Bespark, New York 11709

**AFAL (AYTE/R. D. Larson)**  
Wright-Patterson AFB  
Ohio 45433

**AFCEB (CRMXLR)**  
AFCEB Research Library, Stop 29  
L. G. Hanscom Field  
Bedford, Mass. 01731

**AFETR (ETLIG - I)**  
AFETR Office (for Library)  
Patrick AFB, Florida 32125

**AFETR Technical Library**  
(STV, MU-135)  
Patrick AFB, Florida 32125

**AFVFC (FABPP-2)**  
Technical Library  
Edwards AFB, Calif. 93523

**AFVFC (PHBPS-12)**  
Edwards AFB  
Florida 32542

**ARL (ARIY)**  
Wright-Patterson AFB  
Ohio 45433

**AULT-9653**  
Hanscom AFB  
Alabama 36112

**Mr. Henry L. Dushman**  
Assistant Chief Engineer  
Whelan Laboratories  
125 Cotnam Hill Road  
Great Neck, N. Y. 11021

**Naval Pacific Division**  
1188 Sherman Way  
North Hollywood, Calif. 91605

**Colonel A. D. Blue**  
RTD (RTTL)  
Holling AFB  
Washington, D. C. 20332

**California Institute of Technology**  
Pasadena, California 91109  
Attn: Document Library

**Carnegie Institute of Technology**  
Electrical Engineering Dept.  
Pittsburgh, Pa. 15213

**Central Intelligence Agency**  
Attn: OCE/OD Publications  
Washington, D. C. 20505

**Chief of Naval Operations**  
OP-87  
Washington, D. C. 20350 [2]

**Chief of Naval Research**  
Department of the Navy  
Washington, D. C. 20360  
Attn: Code 427 [3]

**Commandant**  
U. S. Army and General Staff College  
Attn: Secretary  
Fort Leavenworth, Kansas 66570

**Commander**  
Naval Air Development and  
Material Center  
Johnsville, Pennsylvania 16974

**Commanding General**  
Frankford Arsenal  
Attn: SAUTA-14090 (Dr. Sidney Ross)  
Philadelphia, Pa. 19137

**Commandant**  
U. S. Army Air Defense School  
Attn: Missile Sciences Div. C and S Dept.  
P. O. Box 1390  
Fort Bliss, Texas 79916

**Commander**  
U. S. Naval Air Missile Test Center  
Point Mugu, California 93041

**Commanding General**  
Attn: STEWS-W3-VT  
White Sands Missile Range  
New Mexico 88002 [2]

**Commanding General**  
U. S. Army Electronics Command  
Attn: AMEEL-CC  
RD-D  
RD-C  
RD-GP  
RD-MAT  
XL-B  
XL-C  
XL-D  
XL-E  
XL-F  
XL-G  
XL-H  
XL-I  
XL-J  
XL-K  
XL-L  
XL-M  
XL-N  
XL-O  
XL-P  
XL-Q  
XL-R  
XL-S  
XL-T  
XL-U  
XL-V  
XL-W  
XL-X  
XL-Y  
XL-Z

**Commanding General**  
U. S. Army Materiel Command  
Attn: AMCRD-10-DE-1  
Washington, D. C. 20315

**Commanding General**  
U. S. Army Missile Command  
Attn: Technical Library  
Redstone Arsenal, Alabama 35899

**Commanding Officer**  
Naval Avionics Facility  
Indianapolis, Indiana 46241

**Commanding Officer**  
U. S. Army Limited War Laboratory  
Attn: Technical Director  
Aberdeen Proving Ground  
Aberdeen, Maryland 21005

**Commanding Officer**  
U. S. Army Materiel Research Agency  
Watertown Arsenal  
Watertown, Massachusetts 02172

**Commanding Officer**  
U. S. Army Security Agency  
Arlington Hall  
Arlington, Virginia 22212

**Commanding Officer and Director**  
U. S. Naval Underwater Sound Lab.  
Fort Trumbull  
New London, Conn. 06440

**Defense Documentation Center**  
Attn: Technical Library  
Camden Station, Bldg. 5  
Alexandria, Virginia 22314 [20]

**Det No. 6, OAR (LODAR)**  
Air Force Unit Post Office  
Los Angeles, Calif. 90045

**Director**  
Advanced Research Projects Agency  
Department of Defense  
Washington, D. C. 20301

**Director for Materials Sciences**  
Advanced Research Projects Agency  
Department of Defense  
Washington, D. C. 20301

**Director**  
Columbia Radiation Laboratory  
Columbia University  
536 West 120th Street  
New York, New York 10027

**Director**  
Coordinated Sciences Laboratory  
University of Illinois  
Urbana, Illinois 61803

**Director**  
Electronics Research Laboratory  
University of California  
Berkeley, California 94720

**Director**  
Electronic Sciences Laboratory  
University of Southern California  
Los Angeles, California 90007

**Director**  
Microwave Laboratory  
Stanford University  
Stanford, California 94305

**Director - Inst. for Exploratory Research**  
U. S. Army Electronics Command  
Attn: Mr. Robert O. Parker  
Executive Secretary, JSTAC  
(AMEEL-CL-3)  
Fort Monmouth, N. J. 07703

**Director**  
National Security Agency  
Fort George G. Meade  
Maryland 20735  
Attn: James T. Tippett

**Director, Naval Research Laboratory**  
Technical Information Office  
Washington, D. C.  
Attn: Code 2000 [8]

**Director**  
Research Laboratory of Electronics  
Massachusetts Institute of Technology  
Cambridge, Mass. 02139

**Director**  
Stanford Electronics Laboratories  
Stanford University  
Stanford, California 94305

**Commanding Officer**  
Naval Ordnance Laboratory  
White Oak, Maryland 21162 [2]

**Commanding Officer**  
Naval Ordnance Test Station  
China Lake, Calif. 93555

**Commanding Officer**  
Naval Training Device Center  
Orlando, Florida 32811

**Commanding Officer**  
Office of Naval Research Branch Office  
1030 East Green Street  
Pasadena, California

**Commanding Officer**  
Office of Naval Research Branch Office  
215 South Dearborn Street  
Chicago, Illinois 60604

**Commanding Officer**  
Office of Naval Research Branch Office  
493 Sumner Street  
Boston, Massachusetts 02210

**Commanding Officer**  
Office of Naval Research Branch Office  
207 West 24th Street  
New York, New York 10011

**Commanding Officer**  
Office of Naval Research Branch Office  
Box 99, Fleet Post Office  
New York 09510 [4]

**Commanding Officer**  
U. S. Army Engineer R & D Activity  
White Sands Missile Range  
Washington, D. C. 88005

**Commanding Officer**  
U. S. Army Engineer R & D Laboratory  
Attn: DTIN/FO Branch  
Fort Belvoir, Virginia 22660

**Commanding Officer**  
U. S. Army Research Office (Durham)  
Attn: DRD-AA-IP (Richard G. Ullah)  
Box CM, Duke Station  
Durham, North Carolina 27706

**Commanding General**  
USASTRATCOM  
Technical Information Center  
Fort Huachuca, Arizona 85613

**Commanding Officer**  
Henry Diamond  
Attn: Dr. Bernhard Altman (AMXDO-TT)  
Connecticut Ave. & Van Ness St. NW  
Washington, D. C. 20438

**Commanding Officer**  
General Engineering Laboratories  
Aberdeen Proving Ground  
Maryland 21005

**Commanding Officer**  
U. S. Army Ballistics Research Lab.  
Attn: V. W. Richards  
Aberdeen Proving Ground  
Maryland 21005

**Director, USAF Project RAND**  
Via: Air Force Liaison Office  
The RAND Corporation  
1700 Main Street  
Santa Monica, Calif. 90405  
Attn: Library

**Director**  
U. S. Army Engineer Geodesy,  
Intelligence and Mapping  
Research and Development Agency  
Fort Belvoir, Virginia 22660

**Director**  
U. S. Naval Observatory  
Washington, D. C. 20390

**Director, U. S. Naval Security Group**  
Attn: G45  
3801 Nebraska Avenue  
Washington, D. C. 20390

**Division of Engineering and Applied Physics**  
130 Pierce Hall  
Harvard University  
Cambridge, Massachusetts 02138

**Professor A. A. Dougal, Director**  
Laboratories for Electronics and  
Related Sciences Research  
University of Texas  
Austin, Texas 78712

**ED (ESTI)**  
L. G. Hanscom Field  
Bedford, Mass. 01731 [2]

**European Office of Aerospace Research**  
Shell Building  
47 Rue Cantelsteen  
Brussels, Belgium [2]

**Colonel Robert E. Fontana**  
Dept. of Electrical Engineering  
Air Force Institute of Technology  
Wright-Patterson AFB, Ohio 45433

**General Electric Company**  
Research Laboratories  
Schenectady, New York 12301

**Professor Nicholas George**  
California Institute of Technology  
Pasadena, California 91109

**Godard Space Flight Center**  
National Aeronautics and Space Admin.  
Attn: Library, Documents Section  
Code 252  
Green Belt, Maryland 20771

**Dr. John C. Hancock, Director**  
Electronic Systems Research Laboratory  
Purdue University  
Lafayette, Indiana 47907

**Dr. H. Harrison, Code RRE**  
Chief, Electrophysics Branch  
National Aeronautics and Space Admin.  
Washington, D. C. 20546

**Head, Technical Division**  
U. S. Naval Center Intelligence  
Support Center  
Fairmont Building  
4430 North Fairfax Drive  
Arlington, Virginia 22203

**Headquarters**  
Defense Communications Agency  
The Pentagon  
Washington, D. C. 20305

**Dr. L. M. Hellasworth**  
ARCRL (CRN)  
L. G. Hanscom Field  
Bedford, Massachusetts 01731

**Head Library**  
Carnegie Institute of Technology  
Schuylkill Park  
Pittsburgh, Pa. 15213

**The Johns Hopkins University**  
Applied Physics Laboratory  
8641 Georgia Avenue  
Silver Spring, Maryland 20910  
Attn: Boris W. Kovalchuk  
Document Librarian

**Lt. Col. Robert B. Kalisch**  
Chief, Electronics Division  
Directorate of Engineering Sciences  
Air Force Office of Scientific Research  
Arlington, Virginia 22209 [5]

**Colonel Kee**  
ARFSTE  
Head, USAF  
Room ID-429, The Pentagon  
Washington, D. C. 20330

**Dr. S. Benedict Levin, Director**  
Institute for Exploratory Research  
U. S. Army Electronics Command  
Fort Monmouth, New Jersey 07703

**Los Alamos Scientific Laboratory**  
Attn: Library  
P. O. Box 1663  
Los Alamos, New Mexico 87544

**Librarian**  
U. S. Naval Electronics Laboratory  
San Diego, California 92152 [2]

**Lockheed Aircraft Corp.**  
P. O. Box 504  
Sunnyvale, California 94088

**Dr. I. L. Mirman**  
AFSC (SCT)  
Andrews Air Force Base, Maryland

**Lt. Col. Bernard S. Morgan**  
Frank J. Sellar Research Laboratory  
U. S. Air Force Academy  
Colorado Springs, Colorado 80912

**Dr. C. J. Murphy**  
The Technological Institute  
Northern University  
Evanston, Illinois 60201

**Mr. Peter Murray**  
Wright-Patterson AFB, Ohio 45433

**NASA Lewis Research Center**  
Attn: Library  
2100 Brookpark Road  
Cleveland, Ohio 44135

**NASA Scientific & Technical Information Facility**  
Attn: Acquisitions Branch (S/AR/DL)  
P. O. Box 12  
College Park, Maryland 20740 [2]

**National Science Foundation**  
Attn: Dr. John R. Lehmann  
Division of Engineering  
1800 G Street, NW  
Washington, D. C. 20550

**National Security Agency**  
Attn: RA - James Tippett  
Andrews Air Force Base  
Fort George G. Meade, Maryland 20755

**Naval Air Systems Command**  
AFR 03  
Washington, D. C. 20360 [2]

**Naval Electronics Systems Command**  
ELRF 03  
Falls Church, Virginia 22046 [2]

**Naval Ordnance Systems Command**  
ORD 35  
Washington, D. C. 20360 [2]

**Naval Ordnance Systems Command**  
SHIP 035  
Washington, D. C. 20360

**Naval Ship Systems Command**  
SHIP 031  
Washington, D. C. 20360

**New York University**  
College of Engineering  
New York, New York 10019

**Dr. H. V. Noble**  
Air Force Avionics Laboratory  
Wright-Patterson AFB, Ohio 45433

**Office of Deputy Director**  
(Research and Information Rm. 3D103)  
Office of Defense Res. and Eng.  
The Pentagon  
Washington, D. C. 20301

**Polytechnic Institute of Brooklyn**  
55 Johnson Street  
Brooklyn, New York 11201  
Attn: Mr. Jerome Fox  
Research Coordination

**RAD (EM/LAL-1)**  
Griffis AFB, New York 13442  
Attn: Document Library

**Raytheon Company**  
Bedford, Mass. 01730  
Attn: Librarian

**Lt. Col. J. L. Reeves**  
AFSC (ICRB)  
Andrews Air Force Base, Md. 20331

**Dr. A. A. Dougal**  
Asst. Director of Research  
Office of Defense Res. and Eng.  
Department of Defense  
Washington, D. C. 20301

**Research Plans Office**  
U. S. Army Research Office  
3045 Columbia Pike  
Arlington, Virginia 22204

**Dr. H. Kohl, Deputy Chief Scientist**  
U. S. Army Research Office (Durham)  
Durham, North Carolina 27706

**Emil Schaefer, Head**  
Electronic Properties Info. Center  
Hughes Aircraft Company  
Culver City, California 90230

**School of Engineering Sciences**  
Arizona State University  
Tempe, Arizona 85281

**SAMSO (SMED-STINFO)**  
AF Unit Post Office  
Los Angeles, California 90045

**SSD (SSTR/LA. Starbuck)**  
AFVFC  
Los Angeles, California 90045

**Superintendent**  
U. S. Army Military Academy  
West Point, New York 10996

**Colonel A. Swan**  
Aerospace Medical Division  
AMD (AMR2)  
Brooks AFB, Texas 78235

**Syracuse University**  
Dept. of Electrical Engineering  
Syracuse, New York 13210

**University of California**  
Santa Barbara, California 93106  
Attn: Library

**University of Calif. at Los Angeles**  
Dept. of Engineering  
Los Angeles, California 90024

**University of Michigan**  
Electrical Engineering Dept.  
Ann Arbor, Michigan 48104

**U. S. Army Munitions Command**  
Attn: Technical Information Branch  
Picatinny Arsenal  
Dover, New Jersey 07801

**U. S. Army Research Office**  
Attn: Physical Sciences Division  
3045 Columbia Pike  
Arlington, Virginia 22204

**U. S. Atomic Energy Commission**  
Division of Technical Information Res.  
P. O. Box 62  
Oak Ridge, Tenn. 37831

**Dept. of Electrical Engineering**  
Texas Technological College  
Lubbock, Texas 79409

**U. S. Naval Weapons Laboratory**  
Dahlgren, Virginia 22448

**Major Charles Waspy**  
Technical Information Branch  
Office for Technology  
Space Systems Division, AFSC  
Dover, California 90405

**The Walter Reed Institute of Research**  
Walter Reed Medical Center  
Washington, D. C. 20312

**AFSC (SCTR)**  
Andrews Air Force Base  
Maryland 20331

**Weapons Systems Test Division**  
Naval Air Test Center  
Patuxent River, Maryland 20670  
Attn: Library

**Weapons Systems Evaluation Group**  
Attn: Col. Daniel W. McEwen  
Department of Defense  
Washington, D. C. 20305

**Yale University**  
Engineering Department  
New Haven, Connecticut 06720

**Mr. Charles F. Yeat**  
Special Asst. to the Director of Research  
NADA  
Washington, D. C. 20546

**Dr. Leo Young**  
Stanford Research Institute  
Menlo Park, California 94025

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Division of Engineering and Applied Physics Harvard University Cambridge, Massachusetts		2a. REPORT SECURITY CLASSIFICATION Unclassified	
		2b. GROUP	
3. REPORT TITLE  COMPUTATION OF OPTIMAL SINGULAR CONTROLS			
4. DESCRIPTIVE NOTES (Type of report and, inclusive dates) Interim technical Report			
5. AUTHOR(S) (First name, middle initial, last name)  D. H. Jacobson, S. B. Gershwin and M. M. Lele			
6. REPORT DATE January 1969		7a. TOTAL NO. OF PAGES 28	7b. NO. OF REFS 23
8a. CONTRACT OR GRANT NO.  N00014-67-A-0298-0006 and NASA		9a. ORIGINATOR'S REPORT NUMBER(S)  Technical Report No. 580	
b. PROJECT NO. Grant 22-007-068			
c.		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.			
10. DISTRIBUTION STATEMENT This document has been approved for public release and sale; its distribution is unlimited. Reproduction in whole or in part is permitted by the U. S. Government.			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY  Office of Naval Research	
13. ABSTRACT  A class of singular control problems is made non-singular by the addition of an integral quadratic functional of the control to the cost functional; a parameter $\epsilon > 0$ multiplies this added functional. The resulting non-singular problem is solved for a monotone decreasing sequence of $\epsilon$ 's; $\epsilon_1 > \epsilon_2 > \dots > \epsilon_k > 0$ . As $k \rightarrow \infty$ , and $\epsilon_k \rightarrow 0$ , the solution of the modified problem tends to the solution of the original singular problem. A variant of the method which does not require that $\epsilon \rightarrow 0$ is also presented. Four illustrative numerical examples are described.			

14.	KEY WORDS	LINK A		LINK B		LINK C	
		ROLE	WT	ROLE	WT	ROLE	WT
	Computation of Optimal Controls Singular Arcs Successive Approximation Methods						