

Technical University of Denmark



## Electromotive Potential Distribution and Electronic Leak Currents in Working YSZ Based SOCs

**Mogensen, Mogens Bjerg; Jacobsen, Torben**

*Published in:*  
Meeting Abstracts - Electrochemical Society

*Publication date:*  
2009

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*  
Mogensen, M. B., & Jacobsen, T. (2009). Electromotive Potential Distribution and Electronic Leak Currents in Working YSZ Based SOCs. In Meeting Abstracts - Electrochemical Society (pp. Abstract 1283). Electrochemical Society, Incorporated.

## DTU Library

Technical Information Center of Denmark

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

### Electromotive potential distribution and electronic leak currents in working YSZ based SOCs

M. Mogensen<sup>1</sup>, T. Jacobsen<sup>2</sup>

<sup>1</sup>Fuel Cell and Solid State Chemistry Division, Risø National Laboratory for Sustainable Energy, The Technical University of Denmark, DK - 4000 Roskilde, Denmark, <sup>2</sup>Department of Chemistry, Building 2006, The Technical University of Denmark, DK-2800 Lyngby, Denmark

A solid electrolyte will always possess a finite electronic conductivity. This gives rise to worries about the introduction of high partial pressures inside and about too high leak currents through the yttria stabilized zirconia (YSZ) electrolyte of the solid oxide cell (SOC). Especially, problems have been predicted for the case of solid oxide electrolyser cell (SOEC).

The necessary equation for calculating the course of the electromotive potential across an SOC was established in a previous paper [1], and using the data for YSZ reported by Park and Blumenthal [2], the distribution of both the electromotive, the Galvani potentials and oxygen partial pressure across the cell was outlined in general.

This paper gives calculations for cells similar to the Risø DTU type of cells using data from cells measured in solid oxide fuel cell (SOFC) mode [3]. The polarization resistances,  $R_p$ , are taken as independent of current density. This is a fair approximation for these cells. Further, 1 atm pressure, pure oxygen on the oxygen side, and a mixture of 50 % steam, 50 % hydrogen on the hydrogen electrode were assumed. Then, partly based on data from [3] the following numbers were used as basis for the calculations: At 850 °C  $R_{p,Ni-YSZ} = 0.05 \Omega \text{ cm}^{-2}$ ,  $E_a = 0.8 \text{ eV}$ , and  $R_{p,LSM-YSZ} = 0.07 \Omega \text{ cm}^{-2}$ ,  $E_a = 1.1 \text{ eV}$ . All YSZ data were taken from [2]. The varied parameters were cell voltage, temperature, and electrolyte thickness.

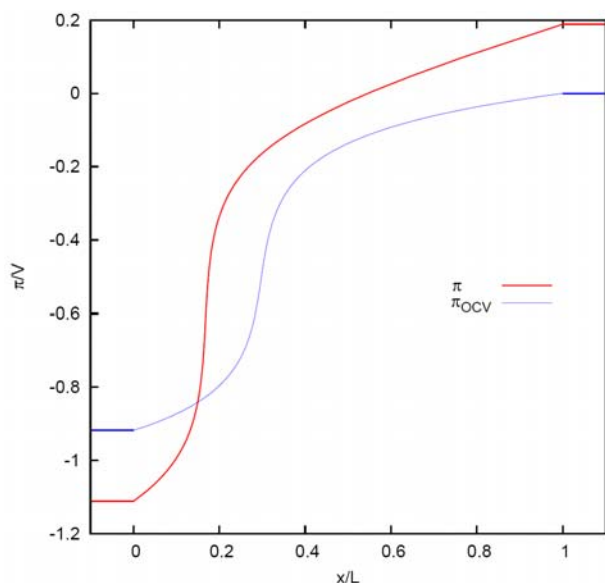


Figure 1: Electromotive potential,  $\pi$ , as function of relative distance from the interface between the negative electrode and the electrolyte in a cell operating in SOEC mode at the thermo-neutral cell voltage of 1.3 V compared to open circuit conditions at 1000 °C.  $x/L = 1$  is the interface to the oxygen electrode. The electrolyte thickness was set to 200  $\mu\text{m}$ , which gave an oxide ion current density of  $-2.1 \text{ A cm}^{-2}$ . The electron leak current density is  $\sim 10^{-4} \text{ A cm}^{-2}$  under the SOEC operation condition.

Apart from the curves of electromotive potential, the cell current density (the oxide ion current density) and the electronic leak current densities were calculated.

Figs. 1 and 2 show two examples. The calculated electromotive potential as function of the distance from the interface between the Ni-YSZ (the  $\text{H}_2\text{O}/\text{H}_2$ ) electrode and the electrolyte is given. The potential of the LSM-YSZ ( $\text{O}_2$ ) electrode is taken as zero, i.e. as the reference.

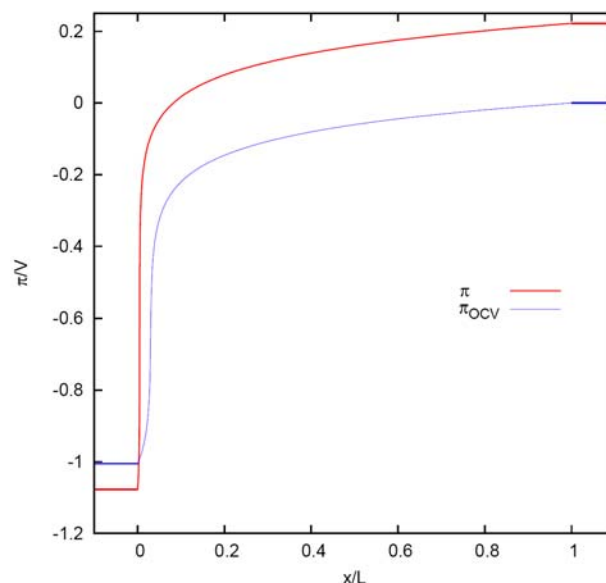


Figure 2: Electromotive potential,  $\pi$ , plotted like in Fig. 1 for 700 °C. The electrolyte thickness was set to 20  $\mu\text{m}$ , which gave an oxide ion current density of  $-0.12 \text{ A cm}^{-2}$ . The electron leak current density is  $\sim 4 \cdot 10^{-6} \text{ A cm}^{-2}$  under the SOEC operation at 1.3 V.

The electromotive potential, which reflects the local concentration of  $n$  and  $p$  (free electrons and holes), and thus the "stability" of the YSZ, follows smooth curves, and does not assume any critical value. The electrolyte part with the  $\pi$ -values left of the inflection points is predominantly  $n$  conductor and on the right side predominantly  $p$  conductor. The cell current densities look realistic, and most importantly, the electronic leak currents stay at insignificant low values compared to the current density of the cell. The calculated parameters as functions of cell voltage, temperatures and electrolyte thickness will be given in the paper.

#### Acknowledgements

This work was supported financially by The Programme Commission on Sustainable Energy and Environment, The Danish Council for Strategic Research, via the SERC project (www.serc.dk), contract no. 2104-06-0011

#### References

- [1] T. Jacobsen and M. Mogensen, *ECS Transactions*, **13** (no.26), 259 (2008).
- [2] J.H. Park and R.N. Blumenthal, *J. Electrochem. Soc.*, **136** 2867 (1989).
- [3] R. Barford, M. Mogensen, T. Klemenso, A. Hagen, Y-L. Liu, P. V. Hendriksen, *J. Electrochem. Soc.*, **154**, B371 (2007).