

Purdue University Purdue e-Pubs

Faculty Publications

Department of Computer Information Technology

4-30-2019

Urban Underground Infrastructure Monitoring IoT: The Path Loss Analysis

Abdul Salam

Purdue University, salama@purdue.edu

Syed Shah

Follow this and additional works at: https://docs.lib.purdue.edu/cit_articles

Part of the [Civil Engineering Commons](#), [Digital Communications and Networking Commons](#), [Electromagnetics and Photonics Commons](#), [Environmental Engineering Commons](#), [Geotechnical Engineering Commons](#), [Hydraulic Engineering Commons](#), [OS and Networks Commons](#), [Soil Science Commons](#), [Structural Engineering Commons](#), [Sustainability Commons](#), [Systems and Communications Commons](#), and the [Water Resource Management Commons](#)

Salam, Abdul and Shah, Syed, "Urban Underground Infrastructure Monitoring IoT: The Path Loss Analysis" (2019). *Faculty Publications*. Paper 15.

https://docs.lib.purdue.edu/cit_articles/15

This document has been made available through Purdue e-Pubs, a service of the Purdue University Libraries. Please contact epubs@purdue.edu for additional information.

Urban Underground Infrastructure Monitoring IoT: The Path Loss Analysis

Abdul Salam
Purdue University, USA
Email: salama@purdue.edu

Syed Shah
Prudential Financial, USA
Email: syed.shah@prudential.com

Abstract—The extra quantities of wastewater entering the pipes can cause backups that result in sanitary sewer overflows. Urban underground infrastructure monitoring is important for controlling the flow of extraneous water into the pipelines. By combining the wireless underground communications and sensor solutions, the urban underground IoT applications such as real time wastewater and storm water overflow monitoring can be developed. In this paper, the path loss analysis of wireless underground communications in urban underground IoT for wastewater monitoring has been presented. It has been shown that the communication range of up to 4 kilometers can be achieved from an underground transmitter when communicating through 10cm thick asphalt layer.

I. INTRODUCTION

Internet of Underground Things (IOUT) has numerous applications in the field of precision agriculture [1], [2], [3], [4], [5], [6], [7], [8], [9], [10], [11], [12], [13], [14], [15], [16], [17], [18], [19], [20] [21]. Another important application is in the area of border monitoring, where this technology is being employed for border enforcement and to curtail infiltration [22], [23]. Moreover, IOUT is also being utilized for landslide and pipeline monitoring [4], [24], [25]. IOUT provides seamless access of information collected from agricultural fields through the Internet. IOUT include in situ soil sensing capabilities (e.g., soil moisture, temperature, salinity), but also provide the ability to communicate through plants and soil, and real-time information about the environment (e.g., wind, rain, solar) [26]. When interconnected with existing machinery on the field (seeders, irrigation systems, combines), IOUT enable complete autonomy on the field, and lead to development of enhanced food production applications [27]. At agricultural farm level, IOUTs are being used to provide valuable information to the farmers.

Urban areas have public infrastructure worth billions of dollars located underground. City governments spend significant budget annually to support this underground infrastructure. The underground IoT solutions are rare due to challenges in connectivity and needs for extensive cabling to leverage over-the-air communication solutions, which increases costs. By combining wireless underground technology and sensor solutions [28], [27], many transformative urban underground IoT application such as real time flow monitoring, intrusion and infiltration (I&I) isolation and smart manhole lids can be developed.

The city waste water bodies are responsible for collecting and treating wastewater at wastewater recovery facilities by processing many million gallons a day. Cities have a strong need to monitor the quantity and quality of wastewater entering the collection system and reaching these recovery facilities. Extra quantities of water entering the pipes can cause backups that result in sanitary sewer overflows. Eliminating I&I is important for controlling the flow of extraneous water into the pipeline. However, currently most cities do not have access to affordable underground sensor and connectivity technologies designed to detect problems in time to take preventive action. In this paper, we present the path loss analysis of wireless underground communications using urban underground IoT for wastewater monitoring. The architecture of urban underground IoT for wastewater monitoring is shown in Fig. 1.

The wastewater flow monitoring application can utilize wireless underground communication technology [29], which allows IoT radios to be buried underground [3]. Underground pipe monitoring sensors, connected to wireless underground software defined radios, can wirelessly connect to the roadside urban infrastructure at the nearest traffic light pole. This wireless underground technology has been shown to be successful in agricultural fields for several years with effective communication ranges of 100-200m [27]. We present a theoretical path loss analysis for wireless underground communication through asphalt to design long-range wireless communication radios, which will allow underground radios to be deployed sufficiently deep to keep cabling to the underground pipes at a minimum while maintaining connectivity [8], [30]. Providing this information to mobile devices will enable large-scale dissemination of timely alerts during emergencies. This application can also drive realistic wireless traffic for evaluating solutions for wireless underground networks.

This rest of the paper is organized as follows: the path loss model for stratified media to air communications has been presented in Section II. In this section, attenuation in the stratified medium and dispersion of sub-grade of soil has been described. In Section III, the model evaluations are performed using different parameters. The paper is concluded in Section IV.

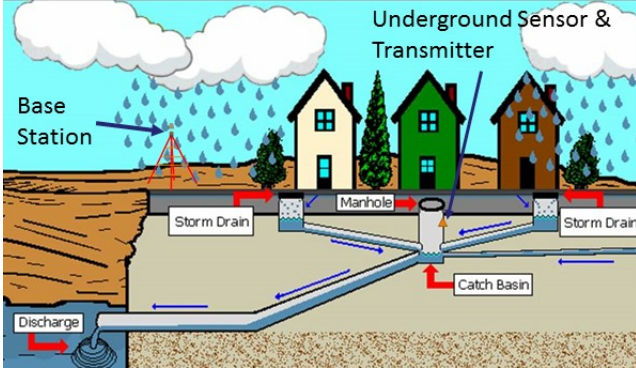


Fig. 1: The architecture of urban underground IoT for wastewater monitoring.

II. PATH LOSS MODEL FOR STRATIFIED MEDIA TO AIR COMMUNICATIONS

In this section we present the attenuation in the stratified medium and dispersion of sub-grade of soil.

A. Attenuation in the Stratified Medium

The layered structure of the underground medium is shown in Fig. 2. The unique characteristics of signal propagation in stratified medium require derivation of the path loss considering the properties of different layers involved in communication [31].

We consider propagation loss at two levels: 1) free space path loss, 2) loss through stratified layers.

Free Space Path Loss: From Friis equation [32], the received signal strength in free space at a distance r from the transmitter is expressed in logarithmic form as:

$$P_r = P_t + G_r + G_t - L_{fs}, \quad (1)$$

where P_t is the transmit power, G_r and G_t are the gains of the receiver and transmitter antennas, and L_{fs} is the path loss in free space in dB, which is given by

$$L_{fs} = 32.4 + 20\log(d) + 20\log(f). \quad (2)$$

where d is the distance between the transmitter and the receiver in meters, and f is the operation frequency in MHz.

Propagation Loss in the Layered Medium: For the propagation through layered medium, loss through medium should account for the effect of the properties of different




Fig. 2: The layered structure of the underground medium.

layers involved in communication. As a result, the received signal can be rewritten as [33]:

$$P_r = P_t + G_r + G_t - L_m, \quad (3)$$

where $L_m = L_{fs} + L_l$, and L_l stands for the additional path loss caused by the propagation of EM waves through the stratified medium, which is calculated by considering the following differences of EM wave propagation in layered medium as compared to that of free space. The additional path loss, L_l , in stratified medium is, hence, composed of loss of the total number of layers:

$$L_l = \sum_{n=0}^{N-1} L_n, \quad (4)$$

where L_n is the attenuation loss in the n th layer for each of the N layers.

Propagation loss in the L_n , depends on the complex propagation constant of the EM wave in that layer, which is given as $\gamma = \alpha + j\beta$ with

$$\alpha = \omega \sqrt{\frac{\mu\epsilon'}{2} \left[\sqrt{1 + \left(\frac{\epsilon''}{\epsilon'}\right)^2} - 1 \right]}, \quad (5)$$

$$\beta = \omega \sqrt{\frac{\mu\epsilon'}{2} \left[\sqrt{1 + \left(\frac{\epsilon''}{\epsilon'}\right)^2} + 1 \right]}, \quad (6)$$

where $\omega = 2\pi f$ is the angular frequency, μ is the magnetic permeability, and ϵ' and ϵ'' are the real and imaginary parts of the dielectric constant as given in (9), respectively. Consequently, the path loss, L_n , in for a particular layer is found as [34]:

$$L_n[\text{dB}] = 20\gamma d \log_{10}(e) \quad (7)$$

where $e = 2.71828$, and d is thickness of the n th layer.

It can be seen that the propagation loss depends on the complex propagation constant of the EM wave in medium, layer thickness d , operating frequency, f , and other properties of the medium. Next, we consider the dispersion of next layer involved in the sewer overflow monitoring system.

B. Dispersion of Sub-grade of Soil

Using Peplinski's principle [35], the dielectric properties of soil in the 0.3-1.3 GHz band can be calculated as follows:

$$\epsilon = \epsilon' - j\epsilon'', \quad (8)$$

$$\epsilon' = 1.15 \left[1 + \frac{\rho_b}{\rho_s} (\epsilon_s^{\alpha'}) + m_v^{\beta'} \epsilon_{fw}^{\alpha'} - m_v \right]^{1/\alpha'}$$

$$- 0.68, \quad \epsilon'' = [m_v^{\beta''} \epsilon_{fw}^{\alpha'']^{1/\alpha'}}, \quad (9)$$

respectively, where ϵ is the relative complex dielectric constant of the soil-water mixture, m_v is the water volume fraction (or volumetric moisture content) of the mixture, ρ_b is the bulk density in grams per cubic centimeter, $\rho_s = 2.66 \text{ g/cm}^3$ is the specific density of the solid soil particles, $\alpha' = 0.65$ is an

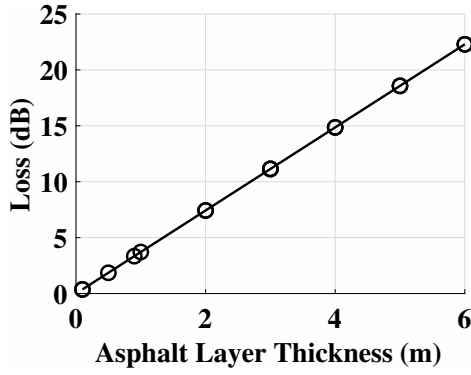


Fig. 3: The propagation loss in the asphalt medium with change in layer thickness.

TABLE I: Model evaluation parameters.

Parameter	Value
P_t	20 dBm
Soil Layer Thickness	20 cm
Asphalt Layer Thickness	10 cm
Frequency	433 MHz
Noise Floor	-90 dBm
Soil Moisture	5% by Volume
Asphalt Temperature	300 K / 80.33 F/ 26 C

empirically determined constant, and β' and β'' are empirically determined constants, dependent on soil-type and given by

$$\beta' = 1.2748 - 0.519S - 0.152C, \quad (10)$$

$$\beta'' = 1.33797 - 0.603S - 0.166C, \quad (11)$$

where S and C represent the mass fractions of sand and clay, respectively. The quantities ϵ'_{fw} and ϵ''_{fw} are the real and imaginary parts of the relative dielectric constant of free water.

III. MODEL EVALUATION

In this section, we present the path loss analysis. The model parameters considered for this evaluation are shown in Table I. The soil and asphalt layer thickness is 20 cm and 10 cm, respectively, with soil moisture level of 5%. The operation frequency of 433 MHz is used with transmission power of 20 dBm. In Fig. 3, the propagation loss in the asphalt medium with change in layer thickness has been shown. It can be observed that with layer thickness of less than 1m, the propagation loss is less than 5dB. However, it increases with increase in layer thickness. It increases to 15dB for the 4m thick asphalt layer.

The path loss with change in distance is shown in Fig. 4. It can be observed that for communication distances up to

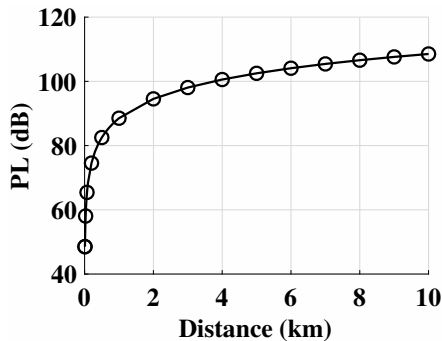


Fig. 4: The path loss with change in distance.

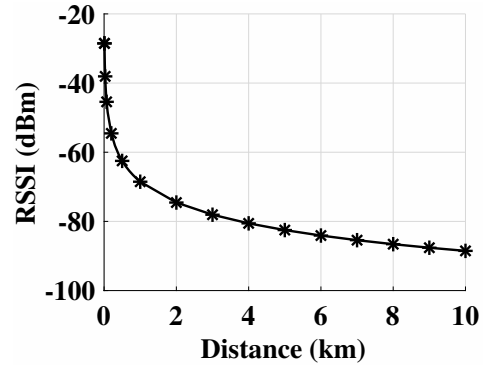


Fig. 5: The received signal strength indicator with distance.

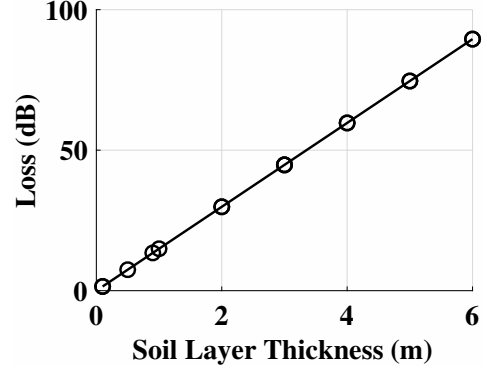


Fig. 6: The propagation loss in the soil medium with change in layer thickness.

4km, the path loss is less than 100dB. It increases to 107dB for a distance of 10km. The received signal strength indicator (RSSI) with distance is shown in Fig. 5. It can be observed that the RSSI decreases with distance. This decrease is abrupt for distances less than 2km. Afterwards, it decreases gradually. At communication distance of 4km, the -80dBm RSSI indicates that underground nodes in urban underground infrastructure monitoring IoT can effectively communicate with urban road-side wireless communication infrastructure.

In Fig. 6, the propagation loss in the soil medium with change in layer thickness has been shown. It can be observed that with layer thickness of less than 2m, the propagation loss is less than 37dB. However, it increases with increase in thickness. It increases to 57dB for the 4m thick soil layer. Moreover, it can also be observed that soil medium has higher loss as compared to the asphalt medium. This is caused by the the higher permittivity of the soil as compared to the asphalt. The higher water holding capacity of the soil in comparison to asphalt medium leads to the higher permittivity of soil.

The effect of temperature change on propagation loss in asphalt is shown in Fig. 7. It can be observed that with change in asphalt temperature from 300K to 360K, the path loss increases to 3.6dB. Therefore, the wireless communication system in urban underground infrastructure monitoring IoT should be design by considering the temperature change of the asphalt medium in different weather conditions.

IV. CONCLUSIONS

In this paper, the path loss analysis of wireless underground communications in urban underground IoT for wastewater

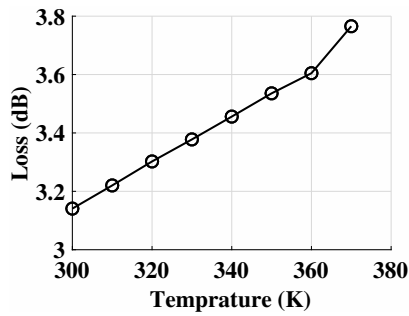


Fig. 7: The effect of temperature change on propagation loss in asphalt.

monitoring has been presented. It has been shown that by combining wireless underground technology and sensor solutions, many transformative urban underground IoT application such as real time flow monitoring, intrusion and infiltration (I&I) isolation and smart manhole lids can be developed. The path loss model evaluations have been done in different communications media under different layers thickness levels.

REFERENCES

- [1] I. F. Akyildiz and E. P. Stuntebeck, "Wireless underground sensor networks: Research challenges," *Ad Hoc Networks Journal (Elsevier)*, vol. 4, pp. 669–686, July 2006.
- [2] H. R. Bogen and et.al., "Potential of wireless sensor networks for measuring soil water content variability," *Vadose Zone Journal*, vol. 9, no. 4, pp. 1002–1013, November 2010.
- [3] X. Dong, M. C. Vuran, and S. Irmak, "Autonomous precision agriculture through integration of wireless underground sensor networks with center pivot irrigation systems," *Ad Hoc Networks*, vol. 11, no. 7, pp. 1975 – 1987, 2013.
- [4] H. Guo and Z. Sun, "Channel and energy modeling for self-contained wireless sensor networks in oil reservoirs," *IEEE Trans. Wireless Communications*, vol. 13, no. 4, pp. 2258–2269, April 2014.
- [5] A. Markham and N. Trigoni, "Magneto-inductive networked rescue system (miners): Taking sensor networks underground," in *Proceedings of the 11th ICPS*, ser. IPSN '12. ACM, 2012, pp. 317–328.
- [6] N. Saeed, T. Y. Al-Naffouri, and M.-S. Alouini, "Towards the internet of underground things: A systematic survey," *arXiv preprint arXiv:1902.03844*, 2019.
- [7] A. Salam and M. C. Vuran, "Wireless underground channel diversity reception with multiple antennas for internet of underground things," in *Proc. IEEE ICC 2017*, Paris, France, May 2017.
- [8] A. Salam and M. C. Vuran, "Smart underground antenna arrays: A soil moisture adaptive beamforming approach," in *Proc. IEEE INFOCOM 2017*, Atlanta, USA, May 2017.
- [9] A. Salam, M. C. Vuran, and S. Irmak, "Pulses in the sand: Impulse response analysis of wireless underground channel," in *Proc. INFOCOM 2016*, San Francisco, USA, Apr. 2016.
- [10] A. Salam and M. C. Vuran, "EM-Based Wireless Underground Sensor Networks," in *Underground Sensing*, S. Pamukcu and L. Cheng, Eds. Academic Press, 2018, pp. 247 – 285.
- [11] A. Salam, M. C. Vuran, and S. Irmak, "Di-sense: In situ real-time permittivity estimation and soil moisture sensing using wireless underground communications," *Computer Networks*, vol. 151, pp. 31 – 41, 2019. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S1389128618303141>
- [12] A. Salam, "Pulses in the sand: Long range and high data rate communication techniques for next generation wireless underground networks," *ETD collection for University of Nebraska - Lincoln*, no. AAI10826112, 2018. [Online]. Available: <http://digitalcommons.unl.edu/dissertations/AAI10826112>
- [13] A. Salam, M. C. Vuran, X. Dong, C. Argyropoulos, and S. Irmak, "A theoretical model of underground dipole antennas for communications in internet of underground things," *IEEE Transactions on Antennas and Propagation*, 2019.
- [14] A. Salam and S. Shah, "Internet of things in smart agriculture: Enabling technologies," in *2019 IEEE 5th World Forum on Internet of Things (WF-IoT) (WF-IoT 2019)*, Limerick, Ireland, Apr. 2019.
- [15] A. Salam, "Underground soil sensing using subsurface radio wave propagation," in *5th Global Workshop on Proximal Soil Sensing*, Columbia, MO, May 2019.
- [16] A. Salam, "A comparison of path loss variations in soil using planar and dipole antennas," in *2019 IEEE International Symposium on Antennas and Propagation*. IEEE, Jul 2019.
- [17] A. Salam, "A path loss model for through the soil wireless communications in digital agriculture," in *2019 IEEE International Symposium on Antennas and Propagation*. IEEE, Jul 2019.
- [18] A. Salam, "Underground environment aware MIMO design using transmit and receive beamforming in internet of underground things," in *2019 International Conference on Internet of Things (ICIOT 2019)*, San Diego, USA, Jun. 2019.
- [19] A. Salam, "An underground radio wave propagation prediction model for digital agriculture," *Information*, vol. 10, no. 4, 2019. [Online]. Available: <http://www.mdpi.com/2078-2489/10/4/147>
- [20] S. Temel, M. C. Vuran, M. M. Lunar, Z. Zhao, A. Salam, R. K. Faller, and C. Stolle, "Vehicle-to-barrier communication during real-world vehicle crash tests," *Computer Communications*, vol. 127, pp. 172 – 186, 2018. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0140366417305224>
- [21] M. J. Tiisanen, "Soil scouts: Description and performance of single hop wireless underground sensor nodes," *Ad Hoc Networks*, vol. 11, no. 5, pp. 1610 – 1618, 2013.
- [22] I. F. Akyildiz, Z. Sun, and M. C. Vuran, "Signal propagation techniques for wireless underground communication networks," *Physical Communication Journal (Elsevier)*, vol. 2, no. 3, pp. 167–183, Sept. 2009.
- [23] Z. Sun, P. Wang, M. C. Vuran, M. A. Al-Rodhaan, A. M. Al-Dhelaan, and I. F. Akyildiz, "Border patrol through advanced wireless sensor networks," *Ad Hoc Networks*, vol. 9, no. 3, pp. 468–477, 2011.
- [24] Z. Sun and I. Akyildiz, "Channel modeling and analysis for wireless networks in underground mines and road tunnels," *IEEE Transactions on Communications*, vol. 58, no. 6, pp. 1758–1768, June 2010.
- [25] Z. Sun and et.al., "MISE-PIPE: Magnetic induction-based wireless sensor networks for underground pipeline monitoring," *Ad Hoc Networks*, vol. 9, no. 3, pp. 218–227, 2011.
- [26] M. C. Vuran, A. Salam, R. Wong, and S. Irmak, "Internet of underground things: Sensing and communications on the field for precision agriculture," in *2018 IEEE 4th World Forum on Internet of Things (WF-IoT) (WF-IoT 2018)*, Singapore, Feb. 2018.
- [27] M. C. Vuran, A. Salam, R. Wong, and S. Irmak, "Internet of underground things in precision agriculture: Architecture and technology aspects," *Ad Hoc Networks*, 2018. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S1570870518305067>
- [28] A. Konda, A. Rau, M. A. Stoller, J. M. Taylor, A. Salam, G. A. Pribil, C. Argyropoulos, and S. A. Morin, "Soft microreactors for the deposition of conductive metallic traces on planar, embossed, and curved surfaces," *Advanced Functional Materials*, vol. 28, no. 40, p. 1803020.
- [29] M. Vuran, X. Dong, and D. Anthony, "Antenna for wireless underground communication," Dec. 27 2016, US Patent 9,532,118. [Online]. Available: <https://www.google.com/patents/US9532118>
- [30] A. Salam, M. C. Vuran, and S. Irmak, "Towards internet of underground things in smart lighting: A statistical model of wireless underground channel," in *Proc. 14th IEEE International Conference on Networking, Sensing and Control (IEEE ICNSC)*, Calabria, Italy, May 2017.
- [31] J. Wait and J. Fuller, "On radio propagation through earth: Antennas and propagation," *IEEE Trans. Antennas and Propagation*, vol. 19, no. 6, pp. 796–798, November 1971.
- [32] A. Goldsmith, *Wireless Communications*. New York, NY, USA: Cambridge University Press, 2005.
- [33] M. C. Vuran and I. F. Akyildiz, "Channel model and analysis for wireless underground sensor networks in soil medium," *Physical Communication*, vol. 3, no. 4, pp. 245–254, December 2010.
- [34] C. T. Johnk, *Engineering Electromagnetic Fields and Waves*, 2nd ed. John Wiley & Sons, Jan. 1988.
- [35] N. Peplinski, F. Ulaby, and M. Dobson, "Dielectric properties of soil in the 0.3–1.3 ghz range," *IEEE Transactions on Geoscience and Remote Sensing*, vol. 33, no. 3, pp. 803–807, May 1995.