

Reservoir Computing with Nonlinear Micro-Resonators on a Silicon Photonics Chip

Damien Rontani,[†] Florian Denis-Le Coarer,[†] Andrew Katumba,[‡] Matthias Freiburger,[‡] Joni Dambre,[‡] Peter Bienstman,[‡] Marc Sciamanna[†]

[†] Chair in Photonics, CentraleSupélec, Université Paris-Saclay F-57070 Metz, France
LMOPS EA 4423 Laboratory, CentraleSupélec & Université de Lorraine, F-57070 Metz, France
[‡] Photonics Research Group, Ghent University/imec, 9000 Gent, Belgium

Email: damien.rontani@centralesupelec.fr, florian.denis@centralesupelec.fr

Abstract – We present here recent advances in the use of a small network of nonlinear micro-resonators integrated on a Silicon chip as a reservoir computer. We provide numerical evidence that this novel photonic integrated circuit can perform binary-type tasks (e.g.: the XOR task or multi-bit header recognition task) at bitrate of 20 Gb/s with a performance level adequate for telecom applications. We analyze the impact of key operational parameters (e.g.: optical power injected) and topological properties of the network on the level of performance of the proposed architecture. Finally, we will compare the performance between this new chip with a previous generation of passive reservoir [1] realized with splitters and combiners without any internal nonlinearity.

Introduction – In the last five years, there has been a reboot of neuro-inspired optical computing via the transposition of a simple, yet very efficient machine learning paradigm known as reservoir computing [2,3]. The proposed architectures rely on typical photonic architectures such as electro-optic oscillators [4,5], semiconductor laser diodes [6], or semi-conductor amplifiers [7]. Although the level of performance of these architectures demonstrated reaches up to 1 million pattern recognitions per second [8] and an energy efficiency increased by two orders of magnitude [6], these setups still suffer from a lack of integration.

The emergence of integrated photonics has attracted a lot attention in recent years with the promise of developing novel functionalities not exceeding a few square centimeters on a chip.

In this proceeding, we report on the performance of a small network (4x4 nodes) of nonlinear micro-resonators on a silicon chip as candidate architecture for reservoir computing. We show there exists regimes of operation where the dynamical network outperforms a purely passive reservoir structure comprised of splitters and combiners [1]. This opens a new venue for the use of novel classes of photonic integrated circuits for neuro-inspired computing.

1. Theoretical Framework

1.1 Model for the nonlinear micro-ring resonator

The dynamical system under consideration is a non-linear micro-ring resonator, illustrated in Fig. 1(a). This system is described within the framework of coupled mode theory (CMT) by the following mathematical model [9]:

$$\frac{da}{dt} = \left[j(\omega_r - \omega + \delta\omega_{nl}) - \frac{\gamma_{loss}}{2} \right] a + \kappa s_{in}, \quad (1)$$

$$\frac{d\Delta T}{dt} = -\frac{\Delta T}{\tau_{ph}} + \frac{\Gamma_{th}\gamma_{abs}|a|^2}{\rho_{Si}c_p Si V_{th}}, \quad (2)$$

$$\frac{dN}{dt} = -\frac{N}{\tau_{fc}} + \frac{\Gamma_{FCA}\beta_{Si}c^2|a|^4}{2\hbar\omega_{FCA}n_g^2}, \quad (3)$$

where a denotes the complex mode amplitude, ΔT the temperature variations and N the free carrier concentration; ω is the frequency of the input optical carrier and ω_r the resonance frequency of the micro-ring, $\delta\omega_{nl}(\Delta T, N)$ is the nonlinear frequency detuning, $\gamma_{loss}(|a|^2, N)$ is the total loss in the cavity due to imperfect coupling, radiations and absorption.

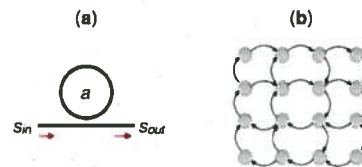


Figure 1 – (a) Illustration of a micro-ring coupled to a waveguide with input (s_{in}) and output (s_{out}) signals and cavity mode (a). There is a simple mathematical relationship between the three quantities: $s_{out} = e^{i\phi} s_{in} + \kappa a$ with ϕ a coupling phase. (b) SWIRL topology of a 4x4 network. Each gray circle represents a micro-ring.

The coefficient κ is the coupling coefficient between the ring and the waveguide as shown in Fig. 1(a) and s_{in} is the input optical signal. The remaining parameters are associated with material properties: τ_{ph} and τ_{fc} are the

relaxation times for the temperature and the free carriers, respectively. β_{Si} is the constant governing the two-photon absorption. $c_{p,Si}$ is the thermal capacity; ρ_{Si} is the density of silicon; n_g is the group index equal in first approximation to the index of bulk silicon. $V_{th,FCA}$ and $\Gamma_{th,FCA}$ are the effective volumes and confinement factor for thermal and free-carrier absorption effects, respectively. Their numerical values are identical to those used in Ref. [9].

1.2 Network structure

We consider in our study the so-called SWIRL topology shown in Fig. 1(b). It allows for the presence of recurrent loops in the network necessary for solving tasks requiring memory (such as multi-step time-series forecasting) [4-6]. This topology has been already used for passive reservoir computer architectures [1].

1.3 Reservoir computing based on network of nonlinear micro-resonators

In the reservoir computing approach [2,3], the structure of the network is not trained to solve a given task, only the weights of a linear combination \hat{y}_{RC} of the network's states (readout layer) are trained to reproduce a target output y_{target} based on a given set of inputs.

In our simulations, we consider that input signal is sent to every node in the network. The output signal is realized as the weighted sum of the optical intensity of each node sampled at discrete times $\Delta t = 6.25$ ps.

The nodes are trained using ridge regression and five-fold cross-validation on sets of 10,000 bits used in the XOR task. The XOR task is a nonlinear problem consisting of estimating from the k -th bit $x[k]$, the quantity $y[k]$ defined by the following expression:

$$y[k] = x[k] \oplus x[k-1]. \quad (4)$$

We analyze the performance of our reservoir computing architecture in terms of bit error rate (BER).

2. Simulations results

In this section, we realize a comparative performance analysis of 4x4 SWIRL networks with (i) passive components similar to that of Ref. [1] and (ii) with nonlinear micro-rings.

We first study the influence of the size of a network of nonlinear micro-rings on the XOR-task performance at two different bit rates 10 Gb/s and 20 Gb/s. Figure 2(a) shows the level of performance for these various networks. Similar to an all-passive reservoir, the performance scales

with the size of the reservoir. However, we observe consistently a lower BER at 20 Gb/s. This dependence of performance on the data rate is linked to the presence of intrinsic time-scales of dynamics in the micro-ring that do not exist in purely passive reservoir. A bitrate of 20 Gb/s corresponds based on extensive simulations to an optimum operational point to use a reservoir with nonlinear micro-rings.

In Fig. 2(b), we compare the performance on the XOR task of a reservoir with passive elements and another one with nonlinear rings. They operate under similar conditions in terms of number of nodes (4x4: 16 nodes), data rate (20 Gb/s), and injected optical power (0.5 mW per node).

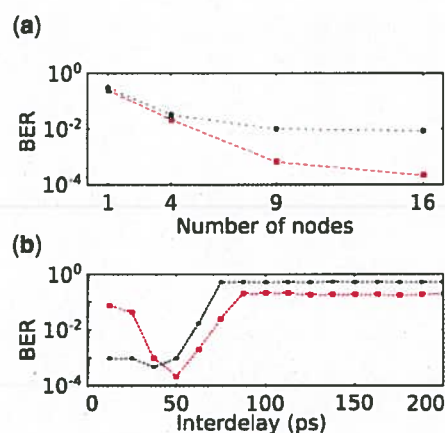


Figure 2 – (a) BER on the XOR task for a $n \times n$ reservoir with $n=1,2,3,4$ at two different bit rates: 10 Gb/s (black curve) and 20 Gb/s (red curve). (b) Comparative performance in terms of BER for a 4x4 passive reservoir (black curve) and reservoir composed of nonlinear micro-ring (red curve) at 20 Gb/s.

We analyze how the inter-delay (the propagation delay between the nodes) in the reservoir relative to the bit rate influences the performance level (this test has been also realized in Ref. [1]). In these conditions, we notice that the minimum BER is smaller than the one obtained by a fully passive reservoir. We also observe that for an inter-delay greater than 50 ps, the reservoir based on micro-rings systematically performs better than its passive counterpart.

3. Conclusion

We have demonstrated in this proceeding preliminary results on the level of performance of a small network of nonlinear micro-rings integrated on a photonic chip for reservoir computing applications. The addition of nonlinear components allows us to perform better on the nonlinear XOR task in adequate similar operating conditions. This motivates further investigation to fully characterize the performance of this type of architecture and opens new venues toward all-optical signal processing.

Acknowledgments

D.R., F.D-L.C., and M.S. acknowledge the support of the Fondation Supélec, Préfecture de Région Grand-Est, Région Grand-Est, Metz Métropole, Département de la Moselle, Airbus GDI Simulation for the Chair in Photonics. This work is performed in the framework of the H2020 European project PHRESCO. D.R acknowledges the AFSOR through grants FA9550-15-1-0279 and FA9550-17-1-0072.

References

[1] K. Vandoorne, P. Mechet, T. Van Vaerenbergh, M. Fiers, G. Morthier, D. Verstraeten, B. Schrauwen, J. Dambre, and P. Bienstman, "Experimental demonstration of reservoir computing on a silicon photonics chip," *Nat. Commun.*, vol. 5, pp.1-6, 2014.

[2] W. Maass, T. Natschläger, H. Markram, "Real-time computing without stable states: a new framework for neural computation based on perturbations," *Neural Comput.* vol. 14, pp. 2531–2560, 2002.

[3] D.Verstraeten, B. Schrauwen, M. D'Haene, D. Stroobandt, "An experimental unification of reservoir computing methods," *Neural Netw.* vol 20, pp. 391–403, 2007.

[4] Y. Paquot, F. Duport, A. Smerieri, J. Dambre, B. Schrauwen, M. Haelterman, S. Massar, "Optoelectronic reservoir computing," *Sci Rep.* vol. 2:287, pp. 1-6, 2012.

[5] L. Larger, M. C. Soriano, D. Brunner, L. Appeltant, J. M. Gutierrez, L. Pesquera, C. R. Mirasso, and I. Fischer, "Photonic information processing beyond Turing: an optoelectronic implementation of reservoir computing," *Opt. Express* vol. 20, pp. 3241- 3249, 2012.

[6] D. Brunner, M.C. Soriano, C.R. Mirasso, I. Fischer, "Parallel photonic information processing at gigabyte per second data rates using transient states," *Nat. Commun.* vol. 4:1364, pp. 1-7, 2013. [SEP]

[7] K. Vandoorne, W. Dierckx, B. Schrauwen, D. Verstraeten, R. Baets, P. Bienstman, and J. Van Campenhout, "Toward optical signal processing using Photonic Reservoir Computing," *Opt. Express* vol.16, pp. 11182-11192, 2008.

[8] L. Larger, A. Baylón-Fuentes, R. Martinenghi, V. S. Udaltsov, Y. K. Chembo, M. Jacquot, "High-speed photonic reservoir computing using a time-delay-based architecture: Million words per second classification," *Phys. Rev. X* vol. 7 :011015, pp.1-14, 2017.

[9] T. Van Vaerenbergh, "All-optical spiking neurons integrated on a photonics chip", PhD Thesis, 2013.

NOLTA2017

CANCÚN INTERNATIONAL CONVENTION CENTER,

CANCÚN, MEXICO

DECEMBER 4TH-7TH, 2017



The 2017 International Symposium on Nonlinear Theory and its Applications (NOLTA2017) will be held at Cancún International Convention Center, Cancún, Mexico from December 4th to 7th, 2017. The objective of the symposium is to provide a forum for exchange of the latest results related to nonlinear theory and its applications. Papers describing original results in all aspects of nonlinear theory and its applications are invited. Topics include, but are not limited to:

Analog and Digital ICs
Applied Mathematics
Artificial Intelligence
Biocybernetics
Biomedical Data Processing
Biomedical Engineering
Cellular Neural Networks
Chaos and Bifurcation
Chaotic Neural Networks
Chemical Reaction Systems
Circuits and Systems
Communications
Complex Networks
Complex Systems

Computational Neuroscience
Control
Coupled Oscillators
Deep Learning
Electrical and Electronic
Engineering
Evolutionary Computation
Fractals
Fuzzy Systems
Image and Signal Processing
Large-Scale Networks
Learning and Memory
Mathematical Economics
Memristors

Modeling and Simulations
Neuro Dynamics
Optics
Optimization
Oscillations
Power Systems
Prediction and Identification
Robotics
Self-Validating Numerics
Social Dynamics
Soft Matter
Solitons
Synchronization

SYMPOSIUM COMMITTEE

GENERAL CO-CHAIRS

Antonio Palacios (San Diego State University)
Hisato Fujisaka (Hiroshima City University)

TECHNICAL PROGRAM CO-CHAIRS

Visarath In (SPAWAR)
Kiyohisa Natsume (Kyushu Institute of Technology)

TECHNICAL PROGRAM SECRETARY

Katsumi Tateno (Kyushu Institute of Technology)

SPECIAL SESSION CO-CHAIRS

Luciano Buono
(University of Ontario Institute of Technology)
Hiroyuki Torikai (Kyoto Sangyo University)

SPECIAL SESSION SECRETARY

Munehisa Sekikawa (Utsunomiya University)

FINANCE CHAIR

Hidehiro Nakano (Tokyo City University)

FINANCE SECRETARY

Nobuyoshi Komuro (Chiba University)

PUBLICITY CHAIR

Takashi Matsubara (Kobe University)

PUBLICATION CO-CHAIRS

Maria Leite (University of South Florida)
Tadashi Tsubone (Nagaoka University of Technology)

PUBLICATION SECRETARY

Wataru Kurebayashi (Aomori University)

GENERAL CO-SECRETARIES

Hugo Gonzalez (Monterrey Institute of Technology)
Masahiro Wada (Konan University)
Takeshi Kamio (Hiroshima City University)

ORGANIZER

NOLTA Society, IEICE

IN COOPERATION WITH

Technical Committee on Nonlinear Problems, IEICE
Technical Committee on Complex Communication Sciences, IEICE
Technical Committee on Circuits and Systems, IEICE

PAPER SUBMISSION

Authors are invited to submit full papers in PDF format via the website:
<http://www.nolta2017.org/>

Only electronic submissions will be accepted. Corresponding authors of accepted papers will be requested to submit a 4-page final paper for the symposium proceedings.

SPECIAL SESSIONS

NOLTA2017 welcomes proposals for special sessions. Proposals will be evaluated based on the timeliness and the scientific quality of the topic. Notification of acceptance will be sent to the organizers by May 1, 2017. Please submit proposals via email by April 19, 2017 to:

NOLTA2017 Special Session Proposal E-mail: ss@nolta2017.org

AUTHOR'S SCHEDULE

Deadline for Special Session proposals	Apr. 19 th , 2017*
Notification of acceptance for Special Sessions	May 1 st , 2017*
Deadline for submission of full papers for Regular & Special Sessions	May 28 th , 2017*
Notification of acceptance for Regular & Special Session papers	July 28 th , 2017*
Deadline for submission of all camera-ready papers	Aug. 28 th , 2017*

(*: extended)

STUDENT PAPER AWARD

The NOLTA2017 symposium will recognize outstanding student papers with the "Student Paper Award". Each accepted full paper authored by a student is eligible for the award, provided that the student is the first author and the presenter at the symposium. The award recipients are selected based on both the quality of the paper and the presentation.