



**UNIVERSITI PUTRA MALAYSIA**

**A BROADBAND COOPERATIVE RELAY-BASED SYSTEM FOR  
POWER LINE COMMUNICATION**

**AIYELABOWO O. P.**

**FK 2019 29**



**A BROADBAND COOPERATIVE RELAY-BASED SYSTEM FOR POWER  
LINE COMMUNICATION**

By

**AIYELABOWO O. P**

**Thesis Submitted to the School of Graduate Studies, Universiti Putra  
Malaysia, in Fulfilment of the Requirements for the Degree of  
Doctor of Philosophy**

**October 2018**

## **COPYRIGHT**

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia



## DEDICATION

To the memories of my late wife, Victoria Omolara Ibikemi Aiyelabowo (nee Ibidun), who died in the course of the programme.



© COPYRIGHT UPM

Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Doctor of Philosophy

## **A BROADBAND COOPERATIVE RELAY-BASED SYSTEM FOR POWER LINE COMMUNICATION**

By

**AIYELABOWO O. P**

**October 2018**

**Chairman : Professor Nor Kamariah Noordin, PhD**  
**Faculty : Engineering**

Demand for data for various broadband applications has placed the power line communication (PLC) in a prime place. In PLC, the existing electrical power installation in the last mile is used as the transmission medium, hence no new installation is required.

Since transmission of broadband data was not intended over the electrical power installation, the network (power line) poses a great deal of impediment to broadband data as it traverses the medium. These impediments are, attenuation over the length of the cable, noise (impulsive and Gaussian), and multipath fading. Hence, signals propagation over the line is either received corrupted at the destination or lost out rightly. This work implements a technique to maximize channel capacity, reduce attenuation characteristic, symbol error rate and outage probability in the PLC. Performance of the system is compared with those of MIMO-PLC and PLC-repeaters (PLC-rep.).

In the first instance, the attenuation over the long length of the power line network was combatted. A customized cooperative relaying system, implementing amplify-and-forward (AF) and decode-and-forward (DF), with placement of the relay modem at three different locations along the network in the PLC was developed. A noise mitigation system was incorporated to improve the system's bit error rate (BER). The systems' performance for channel capacity improvement between 18.32% and 73.5% and 144% and 260% over the MIMO-PLC and PLC-rep. was achieved for AF and DF schemes respectively. SER reduction on the PLCC AF and DF are 43.41% and 85.16% over the MIMO-PLC and 69.26% and 91.9% over the PLC-rep., while outage probability reduced by 96.2% and 99%. Attenuation reduction to 31.4%

was achieved with the DF link when the relay was placed 10 m away from source node.

To achieve performance maximization inspite the branches on the network, PLCC multiple relaying scheme, having three different multiple relay scenarios was arrayed. Selective relaying, implementing best relay channel instantaneous SNR, was deployed for AF and DF, hence, best relay is selected. Selective relaying improved the system's channel capacity by 201%, 303% and 70.6% over MIMO-PLC, PLC-rep. and PLCC (fixed) respectively. Owing to the noise mitigation system, the SER reduced 400% over the duo of MIMO-PLC and PLC-rep. and by 79.37% over the PLCC (fixed) schemes. Outage probability achieved a land marking drop over the benchmark links and 87.5% over the PLCC (fixed) link. Further reduction in attenuation was achieved to 64.1% with the 7 relay DF deployment.

Finally, to keep the system's maximized performance within the electromagnetic compatibility framework, optimal power ratio was developed for optimal power allocation between source and relay modems. Objective function for maximizing and minimizing the direct and cooperative transmission power was developed for optimal power ratio. The optimal power allocation (OPA) algorithm allocates one-third and two-third of the transmitted power ( $P_t$ ) to the source and relay modems, direct and cooperative transmissions respectively. Channel capacity improved by 274% and 44.37% over the MIMO-PLC and equal power allocation (EPA) scheme and achieved 457% improvement over the PLC-rep. SER with OPA reduced drastically over the benchmark links and 76.1% over the EPA scheme, while outage probability further reduces with OPA largely over the benchmark links and 90% over the EPA. The attenuation reduction is also prominent with the OPA scheme. The abstract is a digest of the entire thesis and should be given the same consideration as the main text. It does not normally include any reference to the literature. Abbreviations or acronyms must be preceded by the full term at the first use.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi keperluan untuk ijazah Doktor Falsafah

## **SISTEM KOMUNIKASI KOOPERATIF JALUR KUASA BERASASKAN GEGANTI JALUR LEBAR**

Oleh

**AIYELABOWO O. P**

**Oktober 2018**

**Pengerusi : Profesor Nor Kamariah Noordin, PhD**  
**Fakulti : Kejuruteraan**

Tuntutan data untuk pelbagai aplikasi jalur lebar telah meletakkan komunikasi jalur kuasa (PLC) di tempat yang paling penting. Dalam PLC, pemasangan kuasa elektrik sedia ada dalam perbatuan terakhir digunakan sebagai wadah transmisi, oleh itu pemasangan baru tidak diperlukan.

Oleh kerana transmisi data jalur lebar tidak dirancang untuk pemasangan kuasa elektrik, jaringan (jalur kuasa) memberi rintangan yang besar kepada data jalur lebar oleh kerana ia mengharungi medium tersebut. Halangan-halangan ini termasuk pengecilan pada panjang kabel, hingar (impulsif dan Gaussian), dan pemudaran pelbagai laluan. Oleh itu, penyebaran isyarat ke atas jalur tersebut sama ada diterima dalam keadaan yang korup di destinasi atau hilang sama sekali. Kajian ini melaksanakan satu teknik untuk memaksimumkan kapasiti saluran, mengurangkan ciri-ciri pengecilan, kadar ralat simbol dan kebarangkalian gangguan dalam PLC. Prestasi sistem dibandingkan dengan sistem MIMO-PLC dan pengulang PLC (PLC-rep.).

Dalam contoh pertama, pengecilan ke atas jaringan jalur kuasa yang panjang cuba diatasi. Satu sistem geganti yang direkacipta khas, yang menggunakan amplify-and-forward (AF) dan decode-and-forward (DF), dengan meletakkan modem geganti di tiga lokasi yang berbeza di sepanjang jaringan di PLC telah dibangunkan. Satu sistem pengurangan hingar telah digunakan untuk memperbaiki kadar ralat bit sistem (BER). Prestasi sistem untuk penambahbaikan kapasiti saluran di antara 18.32% dan 73.5% dan 144% dan 260% ke atas MIMO-PLC dan PLC-rep. telah dicapai untuk skim-skim AF dan DF. Pengurangan SER ke atas PLCC AF dan DF adalah 43.41% dan 85.16% ke atas MIMO-PLC dan 69.26% dan 91.9% ke atas PLC-rep., sementara

kebarangkalian gangguan dikurangkan sebanyak 96.2% dan 99%. Pengurangan pengecilan kepada 31.4% dicapai dengan pautan DF apabila geganti diletakkan 10 m daripada nod sumber.

Untuk memaksimumkan prestasi walaupun terdapat cabang-cabang pada saringan, skim pelbagai geganti PLCC, tiga senario geganti telah disusun. Geganti selektif, yang menjalankan SNR segera saluran geganti yang terbaik, telah digunakan untuk AF dan DF, oleh itu geganti terbaik telah dipilih. Geganti selektif memperbaiki kapasiti saluran sistem sebanyak 201%, 303% dan 70.6% merentas MIMO-PLC, PLC-rep. dan PLCC (tetap). Disebabkan oleh sistem pengurangan hingar, SER berkurangan 400% merentas kedua-dua MIMO-PLC dan PLC-rep. dan sebanyak 79.37% merentas PLCC (tetap). Kebarangkalian gangguan mencapai satu kejatuhan yang ketara ke atas pautan penanda aras dan 87.5% ke atas pautan PLCC (tetap). Pengurangan lanjut dalam pengecilan telah dicapai kepada 64.1% dengan penggunaan 7 geganti DF.

Akhir sekali untuk mengekalkan prestasi maksima sistem dalam rangka kerja kesesuaian elektro magnetik, nisbah kuasa yang optima telah dibangunkan untuk mendapatkan pembahagian kuasa yang baik di antara modem sumber dan modem geganti. Kefungsian objektif untuk memaksima dan meminimakan kuasa transmisi yang langsung dan koperatif telah dibangunkan untuk nisbah kuasa yang optima. Algoritma optimal power allocation (OPA) memperuntukkan satu pertiga dan dua pertiga kuasa yang dihantar (Pt) kepada modem sumber dan geganti serta penghantaran langsung dan koperatif. Kapasiti saluran bertambah baik sebanyak 274% dan 44.37% merentas MIMO-PLC dan peruntukkan kuasa yang sama banyak (EPA) dan mencapai 457% peningkatan ke atas PLC-rep. SER dengan OPA berkurangan secara drastik merentas pautan penanda aras dan 76.1% merentas skim EPA, sementara kebarangkalian gangguan terus berkurangan dengan OPA merentas pautan penanda aras dan 90% merentas EPA. Pengurangan pengecilan juga ketara dengan skim OPA.



## ACKNOWLEDGEMENTS

All glory and praise be unto God Almighty for His goodness and faithfulness towards me all through the duration of the programme. His immense grace and empowerment is well appreciated and gratified.

My special thanks goes to the Federal government of Nigeria for sponsoring me on the PhD programme through the Federal Polytechnic, Ilaro, Ogun State. I am grateful for the privilege. I am specially and specifically indebted to the Rector, Arc. O. O. Aluko PhD and Mr. Durowaiye of the Federal Polytechnic, Ilaro for the support and encouragement to carry on when the programme was almost called quit.

Wonderful, resourceful and reliable is the skill in supervision displayed by my supervisory committee, chaired by Prof., N. K. Nordin, supported by Assoc. Prof. S. Aduwati and Assoc. Prof. B. M Samsul. I can say without any equivocation that your mentorship and supervision was a blessing. I am appreciative of the patience of the team with me during the research work.

The patience of my immediate family is appreciated. I render a post-humours appreciation to my wife, Omolara Ibikemi Victoria, who stood in with our children while I was away. Her doggedness to caring for the children is what kept me on, though she is late, I appreciate her.

I am immensely indebted to Dr. Bamidele Adebisi of the University Minnesota Manchester (UMM) for his support, encouragement and lead in the area of power line communication.

I render a profound gratitude to my Parents and siblings for their support and prayers during the course of the programme and even when the programme was besieged by a challenge. Your presence and encouragement is appreciated.

I cannot but show appreciation to the prayers of God's children for me when it seems as if I will not complete the programme. Thank you for standing by me.

The support of my research group members in UPM, Network Laboratory, is appreciated. Thanks for your support.  
For all who have been an inspiration to me, I say thanks so much.

I certify that a Thesis Examination Committee has met on 25 October 2018 to conduct the final examination of Aiyelabowo O. P on his thesis entitled "A Broadband Cooperative Relay-Based System for Power Line Communication" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Doctor of Philosophy.

Members of the Thesis Examination Committee were as follows:

**Sharifah Mumtazah Syed Ahmad Abdul Rahman, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Chairman)

**Fazirulhisyam bin Hashim, PhD**

Senior Lecturer  
Faculty of Engineering  
Universiti Putra Malaysia  
(Internal Examiner)

**Shaiful Jahari bin Hashim, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Internal Examiner)

**Mahamod Ismail, PhD**

Professor  
Universiti Kebangsaan Malaysia  
Malaysia  
(External Examiner)



**RUSLI HAJI ABDULLAH, PhD**

Professor and Deputy Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date: 31 January 2019

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Doctor of Philosophy. The members of the Supervisory Committee were as follows:

**Nor Kamariah Noordin, PhD**

Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Chairman)

**Aduwati Sali, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

**Samsul Bahari Mohd Noor, PhD**

Associate Professor  
Faculty of Engineering  
Universiti Putra Malaysia  
(Member)

**ROBIAH BINTI YUNUS, PhD**

Professor and Dean  
School of Graduate Studies  
Universiti Putra Malaysia

Date:

## Declaration by graduate student

I hereby confirm that:

- this thesis is my original work;
- quotations, illustrations and citations have been duly referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and Innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Name and Matric No.: Aiyelabowo O. P, GS34681

## Declaration by Members of Supervisory Committee

This is to confirm that:

- the research conducted and the writing of this thesis was under our supervision;
- supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: \_\_\_\_\_

Name of Chairman  
of Supervisory  
Committee:

Professor  
Dr. Nor Kamariah Noordin

Signature: \_\_\_\_\_

Name of Member  
of Supervisory  
Committee:

Associate Professor  
Dr. Aduwati Sali

Signature: \_\_\_\_\_

Name of Member  
of Supervisory  
Committee:

Associate Professor  
Dr. Samsul Bahari Mohd Noor

## TABLE OF CONTENTS

		Page
<b>ABSTRACT</b>		i
<b>ABSTRAK</b>		iii
<b>ACKNOWLEDGEMENTS</b>		v
<b>APPROVAL</b>		vi
<b>DECLARATION</b>		viii
<b>LIST OF TABLES</b>		xiv
<b>LIST OF FIGURES</b>		xv
<b>LIST OF ABBREVIATIONS</b>		xviii
<b>CHAPTER</b>		
<b>1</b>	<b>INTRODUCTION</b>	<b>1</b>
1.1	Background	1
1.1.1	Applications of PLC	2
1.2	Problem Statement	3
1.3	Research Aims and Objectives	4
1.4	Research Questions	5
1.5	Motivation	5
1.6	Research Scope	7
1.7	Assumptions	8
1.8	Research Contribution	9
1.9	Thesis Organization	9
<b>2</b>	<b>LITERATURE REVIEW</b>	<b>11</b>
2.1	Introduction	11
2.2	Overview of PLC	12
2.2.1	Power Line Characteristics	13
2.2.1.1	PLC Channel Model	13
2.2.1.2	PLC Noise	16
2.3	Channel Capacity Maximization in PLC	17
2.3.1	Repeaters for PLC Channel Capacity Maximization	18
2.3.2	Channel Capacity Maximization by PLC MIMO	20
2.4	Cooperative Relaying and Optimization Techniques	23
2.4.1	General Principle of Cooperative Diversity	26
2.4.2	Cooperative Transmission Protocols	29
2.4.2.1	Amplify-and-Forward (AF) Single Fixed Relaying	29
2.4.2.2	Decode-and-Forward (DF) Fixed Single Relaying	31
2.4.3	Multiple Relaying Nodes	32
2.4.3.1	Amplify-and-Forward (AF) Fixed Multi Relay	33

	2.4.3.2	Decode-and-Forward (DF) Fixed Multi Relay	34
	2.4.4	Compress-and-Forward (CF)	36
	2.4.5	Code Cooperation	37
2.5		Optimum Position of the Relay	38
2.6		Cooperative Network Performance Metrics	38
	2.6.1	Bit Error Rate (BER)/Bit Error Probability (BEP)	39
	2.6.2	Symbol Error Rate (SER)/Symbol Error Probability (SEP)	39
	2.6.3	Outage Probability	39
	2.6.4	Diversity Order	40
	2.6.5	Outage Rate	41
	2.6.6	Diversity Multiplexing Trade-off (DMT)	41
	2.6.7	Attenuation	42
2.7		Relay Selection	43
	2.7.1	Relay Selection Algorithms	44
	2.7.1.1	Measurement-based relay Selection Algorithm	46
	2.7.1.2	Performance-based Relay Selection Algorithm	46
	2.7.1.3	Threshold-based Relay Selection Algorithm	47
	2.7.1.4	Adaptive Relay Selection Algorithm	47
	2.7.1.5	Table-based Relay Selection Algorithm	47
	2.7.1.6	Multi-hop Relay Selection Algorithm	48
2.8		Cooperative Relaying in Power Line Environment	48
2.9		Resource (Power) Allocation	50
	2.9.1	Centralised Power Allocation Scheme	51
	2.9.1.1	Equal Power Allocation (EPA)	52
	2.9.1.2	Sequential Water Filling Based Power Allocation Strategy	53
	2.9.2	Distributed Power Allocation	55
	2.9.2.1	Auction Theory	57
2.10		Repeaters and Cooperative Relaying Comparison	58
2.11		Summary	61
<b>3</b>		<b>METHODOLOGY</b>	<b>62</b>
	3.1	Introduction	62
	3.2	Methodology Activity Flow	65
	3.3	3.3 Power Line Cooperative Communication (Fixed PLCC) System	66
	3.3.1	Developed PLCC's System Model	67
	3.3.2	PLC Noise Mitigated System	67
	3.3.3	PLCC Network System Description	69
	3.3.3.1	PLCC Amplify-and-Forward (AF)	70
	3.3.3.2	PLCC Decode-and-Forward (DF)	71

3.4	Selective Power Line Cooperative Communication (SPLCC) System	72
3.5	SPLCC System Model	74
3.5.1	SPLCC Relay Selection Algorithm	75
3.6	Optimal Power Allocation (OPA) in Selective Power Line	75
3.6.1	Optimal Power Ratio	77
3.6.1.1	Heuristic Process	77
3.7	Channel Capacity Benefit	77
3.7.1	Fixed PLCC Channel Capacity Analysis	78
3.7.2	SPLCC Channel Capacity Analysis	79
3.7.3	SPLCC-OPA Channel Capacity Analysis	79
3.8	Symbol Error Benefit	81
3.8.1	Fixed PLCC Symbol Error Rate Analysis	81
3.8.2	SPLCC Symbol Error Analysis	82
3.8.3	SPLCC-OPA Symbol Error Rate Analysis	83
3.9	Outage Probability Benefit	83
3.9.1	Fixed PLCC Outage Probability Analysis	84
3.9.2	SPLCC Outage Probability Analysis	85
3.9.3	SPLCC-OPA Outage Probability analysis	86
3.10	Attenuation Analysis	86
3.11	Benchmark Validation	87
3.12	Performance Simulation	91
3.12.1	Optimal Power Ratio Simulation	93
3.12.2	Channel Capacity Simulations	95
3.12.3	Symbol Error Rate Simulation	97
3.12.4	Outage Probability Simulation	98
3.12.5	Attenuation Simulation	98
3.13	Summary	99
<b>4</b>	<b>RESULTS AND DISCUSSION</b>	<b>100</b>
4.1	Introduction	100
4.2	Channel Capacity Performance	100
4.2.1	Fixed PLCC Channel Capacity Performance Evaluation	101
4.2.2	Selective PLCC Channel Capacity Performance Evaluation	102
4.2.3	SPLCC OPA Channel Capacity Performance	104
4.3	Symbol Error Rate Performance	106
4.3.1	Fixed PLCC Symbol Error Rate Performance	106
4.3.2	SPLCC Symbol Error Rate Performance	107
4.3.3	SPLCC-OPA Symbol Error Rate Performance	110
4.4	Outage Probability Performance	112
4.4.1	Fixed PLCC Outage Probability Performance	112
4.4.2	SPLCC Outage Probability Performance	113
4.4.3	SPLCC OPA Outage Probability Performance	115
4.5	Attenuation Investigation	117
4.5.1	Fixed PLCC Attenuation Investigation	117
4.5.2	SPLCC Attenuation Investigation	119



	4.5.3 SPLCC OPA Attenuation Investigation	120
4.6	Summary	121
<b>5</b>	<b>CONCLUSION AND FUTURE COURSE</b>	<b>122</b>
5.1	Conclusion	122
5.2	Future Research Course	122
	<b>REFERENCES</b>	<b>124</b>
	<b>BIODATA OF STUDENT</b>	<b>135</b>
	<b>LIST OF PUBLICATIONS</b>	<b>136</b>



## LIST OF TABLES

<b>Table</b>		<b>Page</b>
1.1	Transmission Media Comparison	1
2.1	PLC Standards	13
2.2	Comparison between Repeater and Cooperative Relaying	59
2.3	PLC Performance Maximization Review	59
3.1	Simulation Parameters	93
3.2	Optimization Simulation Result	94
3.3	Channel Capacity Simulation	95
3.4	Symbol Error Rate Simulation	97
3.5	Outage Probability Simulation	98
4.1	SDF % Channel Capacity Improvement over FDF At 30% Transmitted Power	104
4.2	Percentage Improvement of OPA on SAF Link at 15% Power Transmission	105
4.3	OPA Channel Capacity Percent Improvement on SDF Link at 25% Power Transmission	106
4.4	SDF/FDF Error Symbols Analysis at 6 dB SNR	109
4.5	SAF Symbols in Error at 4 dB SNR	111
4.6	SDF Symbols in Error at 4 dB SNR	111
4.7	Fixed PLCC Percent Attenuation Improvement at 15 MHz	119
4.8	SPLCC (EPA) Percent Attenuation Improvement at 15 MHz	120
4.9	SPLCC-OPA Percent Attenuation Improvement @ 15 MHz	121

## LIST OF FIGURES

Figure		Page
1.1	In-house PLC applications	6
1.2	Research scope description	8
2.1	PLC Architecture	11
2.2	European Low-Voltage Access Network Link [19]	14
2.3	PLC Repeater Setup [7]	19
2.4	PLC Network for MIMO [8]	19
2.5	PLC-MIMO Measurement Setup [37]	20
2.6	MIMO Artificial Mains (MAM) [22]	22
2.7	Nodes in Cooperation [69]	27
2.8	Amplify-and-Forward Cooperation [69]	29
2.9	Decode-and-Forward Cooperation [69]	31
2.10	Multi-Relay Amplify-and-Forward Cooperation [69]	34
2.11	Multi-Relay Decode-and-Forward Cooperation [69]	35
2.12	$\frac{1}{2}$ , / $\frac{1}{4}$ Distributed Convolutional Code Cooperation [77]	37
3.1	Procedural Flow Diagram	62
3.2	Fixed PLCC (Single Relay) Scenario	63
3.3	Multiple Relay PLCC Scenario	63
3.4	Overall Methodology Flow Diagram	64
3.5	Fixed PLCC Flow Diagram	65
3.6	Power Line Cooperative Communication System Model	67
3.7	Noise Mitigation System Model	68
3.8	Multiple Relay PLCC Flow Diagram	73

3.9	SPLCC (Multiple Relay) System Model	74
3.10	SPLCC -OPA Flow Diagram	76
3.11	MIMO-PLC Channel Capacity Benchmark Validation	90
3.12	MIMO-PLC Symbol Error Rate Benchmark Validation	90
3.13	MIMO-PLC Outage Probability Benchmark Validation	91
3.14	Power Line Channel	92
3.15	High Impulsive	92
3.16	Optimization Power Level	94
3.17	Various Channel Responses	97
4.1	Fixed PLCC Channel Capacity Performance	101
4.2	Fixed PLCC Channel Capacity Performance Comparison	102
4.3	SPLCC Channel Capacity Performance	102
4.4	SPLCC Channel Capacity Performance Comparison	103
4.5	SPLCC OPA Channel Capacity Performance	104
4.6	SPLCC OPA Channel Capacity Performance Comparison	105
4.7	Fixed PLCC Symbol Error Rate Performance	106
4.8	Symbol Error Rate Performance Comparison	107
4.9	SPLCC Symbol Error Rate Performance	108
4.10	SPLCC Symbol Error Rate Performance Comparison	109
4.11	SPLCC OPA Symbol Error Rate Performance	110
4.12	SPLCC OPA Symbol Error Rate Performance Comparison	111
4.13	Fixed PLCC Outage Probability Performance	112
4.14	Fixed PLCC Outage Probability Performance Comparison	113
4.15	SPLCC Outage Probability Performance	114
4.16	SPLCC Outage Probability Performance Comparison	114

4.17	SPLCC-OPA Outage Probability Performance	115
4.18	SPLCC-OPA Outage Probability Performance Comparison	116
4.19	Fixed PLCC Attenuation Characteristic at 20% of $P_t$	117
4.20	Fixed PLCC Attenuation Characteristic at 40% of $P_t$	118
4.21	Fixed PLCC Attenuation Characteristic at 40% of $P_t$	118
4.22	SPLCC Attenuation Characteristic	119
4.23	SPLCC-OPA Attenuation Characteristic	120



## LIST OF ABBREVIATIONS

AF	Amplify-and-Forward
AMR	Automatic Meter Reading
AV	Audio and video
AWGN	Additive White Gaussian Noise
BEP	Bit error probability
BPL	Broadband power line
CC	Channel capacity
CDF	Cumulative Density Function
CF	Compressed and-forward
CM	Common Mode
CNR	Carrier-to-noise ratio
CPE	Customer Premises Equipment
CSI	Channel State Information
CTF	Channel Transfer Functions
CTP	Cooperative transmission protocol
CTS	Clear-To-Send
DF	Decode-and-forward
DTF	Discrete Fourier Transform
DMT	Diversity Multiplexing Trade-off
DSL	Digital subscriber line
DSSS	Direct Sequence Spread Spectrum
D-STC	Distributed Space Time Code
e2e	End-to-end
ECC	Error Control Coding
EMC	Electromagnetic compatibility
EPA	Equal power allocation
ERC	Equal Ratio Combining
ESNRC	Enhanced Signal to Noise Ratio Combining
FAF	Fixed Amplify-and-Forward
DFD	Fixed Decode-and-Forward

FER	Frame Error Rate
FFT	Fast Fourier Transform
FRC	Fixed Ratio Combining
GMSK	Gaussian Minimum Shift Keying
HE	Head End
HPAV	Homeplug Audio and Video
IDFT	Inverse Discrete Fourier Transform
IEEE	Institution of Electrical Electronics Engineering
IFFT	Inverse Fast Fourier Transform
LV	Low Voltage
HV	High Voltage
MAM	MIMO Artificial Mains
MIMO	Multiple Input Multiple Output
MRC	Maximum Ratio Combining
MV	Medium Voltage
NBS	Nash Bargaining Solution
OFDM	Orthogonal Frequency Division Multiplexing
OPA	Optimal Power Allocation
PDA	Personal Digital Assistant
PER	Packet Error Rate
PHY	Physical Layer
PL	Power Line
PLC	Power Line Communication
PLCC	Power Line Cooperative Communication
PSD	Power Spectral Density
PSK	Phase Shift Keying
QAM	Quadrature Amplitude Modulation
RS	Reed-Solomon
RTS	Request-To-Send
SAF	Selective Amplify-and-forward
SDF	Selective Decode-and-forward
SDV	Singular decomposition Value
SEP	Symbol Error Probability

SER	Symbol Error Rate
SISO	Single Input Single Output
SNR	Signal-To-Noise Ratio
SNRC	Signal to Noise Ratio Combining
SPLCC	Selective Power Line Cooperative Communication
VNA	Vector Network Analyser





# CHAPTER 1

## INTRODUCTION

An issue in the research world across all fields of engineering and economics is the numerous recurring challenges of achieving a balance between supply and demand. The upsurge in data requirements for various applications is such a challenge. Although various technologies have been deployed for this data requirement, it is still not matching or adequate for the demand. This technologies include wireless and wired. Due to cost of deploying these technologies, some potential consumers could not afford it. Another technology which is readily affordable, owing to its channel presence at the consumer end, is already deployed for the data provision. This technology is the power line communication (PLC) system, which utilizes the electric power network as its channel for broadband data transmission.

However, because the channel was not intended for broadband data transmission, the channel poses a severe challenge to signal propagating through it. These challenges ranges from attenuation, multipath fading and noise corruption. This necessitates the need for channel capacity maximization.

### 1.1 Background

Consequent upon the demand of broadband data for various applications, several technologies have been deployed for its provision. The technologies used for the provisions of applications in education, health, entertainment, gaming, advertising, business and home networking includes wired, wireless and satellites. Various methods of wired provision and their characteristics is specified in Table 1.1.

**Table 1.1 : Transmission Media Comparison**

Type	Distance(m)	Bandwidth (Mbps)	Active Device (Investment)
UTP Cat-5	100	100	Low
UTP Cat-6	100	1000	Low
Coaxial	1000	200	Low
Fiber MM	550	10000	Medium
Fiber SM	20000	10000	Medium

The demand for broadband data continues to increase as areas of application expand. This led to the consideration of the power line network for further provision of the broadband data, owing to its ubiquitous characteristics. The technology that implements the power line network for communication purpose is called power line communication (PLC). It performs the function of transforming the standard electric power network into a communication network pathway. Thereby propagating narrowband/broadband information over the entire length of the PL onto all devices connected to the grid/network and to all outlets [1], [2], [3], [4], [5]. In PLC, the existing house wiring is utilized as medium for broadband internet access provision. Thus, no new cable installation is required for achieving high-speed internet access, as it is achieved on every electrical outlet in the house.

Two architectures are achieved in PLC, these are narrowband [6], [7] and broadband [8] architectures. Frequency spectrum in narrowband architecture in Europe spans from 3 kHz to 148.5 kHz and in the US, can be above 500 kHz. It is designed to cover 1 km maximum distance and yields a data rate in the range kbps, [9], [10]. The frequency spectrum of the broadband architecture is wider, it spans from 1 MHz to 30 MHz, where outdoor and indoor applications makes use of 1 to 15 MHz and 15 to 30 MHz respectively. Data rates in this architecture is up to 300 Mbps [11]. Various modulation schemes have been deployed in high-speed PLC systems. These schemes are; Gaussian Minimum Shift Keying (GMSK), Direct Sequence Spread Spectrum (DSSS) [12], and Orthogonal Frequency Division Multiplexing (OFDM) [13], [14]. However, the OFDM scheme, for its robustness to selective fading multipath and different kinds of interference [15], was adopted for PLC.

### **1.1.1 Applications of PLC**

The two obvious application of the PLC are; Power Line Outdoors Telecoms and Power Line Indoor Telecoms.

Power Line Out-door Telecoms contains Automatic Meter Reading (AMR). This is the reading of the power meter over the power grid homes to substation. It operates over the medium voltage (MV) levels at data rates that is low-level, 600 kbps - 2.4 Mbps. Outdoor application in PLC is in the narrowband architecture, it comprises single directional communication for public light remote switching and bi-directional communications. Activities in bi-directional communication are meter reading and various home automation applications.

Power Line In-door Telecoms involves data communication in a local area (home). This data communication is carried out on home power grid and operates on the low-voltage (110V – 240V) lines, having data rates of 14 – 30

Mbps. PLC technology in the indoor covers a wide range of applications for, voice, multimedia, video and home networking.

## 1.2 Problem Statement

The deployment of power line communication (PLC) system has the capacity of maximizing broadband data provision to teaming population owing to its pervasive installation. However due to the nature of its medium, which includes, long length, branches across its length, the line's time varying characteristic and load terminations to mention a few, signal transmission through it suffers enormous degradation [16]. Hence, there is a need to develop a system that will in spite of all these challenges will render good system performance. Moreover the signal degradation increases with increase in the length of the channel, as its behaviour is time varying, this weakens the signal as it traverses the line. Therefore, there is need for a system which optimizes the system's performance over the entire length of the line. PLC is governed by the policy of electromagnetic compatibility (EMC), which streamlines the transmittable power in PLC. Thus, transmittable should also be optimized for increased system performance. In lieu of this, this thesis addresses the following problems;

1. In PLC, power line network is converted to a pathway for broadband data. Due to the characteristic of this medium (power line), signal is attenuated at both the medium and low voltage levels. These attenuations amounts to 100 dB/km and 10 dB/km on the low and medium voltage levels, respectively. Thus, in conventional PLC systems, the signal is severely attenuated and this attenuation increases over the vast length of the cable [17], [18], [19]. Researchers have proffered several techniques for the mitigation of the PLC attenuation characteristics. On the low voltage networks, repeaters were deployed to lessen the effect of signal attenuation. Further deployment of the repeaters were performed in the last mile to remedy the effect of this signal loss [20]. Multiple Input Multiple Output (MIMO) techniques were recently adapted to PLC systems for the purpose of achieving performance improvement in channel capacity. This was applied at indoor single phase and outdoor three phase levels [21], [22], [23], [24]. The best possible configuration of MIMO-PLC in the indoor application is the 2 x 2, since most indoor installations are single phase 3-wire, comprising three conductors, live, neutral and ground (earth) respectively [21]. The MIMO-PLC is challenged by its restriction to a 2 x 2 antenna configuration. A scheme is required that will yield unrestricted PLC system performance maximization with reduction in noise, which characterizes the MIMO-PLC system.

2. Managing the attenuation on short power line can be easily achieved, but the problem becomes more vast and difficult to manage as the length of the line increases within the house environment. The effect of the attenuation is further made worsen as branches on the line increases, this results in transient behaviour of the line. So the nature of the line is not same all through its length. Hence attenuation effect is severe at some points than other points on the line. There is need for a system that will consider the characteristic of the line and then select the best channel for signal transmission. Thus achieving good system performance despite the length and varied characteristics of the branches on the line.
3. Increasing transmittable power always maximize the performance of a communication system, but in PLC system, there is restriction of transmittable power, this is regulated by electromagnetic compatibility (EMC) policy. Then, if the channel is not attenuation free, this limited power will be wasted over the noisy and harsh medium. Therefore, there is a need for effective power allocation to optimize the transmittable power as the signal traverses from the source to the destination over the power line channel.

### **1.3 Research Aims and Objectives**

To deploy broadband data to all cronies and cranny effectively and efficiently goes beyond just provision but to maximizing the performance of the deployed technology. The PLC system must be seen to perform efficiently over the entire length of its channel with little or no attenuation of signal as it propagates from the source to the user in the destination. Noise inherent in channel and those from the surroundings must be mitigated for quality signal flow over the PL channel. The aim of this Thesis is to develop a technique for PLC that will ensure signal transfer from source to destination on the PLC channel, holistically, efficiently and devoid of severe attenuation, thus maximizing capacity and achieving interference and noise mitigation under an EMC power restriction. Therefore, achieving these aim requires this studies;

- To propose a power line cooperative communication system (PLCC), implementing amplify-and-forward and decode-and-forward protocols on the power line channel that will achieve performance maximization despite the network's attenuation characteristic.
- To investigate the principle of best relay selection algorithm and testing it for PLCC performance maximization over the varied characteristic of the network's branches.
- To investigate and obtain a power allocation ratio that will yield optimal power line cooperative communication (PLCC) system's performance while being within the EMC framework.

## 1.4 Research Questions

Resolving the aforementioned problems in the PL network for the PLC system and achieving maximal performance in terms of channel capacity and reduction of outage probability requires the formulation of these questions

1. How is the power line network characterized in literature and what are the parameters that are responsible for the harsh behaviour of the network to broadband data. Furthermore, what techniques can be deployed to mitigate the effects of these parameters of posing attenuation to signals on the network?
2. Taking into consideration the time variant nature of the network and loads termination, how can the network perform optimally over the entire length of the network? What technique can be developed to ensure that signal strength is maximum all through the cables length?
3. With the EMC policy that restrict the amount of power usage in PLC, what optimal power algorithm can be used for power allocation that will maximize the PLC system's channel capacity for effectiveness on the PL channel?

## 1.5 Motivation

The aim of home networking is to interconnect all digital electronic consumer devices in the home territory, so that data and services are accessed anytime, anywhere by consumers in the home domain irrespective of the location where the electronic device housing the data or service is domiciled.


Amongst the several links implemented in the market for home networking are wired network such as Ethernet, iLINK or USB and several wireless networks. All of these links are limited in their coverage area, performing excellently and efficiently for single room and local clusters. These limitation makes these links inappropriate for room-to-room connections. The data throughput of wireless connection at ISM (Industrial, scientific and medical) frequencies (2.4 GHz), reduces dramatically in situations when signal is required to penetrate through walls and ceilings made up of concrete. For wired networks, the major challenge is its inconvenience in inter-room connections.

In-home backbone, which connects individual devices and clusters in the home domain at a minimum installation effort, can enable the broadband throughput of the room-to-room connectivity. This is provided for by the PLC system. In PLC system, modern modulation techniques are implemented on the PL

network to aid high-speed data services. The provision of home networking using PLC is shown in Figure 1.1.

The consumer electronic devices are connected to the mains via a PLC modem. Tablets, a wireless device, is connected via the PLC access point. Television signals are received by the Satellite dish positioned on top of the house, it then distributes to the consumers within the building. Video signals of activities around the building premises are captured by the camera or the baby monitor for display.

Power line networking provides huge gain consumer comfort. It has also the advantage of efficiently performing internet access delivery. In urban and industrialised nations, Digital Subscriber Line (DSL) access via phone lines is often used for the deployment of this internet access, only a few number of customers can connect to this lines, but with the PLC, much more access is provided.

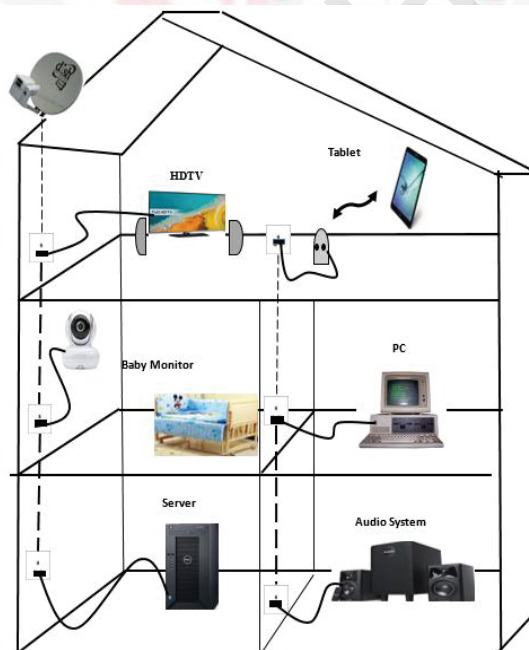

**Figure 1.1 : In-house PLC applications**

For the ubiquitous nature of the PL network, PLC is the choice for the provision of internet access in the rural areas where xDSL is not deployed and remote places where no telecommunication network exists.

Automatic meter reading (AMR), a narrowband architecture PLC, allows new and flexible billing system, which requires no standby power generator, as the PLC is used for the AMR.


The World Bank report published in year 2018 puts the rural population in Malaysia 24.2% in 2017, undeniably, this population is not provided with wireless broadband. Malaysian electricity coverage is 99.4%, this implies that almost the entire population is provided with electricity supply (power line installation) [25]. Implementing PLC will meet the broadband data need of the population for various applications at a very low cost (no installation cost), since the existing electrical installation will be used.

## **1.6 Research Scope**

Power line communication comprises of two architectures namely, narrowband and broadband and in terms of application, outdoor and indoor.

The scope of this thesis is the broadband, covering 1 MHz to 30 MHz. The methodology in this thesis was performed on the medium access of control (MAC) layer of the PLC, that is, maximizing performance of the system as the PLC base-station propagates signal to the PLC destination modem. The red highlighted section in Figure 1.2 depicts the scope of the research study.

A power line network of 20 m length was considered for the work.

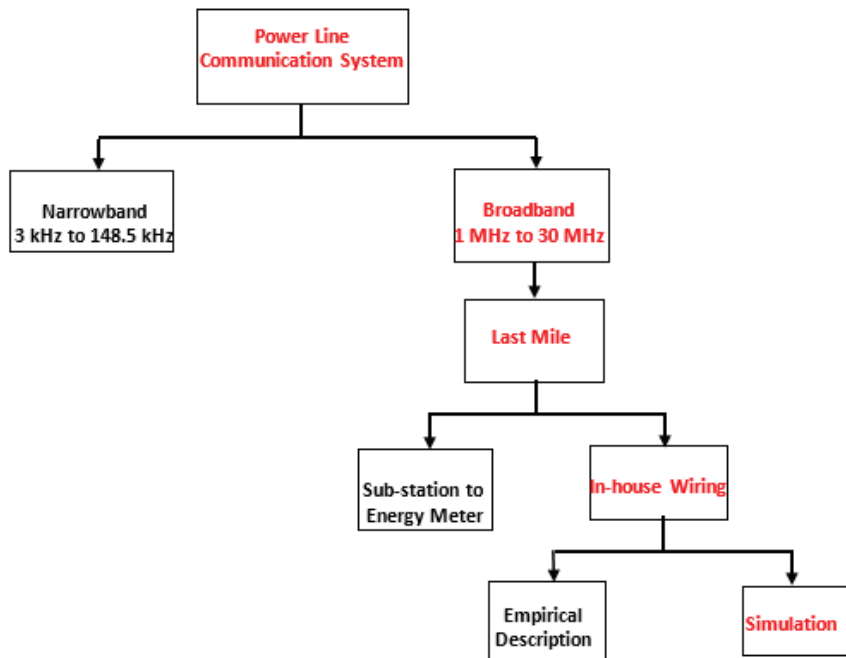

**Figure 1.2 : Research scope description**

As shown in the Figure, the method of system performance evaluation is simulation using Matlab package.

Furthermore, the in-band full duplex situation was adopted on the power network, the line used for both transmission and reception.

### 1.7 Assumptions

The following assumption were made to achieve the set objectives in this thesis;

- ✚ There were 20 numbers of branches (taps) on the power line network considered.
- ✚ All cables in the network have the same characteristics.
- ✚ PLC source modem is PLC base-station.
- ✚ Same noise characteristic is experienced throughout the network.



## 1.8 Research Contribution

The highlights below are the summary of the contribution of this thesis on the power line cooperative communication (PLCC) system.

- ❖ Power line cooperative communication (PLCC) system, with noise mitigation system was developed and introduced. This system implements cooperative techniques of AF and DF to achieve reliability of the PLC system. This noise mitigation system was used to reduce the BER on the power line channel. The two cooperative protocols (AF and DF) achieved PLC performance maximization over the length of the power line network in increased channel capacity, reduction in symbol error rate and outage probability than the other techniques in literature.
- ❖ To further achieve improvement in the system's reliability over the numerous branches of the power line network, selective relaying on the PLCC system was proposed. A selection algorithm using instantaneous SNR was proposed and implemented. Thus, the relay node with the best instantaneous SNR was selected for cooperation with the destination node. The selective cooperation links, SAF and SDF for 3-R scenario achieved a laudable improvement over the fixed relaying, MIMO-PLC and PLC-repeater links. Symbol error rate and outage probability on same links and relay scenario yielded an enormous improvement too.
- ❖ For the transmittable power restriction in the PLC due to electromagnetic compatibility, an optimal power allocation algorithm, which allocates more power for the cooperative transmission to a chosen relay node was proposed to improve the performance of the SPLCC system. For the 3-R scenario, the channel capacity was increased on the SAR link, symbol error rate and outage probability reduced drastically with optimal power allocation (OPA) algorithm over the EPA algorithm, MIMO-PLC schemes and PLC-repeater.

## 1.9 Thesis Organization

A short introduction to the research area (PLC), which include the problem statement and study objectives, is presented in this Chapter. Research questions, which serves as a lead into the work, the driving force (motivation) and scope of the research were also highlighted. Other Chapters of the thesis are organized as follows;

In Chapter 2, literatures associated with the PLC are reviewed. This review covers the modelling of the power line characteristics and its inherent noise. Research activities performed to maximize the performance of the PLC were also reviewed, which include MIMO-PLC and PLC repeaters. The Chapter also has reviews on cooperative relaying in wireless communication and cooperative relaying in power line environment.

The methodologies of the three objectives described in Chapter 1 were presented in Chapter 3. The Chapter has three major sections namely, power line cooperative communication (PLCC) system, selective PLCC system and investigation and determination of best power ratio allocation for optimal performance. All these methodologies implement Amplify-and-forward and decode-and-forward cooperation protocols.

In Chapter 4 the results of the schemes proposed in chapter 3 were benchmarked with those in literature (MIMO-PLC and PLC repeaters). The Chapter further discusses the performance maximization of the various proposed system with the existing system in literature. Channel capacity, symbol error rate, outage probability and attenuation are the parameters used for system performance evaluation.

The summary of the thesis, followed by the salient contribution were presented in Chapter 5. Finally, research issues in the PLC are highlighted and direction is suggested for further investigation.

## REFERENCES

- [1] C. Cano, A. Pittolo, D. Malone, L. Lampe, S. Member, A. M. Tonello, S. Member, and A. G. Dabak, "State of the Art in Power Line Communications: From the Applications to the Medium," *IEEE Journal on Selected Areas In Communications*, vol. 34, no. 7, pp. 1935–1952, 2016.
- [2] M. S. Yousuf, S. Z. Rizvi, S. Arabia, and M. El-shafei, "Power Line Communications: An Overview – Part II," *4th International Conference on Innovations in Information Technology (IIT'07)*, pp. 218–222, 2007.
- [3] L. Lampe, A. M. Tonello, and T. G. Swart, *Power Line Communications: Principles, Standards And Applications From Multimedia To Smart Grid*, Southern Gate, Chichester, West Sussex, PO19 8SQ, United Kingdom, John Wiley & Sons, Ltd., 2016.
- [4] H. C. Ferreira, L. Lampe, J. Newbury, and T. G. Swart, *Power Line Communications: Theory and Applications for Narrowband and Broadband Communications over Power Lines*. Southern Gate, Chichester, West Sussex, PO19 8SQ, United Kingdom: John Wiley & Sons, Ltd., 2010.
- [5] S. Najjar, F. Rouissi, H. Gassara, and A. Ghazel, "Comparative study of modulation techniques performances for communication over narrowband Powerline channel characteristics," *International Conference on Multimedia Computing and Systems -Proceedings*, pp. 788–792, 2017.
- [6] N. Shlezinger and R. Dabora, "On the Capacity of Narrowband {PLC} Channels," *IEEE Transactions on Communications*, vol. 63, no. 4, pp. 1191–1201, 2015.
- [7] G. Artale, V. Cosentino, A. Cataliotti, D. Di Cara, R. Fiorelli, P. Russotto, and G. Tine, "Medium voltage smart grid: Experimental analysis of secondary substation narrow band power line communication," *IEEE Transactions on Instrumentation and Measurement*, vol. 62, no. 9, pp. 2391–2398, 2013.
- [8] K. M. Rabie and E. Alsusae, "On Improving Communication Robustness in PLC Systems for More Reliable Smart Grid Applications," *IEEE Transactions on Smart Grid*, vol. 6, no. 6, pp. 2746–2756, 2015.
- [9] M. Katayama, T. Yamazato, and H. Okada, "A Mathematical Model of Noise in Narrowband Power Line Communication Systems," *IEEE Journal on Selected Areas in Communication*, vol. 24, no. 7, pp. 1267–1276, 2006.

- [10] Xavier Carcelle, "Power Line Communication in Practise"; Boston/London, Artech House Telecommunications Library, pp. 706–716, 2008..
- [11] M. Korke, N. Hosseinzadeh, H. L. Vu, T. Moazzeni, and C. H. Foh, "Impulsive noise reduction of a narrowband power line communication using optimal nonlinearity technique," Australasian Telecommunication Networks and Applications Conference (ATNAC), pp. 1–4, 2011.
- [12] D. Support and T. Documents, "An Introduction to Spread-Spectrum Communications," [www.maximintegrated.com/app..](http://www.maximintegrated.com/app..), pp. 1–12, 2003.
- [13] F. A. Pinto-Benel, M. Blanco-Velasco, and F. Cruz-Roldan, "Throughput 176 Analysis of Wavelet OFDM in Broadband Power Line Communications," *IEEE Access*, vol. 6, pp. 16727–16736, 2018.
- [14] S. S. Dash, "Application of OFDM over Indoor Power Line Communication," *IEEE WiSPNET 2017 conference*, pp. 240–245, 2017.
- [15] S. I. Tsakiris, A. D. Salis, and N. K. Uzunoglu, "Performance of OFDM Systems for Broadband Power Line Communications Under Low Signal Strength," *Microwave Review*, vol. 9, no. 2, pp. 41–46, 2009.
- [16] N. M. Abdalrhman, L. F. Abusedra, and A. R. Zerek, "The Effect of Broadband Power Line Parameters on the Communication Signal," *15th International Conference on Sciences and Techniques of Automatic control & computer engineering - STA'2014*, no. 1, pp. 1010–1013, 2014.
- [17] D. Duche and P. V. Gogate, "Signal Attenuation in Powerline Communication Channel," *International Journal of Emerging Trends & Technology in Computer Science*, vol. 3, no. 2, pp. 123–130, 2014.
- [18] T. Maenou and M. Katayama, "Study on Signal Attenuation Characteristics in Power Line Communications," *2006 IEEE International Symposium on Power Line Communications and Its Applications*, pp. 217–221, 2006.
- [19] I. S. Areni, E. Palantei, A. Suyuti, Adnan, W. S. Yusnita, and H. Susanti, "Attenuation Measurement of Laboratory-based PLC Implementation," *Internetworking Indonesia Journal*, vol. 8, no. 1, pp. 55–58, 2016.
- [20] P. An, X. Chen, J. Wang, S. Zhou, and X. Shan, "Analysis on Application of Repeater Technology in Powerline Communications Networks," *IEEE International Symposium on Power Line Communications and Its Applications*, pp. 273–277, 2007.

- [21] R. Hashmat, P. Pagani, A. Zeddani, and T. Chonavel, "MIMO communications for inhome PLC networks: Measurements and results up to 100 MHz," IEEE International Symposium on Power Line Communications and Applications, no. 1, pp. 120–124, 2010.
- [22] A. Schwager and D. Schneider, "MIMO PLC: Theory, Measurements and System Setup," IEEE International Symposium on Power Line Communications and Applications, pp. 48–53, 2011.
- [23] N. Shlezinger, R. Shaked, and S. Member, "On the Capacity of MIMO Broadband Power Line Communications Channels," IEEE Transactions on Communications, vol. 66, no. 10, pp. 4795–4810, 2018.
- [24] P. Pagani and A. Schwager, "A Statistical Model of the In-Home MIMO PLC Channel Based on European Field Measurements," IEEE Journal on Selected Areas in Communications, vol. 34, no. 7, pp. 2033–2044, 2016.
- [25] "Access to electricity (% of population) — Data — Table." <https://data.worldbank.org/indicator/EG.ELC.ACCT.ZS>. Assessed on 23rd March 2014.
- [26] H. Hrasnica, A. Haidine, and R. Lehnert, Broadband powerline communications: network design. Southern Gate, Chichester, West Sussex, PO19 8SQ, United Kingdom: John Wiley & Sons, Ltd, 2005.177
- [27] H. Ferreira and H. Grove, "Power line communications: an overview," 4th IEEE AFRICON, pp. 558–563, 1996.
- [28] B. P. Ross, T. J. Carbino, and S. J. Stone, "Physical-Layer discrimination of Power Line Communications," International Conference on Computing, Networking and Communications, ICNC 2017, 2017, pp. 341–345.
- [29] H. P. Alliance, "Technology White Paper," Technology, <http://www.homeplug.org/products/whitepapers/>, 2011.
- [30] H. Alliance, "HomePlug AV white paper," <http://www.homeplug.org/products/whitepapers/>, 2007.
- [31] S. Committee, "IEEE Standard for Broadband over Power Line Networks : Medium Access Control and Physical Layer Specifications," IEEE Standards, 2010.
- [32] "IEEE 1901 HD-PLC (High Definition Power Line Communication)," [www.hd-plc.org](http://www.hd-plc.org), 1901.

- [33] J. Matanza, S. Kiliccote, S. Alexandres, and C. Rodríguez-Morcillo, "Simulation of Low-voltage Narrow-band Power Line Communication Networks to Propagate Open ADR Signals," *Journal of Communications and Networks*, vol. 17, no. 6, pp. 656–664, 2015.
- [34] C. Rodriguez-Morcillo, J. Matanza, and S. Alexandres, "Difference Sets-based Compressive Sensing as Denoising Method for Narrow-band Power Line Communications," *IET Communications*, vol. 7, no. 15, pp. 1580–1586, 2013.
- [35] K. Al-mawali, A. Z. Sadik, Z. M. Hussain, and A. O. System, "Joint Time-domain / Frequency-domain Impulsive Noise Reduction in OFDM-based Power Line Communications," *Australasian Telecommunications Networks and Applications Conference, ATNAC 2008.*, pp. 138–142, 2008.
- [36] M. Gotz, M. Rapp, and K. Dostert, "Power line channel characteristics and their effect on communication system design," *Communications Magazine, IEEE*, no. April, pp. 78–86, 2004.
- [37] M. O. Ahmed and L. Lampe, "Power Line Communications for Low-Voltage Power Grid Tomography," *IEEE Transactions on Communications*, vol. 61, no. 12, pp. 5163–5175, 2013.
- [38] A. M. Tonello, F. Versolatto, and A. Pittolo, "In-home Power Line Communication Channel: Statistical Characterization," *IEEE Transactions on Communications*, vol. 62, no. 6, pp. 2096–2106, 2014.
- [39] Y. Ma, P. So, E. Gunawan, and Y. Guan, "Modeling and Analysis of the Effect of Impulsive Noise on Broadband PLC Networks," *Proceedings of IEEE International Symposium on Power Line Communications and Applications*, 2004.
- [40] P. J. Joseph and S. S. Pillai, "Modeling of broadband power line communication in last-mile networks," *International Conference on Communication Systems and Networks (ComNet 2016)*, pp. 137–142, 2016.
- [41] and R. K. Siqian Liu, Bei Gou, Hongxiang Li, "Power-Line Communication 178 Channel," *IEEE Transactions on Communications*, vol. 29, no. 4, pp. 1701–1708, 2014.
- [42] H. Philipps, "Modelling of powerline communication channels," *Proceedings on IEEE International Symposium on Power Line Communications and Applications*, pp. 2–9, 1999.

- [43] M. Zimmerman and K. Dostert, "A Multi-Path Signal Propagation Model for the Power Line Channel in the High Frequency Range," Proceedings of 3rd IEEE International Symposium on Power Line Communications and Its Applications, ISPLC, 1999.
- [44] L. González-Sotres, P. Frías, and C. Mateo, "Power Line Communication Transfer Function Computation in Real Network Configurations for Performance Analysis Applications," IET Communications, 2017.
- [45] H. Meng, S. Chen, S. Member, Y. L. Guan, C. L. Law, P. L. So, E. Gunawan, and T. T. Lie, "Modeling of Transfer Characteristics for the Broadband Power Line Communication Channel," IEEE Transactions on Power Delivery, vol. 19, no. 3, pp. 1057–1064, 2004.
- [46] J. Anatory and N. Theethayi, Broadband Power-line Communication Systems. Southern Gate, Chichester, West Sussex, PO198SQ, United Kingdom, John Wiley & Sons, Ltd., 2010.
- [47] H. Meng, S. Chen, and Y. Guan, "A transmission line model for high-frequency power line communication channel," Proceedings of International Conference on Power System Technology, vol.2, no.2, pp 1290–1295, 2002.
- [48] M. Nicolas Hadad, M. Alan Funes, P. Gabriel Donato, and D. O. Carrica, "Dynamic Characterization and Equalization of a Power Line Communication Channel," IEEE Latin America Transactions, vol. 11, no. 6, pp. 1301–1306, 2013.
- [49] J. Barnes, "A physical multi-path model for power distribution network propagation," Proceedings of IEEE International Symposium on Power Line Communications and Applications, 1998.
- [50] J. Anatory, S. Member, and N. Theethayi, "On the Efficacy of Using Ground Return in the Broadband Power- Line Communications - A Transmission-Line Analysis," IEEE Transactions on Power Delivery, vol. 23, no. 1, pp. 132–139, 2008.
- [51] L. Tinarwo, "Development of methodologies for deploying and implementing local and medium area broadband PLC networks in offices and residential electric grids," MSc Thesis, University of Forte Hare, 2008.
- [52] A. Cort, D. Luis, and F. J. Ca, "Analysis of the Periodic Impulsive Noise Asynchronous with the Mains in Indoor PLC Channels," IEEE International Symposium on Power Line Communications and Applications, pp. 26–30, 2009.

- [53] V. Guillet, G. Lamarque, and P. Ravier, "Improving the Power Line Communication Signal-to-Noise Ratio During a Resistive Load Commutation," *Journal of Communications*, vol. 4, no. 2, pp. 126–132, 2009. 179
- [54] K. S. Al-mawali, A. Z. Sadik, Z. M. Hussain, and A. O. System, "Time-Domain Techniques for Impulsive Noise Reduction in OFDM-Based Power Line Communications: A Comparative Study," *Proceedings of the 2009 International Conference on Communication, Computer and Power (ICCCP'09)*, pp. 1–5, 2009.
- [55] F. Chiti, R. Fantacci, D. Marabissi, and A. Tani, "Performance Evaluation of an Efficient and Reliable Multicast {Power} {Line} {Communication} {System}," *IEEE Journal on Selected Areas in Communications*, vol. 34, no. 7, pp. 1953–1964, 2016.
- [56] N. Andreadou and A. M. Tonello, "On the mitigation of impulsive noise in power-line communications with LT codes," *IEEE Transactions on Power Delivery*, vol. 28, no. 3, pp. 1483–1490, 2013.
- [57] H. Dai and H. Poor, "Advanced signal processing for power line communications," *IEEE Communications Magazine*, no. 919, 2003.
- [58] H. Hrasnica, A. Haidine, and R. Lehnert, *Broadband powerline communications: network design*. Southern Gate, Chichester, West Sussex, PO198SQ, United Kingdom, John Wiley & Sons, Ltd., 2005.
- [59] E. Beres, "Node Selection in Cooperative Wireless Networks," PhD Thesis, University of Toronto, Canada, 2009.
- [60] Cypress, "AN62487 - Cypress Powerline Communication (PLC) Repeater Implementation," [www.cypress.com](http://www.cypress.com) > Documentation > Application Notes, pp. 1–17, 2011.
- [61] R. Hashmat, P. Pagani, A. Zeddani, and T. Chonavel, "A Channel Model for Multiple Input Multiple Output In-home Power Line Networks," *IEEE International Symposium on Power Line Communications and Applications*, pp. 35–41, 2011.
- [62] J. S. Lothar Stadelmeier, Dietmar Schill, Andreas Schwager, Daniel Schneider, "MIMO for Inhome Power Line Communications," *7th International ITG Conference on Source and Channel Coding (SCC)*, no. 1–6, 2008.
- [63] M. Veluppillai, "Cooperative Diversity and Partner Selection in Wireless Networks," PhD Thesis, University of Waterloo, Ontario, Canada, 2007.



- [64] A. Meier, "Cooperative diversity in wireless networks," MSc Thesis, University of Edinburgh, Scotland, 2005.
- [65] H. L. Adam, "Cooperative Diversity in Wireless Networks: Relay Selection and Medium Access," PhD Thesis, Alpen-Adria-Universität, Klagenfurt, 2011.
- [66] J. Garg, P. Mehta, and K. Gupta, "A Review on Cooperative Communication Protocols in Wireless World," *International Journal of Wireless & Mobile Networks*, vol. 5, no. 2, pp. 107–126, 2013.
- [67] G. Kaur and P. P. Bhattacharya, "A Survey on Cooperative Diversity and Its Applications in Various Wireless Networks." *International Journal of Computer and Engineering Survey*, vol. 2, no. 4, pp. 133–152, 2011. 180
- [68] F. Gómez-Cuba, R. Asorey-Cacheda and F.J. González-Castaño, "A Survey on Cooperative Diversity for Wireless Networks," *IT Professional*, vol. 14, no. 5, pp. 34–39, 2012.
- [69] P. O. Aiyelabowo, N. K. Noordin, A. Ikpehai, and B. Adebisi, "Cooperative Relaying In Power Line Environment: A Survey and Tutorial," *International Journal of Computer Science and Network (IJCSN)*, vol. 5, no. 6, pp. 893–905, 2016.
- [70] W. Su, A. K. Sadek, and K. J. Ray Liu, "Cooperative Communication Protocols in Wireless Networks: Performance Analysis and Optimum Power Allocation," *Wireless Personal Communications*, vol. 44, no. 2, pp. 181–217, 2007.
- [71] T. Hunter and A. Nosratinia, "Diversity through coded cooperation," *IEEE Transaction on Wireless Communications.*, vol. 5, no. 2, pp. 283–289, 2006.
- [72] H. Nguyen, "Cooperative Transmission Techniques in Wireless Communication Networks," PhD Thesis, University of Saskatchewan, Canada, 2011.
- [73] S. Valentin, H. Lichte, H. Karl, and I. Aad, "Opportunistic Relaying vs. Selective Cooperation: Analyzing the Occurrence-Conditioned Outage Capacity," *Proceedings of 11 th ACM International Conference on Modelling Analysis and Simulation of Wireless and Mobile Systems*, 2008.
- [74] Z. Ding, W. Chin, and K. Leung, "Distributed Beamforming and Power Allocation for Cooperative Networks," *IEEE Transactions on Wireless Communications*, vol. 7, no. 5, pp. 1817–1822, 2008.

- [75] R. Mudumbai, "On the Feasibility of Distributed Beamforming in Wireless Networks," *IEEE Transactions on Wireless Communications*, vol. 6, no. 5, pp. 1754–1763, 2007.
- [76] G. Kramer, M. Gastpar, and P. Gupta, "Cooperative Strategies and Capacity Theorems for Relay Networks," *IEEE Transactions on Information Theory*, vol. 51, no. 9, pp. 3037–3063, 2005.
- [77] A. Stefanov and E. Erkip, "Cooperative Coding for Wireless Networks," *IEEE Transactions on Communications*, vol. 52, no. 9, pp. 1470–1476, 2004.
- [78] T. L. Lim, V. Srivastava, and M. Motani, "Selective Cooperation Based on Link Distance Estimations in Wireless Ad-Hoc Networks," *International Symposium on a World of Wireless, Mobile and Multimedia Networks (WoWMoM'06)*, pp. 391–400, 2006.
- [79] M. R. Souryal and B. R. Vojcic, "Performance of Amplify-and-Forward and Decode-and-Forward Relaying in Rayleigh Fading with Turbo Codes," *IEEE International Conference on Acoustics Speed and Signal Processing Proceedings*, vol. 4, p. IV-681-IV-684, 2006.
- [80] G. Breed, "Bit Error Rate and Measurement Issues," *High Frequency Electronics Copyright © 2003 Summit TechnicalMedia, LLC*, 2003.
- [81] Y. Ko, M. Alouini, and M. Simon, "Outage Probability of Diversity Systems Over Generalized Fading Channels," *IEEE Transactions on Communications*, vol. 48, no. 11, pp. 1783–1787, 2000.
- [82] K. M. Rabie, B. Adebisi, and H. Gacanin, "Outage Probability and Energy Efficiency of DF Relaying Power Line Communication Networks: Cooperative and Non-Cooperative," *IEEE International Conference on Communications*, 2017.
- [83] Z. Lin, "Cooperative communication in OFDM-based systems," *MSc Thesis, University of Wollongong, New South Wales, Australia*, 2013.
- [84] O. Hooijen, "On the relation between network-topology and power line signal attenuation," *IEEE International Symposium on Power Line Communications and Its Applications, ISPLC*, 1998.
- [85] E. Beres and R. Adve, "Selection cooperation in multi-source cooperative networks," *IEEE Transactions on Wireless Communications*, vol. 7, no. 1, pp. 118–127, 2008.
- [86] A. Bletsas and A. Khisti, "A simple cooperative diversity method based on network path selection," *IEEE Journal on Selected Areas in Communications*, vol. 24, no. 3, pp. 659–672, 2006.

- [87] K. Egoh and S. De, "Priority-Based Receiver-Side Relay Selection in Wireless Ad hoc Sensor Networks," Proceedings of International Conference on Communications and Mobile Computing ( IWCNC '06), p. 1177, 2006.
- [88] C. Lo, R. Heath, and S. Vishwanath, "Hybrid-ARQ in multihop networks with opportunistic relay selection," IEEE International Conference on Acoustics, Speech and Signal Processing , ICASSP 2007, pp. 617–620, 2007.
- [89] L. Xie, X. Zhang, and P. Qiu, "Relay Selection Strategies for Distributed Space-Time Cooperative Systems Over Wireless Ad-Hoc Networks," Proceedings of 15th International Conference on Computer Communications and Networks, pp. 213–218, 2006.
- [90] V. Shah and A. Gharge, "A Review on Relay Selection Techniques in Cooperative Communication," International Journal of Engineering and Innovative Technology (IJEIT), vol. 2, no. 5, pp. 65–69, 2012.
- [91] H. Shan, P. Wang, W. Zhuang, and Z. Wang, "Cross-Layer Cooperative Triple Busy Tone Multiple Access for Wireless Networks," IEEE Global Telecommunications Conference, pp. 1–5, 2008.
- [92] Z. Zhou, S. Zhou, J. Cui and S. Cui, "Energy-Efficient Cooperative Communication Based on Power Control and Selective Single-Relay in Wireless Sensor Networks," IEEE Transactions on Wireless Communications, vol. 7, no. 8, pp. 3066–3078, 2008.
- [93] H. Adam, C. Bettstetter, and S. M. Senouci, "Adaptive Relay Selection in Cooperative Wireless Networks," IEEE 19th International Symposium on Personal, Indoor and Mobile Radio Communications, pp. 1–5, 2008.
- [94] J. Valencia, T. R. Oliveira, and M. V. Ribeiro, "Cooperative Power Line Communication: Analysis of Brazilian In-Home channels," 18th IEEE International Symposium on Power Line Communications and Its Applications, pp. 301–305, 2014. 182
- [95] X. Cheng, R. Cao, and L. Yang, "Relay-Aided Amplify-and-Forward Powerline Communications," IEEE Transactions on Smart Grid, vol. 4, no. 1, pp. 265–272, 2013.
- [96] S. D'Alessandro, A. M. Tonello, and F. Versolatto, "Power Savings with Opportunistic Decode and Forward Over In-home PLC Networks," IEEE International Symposium on Power Line Communications and Its Applications, pp. 176–181, 2011.

- [97] L. Lampe and A. J. H. Vinck, "Cooperative Multihop Power Line Communications," IEEE International Symposium on Power Line Communications and Its Applications, (ISPLC 2012), 2012, pp. 1–6.
- [98] B. Tan and J. Thompson, "Relay Transmission Protocols for In-Door Powerline Communications Networks," IEEE International Conference on Communications Workshops (ICC), vol. 2, pp. 1–5, 2011.
- [99] A. Dubey and R. K. Mallik, "PLC System Performance With AF Relaying," IEEE Transactions on Communication, vol. 63, no. 6, pp. 2337–2345, 2015.
- [100] B. Nikfar and A. J. H. Vinck, "Relay Selection in Cooperative Power Line Communication: A Multi-Armed Bandit Approach," Journal of Communications and Networks, vol. 19, no. 1, pp. 1–9, 2017.
- [101] J. Adeane, M. R.D. Rodrigues and J. Ian, "Centralised and Distributed Power Allocation Algorithms in Cooperative Networks," IEEE 6th Signal Processing Advances in Wireless Communication, pp. 333–337, 2005.
- [102] H. Goudarzi and M. R. Pakravan, "Equal Power Allocation Scheme for Cooperative Diversity," 4th IEEE/IFIP International Conference on Central Asia on Internet, pp. 1–5, 2008.
- [103] Z. Ding, S. Perlaza, I. Esnaola, and H. Poor, "Power Allocation Strategies in Energy Harvesting Wireless Cooperative Networks," IEEE Transactions on Wireless Communication, vol. 13, no. 2, pp. 846–860, 2013.
- [104] J. Li, D. Chen, W. Li, and J. Ma, "Multiuser Power and Channel Allocation Algorithm in Cognitive Radio," The International Conference on Parallel Processing, (ICPP 2007), pp. 72–77, 2007.
- [105] Q. D. La, Y. H. Chew, W. H. Chin, and B. Soong, "A Game Theoretic Distributed Dynamic Channel Allocation Scheme with Transmission Option," IEEE Military Communications Conference (MILCOM 2008), pp. 1–7, 2008.
- [106] D. Engelmann, "An Introduction to Auction Theory, its Applications and Experimental Evidence," <http://www.cesifogroup.net>. Accessed February 17 th 2014.
- [107] B. Tan and J. Thompson, "Decode-and-Forward Relay PLC Networks," IEEE International Conference on Communication Workshop (ICC), vol. 2, pp 1-5, 2011.

- [108] A. Dubey, C. Kundu, T. M. N. Ngatched, O. A. Dobre, and R. K. Mallik, "Incremental Selective Decode-and-Forward Relaying for Power Line Communication," IEEE Vehicular Technology Conference, pp 1-6. 2018. 183
- [109] U. Tuntoolavest, N. Sakunnithimetha, and K. Limchaikit, "Reed Solomon Inner-Convolutional Outer Concatenated Code with Error-Erasure Decoding for Narrowband and Broadband Power Line Communications," Songklanakarin Journal of Science and Technology, vol.39, no. 5, pp 601-608, 2017 .
- [110] C. D. J. Lin Shu, Error control coding-fundamentals and applications. New Jersey: Pearson education Inc., Pearson Prentice Hall, Pearson Education Inc, Upper Saddle River, NJ. 07458, 2004.
- [111] Y. C. Kim, J. N. Bae, J. Y. Kim, and S. Member, "Novel Noise Reduction Scheme for Power Line Communication Systems with Smart Grid Applications," International Conference on Consumer Electronics (ICCE), pp. 791–792, 2011.
- [112] Y. Yoon, J. Choi, S. Kim, J. Lee, and Y. Kim, "The Optimal Power Allocation for Security in Multicarrier Relay Power Line Communication," IEEE International Symposium on Power Line Communications and its Applications (ISPLC), pp. 190–195, 2016.
- [113] G. L. Stüber, Principles of Mobile Communication, Second Edition. New York, USA, Kluwer Academic Publishers, 2002.
- [114] X. Wang, M. Yang, and Q. Guo, "Outage Probability Evaluation of Land Mobile Satellite Cooperative Diversity Communication System," International Conference on Advances in Satellite and Space Communications, no. c, pp. 26–30, 2012.
- [115] A. Vukicevic, "Electromagnetic compatibility of power line communication systems," Doctoral Dissertation, École Polytechnique Fédérale de Lausanne, Suisse, 2008.

## BIODATA OF STUDENT

Aiyelabowo O. P obtained the Higher National Diploma (HND) in Electrical/Electronics Engineering (Electronics/Telecommunication) of the Federal Polytechnic, Bida, Nigeria in the year 1995, Post-Higher National Diploma (Post-HND) in Electronics/Telecommunication Engineering of the Kaduna Polytechnic, Kaduna, Nigeria in the year 1999 and an M.Eng, Electrical/Electronics Engineering of the Abubakar Tafawa Balewa University, Bauchi, Nigeria in the year 2004. He is currently a PhD candidate in the Department of Computer and Communication Systems Engineering, Universiti Putra Malaysia. His research areas includes power line communication (PLC) and wireless communication systems. He has to his credit several publications in journals and international conference proceedings.

Email: [peter.aiyelabowo@federalpolyilaro.edu.ng](mailto:peter.aiyelabowo@federalpolyilaro.edu.ng)

## LIST OF PUBLICATIONS

### International Refereed Journals

Aiyelabowo, O. P., Sali, A., Samsul, B. N., Noordin, N. K. (2016), 'Performance Evaluation of Power Line Cooperative Communication System', *International Journal of Computer Science and Networks (IJCSN)*, vol. 2, Issue 6, pg. 893 - 906, ISSN: 2277-5420(Elsevier-indexed) (IF: 1.02).

Aiyelabowo, O. P., Sali, A., Samsul, B. N., and Noordin, N. K. (2016), 'Outage Probability Assessment of Power Line Cooperative Communication (PLCC) System', *International Journal of Advanced Engineering Research and Science*, vol. 3, Issue 4, pg. 85 – 94, ISSN: 2349-6495 (Scopus-indexed).

### International Refereed Conferences

Aiyelabowo, O. P., Sali, A., Samsul, B. N., and Noordin, N. K., (2016). 'Selective Relaying for Reliability in Power Line Cooperative Communication System', Proceedings of 4<sup>th</sup> *IEEE International Conference on Wireless Networks and Mobile Communication (WINCOM2016)*, Fez, Morocco.

Aiyelabowo, O. P., Sali, A., Samul, B. N., and Noordin, N. K., (2016). 'Channel Capacity and Outage probability Investigation of Selective Relaying in Power Line Cooperative Communication System' Proceedings of the 12<sup>th</sup> *NIEEE International Conference and Exhibition on Power and Telecommunication (ICEPT2016)*, Jos, Nigeria.

Aiyelabowo, O. P., Sali, A., Noordin, N. K., and Adebisi, B. , (2015) 'Reed-Solomon and Convolutional Codes on Modulation Schemes for Power Line Communication (PLC)', Proceedings of 25<sup>th</sup> *International Conference on Robotics, Automation and Communication Engineering (ICRACE2015)*, Kuala Lumpur, Malaysia, pg. 12 - 22. - The IIER Excellent Paper Award for Category of Best Presentation / Best Content at 25th IIER International Conference.

### Submitted Article

Aiyelabowo, O. P., Sali, A., Samul, B. N., and Noordin, N. K., "Achieving Performance Improvement in Power Line Cooperative Communication system through Selective Relaying", *Computer Communications*.



**UNIVERSITI PUTRA MALAYSIA**

**STATUS CONFIRMATION FOR THESIS / PROJECT REPORT AND COPYRIGHT**

**ACADEMIC SESSION :** \_\_\_\_\_

**TITLE OF THESIS / PROJECT REPORT :**

A BROADBAND COOPERATIVE RELAY-BASED SYSTEM FOR POWER LINE COMMUNICATION

**NAME OF STUDENT:** AIYELABOWO O. P

I acknowledge that the copyright and other intellectual property in the thesis/project report belonged to Universiti Putra Malaysia and I agree to allow this thesis/project report to be placed at the library under the following terms:

1. This thesis/project report is the property of Universiti Putra Malaysia.
2. The library of Universiti Putra Malaysia has the right to make copies for educational purposes only.
3. The library of Universiti Putra Malaysia is allowed to make copies of this thesis for academic exchange.

I declare that this thesis is classified as :

\*Please tick (✓)

**CONFIDENTIAL**

(Contain confidential information under Official Secret Act 1972).

**RESTRICTED**

(Contains restricted information as specified by the organization/institution where research was done).

**OPEN ACCESS**

I agree that my thesis/project report to be published as hard copy or online open access.

This thesis is submitted for :

**PATENT**

Embargo from \_\_\_\_\_ until \_\_\_\_\_  
(date) (date)

**Approved by:**

\_\_\_\_\_  
(Signature of Student)  
New IC No/ Passport No.:

Date :

\_\_\_\_\_  
(Signature of Chairman of Supervisory Committee)  
Name:

Date :

**[Note : If the thesis is CONFIDENTIAL or RESTRICTED, please attach with the letter from the organization/institution with period and reasons for confidentially or restricted. ]**