

NOTICE
PORTIONS OF THIS REPORT ARE ILLEGIBLE.
It has been reproduced from the best available copy to permit the broadest possible availability.

CONF-841013--2

Consolidated Fuel Reprocessing Program

A CONTROL ROOM CONCEPT FOR REMOTE MAINTENANCE
IN HIGH RADIATION AREAS

CONF-841013--2

DE85 002458

Margaret M. Clarke
Clarke Ambrose Incorporated*
Post Office Box 23064
Knoxville, Tennessee 37933-1064

John G. Kreifeldt
Tufts University†
Medford, Massachusetts 02155

Paper to be Presented
at
International Atomic Energy Agency
OECD Nuclear Energy Agency
Nuclear Fuel Cycle Facilities
October 2-5, 1984
Harwell, United Kingdom

By acceptance of this article, the publisher or recipient acknowledges the U.S. Government's right to retain a nonexclusive, royalty-free license in and to any copyright covering the article.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

*Clarke Ambrose Incorporated performs work for the Fuel Recycle Division of Oak Ridge National Laboratory under work order AC467GA1. Oak Ridge National Laboratory is operated by Martin Marietta Energy Systems Inc., for the U.S. Department of Energy.

†Tufts University performs work for the Fuel Recycle Division of Oak Ridge National Laboratory under subcontract No. 11Y39088V. Oak Ridge National Laboratory is operated by Martin Marietta Energy Systems Inc., for the U.S. Department of Energy.

MASTER

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

Consolidated Fuel Reprocessing Program
A CONTROL ROOM CONCEPT FOR REMOTE MAINTENANCE
IN HIGH RADIATION AREAS*

Margaret M. Clarke
Clarke Ambrose Incorporated
Post Office Box 23064
Knoxville, Tennessee 37933-1064

John G. Kreifeldt
Tufts University
Medford, Massachusetts 02155

ABSTRACT

This paper summarizes the design of a control room concept for an operator interface with remote maintenance equipment consisting of force-reflecting manipulators, tools, hoists, cranes, cameras, and lights. The design development involved two major activities. First, detailed requirements were defined for foreseeable functions that will be performed by the control room operators. Second, concepts were developed, tested, and refined to meet these requirements.

INTRODUCTION

Conceptual designs for future nuclear reprocessing facilities require large, canyon-like process cells where high radiation levels preclude human entry for repair or maintenance. The Remote Control Engineering (RCE) Task of the Consolidated Fuel Reprocessing Program at Oak Ridge National Laboratory (ORNL) is developing advanced remote system technology to totally replace human presence in these remote

*Research sponsored by the Office of Spent Fuel Management and Reprocessing Systems, U.S. Department of Energy under contract No. DE-AC05-84OR21400 with Martin Marietta Energy Systems, Inc.

process cells. The Advanced Integrated Maintenance System (AIMS) consisting of advanced elbows-down, electronic, force-reflecting servo-manipulators with remote viewing, sound, tooling, and transporter capabilities will be capable of performing all necessary remote repair and maintenance tasks. The design of the AIMS control room, where the human operator interfaces with remote equipment, has been an important aspect of the RCE activity. The design goal has been to provide a safe, efficient interaction between the operator and all AIMS equipment. This paper describes the five-stage method used in the development of this design: mission description, design requirements, preliminary design solution, construction, and verification of the mock-up, and refinement of the design solution.

MISSION DESCRIPTION

The authors' goal was to generate a clear account of tasks that would be done in the control room, the information and outputs operators would need to do these tasks, the characteristics of the operators themselves, and the characteristics of the environment in which the tasks would be performed.

Typical remote small-volume maintenance tasks (e.g., removing a bolt from a metal plate) and typical large-volume tasks (e.g., unbolting and transporting a large flange) were constructed in a simulated remote environment. Manipulator operators then performed the tasks under a series of experimental conditions, providing the means to generate concise statements about the information and controls the operator would need in a hot facility control room.^{1,2}

Details of television displays the operators would need from the remote cell were stated (e.g., views from the three cameras on-board the manipulator; from fixed, wall cameras; and from a small, portable camera held by the slave arm of the remote manipulator). Details of necessary alphanumeric/graphic and hard-copy displays were also stated. For example, operators would need information about the slave's position in space, condition of its motors, and schematics of the equipment on which it would be working. Remote sound information from the process cell, as well as audio alarms and signals, were also considered.

Next, a list of all the control functions the operators would need to perform the specified tasks was generated. First, all controls for remote equipment were considered: controls for cameras, lights,³ tools, transporter, and crane. Second, the controls necessary to present this information to the operators were considered: monitor controls, video switching, mixing, interaction with computer-generated graphic displays, controls for remote sound, and emergency responses.

Since the control room must conform to the people who work there, a list of personnel characteristics that would have to be accommodated was generated. The list included operator reach and viewing envelopes for 5th percentile female to 95th percentile male,⁴ normal visual acuity, and normal color vision.

All other accessories and equipment needed in the control room (e.g., electronic racks, printers, storage for nonelectronic documents) were listed. Information was also obtained on the probable size and shape of the room, and the location of doorways and ducts. Finally, experience suggests that the operators be close enough to communicate

efficiently by direct speech rather than by telephone or other nondirect means and that each operator be able to see the other easily and without obstruction.

DESIGN REQUIREMENTS

The next stage in the design involved developing specific design requirements. The material generated in the mission description played an important part in requirement development; however, other inputs were also used. The authors became familiar, through literature surveys and on site visits, with other facilities engaged in similar work and the kinds of design solutions they have employed.⁵ Next, two separate surveys of experts were conducted. Eleven experts in remote handling in nuclear and other hazardous environments (NASA, U.S. Navy, Los Alamos National Laboratory, etc.) were surveyed as to the kind of remote tasks they performed, how many operators made up a typical crew, the function of each member, typical errors, and recovery from errors. Fourteen experts in remote systems at ORNL were presented with typical task scenarios and were asked what size crew should do the task and which operator should use each control or display. Data were then collected at the Remote Systems Development Facility giving valuable information on the frequency and sequence in which operators used various controls and displays, and on the effect of decreased crew size on task performance time.

Finally, analysis of the mission description, and of the information described above were then used to develop general design requirements which are summarized below.

Operator-Related Requirements

Two-person team: a manipulator operator (MANOP) will control all manipulator functions; a secondary operator or camera operator (CAMOP) will control lights, tooling, transporter, cranes, and all other functions necessary to support the MANOP.

Proximity of operators: Operators must be physically close enough to communicate by direct speech and have a clear view of each other without obstructing each other's views. All MANOP television monitor information must be duplicated on the CAMOP displays.

Anthropometric range: The design must accommodate the anthropometric characteristics of the anticipated wide range of the work force population (5th percentile female through 95th percentile male) with normal viewing and hearing.

Equipment/Architecture-Related Requirements

Aesthetics: The control station must provide a pleasant, non-stressful work environment for long maintenance tasks. A pleasing design also reinforces the operators' perception of the tasks' importance as well as the operators' self-image.

Positioning: All MANOP displays and controls must be out of reach of the maximum extension of the master to prevent interference.

Use of controls/displays: Advanced integrated controls/displays (i.e., touch or voice-actuated units, graphics displays, etc.) should be utilized to the maximum extent. Reliance on discrete dedicated controls should be minimized to avoid clutter and potential confusion and to permit easier configuration in dedicated controls.

Modularity: The use of modular units will allow easy repair or input of new technology.

Flexibility: One operator must be able to perform all functions when tasks are easy or when circumstances mandate this approach (e.g., emergencies).

PRELIMINARY DESIGN SOLUTION

Several different concepts were devised and evaluated, and then synthesized into a single efficient aesthetically pleasing design,⁶ which incorporates several advanced state-of-the-art features in original ways (Fig. 1). First, MANOP selects major manipulative functions by voice or from menu displays. Because the menu displays are located out of range of any interference from the manipulator master arms they are also out of MANOP's reach and cannot be touch controlled. They are activated instead by a small switch on the master controller handle which moves a light cursor over the menu to select necessary item. Second, CAMOP controls remote equipment (cameras, lights, cranes, etc.) through two small integrated hand controllers, similar to that shown in Fig. 2, to which CAMOP will assign functions by touch screen or


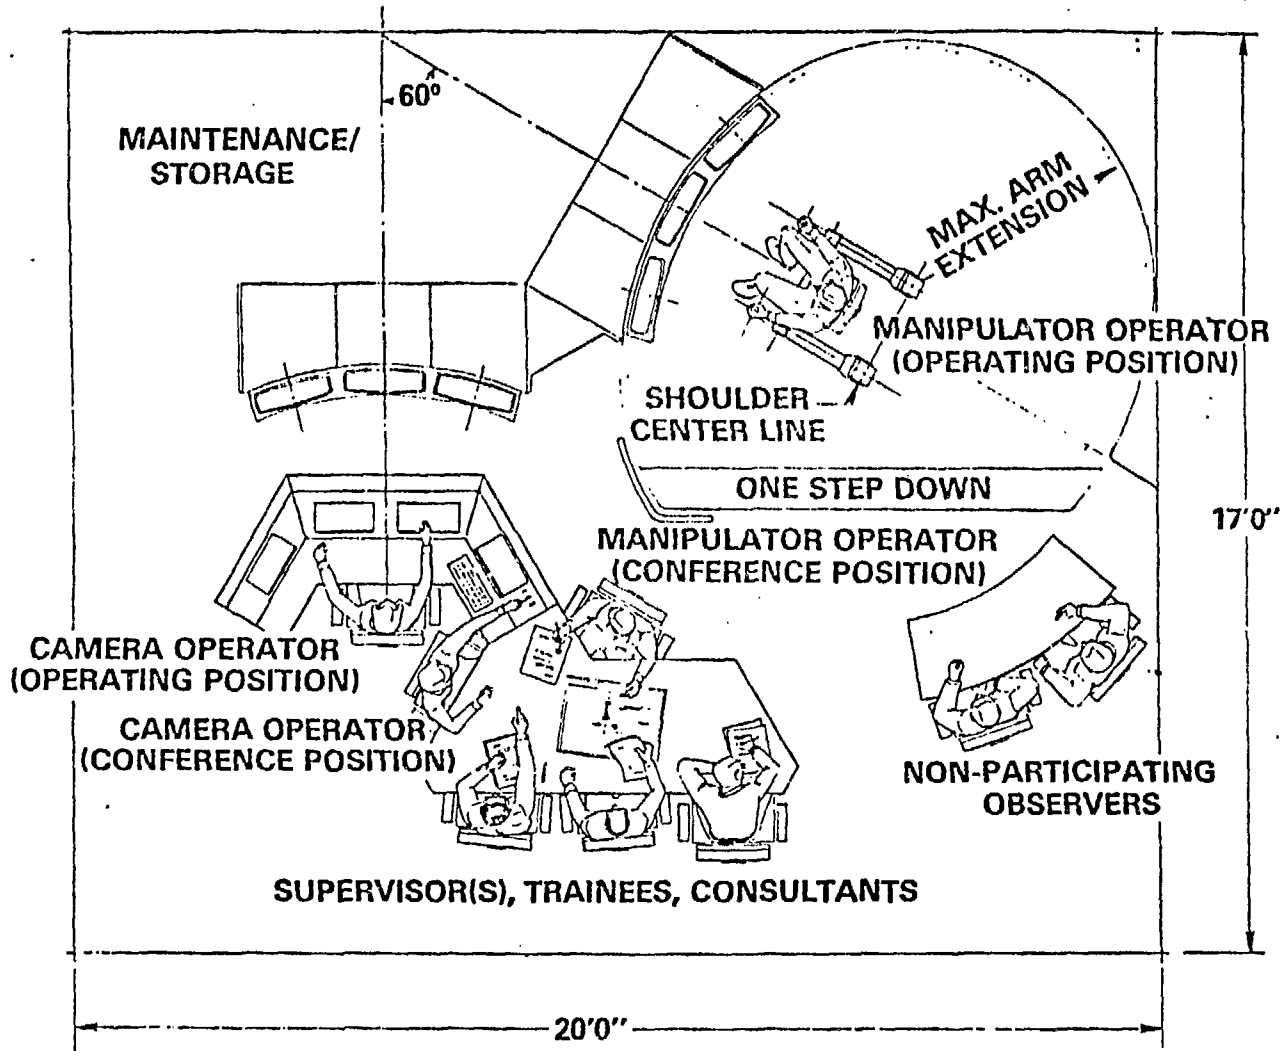


Fig. 1. Control room design

ORNL-DWG 83-17988

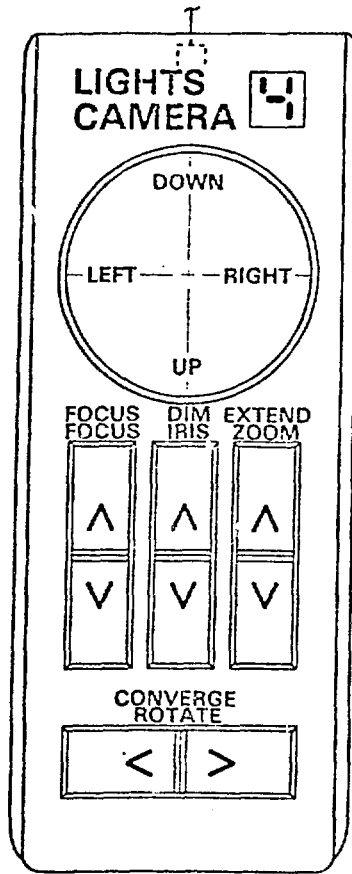

TOP VIEW

voice. The controllers can also be operated from the MANOP station, allowing the whole task to be under one person's control if necessary. Third, the design relies on advanced graphic displays for both control menus and information display. Fourth, all dimensions, viewing angles, and reach envelopes have been selected to accommodate the body size and strength of the expected operator

CONSTRUCTION AND VERIFICATION OF MOCK-UP

In order to evaluate the spatial relationships between the operators and their controls and displays, the authors built a full-scale soft model of the CAMOP station and MANOP displays. Photographs of the task or of alphanumeric or graphic displays simulated dynamic visual information. Fourteen volunteer subjects (staff at ORNL), ranging in height from 4 ft 11 in. (5th percentile female) to 6 ft 4 in. (93th percentile male), performed simulated tasks using the information on the various "screens" and on the simulated hand controller. Subjects' ease or difficulty in seeing and reaching all required equipment was noted and subjects were also asked to complete a questionnaire about their general impression of the design. The two worst case subjects (4 ft 11 in. and 6 ft 4 in.) were more intensively evaluated as regards any difficulty in using a real facility. Based on the data collected during the evaluation, the height and angulation of several monitors were adjusted for better visibility and the writing/conference area was refined for improved comfort and efficiency. In addition, further analysis of lines of sight from CAMOP to MANOP suggested that the step

down to the MANOP work area was unnecessary; it was removed. The initial solution (Fig. 1) was modified to incorporate the improvements suggested by the mock-up. The modified design is shown in Fig. 3. Now that these modifications are in place, detailed plans for hardware fabrication are proceeding.

SUMMARY


The control room represents a significant departure, technologically and architecturally, from others and is based on sound human engineering and industrial design principles. Essential to the development were task analyses and realtime studies, solicitation of expert operators to participate at various points in the design process and verification of the mock-up to ensure that the design fits the expected operator population. The end result is a design which is not only technically advanced, but also a safe, productive, nonfatiguing, and aesthetically pleasing work environment.

REFERENCES

1. M. M. Clarke, S. J. Handel, and J. Garin, "A Comparison of Color and Black and White Television for Remote Viewing in Nuclear Facilities," Trans. Am. Nucl. Soc., 43:239 (November 1982).
2. M. M. Clarke, W. R. Hamel, and J. V. Draper, "Human Factors in Remote Control Engineering Development Activities," pp. 8-16 in Proceedings of the Remote Systems Technology Division, American Nuclear Society, 1983.

Fig. 3

CONTROL STATION FOR ADVANCED INTEGRATED MAINTENANCE SYSTEM: FINAL CONCEPT

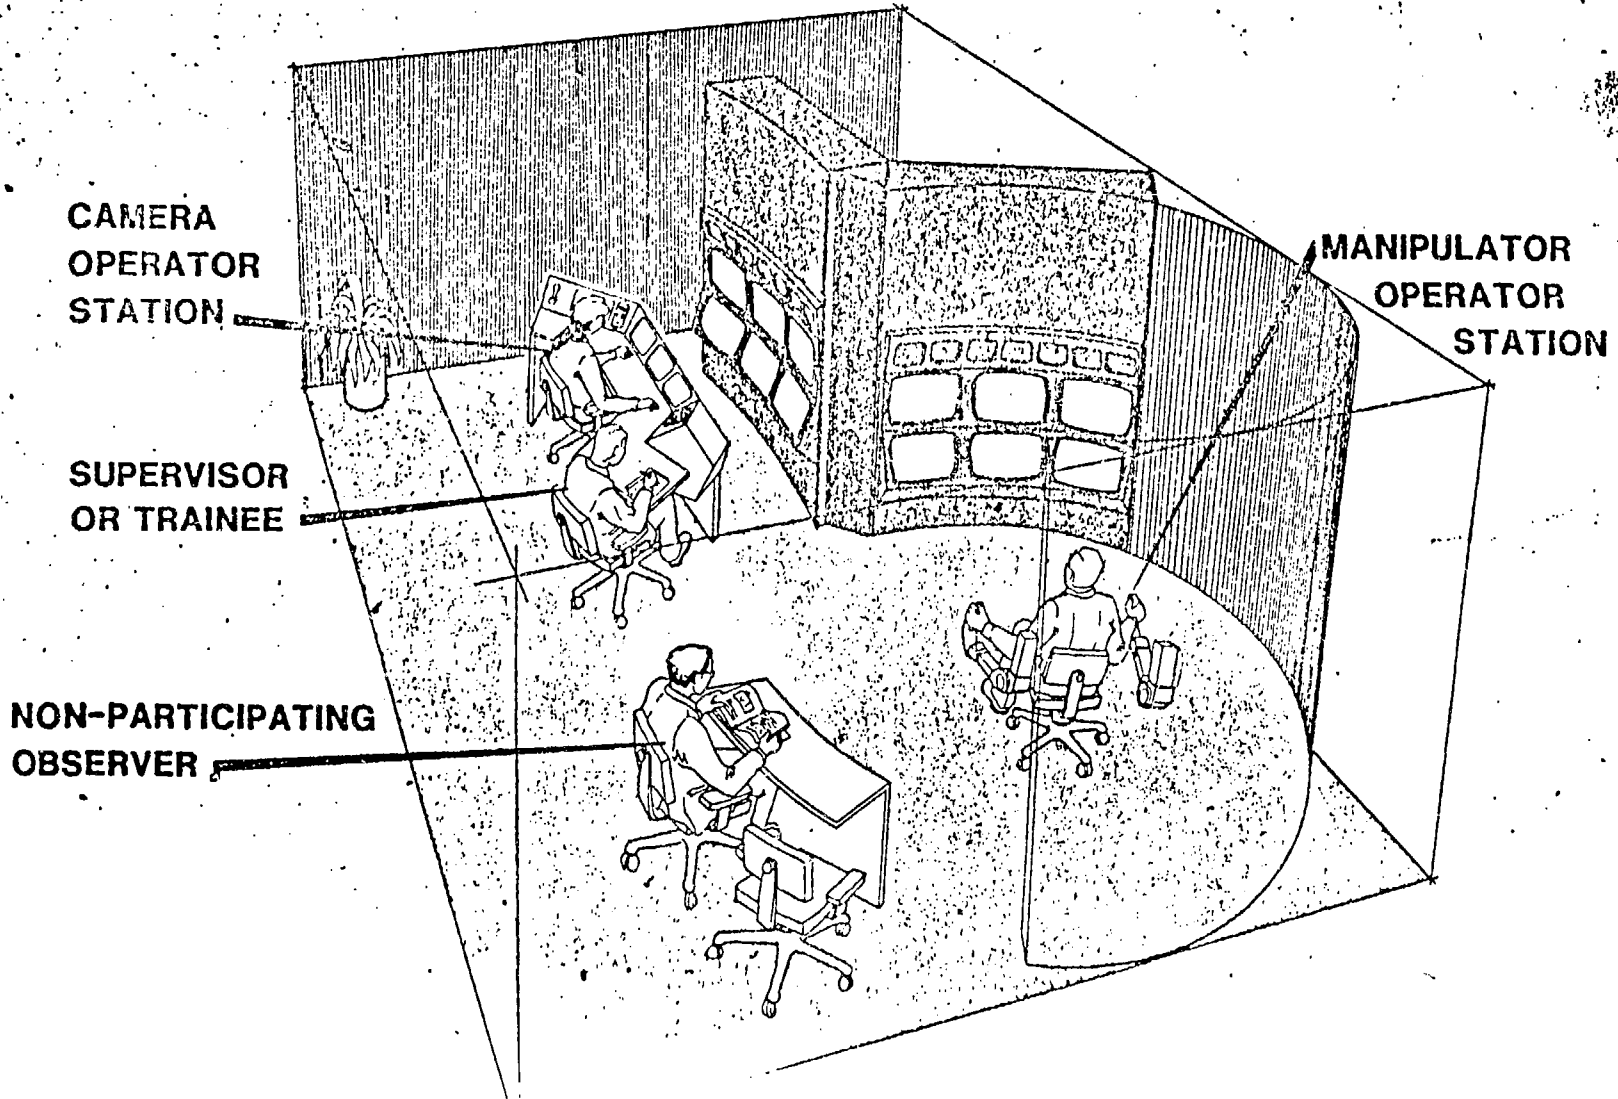

3. J. V. Draper, "Lighting for Remote Viewing Systems," Proceedings — Robotics and Remote Handling in Hostile Environments, American Nuclear Society, Gatlinburg, Tenn., April 1984.
4. Humanscale, Massachusetts Institute of Technology Press, Cambridge, Mass., 1983.
5. D. L. Grisham, J. E. Lambert, "Human Factors Considerations in the Monitor Systems," pp. 35-39 in Proceedings — Remote Systems Technology Division, American Nuclear Society, 1983.
6. M. M. Clarke and J. G. Kreifeldt, "Elements of an Advanced Integrated Operator Control Station," Proceedings Robotics and Remote Handling in Hostile Environments, American Nuclear Society, Gatlinburg, Tenn., April 1984.