

Applications of Solvent Extraction: A Summary

Noorhalieza Ali Department of Chemical Engineering UTM

Abstract

This paper summaries the processes involved in solvent extraction plus its various applications in the organic and inorganic chemical industries.

Solvent Extraction

Solvent extraction is a separation technique which should strictly be called liquid-liquid extraction as the term solvent extraction could be confused with the recovery of components from solids by treatment with an organic solvent. It involves contacting the original mixture (feed) which contains one or more of the desired components (solutes) with a second liquid (solvent) which is immiscible or partially immiscible with the original solution. The resultant mixture is then split into two separate phases of 'extract' containing the required solute and 'raffinate' which is the depleted feed with a certain amount of solute. The solvent which is made up of a mixture of extractant and diluent must be chosen such that the desired solute is transferred or extracted with the solvent. Its selection usually involves a compromise between different conflicting properties involved. (Hughes, 1989).

Solvent extraction is divided into two broad categories based on molecular interaction between the solute and the solvent:

- (1) physical interaction which possibly involves polarity difference or hydrogen bonding.
- (2) chemical compound formation.

The nature of the interaction dictates to an extent the type of equipment which may be used and also the methods of solvent recovery. In general, extraction of an organic material usually involves physical interaction whereas inorganic and metal species involves chemical interaction.

The extraction process involves

- (1) contacting the solvent with the feed with an approach towards equilibrium.
- (2) removal of impurities in the extract (scrubbing) by contacting the extract with another liquid (scrub feed) usually the original feed which is immiscible with the extract so that the desired solute retained in the extract while the impurities go into the scrub feed.
- (3) recovery of solvent and solute from the extract phase (stripping/backwashing) which involves contacting the extract with a second immiscible liquid phase under conditions in which the solute passes to the second phase.

In a physical interaction extraction, the solute recovery from the extract is by physical means (usually distillation) whereas in a chemical interaction, the solute recovery requires reversal of the chemical interaction achieved by some form of chemical conditioning (for example, contacting with an aqueous phase of different pH).

Solvent washing is sometimes required if the solvent is subjected to degradation in use or if some impurity is extracted which is not removed in the stripping operation. Figure 1 shows the simplified process involved. In large scale operation, the operations are continuous and multistage.

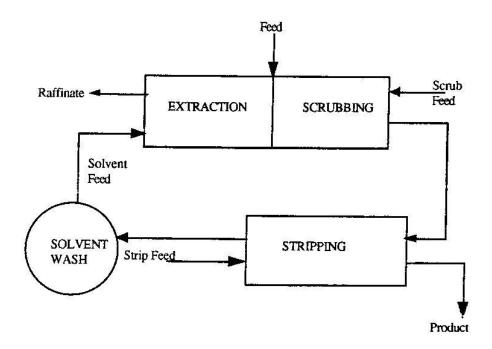


Figure 1: Simplified Overall Extraction Process.(Hughes, 1989)

Application of Solvent Extraction

Solvent extraction is chosen when

- it is the only method available since separation cannot be achieved by distillation, evaporation and crystallization or
- (b) it is the most economical process. Due to this reason, solvent extraction has found applications in the separation of
 - (1) solutions of close boiling and azeotrope-forming components
 - (2) solutions of components having low relative volatility
 - (3) dissolved solute when evaporation may be impractical
 - (4) heat-sensitive components such as antibiotics and penicillin

 (5) components of differing chemical type whose boiling points may overlap such as petroleum.
(Hughes, 1989; Laddha and Degaleesan, 1976)

The application of solvent extraction is broadly classified into organic and inorganic chemical industries with applications in the petroleum industries, coal tar industries, refining of vegetable oils and animal fats, separation and purification of pharmaceutical and natural products, recovery of pollution chemicals, metallurgical industries and fertilizer industries. There is currently considerable research effort particularly in metallurgical extraction to increase the application still further. (Bailes et al.)

Tables 1 and 2 give the various applications of solvent extraction in the organic and inorganic chemical industries. (Laddha and Degaleesan, 1976)

From the examples of its vast applications, solvent extraction offers great potential as a separation and purification method in chemical engineering operations.

Table 1 - Important Application of Liquid-liquid Extraction in Organic Chemical Industry

| Table 1 : Important Application of Liquid-liquid Extraction in Organic Chemical Industry | | | | | |
|--|--|--|--|--|--|
| Feed | Solvent | Solute | Remarks | | |
| PETROLEUM INDUSTRY | | | | | |
| Petroleum fractions in the boiling range from kerosene to lubricating oil | Liquid sulphur dioxide | Aromatic and sulphu- containing compounds | Edeleanu process. First installation in 1911 | | |
| On | | Minateria, and said | NAMES AND ADDRESS OF THE PROPERTY OF THE PROPE | | |
| Petroleum stocks of wide boiling range | A mixture of diethylene glycol and water | High purity aromatics- benzene toluene and xylenes | Udex Process - recovery of aromatics 91 - 99% and purity 96 - 98 | | |
| Diesel oil, heating oil & lubricating oil fraction | Furfural | Sulphur-containing and cyclic compounds | Treatment improves cetane number and qualities | | |
| Wax containing heavy crude residuums | Propane | Wax and Asphaltic materials | Asphaltic and resinous materials are insoluble in propane | | |
| Crude distillate | Propane and creasylic acid | Paraffins and napthalene | Duo-sol process | | |
| Low viscosity spindle oil and high viscosity machine oil | Dichloroethane and methylene chloride | Paraffin wax | Di-me solvent process | | |
| Gasoline and kerosene fractions | Sulfolane | Aromatic hydrocarbons | High purity aromatic hydrocarbons obtained | | |
| Catalytic reformates, straight run gasoline or kerosene | Dimethyl sulfoxide (DMSO) | Aromatic hydrocarbons | | | |
| COAL TAR INDUSTRY | | | · | | |
| Coke-oven oil | Diethylene glycol-water | Aromatics | Udex process | | |
| Crude tar distillate | Aqueous methanol and hexane | Tar acids | Fractional extraction | | |
| Commercial tar acid fraction | Aqueous sodium hydroxide and toluene | 2-4 and 2-5 xylenol | Dissociation extraction | | |
| Gas liquor | Benzene | PhenoIs | | | |
| OILS AND FATS | | | | | |
| Vegetable oil and animal fats | Propane | Unsaturated glycerides and vitamins | Solexol process | | |
| Vegetable oils | Furfural | Unsaturated glycerides | For production of drving oil | | |

(cont'd table 1)

| Feed | Solvent | Solute | Remarks |
|---|-----------------------|-----------------------------|---------------------------|
| PHARMACEUTICAL | | | |
| Fermentation broth | Butyl or amyl acetate | Penicillin | Multiple rapid extraction |
| Soyabean meal fermented beer | Butanol | Bacitracin | 72 |
| MISCELLANEOUS | | | |
| Dilute solution of acetic acid | Ethyl acetate | Acetic Acid | |
| Pulpmill black liquor | Methy ethyl ketone | Acetic acid and formic acid | |
| Catalytic cracking petroleum plant effluent water | Light catalytic oil | Phenol | Phenex process |

Table 2: Important Application of Liquid-liquid Extraction in Inorganic Industry

| Feed | Solvent | Solute | Remarks |
|--|--|-------------------|--|
| METALLURGICAL INDUSTRY | | | - |
| Low quality sulphuric acid ore-leach liquor | Secondary and tertiary amine | Uranium salt | Anex process |
| Ore-leach liquor | Di-2-ethyl hexyl phosphoric acid and tri- butyl phosphoric acid in kerosene | Uranium salt | Dapex process |
| Uranium concentrate solution in nitric acid | 20% Tributyl phosphate in kerosene | Uranium nitrate | For final purification |
| Monazite leach solution | TBP in xylene or Di (tridecy) amine | Thorium nitrate | |
| Zirconium-hafnium solution | Hexane and tributyl phosphate or hexone and ammonium thiocyanate | Hafnium | Produces reactor grade zirconium |
| Mixed fluorides of niobium and tantalum | Hexone or TBP | Tantalum | Both tantalum and niobium are extracted by TBP |
| Uranium mill slime tailings | Di-2-ethyl hexyl phosphoric acid and TBP in kerosene | Vanadium | |
| Copper ore-leach solution | α-Bromolauric acid | Copper | |
| MISCELLANEOUS | | , | |
| Phosphoric acid solution from phosphate rock digestion | C ₄ .C ₅ alcohols | Phosphoric | IMI process |
| Bromide salt in brine | Tetrabromoethane | Bromine | |
| Hydrogen peroxide solution in anthra- quinone | Deionized water | Hydrogen peroxide | Autoxdation process |

References

- Bailes, P.J., Bryant, A. J. and Ellis, D. I. Mass Transfer Processes. Dept. Of Chem. Eng., Univ. of Bradford, n.d.
- 2. Bailes, P.J., Hanson, C. and Hughes, M. A. "Liquid-liquid Extraction: The Process, the Equipment" Chem. Eng., 83 (1976), 86-100
- 3. Hanson, C. " Solvent Extraction Theory, Equipment, Commercial Operation and Economics " Chem. Eng., 75 (1968), 76 98
- Hughes, M. A. "Basic Princeiples of Solvent Extraction" Lecture presented at the Univ. of Bradford, 16 January, 1989
- Laddha, G. S. and Degaleesan, T. E. "Dispersion and Coalescence" Handbook of Solvent Extraction. Ed. Lo, T. C. Baird, M. H. I. and Hanson, C. New York: John Wiley & Sons, 11983