

December 1971

B71-10498

NASA TECH BRIEF

Ames Research Center



NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

Wide-Range Logarithmic Radiometer for Measuring High Temperatures

The problem:

Measuring rapid variations of the temperature of a white-hot charred body at 2000° to 3000°K.

The solution:


A filter radiometer utilizing a photomultiplier circuit in which a direct-coupled amplifier varies dynode voltage so as to maintain constant anode current; the logarithm of the voltage applied to the photomultiplier is a nearly linear function of the reciprocal temperature of the white-hot source.

How it's done:

Examination of a plot of the radiant energy emitted in the near ultraviolet by a nearly black body obeying Wien's law reveals that there is approximately a four-order-of-magnitude change of radiant energy over the interval 2000° to 3000°K and that it is nearly constant over the range of emissivities commonly associated with charred bodies. In comparison, the emission of radiant energy in the infrared is a more sensitive function of emissivity. Accordingly, the radiometric measurement of temperature is accomplished with the logarithmic photometer depicted in the figure by passing radiation emitted from the white-hot body through a filter which transmits largely in the 320 nm region before it falls onto the sensitive surface of the photomultiplier.

The output current of the photomultiplier anode generates a voltage across R1; this voltage is directly coupled to the grid of V1. The plate voltage of V1 is direct-coupled to V2 via Zener diode D1, and thus is differentially compared with the Zener potential across D2. The output plate voltage of V2 in turn

is coupled directly to a series-control tube, V3, and its cathode bias, Zener diode D3. The circuit elements are adjusted so that the output current through R1 is of the order of 1 microampere; any variation

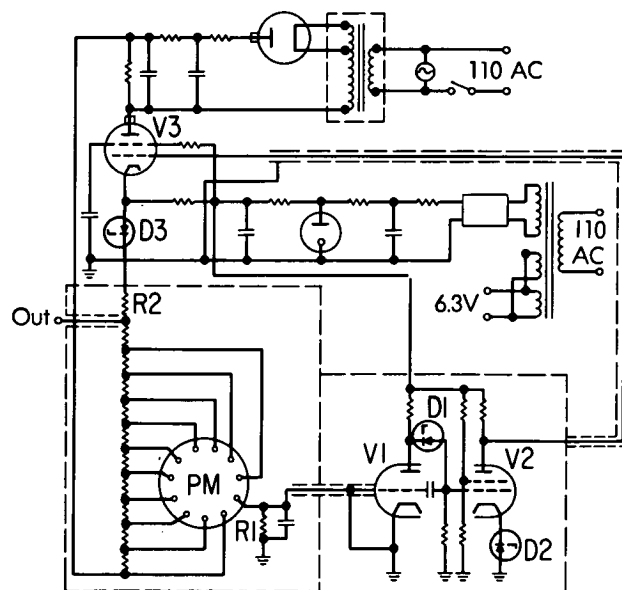

in the voltage drop across R1 is greatly amplified and applied to the control grid of V3. As a result, the total potential applied to the photomultiplier dynode resistor string is varied and the initial conditions at R1 are re-established. The logarithm of the voltage that must be supplied to the photomultiplier to maintain design potential across R1 is nearly a linear function of the logarithm of light intensity. The circuit can change the dynode voltage from 25 to

(continued overleaf)

125 volts per stage, corresponding to a total change of photomultiplier gains of a million to one. The drop across resistor R2 (less than 1 volt) is measured and taken as an indication of the total photomultiplier supply voltage.

The radiometer can be calibrated with a disappearing-filament pyrometer when both instruments are viewing a flat graphite surface maintained at white heat. The logarithm of the photomultiplier voltage bears a closely linear ($\pm 0.5\%$) relationship to the reciprocal of the absolute temperature,

$$\log V = K(1/T) + C$$

over the range of 2000° to 3000°K with a 320-nm filter at a 7-nm half-bandwidth.

Notes:

1. The response of the radiometer was checked with

a pulsed ultraviolet glow lamp and found to be of the order of 50 microseconds.

2. Requests for additional information may be directed to:

Technology Utilization Office
Ames Research Center
Moffett Field, California 94035
Reference: TSP-71-10498

Patent status:

No patent action is contemplated by NASA.

Source: Edward M. Liston of
Stanford Research Institute
under contract to
Ames Research Center
(ARC-10254)