

NASA TECH BRIEF

Marshall Space Flight Center



NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

An Electrochemical Engine

A thin-electrode fuel cell (see NASA Tech Brief 10472), with the electrodes arranged in a circular shape, can provide the power for a new electrochemical engine. This engine has a weight to power ratio potential of 1 kg/kW, as compared to 5.5 kg/kW for the gasoline engine of today. The configuration of the engine allows many thin cells to be connected in series, producing a low-cost high-voltage, high power-density system.

In the illustration of the basic element of the engine, it may be seen that the electrodes surround a magnetically-permeable soft-iron core. The current collectors of the circular stack of cells are parallel disks. Electrons are removed from the anode at one end and are put in at the cathode at the other end. The high-voltage taps of the stack are connected to a load coil that creates more magnetic flux in the iron core or in some other magnetic structure of the motor. The fuel-cell electromagnet can be used either in the stator or the rotor.


Heat flux and heat dissipation, important considerations in the design, may be handled in several ways.

For instance, a heat and mass plate (see NASA Tech Brief 10489) can transfer heat around the circumference of the cylindrical cathode-and-anode structure to a heat-dissipation zone.

With this system, a safe high-voltage engine may be constructed. Since each electrode assumes a potential relative to the electrolyte, and since there are no electrolyte paths between cells, any number of cell stacks can be connected in series. In this way, the high voltages are contained within the engine, minimizing shock hazard.

Notes:

1. The development of a fuel-cell system is further described in the following NASA Tech Briefs:
B73-10475, Vapor-Deposited Platinum as a Fuel-Cell Catalyst
B73-10489, Fuel-Cell Heat and Mass Plate
B73-10472, A Methanol/Air Fuel-Cell System
2. Requests for further information may be directed to:
Technology Utilization Officer
Marshall Space Flight Center
Code A&PS-TU
Marshall Space Flight Center, Alabama 35812
Reference: B73-10473

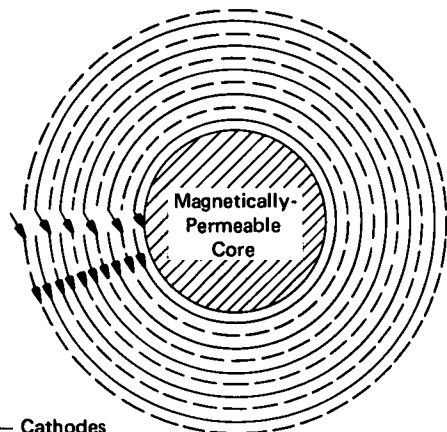

----- Cathodes
 _____ Anodes
 → Electron Flow Direction

The Basic Element of the Engine:
A Cylindrical Stack of Electrodes

Patent status:

Inquiries concerning rights for the commercial use of this invention should be addressed to:

Patent Counsel
 Marshall Space Flight Center
 Code A&PS-PAT
 Marshall Space Flight Center, Alabama 35812

Source: W. J. Asher of
 Exxon Corp.
 under contract to
 Marshall Space Flight Center
 (MFS-22542)

Category 06, 07