



RF MEMS Switches With SiC Microbridges for Improved Reliability

Maximilian C. Scardelletti
Glenn Research Center, Cleveland, Ohio

Christian A. Zorman
Case Western Reserve University, Cleveland, Ohio

Daniel R. Oldham
Glenn Research Center, Cleveland, Ohio

NASA STI Program . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) program plays a key part in helping NASA maintain this important role.

The NASA STI Program operates under the auspices of the Agency Chief Information Officer. It collects, organizes, provides for archiving, and disseminates NASA's STI. The NASA STI program provides access to the NASA Aeronautics and Space Database and its public interface, the NASA Technical Reports Server, thus providing one of the largest collections of aeronautical and space science STI in the world. Results are published in both non-NASA channels and by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.
- **CONFERENCE PUBLICATION.** Collected

papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.

- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services also include creating custom thesauri, building customized databases, organizing and publishing research results.

For more information about the NASA STI program, see the following:

- Access the NASA STI program home page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA STI Help Desk at 301-621-0134
- Telephone the NASA STI Help Desk at 301-621-0390
- Write to:
NASA Center for AeroSpace Information (CASI)
7115 Standard Drive
Hanover, MD 21076-1320



RF MEMS Switches With SiC Microbridges for Improved Reliability

*Maximilian C. Scardelletti
Glenn Research Center, Cleveland, Ohio*

*Christian A. Zorman
Case Western Reserve University, Cleveland, Ohio*

*Daniel R. Oldham
Glenn Research Center, Cleveland, Ohio*

Prepared for the
IEEE International Symposium on Antennas and Propagation
sponsored by IEEE, URSI, and APS
San Diego, California, July 5–12, 2007

National Aeronautics and
Space Administration

Glenn Research Center
Cleveland, Ohio 44135

Acknowledgments

The authors would like to thank Elizabeth McQuaid and Nick Varaljay for their CAD and fabrication efforts. This work was supported by the Wireless Communications group of the Integrated Vehicle Health Management (IVHM) project at NASA.

This report is a preprint of a paper intended for presentation at a conference. Because changes may be made before formal publication, this preprint is made available with the understanding that it will not be cited or reproduced without the permission of the author.

Trade names and trademarks are used in this report for identification only. Their usage does not constitute an official endorsement, either expressed or implied, by the National Aeronautics and Space Administration.

Level of Review: This material has been technically reviewed by technical management.

Available from

NASA Center for Aerospace Information
7115 Standard Drive
Hanover, MD 21076-1320

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161

Available electronically at <http://gltrs.grc.nasa.gov>

RF MEMS Switches With SiC Microbridges for Improved Reliability

Maximilian C. Scardelletti
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135

Christian A. Zorman
Case Western Reserve University
Cleveland, Ohio 44106

Daniel R. Oldham
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135

Introduction

Radio frequency (RF) microelectromechanical (MEMS) switches offer superior performance when compared to the traditional semiconductor devices such as PIN diodes or GaAs transistors (ref. 1). MEMS switches have a return loss (RL) better than -25 dB, negligible insertion loss (IL), isolation better than -30 dB, and near zero power consumption. However, RF MEMS switches have several drawbacks the most serious being long-term reliability. The ability for the switch to operate for millions or even billions of cycles is a major concern and must be addressed. MEMS switches are basically grouped in two categories, capacitive and metal-to-metal contact. The capacitive type switch consists of a movable metal bridge spanning a fixed electrode and separated by a narrow air gap and thin insulating material. The metal-to-metal contact type utilizes the same basic design but without the insulating material. After prolonged operation the metal bridges, in most of these switches, begin to sag and eventually fail to actuate. For the metal-to-metal type, the two metal layers may actually fuse together. Also if the switches are not packaged properly or protected from the environment moisture may build up and cause stiction between the top and bottom electrodes rendering them useless. Many MEMS switch designs have been developed and most illustrate fairly good RF characteristics. Nevertheless very few have demonstrated both great RF performance and ability to perform millions/billions of switching cycles (refs. 2 and 3). Of these, nearly all are of metal-to-metal type so as the frequency increases RF performance decreases.

Silicon carbide (SiC) is widely known for its potential as a structural material for MEMS devices designed to operate in harsh environments (i.e., high temperature, radiation, wear, etc.). It has robust mechanical properties that make SiC very attractive for RF MEMS applications. When used as the structural material in micromachined bridges, the inherent stiffness and tensile stresses of SiC results in beams that are extremely resistant to sagging. Moreover, its chemical inertness makes SiC highly resistant to stiction. These properties makes SiC an ideal alternative to metals in surface micromachined bridge-based RF MEMS switches for the reasons described above. Incorporation of insulating, amorphous SiC as the main mechanical structure in bridge-based RF switches eliminates the need to use a stiction-preventing insulating film between the cantilever and transmission because the SiC itself is highly resistant to stiction, due to its chemical inertness coupled with its resistance to oxidation.

In this paper we present RF MEMS switches which utilize 500- and 300-nm-thick amorphous SiC films for structural support in order to improve reliability. The MEMS switch incorporating the 500-nm-thick microbridge actuates readily but suffers from poor RF performance while the switch with the 300-nm-thick SiC microbridge exhibits great RF performance but does not actuate reliably.

MEMS Switch Design and Fabrication

A schematic of the RF MEMS switch with a SiC microbridge is shown in figure 1(a). The MEMS switch is constructed out of coplanar waveguide (CPW) transmission line media. The SiC microbridge spans the width of the CPW completely thus making the effect of the bridge on the CPW negligible while in the up-position (off-state) and renders the MEMS switch in shunt configuration. Furthermore the by making the bridge extend completely over the CPW with no contact the MEMS switch can be biased directly and the CPW left at ground potential to bias other electronic components.

The MEMS switch is fabricated on a sapphire wafer with a dielectric constant of 9.4 and a thickness of 500 μm . The CPW has a center conductor width (S), a slot width (W), and a ground width (G) of 130, 60, and 300 μm , respectively, which equates to a characteristic impedance of 50 Ω . Typical integrated circuit (IC) fabrication techniques were used to develop the switches. The CPW transmission lines consist of chrome (Cr) and gold (Au) with a thickness of 25 and 1200 nm, respectively. The SiC microbridge consisted of 300 nm or 500-nm-thick amorphous SiC films deposited by plasma enhanced chemical vapor deposition using a process detailed elsewhere (4). Since the SiC film is insulating, a thin layer of Cr/Au (25/120 nm) was deposited on top of the bridge to ensure a potential would be created between the bridge and the CPW to actuate the switch. An SEM micrograph of a released MEMS switch is shown in figure 1(b).

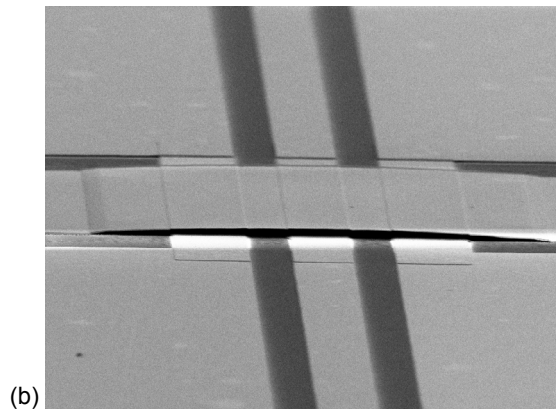
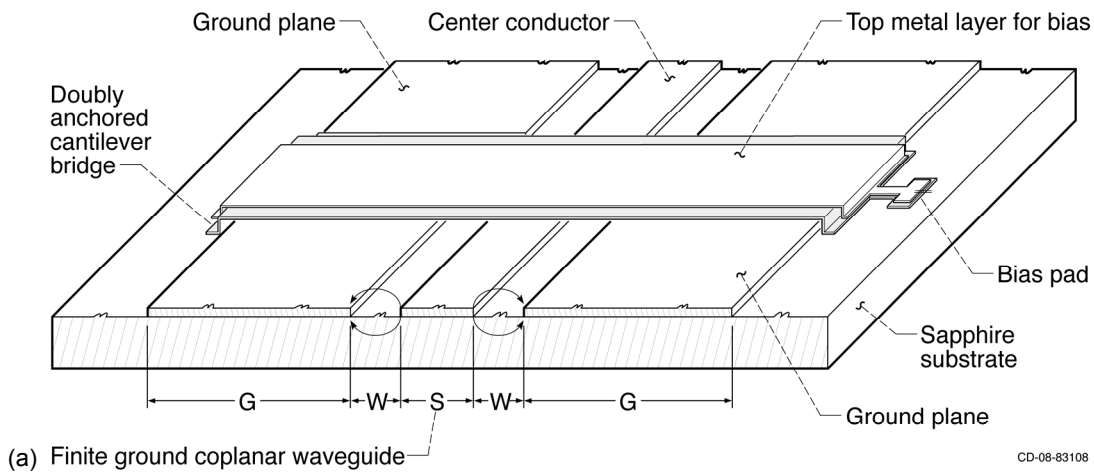


Figure 1.—(a) Schematic diagram of the SiC-based RF MEMS switch, and (b) SEM micrograph of a SiC micrombridge-based switch.

MEMS Switch Characterization

The SiC RF MEMS shunt switch was characterized with the HP 8510C Vector Network Analyzer (VNA), a RF/Microwave Cascade Microtech probe station and 150 micron pitch ground-signal-ground probes from GGB Industries. MultiCal Software by NIST and a thru-reflect-line (TRL) calibration was performed to calibrate the system with a set of on-wafer TRL calibration standards. The RL and IL for the MEMS switch with the 500-nm-thick SiC microbridge while in the up position (off-state) is shown in figure 2(a). The RF performance of the switch is fairly good but when the switch is turned on when an actuation voltage of 52 V is applied to the DC bias pads and the bridge is set to the down position, as seen in figure 2(b), the RF performance is poor. This is principally due to the thickness of the SiC film which creates a small on-state capacitance. However, figure 3 shows that the switch actuates readily and reliably when repeatedly turned off and on. Furthermore this switch has been subjected to over 500,000 switching cycles to date with no signs of performance degradation. The noisiness illustrated in the figure is strictly from the actuation source. A much more precise and sensitive power source is needed to ensure accurate characterization. The RL and IL of the MEMS switch fabricated using the 300-nm-thick SiC microbridge is shown in figure 4. The RF performance in the down position (on-state) is outstanding. The S11 is less than 0.3 dB from 0 to 45 GHz and the isolation (S21) is better than -20 dB from 10 to 45 GHz. Unfortunately this switch does not actuate as readily as the 500 nm SiC switch. It is believed that this is due to the inherent stresses in the 300-nm-thick microbridge as compared with the 500-nm-thick microbridge and/or the influence of the metal conductor on the mechanical properties of this bridge.

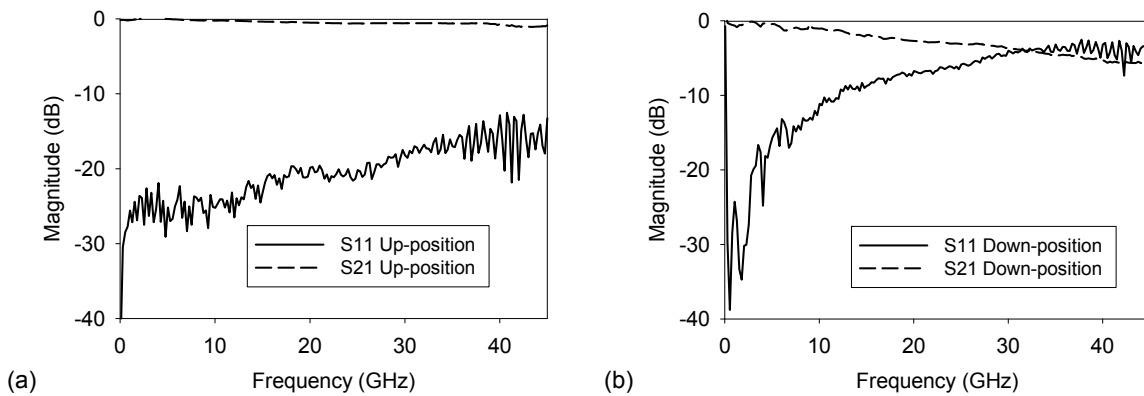


Figure 2.—SiC MEMS switch (a) in the up position (off-state) and (b) in the down position (on-state).

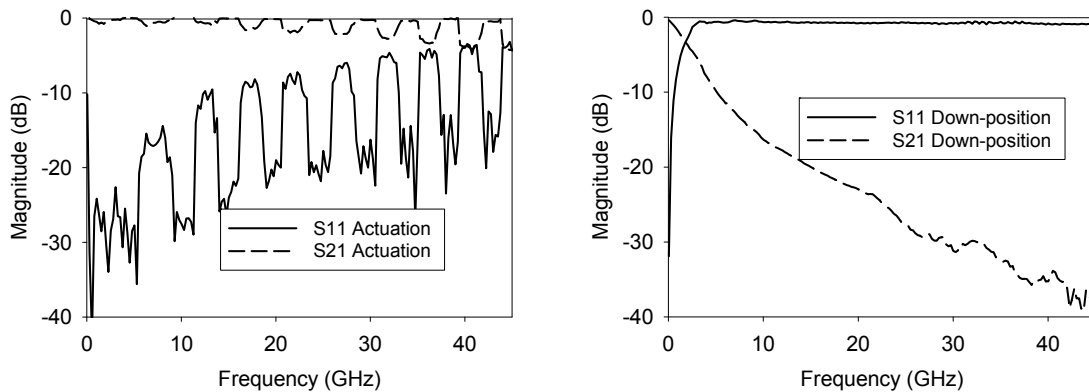


Figure 3.—500 nm SiC MEMS actuation.

Figure 4.—The 300 nm SiC switch in down position.

Conclusion

RF MEMS switches which utilize an insulating SiC microbridge as a structural layer have been developed. The MEMS switch with the 500 nm SiC microbridge exhibits good off-state performance but poor on-state characteristics due to the small on-state capacitance of the structure. However the mechanical reliability of the switch is exceptional. The MEMS switch with the 300 nm SiC thick microbridge has outstanding down position (on-state) RF characteristics which is do to the film being 40 percent thinner than the 500 nm microbridge thus creating a much larger on-state capacitance. Unfortunately the 300-nm-thick microbridge does not actuate readily. It is believed that this is due to the stresses within the bridge.

References

1. Maximilian C. Scardelletti, George E. Ponchak, Afroz J. Zaman, and Richard Q. Lee, "RF MEMS Phase Shifters and Their Application in Phased Array Antennas," *IEEE Wireless and Microwave Technology Conference*, Clearwater, Florida, April 7–8, 2005.
2. McKillop, J., Fowler, T., Goins, D., and Nelson, R., "Design, Performance and Qualification of a Commercially Available MEMS Switch," *36th European Microwave Conference*, pp. 1399–1401, Sept. 2006.
3. RadantMEMS, Stow, MA 01775.
4. J.B. Summers, M.C. Scardelletti, R. Parro, and C.A. Zorman, "Development of Amorphous SiC for MEMS-based Microbridges, in *Proceedings of SPIE—MEMS/MOEMS Components and Their Applications IV*, San Jose CA, January 22–23, 2007, vol. 6464, pp. 64640H–1 to H–12.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

1. REPORT DATE (DD-MM-YYYY) 01-05-2008		2. REPORT TYPE Technical Memorandum		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE RF MEMS Switches With SiC Microbridges for Improved Reliability				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Scardelletti, Maximilian, C.; Zorman, Christian, A.; Oldham, Daniel, R.				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER WBS 122711.03.11.03.04.03.02	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191				8. PERFORMING ORGANIZATION REPORT NUMBER E-16472	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001				10. SPONSORING/MONITORS ACRONYM(S) NASA	
				11. SPONSORING/MONITORING REPORT NUMBER NASA/TM-2008-215201	
12. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified-Unlimited Subject Categories: 01, 03, and 33 Available electronically at http://gltrs.grc.nasa.gov This publication is available from the NASA Center for AeroSpace Information, 301-621-0390					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT Radio frequency (RF) microelectromechanical (MEMS) switches offer superior performance when compared to the traditional semiconductor devices such as PIN diodes or GaAs transistors. MEMS switches have a return loss (RL) better than -25 dB, negligible insertion loss (IL), isolation better than -30 dB, and near zero power consumption. However, RF MEMS switches have several drawbacks the most serious being long-term reliability. The ability for the switch to operate for millions or even billions of cycles is a major concern and must be addressed. MEMS switches are basically grouped in two categories, capacitive and metal-to-metal contact. The capacitive type switch consists of a movable metal bridge spanning a fixed electrode and separated by a narrow air gap and thin insulating material. The metal-to-metal contact type utilizes the same basic design but without the insulating material. After prolonged operation the metal bridges, in most of these switches, begin to sag and eventually fail to actuate. For the metal-to-metal type, the two metal layers may actually fuse together. Also if the switches are not packaged properly or protected from the environment moisture may build up and cause stiction between the top and bottom electrodes rendering them useless. Many MEMS switch designs have been developed and most illustrate fairly good RF characteristics. Nevertheless very few have demonstrated both great RF performance and ability to perform millions/billions of switching cycles. Of these, nearly all are of metal-to-metal type so as the frequency increases RF performance decreases.					
15. SUBJECT TERMS MEMS; CPW; SiC					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE			STI Help Desk (email:help@sti.nasa.gov)
U	U	U	UU	10	19b. TELEPHONE NUMBER (include area code) 301-621-0390

