

N88-25696

**MOBILE SATELLITE PROPAGATION MEASUREMENTS AND MODELING:  
A REVIEW OF RESULTS FOR SYSTEMS ENGINEERS****Editor:**

W. L. Stutzman                      Virginia Tech

**Contributors:**

R. M. Barts	Virginia Tech
C. W. Bostian	Virginia Tech
J. S. Butterworth	CRC, Canada
R. Campbell	Michigan Tech
J. Goldhirsh	Applied Physics Lab./JHU
W. L. Stutzman	Virginia Tech
W. J. Vogel	U. of Texas

**VIRGINIA TECH**

Satellite Communications Group  
Bradley Department of Electrical Engineering  
627 Whittemore Hall  
Blacksburg, VA 24061

**ABSTRACT**

This overview of Mobile Satellite System (MSS) propagation measurements and modeling is intended as a summary of current results. While such research is on going, the simple models presented here should be useful to system engineers. A complete summary of MSS propagation experiments with literature references is also included.

**INTRODUCTION**

This paper is a collective effort by a group of researchers in the U. S. and Canada in the area of Land Mobile Satellite propagation. It concerns the propagation effects of the natural environment as encountered under highway conditions at UHF and L-Band frequencies. It presents results, experimental and theoretical, that are applicable to future operational Mobile Satellite Systems (MSS). Our understanding of MSS propagation is by no means complete. Much needs to be done both in measurement and in theory. This review is essentially a summary of the current state of knowledge.

This paper emphasizes results, not the details of how experiments were performed or the theoretical background of the models developed. A comprehensive list of MSS related propagation experiments is presented (see Table 1); literature references for these experiments as well as for key theory and modeling works are given.

## CHARACTERISTICS OF MSS PROPAGATION EFFECTS

MSS communications system design presents new problems. Mobile terminals do not have the fixed-terminal advantage of placing antennas with a clear line of sight view to the satellite. Instead, a mobile with a roof mounted antenna will encounter several propagation effects that will influence the system margin, reliability, and modulation format selection. These may be classified as follows:

- (a) Tree shadowing of the direct wave
- (b) Blockage from natural terrain and structures like overpasses
- (c) Multipath scattering from terrain, and from simple scatterers like utility poles

Specular reflection is not significant above 15 degrees elevation with circularly polarized antennas [5] and therefore, we have not listed it as a propagation problem. Blockage from structures such as overpasses have been noted by Vogel during his balloon experiments [9]. They are obviously serious short term blockage problems but are not statistically significant. This paper does not include structure blockage effects, but concentrates on vegetative blockage and multipath scattering.

## MSS PROPAGATION RESEARCH LITERATURE

### Overview

The MSS propagation problem is attacked on three fronts: experimental, basic EM theory, and modeling. The most important of these is the establishment of an experimental data base. Satellite, helicopter, balloon, remotely piloted aircraft and tower platforms have been used, and most results appear to be applicable to satellite-to-earth mobile systems. This data base serves

two purposes. First, it may be used for system planning if data of the proper frequency, elevation angle, etc. are available or can be scaled. Second, experimental data are used in verifying theoretical models and to drive software simulators.

Complete analytical solutions from electromagnetic theory are not available due to the complexity of the propagation environment, but partial analytical and empirical statistical models of MSS propagation have been developed [14, 20, 21, 22]. These offer considerable insight into the physics of slant path propagation.

The mobile aspect of MSS propagation complicates the problem. Theoretical models do not provide complete information on the variation of the parameters in terms of highway and system constraints. Simple empirical models can be developed to give fade statistics for simple relationships with the highway and system parameters as inputs.

### Experiments

Mobile satellite propagation experiments have been conducted since 1978. Table 1 presents a chronology of slant path propagation experiments in the UHF and L-bands. Most of the experiments produced fade depth and duration statistics for various mobile travel conditions. Some results from these are given in following sections.

Some experiments also collected phase data. The peak-to-peak variations of the phase,  $P$ , as a function of peak-to-peak signal level fluctuations in dB,  $L$ , can be expressed by [14]

$$P = C * L \quad [\text{degrees}] \quad (1)$$

where

C = 6.0	analytical value for unshadowed multipath
7.6	90th percentile) measured, includes
3.9	median } shadowing for fades up
2.1	10th percentile) to about 15 dB

The signal arriving at an MSS receiver has two components: a direct path component which can experience shadowing, and a diffuse component that is the sum of signals reflected from nearby objects. Campbell has performed experiments focusing on characterization of the diffuse component, which is quantified by the power level relative to the unattenuated direct signal power,  $b_0$ , and the spatial distribution of arrival angles for the diffuse power. The measurements were made at 1300 MHz at

several elevation angles near 10 degrees along a section of a hardwood tree lined road in upper Michigan. The average total diffuse signal power is 17 dB  $\pm$  1 dB below the unattenuated direct path signal. The diffuse signal has a rather even angular distribution, except for trees within about 100 m of the receiver which have significant contributions. The diffuse component is relatively unaffected by instantaneous blockage of the direct component; therefore, during deep fading the diffuse component will dominate.

## FADE DISTRIBUTIONS

### Form Of The Fade Distribution

Both experimental observations and basic theory indicate that the fade statistics measured over a large distance, become Rician at low fade levels, because of the dominant multipath effects. For high fade levels a number of experiments indicate that they become lognormal when vegetative shadowing dominates. Thus, MSS fading is modeled by a Rician distribution, described by the multipath-to-carrier ratio  $K$ , to predict fading when there is no blockage of the signal. When tree blockage is present, the fading is modeled by the sum of a lognormal distribution, described by the mean,  $\mu$ , and standard deviation,  $\sigma$ , and a Rayleigh distribution, described by  $b_0$ , the average scattered power in the multipath component. Bradley and Stutzman [18] showed how these distributions can be combined for an arbitrary percentage of shadowing along the travel route; apparently Lutz et al. [11] found this independently.

### Experimental Results

Representative experimental results are plotted in Fig. 1. Shown are cumulative fade distributions over typically tens of km of road distance [18]. The distributions depend strongly on the elevation angle when shadowing by roadside trees dominates. A four-lane divided freeway lined with trees (Fig. 1a) can produce larger fades than a two-lane road lined with utility poles and trees (Fig. 1b). In comparison, a road with a wider cleared easement, even though tree lined (RT. 32), will have smaller probabilities. Measurements obtained at UHF on a road for various growing seasons (Leafless, March 1986; Fall Foliage, October 1985; Full Blossom,

June 1986) show only a small increase in attenuation due to leaves (Fig. 1c).

To scale UHF data to L-Band, the relationship

$$F_L = (1.35 \pm 0.1) * F_U \quad (3)$$

can be used where  $F_L$  and  $F_U$  are the L-Band and UHF fades in dB, respectively [18]. A comparison of distributions obtained in differing geographic areas (Fig. 1d) emphasizes the dependence of the distribution on the dominating environmental parameters, from heavy tree shadowing (Curve A) to pure multipath (Curve G).

### Simple Model

A simple model for predicting the probability that the fades will be less than a certain amount  $F$  is given by [23]

$$G(F) = [1 - e^{-(F-U1)/U2}] (1-P) + [1 - \{(F + 50)/V1\}^{V2}] P \quad (2)$$

where

$F$  = fade level with respect to LOS in dB  
 $P$  = fraction of time vegetative shadowing occurs along travel route

$U1, U2, V1, V2$  = fit coefficients

$$U1 = 0.01 * K^2 - .378 * K + 53.98$$

$$U2 = 331.25 * K^{-2.29}$$

$$V1 = 0.275 * b_0 + 0.723 * \mu + 0.336 * \sigma + 56.987$$

$$V2 = 0.006 * b_0 - 0.008 * \mu + 0.013 * \sigma + 0.121$$

where

$K$  = average multipath-to-unshadowed carrier ratio for unshadowed path

$b_0$  = average multipath-to-carrier ratio for shadowed path

$\mu$  = mean of lognormal signal

$\sigma$  = standard deviation of lognormal signal

This simple model is valid for typical ranges of the propagation parameters. Typical values for each of the parameters are as follows:

$$\begin{aligned}
-13 \text{ dB} < K < -22 \text{ dB} \\
-12 \text{ dB} < b_0 < -18 \text{ dB} \\
-1 \text{ dB} < \mu < -10 \text{ dB} \\
0.5 \text{ dB} < \sigma < 3.5 \text{ dB}
\end{aligned}$$

### Behavior Of Statistical Parameters With Time

Cumulative fade distributions give information about the average link performance for a large number of transmissions for particular environmental conditions. A typical telephone call has a shorter duration (about 90 seconds) and therefore covers a shorter distance than the one on which Fig. 1 is based. When cumulative fade distributions are determined for successive 90 second intervals, they will vary, depending upon the short term variation of the shadowing parameter statistics. At percentage levels of main interest, from 1% to 20%, the 10th, 50th and 90th percentiles of the 90 second fade levels have been calculated and are given in Fig. 2 for elevation angles of 30, 45 and 60 degrees. The curve labeled **median** represents the median cumulative fade distribution and the upper and lower curves give the bounds into which 80% of the measured distributions fall. The curves can be fit by the relationship:

$$F(n,P) = A(n) * \ln(P) + B(n) \quad (4)$$

where

$$\begin{aligned}
F(n,P) &= \text{Fade at } n\text{th percentile for } P \text{ percent of} \\
&\quad \text{time fade is exceeded} \\
A(n), B(n) &= \text{fit coefficients}
\end{aligned}$$

Hence, these experimental results indicate that over the limited percentage interval a simple logarithmic relationship holds.

### FADE DURATIONS

Measured fade durations for a 5 dB threshold are given in Fig. 3. The curves correspond to the combined results of repeated runs along several roads at the indicated elevation angles, both under predominantly shadowing or under multipath conditions. Two sets of statistics are provided, "fade durations": the duration the signal is below the threshold and "nonfade durations": the duration the signal is greater than the

threshold. The duration is expressed as spatial variable in wavelengths (0.2m) to gain independence from the vehicle speed. The durations are seen to systematically depend upon the elevation angle for the shadowing data. The lower the elevation, the longer the fades and the shorter the nonfades. Multipath durations are independent of the elevation angle, having very short fades and long nonfades.

The distribution of fade durations cannot in general be predicted analytically. Schmier and Bostian have reported a software simulator [24] which they claim will accurately predict the fade duration statistics of a signal whose cumulative fade distribution is known. The simulator operation is based on scaling values from a universal data set. Its predictions of the total number of fades exceeding specified thresholds agree well with experiment, but unpublished work by Barts indicates that it may not predict average fade durations well. Barts' work indicates that Schmier and Bostian's simulator works correctly, but its universal data set may have been incorrectly derived. Each side can make an effective case for the correctness of its results, and at the time this paper was written the issue was still unsettled.

Table 1

**Summary of Slant Path UHF/L-Band  
Propagation Experiments**

Entry No.	Investigators	Date	Source	Freq (MHz)	Comments
1	Hess[1,2]	3/78	ATS-6	860	
2	Anderson[3,4]	78	ATS-6	1550	
3	Butterworth[5]	4-11/81	Tower	840	Static tests
4	" [5]	82	Tethered Balloon		
5	" [5]	9/82	Helicopter	870	
6	" [6]	6/83	Helicopter	870	
7	" [7]	11/82	MARECS A	1542	
8	" [6]	6/83	MARECS A	1542	
9	Vogel[8]	10/83 1/84	Balloon	869	
10	Vogel[9]	11/84	Balloon	869 1501	
11	Bultitude[10]	85	Tower	800 900	Spread spectrum measurements
12	Lutz, et. al.[11]	1/21-28/84 2/25-3/8/84 6/27-7/1/84	MARECS	1560	Measurements made in Europe
13	Vogel/Goldhirsh[12]	6/85	RPV	870	
14	Goldhirsh/Vogel[13]	10/85	Helicopter	870	
15	Vogel/Hong[14]	3/86 7/86	Balloon	870 1502	
16	Vogel/Goldhirsh[15]	8/86	Helicopter	870 1502	
17	PiFex[16,17]	3/87	Tower	870	No propagation data avail.
18	Goldhirsh/Vogel[18]	6/87	Helicopter	870 1502	
19	Vogel/Goldhirsh[19]	12/87	MARECS A	1541	21° elevation angle

CUMULATIVE DISTRIBUTIONS FOR ROUTE 295 SOUTH (RHS)  
COMPARISON FOR DIFFERENT ELEVATION ANGLES AT L-BAND

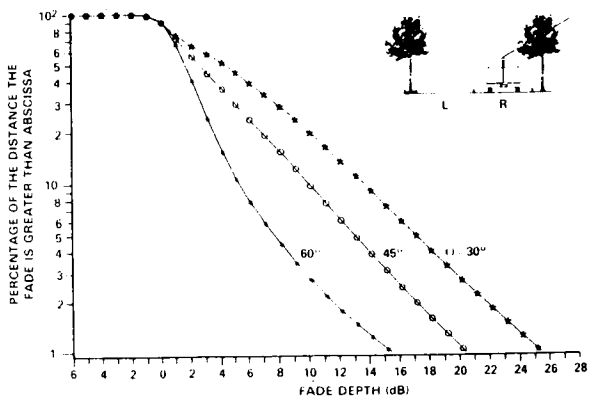


Figure 1a.

COMPARISON OF CUMULATIVE FADE DISTRIBUTIONS  
FOR VARIOUS ROADS AT AN ELEVATION ANGLE OF  
45° FOR L-BAND

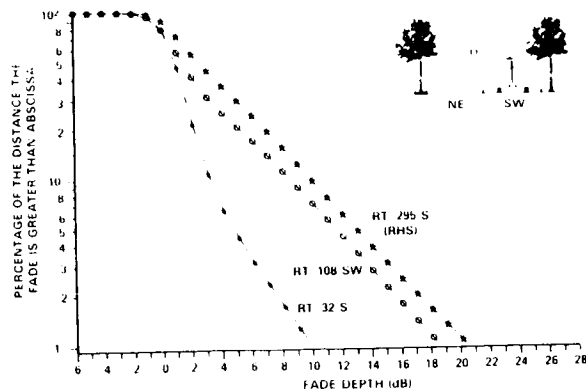


Figure 1b.

CUMULATIVE FADE DISTRIBUTIONS FOR  
VARIOUS SEASONS  
ROUTE 295 SOUTH (RHS) - UHF AT 45°

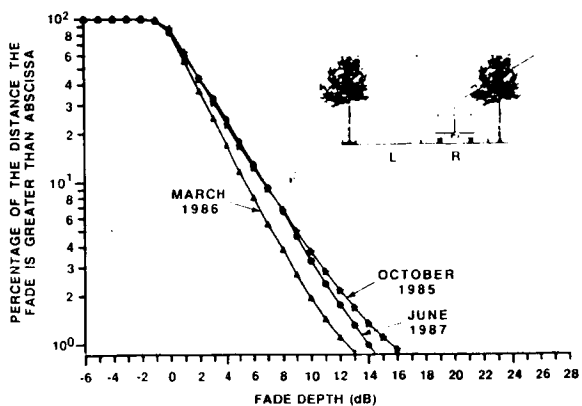


Figure 1c.

COMPARISON OF L BAND FADE DISTRIBUTIONS  
FOR VARIOUS MSS INVESTIGATIONS

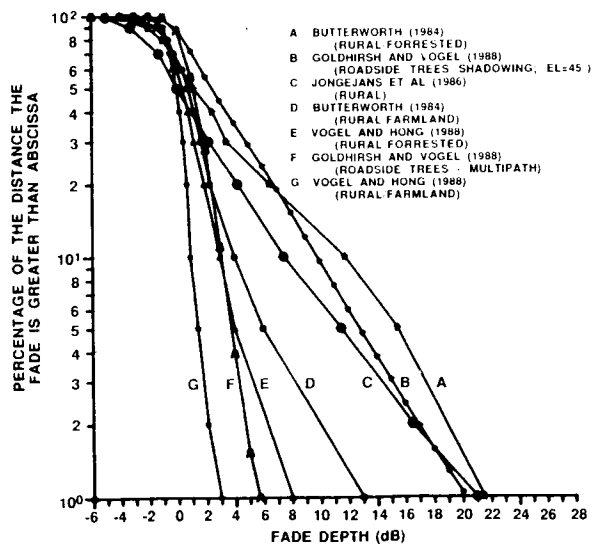


Figure 1d.



BEST FIT CUMULATIVE MEDIAN FADE DISTRIBUTION  
WITH 10 AND 90 PERCENTILE BOUNDS  
(ELEVATION ANGLE = 30°)

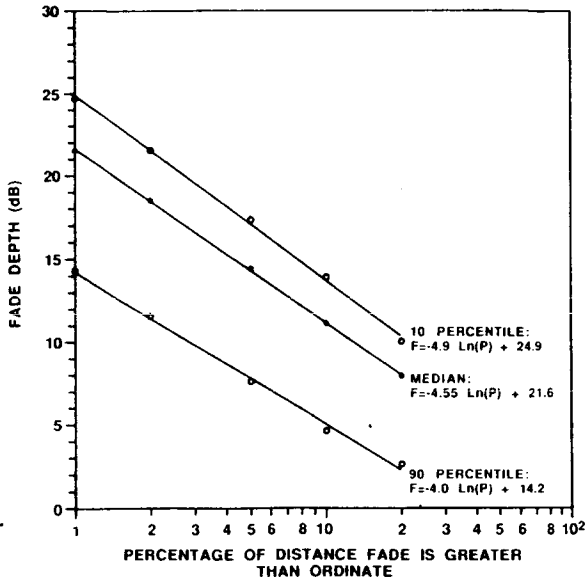


Figure 2a.

BEST FIT CUMULATIVE MEDIAN FADE DISTRIBUTION  
WITH 10 AND 90 PERCENTILE BOUNDS  
ELEVATION ANGLE = 45°

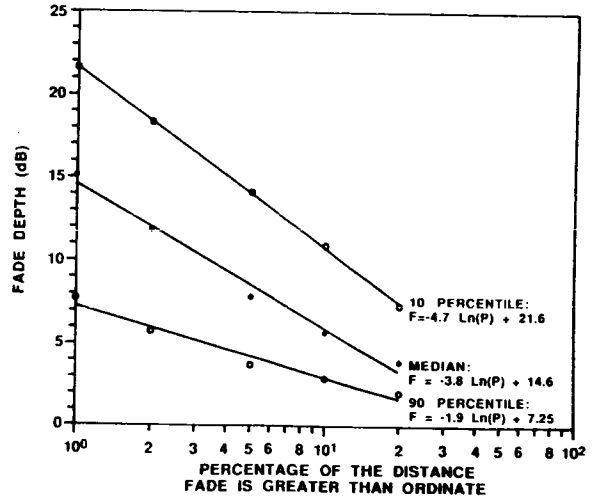


Figure 2b.

BEST FIT CUMULATIVE MEDIAN FADE DISTRIBUTION  
WITH 10 AND 90 PERCENTILE BOUNDS  
ELEVATION ANGLE = 60°

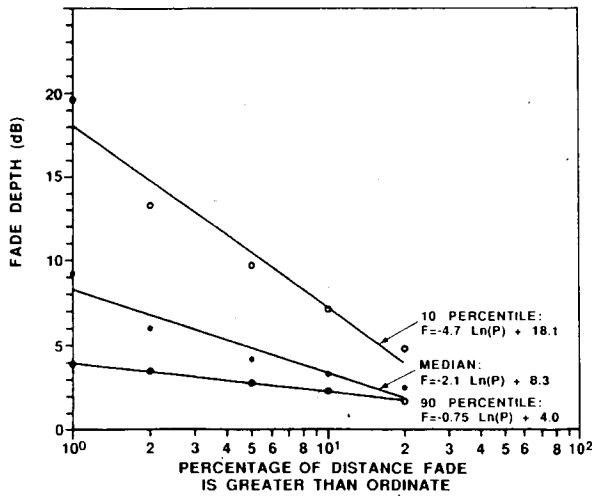


Figure 2c.

Fade/Nonfade Durations at L Band  
5 dB Fade Threshold

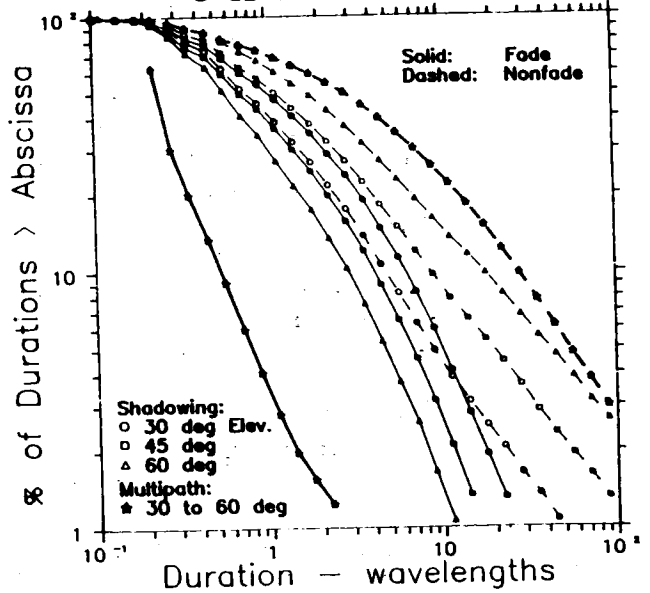


Figure 3.

## REFERENCES

1. G. C. Hess, "Land Mobile Satellite Path Loss Measurements," Third Year ATS-6 Experiment Final Report, Motorola Inc., Schaumburg, IL, Sept. 6, 1978.
2. G. C. Hess, "Land mobile satellite excess path loss measurements," IEEE Trans. on Vehicular Technology, vol. VT-29, pp. 290-297, May 1980.
3. R. E. Anderson, R. L. Frey, and J. R. Lewis, "Satellite-Aided Mobile Communications Limited Operational Test in the Trucking Industry," Final Report for NASA Contract NAS5-24365 (N81-20338), June 1979.
4. R. E. Anderson, R. L. Frey, J. R. Lewis, and R. T. Milton, "Satellite-aided mobile communications: Experiments, applications, and prospects," IEEE Trans. on Vehicular Technology, vol. VT-30, no. 2, pp. 54-61, May 1981.
5. J. S. Butterworth, "Propagation Measurements for Land-Mobile Satellite Services in the 800 MHz Band," Communications Research Centre Technical Note No. 724, Department of Communications, Canada, Aug. 1984.
6. J. S. Butterworth, "Propagation data for land-mobile satellite systems," Proceedings of NAPEX VIII, Vancouver, B.C., Canada, Aug. 1985.
7. J. S. Butterworth, "Propagation Measurements for Land Mobile Satellite Systems at 1542 MHz," Communications Research Centre Technical Note No. 723, Department of Communications, Canada, Aug 1984.
8. W. J. Vogel and G. W. Torrence, "Measurement Results From A Balloon Experiment Simulating Land Mobile Satellite Transmissions," MSAT-X Report No. 101, NASA-JPL, Pasadena, CA, April 1984.
9. W. J. Vogel, "Land Mobile Satellite Transmission Measurements at 869 MHz," MSAT-X Report No. 106, NASA-JPL, Pasadena, CA, April 12, 1985.
10. R. J. C. Bultitude, "Measured characteristics of 800/900 MHz fading radio channels with high angle propagation through moderately dense foliage," IEEE Journal on Selected Areas in Communications, vol. SAC-5, No. 2, Feb. 1987.
11. E. Lutz, W. Papke, and E. Plochinger, "Land mobile satellite communications - channel modeling, modulation and error control," Proceedings of 7th International Conference on Digital Satellite Communications, Munich, Germany, May 1986.
12. W. J. Vogel, and J. Goldhirsh, "Tree attenuation at

- 869 Mhz derived from remotely piloted aircraft measurements," IEEE Trans. on Antennas and Propagation, vol. AP-34, No. 12, Dec. 1986.
13. J. Goldhirsh, and W. J. Vogel, "Roadside tree attenuation measurements at UHF for land mobile satellite systems," IEEE Trans. on Antennas and Propagation, vol. AP-35, No. 5, May 1987.
  14. W. J. Vogel, and U. Hong, "Measurement and modeling of land mobile satellite propagation at UHF and L-Band," IEEE Trans. on Ant. and Prop., vol. AP-36, May 1988.
  15. W. J. Vogel, and J. Goldhirsh, "Fade measurements at L-Band and UHF in mountainous terrain for land mobile satellite systems," IEEE Transactions on Antennas and Propagation, vol. AP-36, Jan 1988.
  16. J. B. Berner, "PiFEx Tower 1 Results," Proceedings of NAPEX XI, NASA-JPL, Pasadena, CA, Aug. 31, 1987.
  17. Special Issue on PiFEx Tower 1 Experiments, MSAT-X Quarterly, JPL, No. 13, Jan. 1988.
  18. J. Goldhirsh and W. J. Vogel, "Attenuation Statistics Due to Shadowing and Multipath from Roadside Trees at UHF and L-Band for Mobile Satellite Systems," Johns Hopkins University/APL Report No. S1R-88-U004, Feb. 1988.
  19. W.J. Vogel and J. Goldhirsh, "A Comparison of Mobile Satellite Fade Statistics Obtained with a Helicopter and a Geosynchronous Satellite," manuscript in preparation.
  20. W. S. Bradley, and W. L. Stutzman, "Propagation Modeling for Land Mobile Satellite Communications," Technical Report submitted to JPL under NASA Contract 956512, August 1985.
  21. W. T. Smith, and W. L. Stutzman, "Statistical Modeling for Land Mobile Satellite Communications," Technical Report submitted to JPL under NASA Contract 956512, August 1986.
  22. C. H. Loo, "A statistical model for the land mobile satellite link," Proceedings of the IEEE International Communications Conference, pp. 588-594, 1984.
  23. R. M. Barts, W. L. Stutzman, W. T. Smith, R. S. Schmier, and C. W. Bostian, "Land mobile satellite propagation modeling," Proceedings of 1987 IEEE Antennas and Propagation Society International Symposium, Blacksburg, VA, June 1987.
  24. R. G. Schmier and C. W. Bostian, "Fade durations in satellite path mobile radio propagation," IEEE Transactions on Vehicular Technology, Nov. 1987.