

AD

RSIC-583

# DIFFERENTIATION CIRCUITS FOR AMPLITUDE - MODULATED SIGNAL ENVELOPES

by  
V. I. Anisimov  
Yu. F. Likhodiyevskiy

Priborostroenie, 7, No. 5, 41-46 (1964)

Translated from the Russian  
by R. C. Taylor

August 1966

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

## REDSTONE SCIENTIFIC INFORMATION CENTER REDSTONE ARSENAL, ALABAMA

JOINTLY SUPPORTED BY



U.S. ARMY MISSILE COMMAND



GEORGE C. MARSHALL SPACE FLIGHT CENTER

Acquisition Document  
SQT

GPO PRICE	\$	
CFSTI PRICE(S)	\$	
Hard copy (HC)		2.00
Microfiche (MF)		1.65

ff 853 July 65

AD640308

N67-18460  
FACILITY FORM 602  
(ACCESSION NUMBER)

(PAGES)

8  
ALL 64-0308  
(NASA CR OR TX OR AD NUMBER)

TMX 59391



(THRU)

(CODE)

09  
(CATEGORY)

**Disclaimer**

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other, authorized documents.

**Disposition**

Destroy this report when it is no longer needed. Do not return it to the originator.

16 August 1966

RSIC-583

**DIFFERENTIATION CIRCUITS  
FOR AMPLITUDE-MODULATED SIGNAL ENVELOPES**

by  
V. I. Anisimov  
Yu. F. Likhodiyevskiy

Priborostroenie, 7, No. 5, 41-46 (1964)

Translated from the Russian  
by R. C. Taylor

**DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED**

Translation Branch  
Redstone Scientific Information Center  
Research and Development Directorate  
U. S. Army Missile Command  
Redstone Arsenal, Alabama 35809

Two differentiation circuits for amplitude-modulated signal envelopes in which the functions of the modulator and the demodulator are accomplished by one switch are examined in this article.

A serious problem arising during the designing of a system with signal modulation is the creation of economic and stable compensation circuits. There are two basic methods of compensation circuits which operate on alternating current.

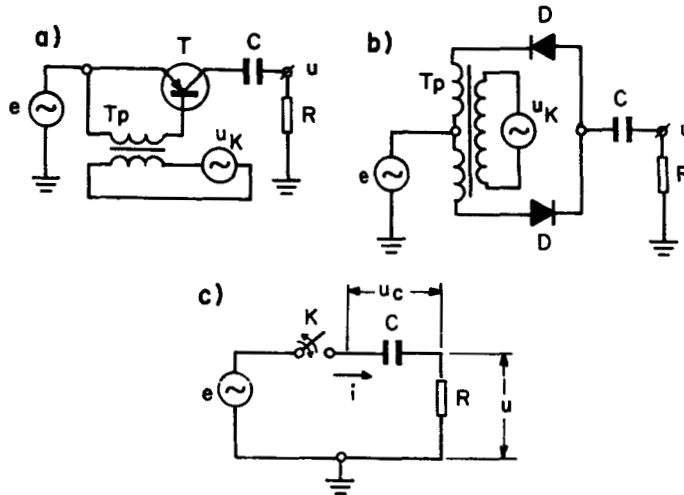


Figure 1. Schematics of Differentiating Circuits (a, b) and Their Equivalent Schematic (c)

The first method is compensation by sections of alternating current which are different resonance circuits tuned to the carrier frequency. On the strength of this such circuits are extremely critical to changes of the carrier frequency and magnitudes of the self-capacitances, inductances, and resistances.

The second method is compensation with double conversion of the signal frequency (according to the schematic: demodulator - compensation circuit of direct current - modulator). However, such devices are complex and unwieldy and also not very effective in case the construction of a compensation circuit of the differentiating type is required since it still contains filters of lower frequencies for feeding pulses to the circuit's output.

A development of the second method of compensation is the application of a circuit in which one switching element executes simultaneously the functions of the demodulator and the modulator.<sup>1, 2</sup>

In this case the compensation circuits are significantly simplified, and during the construction of differentiating (leading) type circuits there is no necessity for using the smoothing filter.

Two simple schematics of compensation circuits of the differentiating type, in which the switching element simultaneously executes the functions of the demodulator and the modulator, are presented in this article. These schematics are presented in Figure 1a and 1b.

If we assume the transistor to be the ideal switch key, then the first of the schematics which is presented can be exchanged for the equivalent schematic (Figure 1c). If we fulfill the conditions  $U_{Km} \gg E_m$ , where  $U_{Km}$  is the voltage of the switching voltage and  $E_m$  is the amplitude of the incoming signal, we can also relate Figure 1b to this schematic.

In the equivalent schematic (Figure 1c) the switch key closes in step and in phase with the incoming signal.

We will find the voltage at the capacitor  $u_c \Delta$  and the output voltage  $u$  during the feeding of sinusoidal voltage with frequency  $\omega_0$  into the input.

We will assume that

$$RC \gg \frac{1}{\omega_0} ,$$

( $\omega_0$  is the circular carrier frequency), since the voltage at the capacitor  $u_c$  barely changes during the semiperiod of switching and is equal to the mean value  $U_c$ .

---

<sup>1</sup> E. V. Bohn, Demodulator Lead Networks. IRE Trans. Circuit Theory, v. CT-7, 1960, N 1.

<sup>2</sup> E. V. Bohn, A Simple Method for the Analysis of Demodulator Compensating Networks. IRE Trans. Circuit Theory, v. CT-9, 1961, N 3.

Then in the semiperiod which corresponds to the closed switch key the current through the capacitor is

$$i_C = \frac{e - U_C}{R} .$$

In the following semiperiod  $i_C = 0$ .

The mean current through the capacitor for the entire period is

$$I_C = \frac{1}{2\pi} \int_0^{2\pi} i_C(\omega_0 t) d(\omega_0 t) = \frac{1}{2\pi} \int_0^{\pi} \frac{E_m}{R} \sin \omega_0 t d(\omega_0 t) -$$

$$- \frac{1}{2\pi} \int_0^{\pi} \frac{U_C}{R} d(\omega_0 t) = \frac{E_m}{\pi R} - \frac{U_C}{2R} .$$

Considering that  $C \frac{dU_C}{dt} = I_C$ , we have

$$T \cdot \frac{dU_C}{dt} + U_C = \frac{2}{\pi} E_m ,$$

where  $T = 2RC$ .

Consequently,

$$U_C = \frac{2}{\pi} E_m \cdot \left( 1 - e^{-\frac{t}{T}} \right)$$

The output voltage in the operating semiperiod is

$$u = e - U_C = E_m \sin \omega_0 t - U_C .$$

In the second semiperiod  $u = 0$  (Figure 2).

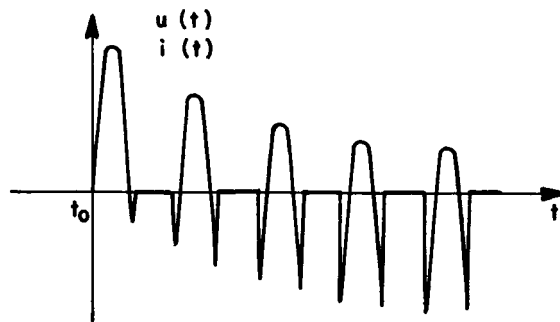


Figure 2. The Output Voltage of the Differentiating Circuit

The amplitude of the first harmonic of the output voltage is

$$\begin{aligned}
 U_{m1} &= \frac{1}{\pi} \int_0^{\pi} u(\omega_0 t) \sin \omega_0 t \, d(\omega_0 t) = \\
 &= \frac{1}{\pi} \int_0^{\pi} (E_m \sin \omega_0 t - U_c) \sin \omega_0 t \, d(\omega_0 t) = \\
 &= \frac{1}{2} E_m - \frac{2}{\pi} U_c = E_m \left[ \left( \frac{1}{2} - \frac{4}{\pi^2} \right) + \frac{4}{\pi^2} e^{-\frac{t}{T}} \right]; \\
 U_{m1} &\approx \left( 0.1 + 0.4 e^{-\frac{t}{T}} \right) E_m .
 \end{aligned}$$

Apparently there are other harmonic components in the output signal besides the basic harmonic.

We will evaluate their magnitude.

The constant component is

$$U_0 = \frac{1}{2\pi} \int_0^{\pi} u(\omega_0 t) \, d(\omega_0 t) = \frac{E_m}{\pi} - \frac{U_c}{2} = \frac{1}{\pi} e^{-\frac{t}{T}} E_m .$$

The quadratic component of the first harmonic is

$$U_{m1} = \frac{1}{\pi} \int_0^{\pi} u(\omega_0 t) \cos \omega_0 t \, d(\omega_0 t) = 0 ,$$

i. e., the device does not permit a phase displacement on the carrier frequency.

The sine component of the second harmonic is

$$U_{m2} = \frac{1}{\pi} \int_0^{\pi} u(\omega_0 t) \sin 2 \omega_0 t \, d(\omega_0 t) = 0 .$$

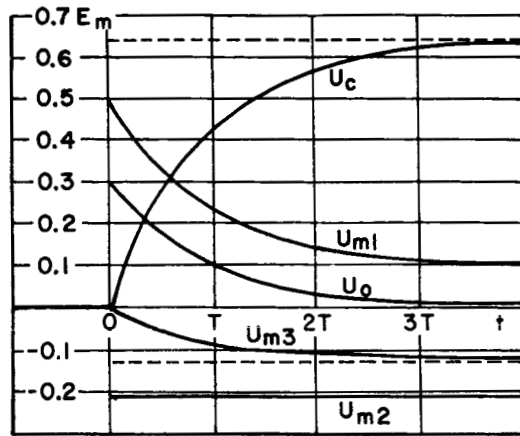


Figure 3. The Comparative Magnitude of the Harmonic Components of the Output Voltage of the Differentiating Circuit

The cosine component of the second harmonic is

$$U'_{m2} = -\frac{2}{3\pi} E_m .$$

The sine component of the third harmonic is

$$U_{m3} = -\frac{2}{3\pi} U_c = \frac{4}{3\pi^2} \left( e^{-\frac{t}{T}} - 1 \right) .$$

The cosine component of the third harmonic is

$$U'_{m3} = 0 .$$

The comparative magnitude of the harmonics in time is shown in Figure 3.

Inasmuch as the presence of a demodulator which basically reacts only to the first harmonic of voltage  $U_{m1}$  is assumed in the channel of the amplifier channel, then the action of the constant component and the higher harmonics only leads to a decrease in the dynamic band of the amplifier channel.

Writing the expression for the amplitude of the first harmonic of the output signal in the form



$$U_{m1} = A \cdot a \left( 1 + \frac{1-a}{a} e^{-\frac{t}{T}} \right) E_m ,$$

where

$$A = \frac{U_{m1}(0)}{E_m} \approx 0.5 ;$$

$$a = \frac{U_{m1}(\infty)}{U_{m1}(0)} \approx 0.2 ,$$

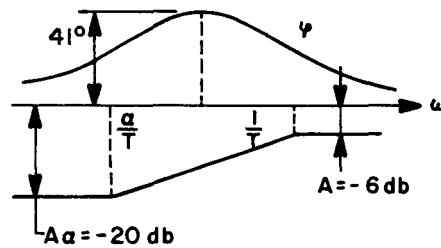


Figure 4. The Equivalent Frequencies of the Characteristic of a Differentiating Circuit

it is not hard to be convinced that such a transient characteristic matches the equivalent transfer function along the signal envelope.

$$W_{or}(p) = \left| \frac{U_{m1}(p)}{E_m(p)} \right| = A \cdot a \cdot \frac{\frac{T}{a} p + 1}{Tp + 1} ,$$

where  $T = 2RC$ .

Thus, the given circuit is actually a differentiating circuit for an amplitude-modulated signal envelope.

The corresponding frequency characteristics are depicted in Figure 4.

As has already been noted, the quoted conclusion is valid at  $T \gg (1/\omega_0)$ . The nearness of the carrier frequency to  $1/T$  decreases the effectiveness of the circuit (coefficient A drops and  $\alpha$  approaches 1)

During practical realization of the schematic it is necessary to consider the resistance introduced by the switch key and the internal resistance of the signal source. The effect of the resistance of the source  $R_i$  and the resistance of the key  $r$  consists of an increase of the constant time  $T$  and a decrease of coefficient A, i. e.,

$$T = 2 (R + R_i + r) C;$$

$$A = 0.5 \cdot \frac{R}{R + R_i + r} .$$

Since magnitude  $\alpha$  and, consequently, the maximum phase shift do not depend on values  $R_i$  and  $r$ , the circuits being considered can easily match the different amplifying cascades. In particular, we can build a differentiating circuit of the second order if we bypass two similar devices with the aid of a transistor cascade (Figure 5).

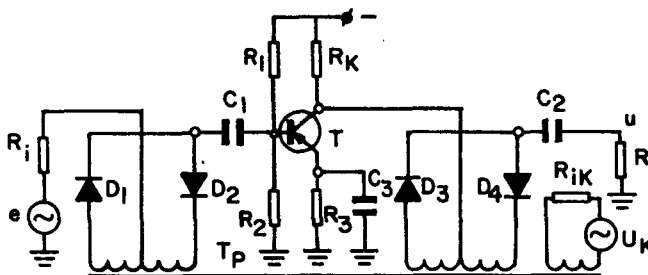


Figure 5. A Differentiating Circuit of the Second Order.

Thus, combining the functions of the modulator and the demodulator in one switching element permits schematics for differentiation along amplitude-modulated signal envelopes to be built which do not contain smoothing filters.

# DISTRIBUTION

	No. of Copies		No. of Copies
<u>EXTERNAL</u>		U. S. Atomic Energy Commission ATTN: Reports Library, Room G-017 Washington, D. C. 20545	1
Air University Library ATTN: AUL3T Maxwell Air Force Base, Alabama 36112	1	U. S. Naval Research Laboratory ATTN: Code 2027 Washington, D. C. 20390	1
U. S. Army Electronics Proving Ground ATTN: Technical Library Fort Huachuca, Arizona	1	Weapons Systems Evaluation Group Washington, D. C. 20305	1
U. S. Naval Ordnance Test Station ATTN: Technical Library, Code 753 China Lake, California 93555	1	John F. Kennedy Space Center, NASA ATTN: KSC Library, Documents Section Kennedy Space Center, Florida 32899	2
U. S. Naval Ordnance Laboratory ATTN: Library Corona, California 91720	1	APGC (PGBPS-12) Eglin Air Force Base, Florida 32542	1
Lawrence Radiation Laboratory ATTN: Technical Information Division P. O. Box 808 Livermore, California	1	U. S. Army CDC Infantry Agency Fort Benning, Georgia 31905	1
Sandia Corporation ATTN: Technical Library P. O. Box 969 Livermore, California 94551	1	Argonne National Laboratory ATTN: Report Section 9700 South Cass Avenue Argonne, Illinois 60440	1
U. S. Naval Postgraduate School ATTN: Library Monterey, California 93940	1	U. S. Army Weapons Command ATTN: AMSWE-RDR Rock Island, Illinois 61201	1
Electronic Warfare Laboratory, USAECOM Post Office Box 205 Mountain View, California 94042	1	Rock Island Arsenal ATTN: SWERI-RDI Rock Island, Illinois 61201	1
Jet Propulsion Laboratory ATTN: Library (TDS) 4800 Oak Grove Drive Pasadena, California 91103	2	U. S. Army Cmd. & General Staff College ATTN: Acquisitions, Library Division Fort Leavenworth, Kansas 66027	1
U. S. Naval Missile Center ATTN: Technical Library, Code N3022 Point Mugu, California	1	Combined Arms Group, USACDC ATTN: Op. Res., P and P Div. Fort Leavenworth, Kansas 66027	1
U. S. Army Air Defense Command ATTN: ADSX Ent Air Force Base, Colorado 80912	1	U. S. Army CDC Armor Agency Fort Knox, Kentucky 40121	1
Central Intelligence Agency ATTN: OCR/DD-Standard Distribution Washington, D. C. 20505	4	Michoud Assembly Facility, NASA ATTN: Library, I-MICH-OSD P. O. Box 29300 New Orleans, Louisiana 70129	1
Harry Diamond Laboratories ATTN: Library Washington, D. C. 20438	1	Aberdeen Proving Ground ATTN: Technical Library, Bldg. 313 Aberdeen Proving Ground, Maryland 21005	1
Scientific & Tech. Information Div., NASA ATTN: ATS Washington, D. C. 20546	1	NASA Sci. & Tech. Information Facility ATTN: Acquisitions Branch (S-AK/DL) P. O. Box 33 College Park, Maryland 20740	5
		U. S. Army Edgewood Arsenal ATTN: Librarian, Tech. Info. Div. Edgewood Arsenal, Maryland 21010	1

	No. of Copies		No. of Copies
National Security Agency ATTN: C3/TDL Fort Meade, Maryland 20755	1	Brookhaven National Laboratory Technical Information Division ATTN: Classified Documents Group Upton, Long Island, New York	1
Goddard Space Flight Center, NASA ATTN: Library, Documents Section Greenbelt, Maryland 20771	1	Watervliet Arsenal ATTN: SWEMV-RD Watervliet, New York 12189	1
U. S. Naval Propellant Plant ATTN: Technical Library Indian Head, Maryland 20640	1	U. S. Army Research Office (ARO-D) ATTN: CRD-AA-IP Box CM, Duke Station Durham, North Carolina	1
U. S. Naval Ordnance Laboratory ATTN: Librarian, Eva Liberman Silver Spring, Maryland 20910	1	Lewis Research Center, NASA ATTN: Library 21000 Brookpark Road Cleveland, Ohio 44135	1
Air Force Cambridge Research Labs. L. G. Hanscom Field ATTN: CRMCLR/Stop 29 Bedford, Massachusetts 01730	1	Systems Engineering Group (RTD) ATTN: SEPIR Wright-Patterson Air Force Base, Ohio 45433	1
Springfield Armory ATTN: SWESP-RE Springfield, Massachusetts 01101	1	U. S. Army Artillery & Missile School ATTN: Guided Missile Department Fort Sill, Oklahoma 73503	1
U. S. Army Materials Research Agency ATTN: AMXMR-ATL Watertown, Massachusetts 02172	1	U. S. Army CDC Artillery Agency ATTN: Library Fort Sill, Oklahoma 73504	1
Strategic Air Command (OAI) Offutt Air Force Base, Nebraska 68113	1	U. S. Army War College ATTN: Library Carlisle Barracks, Pennsylvania 17013	1
Picatinny Arsenal, USAMJCOM ATTN: SMJPA-VA6 Dover, New Jersey 07801	1	U. S. Naval Air Development Center ATTN: Technical Library Johnsville, Warminster, Pennsylvania 18974	1
U. S. Army Electronics Command ATTN: AMSEL-CB Fort Monmouth, New Jersey 07703	1	Frankford Arsenal ATTN: C-2500-Library Philadelphia, Pennsylvania 19137	1
Sandia Corporation ATTN: Technical Library P. O. Box 5800 Albuquerque, New Mexico 87115	1	Div. of Technical Information Ext., USAEC P. O. Box 62 Oak Ridge, Tennessee	1
ORA(RRRRT) Holloman Air Force Base, New Mexico 88330	1	Oak Ridge National Laboratory ATTN: Central Files P. O. Box X Oak Ridge, Tennessee	1
Los Alamos Scientific Laboratory ATTN: Report Library P. O. Box 1663 Los Alamos, New Mexico 87544	1	Air Defense Agency, USACDC ATTN: Library Fort Bliss, Texas 79916	1
White Sands Missile Range ATTN: Technical Library White Sands, New Mexico 88002	1	U. S. Army Air Defense School ATTN: AKBAAS-DR-R Fort Bliss, Texas 79906	1
Rome Air Development Center (EMLAL-1) ATTN: Documents Library Griffiss Air Force Base, New York 13440	1		

	No. of Copies	<u>INTERNAL</u>	No. of Copies
U. S. Army CDC Nuclear Group Fort Bliss, Texas 79916	1	Headquarters U. S. Army Missile Command Redstone Arsenal, Alabama	
Manned Spacecraft Center, NASA ATTN: Technical Library, Code BM6 Houston, Texas 77058	1	ATTN: AMSMI-D AMSMI-XE, Mr. Lowers AMSMI-XS, Dr. Carter AMSMI-Y AMSMI-R, Mr. McDaniel AMSMI-RAP AMSMI-RBLD USACDC-LnO AMSMI-RB, Mr. Croxton AMSMI-RBT	1 1 1 1 1 10 1 1 8
Defense Documentation Center Cameron Station Alexandria, Virginia 22314	20		
U. S. Army Research Office ATTN: STINFO Division 3045 Columbia Pike Arlington, Virginia 22204	1	National Aeronautics & Space Administration Marshall Space Flight Center Huntsville, Alabama ATTN: MS-T, Mr. Wiggins	5
U. S. Naval Weapons Laboratory ATTN: Technical Library Dahlgren, Virginia 22448	1		
U. S. Army Engineer Res. & Dev. Labs. ATTN: Scientific & Technical Info. Br. Fort Belvoir, Virginia 22060	2		
Langley Research Center, NASA ATTN: Library, MS-185 Hampton, Virginia 23365	1		
Research Analysis Corporation ATTN: Library McLean, Virginia 22101	1		
U. S. Army Tank Automotive Center ATTN: SMOTA-RTS.1 Warren, Michigan 48090	1		
Hughes Aircraft Company Electronic Properties Information Center Florence Ave. & Teale St. Culver City, California	1		
Foreign Technology Division ATTN: Library Wright-Patterson Air Force Base, Ohio 45400	1		
Clearinghouse for Federal Scientific and Technical Information U. S. Department of Commerce Springfield, Virginia 22151	1		
Foreign Science & Technology Center, USAMC ATTN: Mr. Shapiro Washington, D. C. 20315	3		

DOCUMENT CONTROL DATA - R&D		
<i>(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)</i>		
1. ORIGINATING ACTIVITY <i>(Corporate author)</i> Redstone Scientific Information Center Research and Development Directorate U. S. Army Missile Command Redstone Arsenal, Alabama 35809		2a. REPORT SECURITY CLASSIFICATION Unclassified
		2b. GROUP N/A
3. REPORT TITLE DIFFERENTIATION CIRCUITS FOR AMPLITUDE-MODULATED SIGNAL ENVELOPES Priborostroenie, 7, No. 5, 41-46 (1964)		
4. DESCRIPTIVE NOTES <i>(Type of report and inclusive dates)</i> Translated from the Russian by R. C. Taylor		
5. AUTHOR(S) <i>(Last name, first name, initial)</i>  Anisimov, V.I. and Likhodiyevskiy, Yu.F.		
6. REPORT DATE 16 August 1966	7a. TOTAL NO. OF PAGES 10	7b. NO. OF REFS 2
8a. CONTRACT OR GRANT NO. N/A	9a. ORIGINATOR'S REPORT NUMBER(S) RSIC-583	
b. PROJECT NO. N/A	9b. OTHER REPORT NO(S) <i>(Any other numbers that may be assigned this report)</i>	
c.	AD	
d.		
10. AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited.		
11. SUPPLEMENTARY NOTES None	12. SPONSORING MILITARY ACTIVITY Same as No. 1	
13. ABSTRACT <p>Two differentiation circuits for amplitude-modulated signal envelopes in which the functions of the modulator and the demodulator are accomplished by one switch are examined in this article.</p> <p>A serious problem arising during the designing of a system with signal modulation is the creation of economic and stable compensation circuits. There are two basic methods of compensation circuits which operate on alternating current.</p> <p>The first method is compensation by sections of alternating current which are different resonance circuits tuned to the carrier frequency. On the strength of this such circuits are extremely critical to changes of the carrier frequency and magnitudes of the self-capacitances, inductances, and resistances. The second method is compensation with double conversion of the signal frequency.</p>		

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Differentiation circuit Amplitude-modulated signal envelope Modulator Demodulator Compensation circuit						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.
- 2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.
- 2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.
3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.
4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.
5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.
6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.
- 7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.
- 7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.
- 8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.
- 8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.
- 9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.
- 9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.
12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.
13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.