

A MODIFIED CRACK CLOSURE INTEGRAL METHOD FOR CALCULATING STRESS INTENSITY FACTORS FOR CRACKED PLATES SUBJECT TO BENDING LOADS

S.Viswanath, H.V. Lakshminarayana, and D.D.Ravindranath
Structures Division, National Aeronautical Laboratory
Bangalore-560017, India
id: 573341-54

A simple and accurate method is needed for calculating strain energy release rates (G) or the stress intensity factors (K) from the results of finite element analysis of plates with through cracks subjected to bending loads. The purpose of this report is to develop a method to calculate G or K using only nodal forces and displacements from a standard finite element analysis code. It is an extension of the well known Modified Crack Closure Integral (MCCI) approach [1-5] to the bending of plates with through cracks. The significant advantages of this method over other methods commonly used to calculate G or K are:

1) It avoids dealing with the details of singular stress fields around crack tips, where there are added complexities of anisotropic material behaviour and mode interaction.

2) It permits separation of G into its components, G_i (i=I, II and III) in a mixed mode fracture problem.

3) It ensures higher accuracy even with a coarse mesh of conventional elements. Both lower- and higher-order elements can be used.

4) The finite element modeling does not require the use of singular elements

citation and similar papers at core.ac.uk

5) The strain energy release rates are calculated directly using crack surface opening displacements and nodal forces at and ahead of crack tips. Therefore computation of element stresses is unnecessary.

6) The method requires only one analysis per crack length. It is not restricted to self-similar crack growth.

7) It can be applied to homogeneous isotropic as well as laminated anisotropic materials.

8) General purpose finite element analysis codes can be used without any modification.

However, application of the MCCI technique to the bending of plates with through cracks has not been reported in the literature.

An examination of bending of plates with through cracks based on shear deformation theories [6-10] revealed that the bending stress intensity factor (K) depends strongly on the ratio of plate thickness (h) and half crack length (a). Hence, there is a need to examine the effect of (h/a) on the accuracy of G and K obtained by the MCCI approach.

In the present work, the accuracy of the MCCI method is verified by analyzing a square plate of side length L and thickness h with a central crack of length $2a$ subjected to uniform edge moment M_0 and comparing the results with those reported in the literature.

The configuration analyzed is shown in Fig. 1 and a typical finite element model using 4-node quadrilateral plate elements is illustrated in Fig. 2. Exploiting symmetry, only one quarter of the plate has been discretized. Three levels of mesh refinements, where the size of the elements around the crack tip is maintained at $\Delta a/a = 0.04, 0.02$ and 0.01 are considered. The computations were carried out using the CSA/NASTRAN program employing the QUAD4 element. The particular element formulation due to Hughes and Tezduyar [11] is based on Mindlin's shear deformation theory and is free from shear locking in the thin limit.

For mode I loading, the expression for the strain energy release rate G_I is given by

$$G_I = \lim_{\Delta a \rightarrow 0} \frac{1}{2\Delta a} \left[F_{8x}^i \left(\theta_x^k - \theta_x^{k'} \right) \right] \quad (1)$$

Where F_{8x}^i denotes the nodal force at the crack tip corresponding to the rotational degree of freedom θ_x ; θ_x^k is the rotation of the first node k behind the crack front etc., (see Fig. 3). The right hand side of (1) is a function of the nodal forces and displacements calculated from a standard finite element analysis program. Equation (1) can easily be extended to quadratic or cubic element idealisation.

The stress intensity factor K_I , is calculated from G_I using the relation

$$K_I = [(G_I E h^3 / 12\pi)]^{1/2}$$

The apparent values of G_I and hence K_I corresponding to the three values of $\Delta a/a$ are first obtained. The actual SIF is then obtained by extrapolation to the crack tip.

Table 1 gives the computed values of nondimensionalised bending stress intensity factor

$$\bar{K}_I = K_I / \sigma_0 \sqrt{a},$$

where $\sigma_0 = 6 M_0 / h^2$ for three values of (h/a) . The theoretical solution is taken from Hartranft and Sih [12] and the finite element solution is due to Viswanath et al. [10]. The extrapolation to get K for the three h/a ratios is shown in Fig. 4. It is seen that the prediction by the MCCI approach is excellent for the thickness ratios considered.

The MCCI approach is then applied to study the effect of decreasing h/a on the accuracy of the computed bending stress intensity factors. Figure 5 shows the variation K_I with h/a . The results obtained by the MCCI approach are shown as open circles along with the theoretical solution of Hartranft and Sih [12] as a continuous curve. The singular element solution is due to Viswanath et al. [10]. It is seen that the predictions from MCCI approach start deviating considerably for $fc/K < 0.35$. For instance the error is of the order of 15 percent for $h/a = 0.1$. Obviously a further refinement of the adopted finite element mesh is necessary for $h/a < 0.35$. Alternatively it is useful to experiment with quadratic or cubic elements.

Thus, this report demonstrates that the MCCI approach is simple to apply, ensures high accuracy with a coarse mesh and does not require the use of singular elements. Obviously, much work remains to be done to establish the accuracy of the MCCI approach for mode II and mixed mode loading conditions.

This study also sets the stage for confident application of the MCCI approach for the solution of crack problems in general shell structures.

REFERENCES

- [1] E.F. Rybicki and M.F. Kanninen, *Engineering Fracture Mechanics* 9 (1977) 931-938.
- [2] F.G. Buchholz, *ART in FEM Technology*, Robinson and Associates (1984).
- [3] T.S. Ramamurthy et al., *Mechanics Research Communications* 13 (1986) 179-186.
- [4] I.S. Raju, *Engineering Fracture Mechanics* 28 (1987) 251-274.
- [5] K.N. Shivakumar, P.W. Tan, and J.C. Newman, Jr., *International Journal of Fracture* 36 (1988) R43-R50.
- [6] K. Moriya, in *Proceedings 23rd Japan Congress for Materials Research* (1979) 68.
- [7] M.V.V. Murthy, K.N. Raju, and S. Viswanath, *International Journal of Fracture* 17 (1981) 537-552.
- [8] G. Yagawa and T. Nishioka, *International Journal of Numerical Methods in Engineering* 14 (1979) 727-740.
- [9] H.C. Rhee and S.N. Atluri, *International Journal of Numerical Methods in Engineering* 18 (1982) 259-271.
- [10] S. Viswanath, M.V.V. Murthy, A.V. Krishna Murthy, and K.P. Rao, *Engineering Fracture Mechanics*, to appear.
- [11] T.J.R. Hughes and T.E. Tezduyar, *Journal of Applied Mechanics* 48 (1981) 587-596.
- [12] R.J. Hartranft and G.C. Sih, *Journal of Mathematics and Physics* 47 (1968) 276-291.

Table - 1

Nondimensionalized SIF ($\bar{K}_I = K_I / \sigma_0 \sqrt{a}$) in a square plate with a central crack subjected to an edge moment M_0 *

$$\sigma_0 = 6 M_0 / h^2 ; \nu = 0.25$$

h/a	Present solution	FEM solution [10]	Theoretical [12]
0,6325	0.7000	0.7014	0.7060
1.5810	0.7833	0.7833	0.7860
3.1620	0.8666	0.8642	0.8680

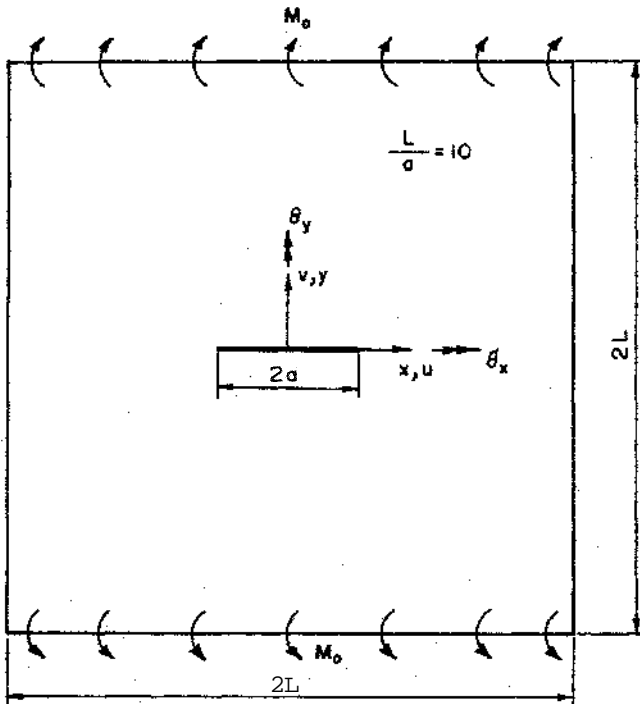


Figure 1. A square plate with a central crack subjected to uniform edge moment.

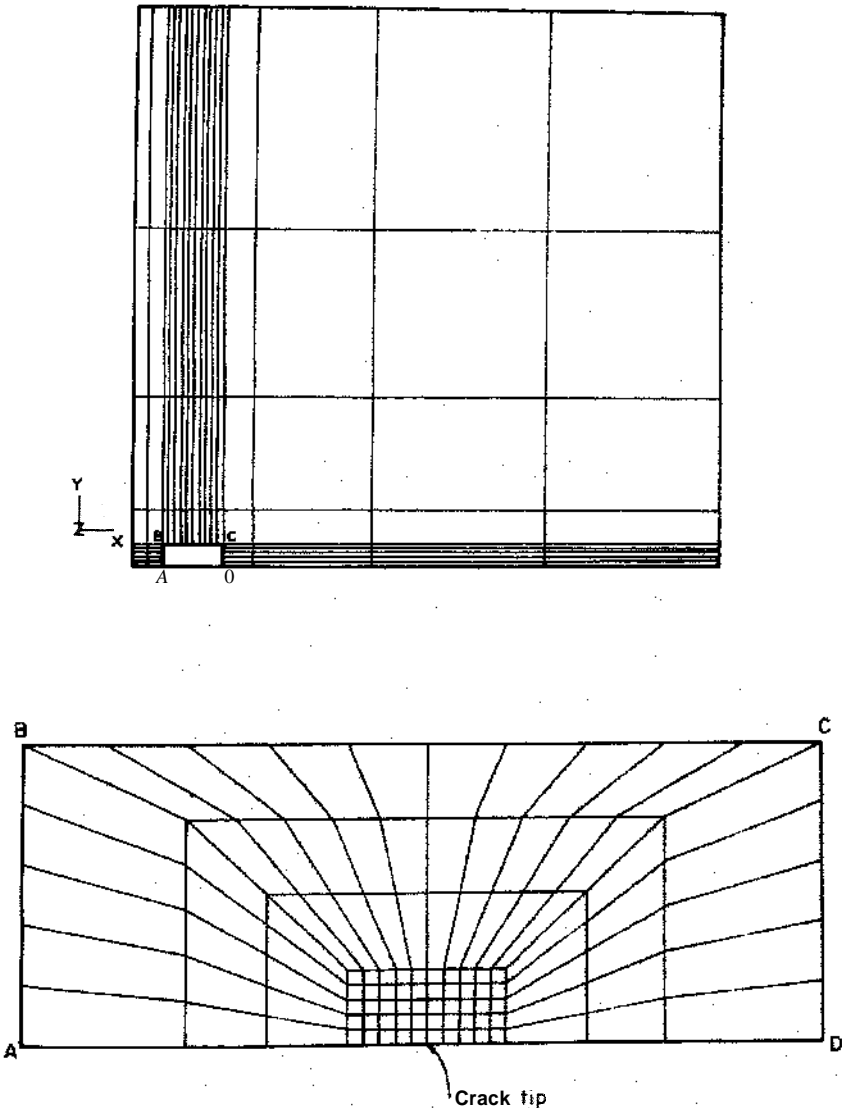


Figure 2. Finite element discretization of a square plate with a central crack (quarter plate).

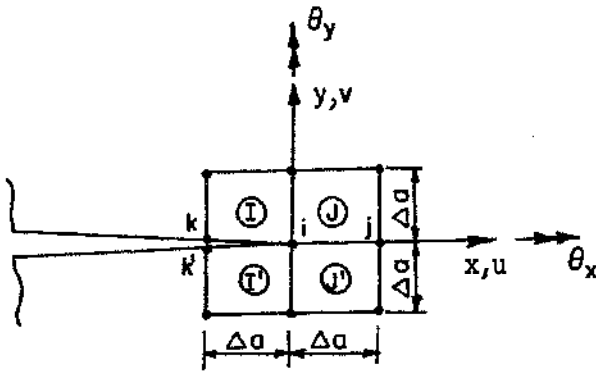


Figure 3. 4 node quadrilateral elements around a crack tip.

Figure 4. Extrapolation of SIF to crack tip.

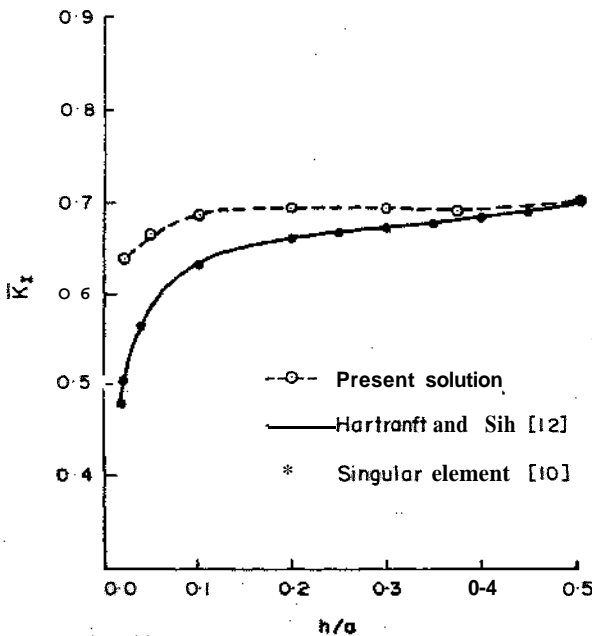
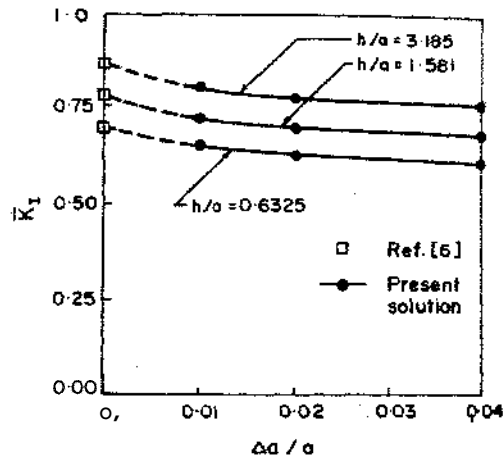


Figure 5. Variation of SIF with (h/a) for a square plate with a central crack subjected to uniform edge moment.