

# EMBEDDED TCP/IP IN SENSOR NODES (SENSORNETS)

WARSUZARINA BINTI MAT JUBADI

UNIVERSITI TEKNOLOGI MALAYSIA

PERPUSTAKAAN UTHM



\*30000001866505\*

CU/87039

## UNIVERSITI TEKNOLOGI MALAYSIA

**BORANG PENGESAHAN STATUS TESIS**JUDUL : EMBEDDED TCP/IP IN SENSOR NODES (SENSORNETS)SESI PENGAJIAN: 2005 / 2006Saya : WARSUZARINA BINTI MAT JUBADI

(HURUF BESAR)

mengaku membenarkan tesis (PSM/Sarjana/Doktor-Falsafah)\* ini di simpan di Perpustakaan Universiti Teknologi Malaysia dengan syarat-syarat kegunaan seperti berikut:

1. Tesis adalah hak milik Universiti Teknologi Malaysia.
2. Perpustakaan Universiti Teknologi Malaysia dibenarkan membuat salinan untuk tujuan pengajian sahaja.
3. Perpustakaan dibenarkan membuat salinan tesis ini sebagai bahan pertukaran antara institusi pengajian tinggi.
4. \*\*Sila tandakan ( ✓ )

SULIT


(Mengandungi maklumat yang berdarjah keselamatan atau kepentingan Malaysia seperti yang termaktub di dalam AKTA RAHSIA RASMI 1972)

TERHAD


(Mengandungi maklumat TERHAD yang telah ditentukan oleh organisasi/badan di mana penyelidikan dijalankan)

TIDAK TERHAD

Disahkan oleh



(TANDATANGAN PENULIS)



(TANDATANGAN PENYELIA)

Alamat Tetap:

LOT 2694, KG. TELUK RHU,45200 SABAK BERNAMSELANGOR DARUL EHSANPROF. DR NORSHEILA BT FISAL

(Nama Penyelia)

Tarikh : 29 NOVEMBER 2005Tarikh : 29 NOVEMBER 2005

- CATATAN :
- \* Potong yang tidak berkenaan.
  - \*\* Jika tesis ini SULIT atau TERHAD, sila lampirkan surat daripada pihak berkuasa/organisasi berkenaan dengan menyatakan sekali sebab dan tempoh tesis ini perlu dikelaskan sebagai SULIT atau TERHAD.
  - ♦ Tesis dimaksudkan sebagai tesis bagi Ijazah Doktor Falsafah dan Sarjana secara penyelidikan, atau disertasi bagi pengajian secara kerja khusus dan penyelidikan, atau Laporan projek Sarjana Muda (PSM).

“I hereby, declare that I have read this thesis and in my opinion this thesis is sufficient in terms of scope and quality for the award of degree of Master of Engineering (Electrical-Electronic & Telecommunication)”

Signature :  \_\_\_\_\_

Name of Supervisor : PROF DR. NORSHEILA BINTI FISAL

Date : 29 NOVEMBER 2005

**EMBEDDED TCP/IP IN SENSOR NODES (SENSORNETS)**


**WARSUZARINA BINTI MAT JUBADI**

**A project report submitted in partial fulfilment of the  
requirements for the award of the degree of  
Master of Engineering (Electrical-Electronics & Telecommunications)**

**Faculty of Electrical Engineering  
Universiti Teknologi Malaysia**

**NOVEMBER, 2005**

I declare that this thesis entitled “Embedded TCP/IP in Sensor Nodes (sensornets)” is the result of my own research except as cited in the references. The report has not been accepted for any degree and is not concurrently submitted in candidature of any other degree.

Signature :  \_\_\_\_\_

Name : WARSUZARINA BINTI MAT JUBADI

Date : 29 NOVEMBER 2005

*To my beloved husband for his support and understanding*

*To my 'little baby' for not giving any problem*

*To my dearest mother, father and family for their encouragement and blessing*

## ACKNOWLEDGEMENT

First of all, I am greatly indebted to ALLAH SWT on His blessing to make this project successful.

I would like to express my gratitude to honourable Professor Dr. Norsheila Bt. Fisal, my supervisor of Master's project. During the research, she inspired me with motivations, guidance, encouragement and assistance which finally led me to the completion of this project.

A very big appreciation goes to Mr. David Armstrong; an active members in AVR-GCC mailing list, and also to Mr. Dennis Kuschel, the developer of my-CPU who guide and assist me without any doubt through the emails. They have guided me a lot through the compiling of the embedded TCP/IP stack, the biggest part of this project.

I would also dedicate my appreciation to my husband, my little baby, my parents and family, and my friends who helped me directly or indirectly help me in this project. I am grateful to Kolej Universiti Teknologi Tun Hussein Onn (KUiTTHO), for supporting me in the form of a scholarship and study leave. Guidance, co-operation and encouragement from all people above are appreciated by me in sincere.



## ABSTRACT

A sensor network is a group of sensor nodes (sensor) which are connected and communicate each other. Sensor node has the ability to sense environmental data such as humidity, light, weight, and temperature, and has been ported with embedded TCP/IP protocol to perform the networking. A sensor node is equipped with a small microcontroller, a radio transceiver, and an energy source. Sensors are constrained in terms of memory and processing power because of their limited physical size and cost. These constraints have been considered too limiting for physical size sensor to be able to use the TCP/IP protocols. This project was carried out to develop two sensor nodes that able to sense the temperature value, to embed the TCP/IP stack into the sensor nodes, and to apply the SLIP protocol into the TCP/IP stack. One will be the transmitter node while the other is the receiver node. The programming was developed with WinAVR, an AVR-GCC development tools and the hex code was ported using AVRISP connector. Finally, the transmission of data between sensor nodes is measured and result is compared between wired and wireless data.

## ABSTRAK

Rangkaian pengesan ialah sekumpulan nod-nod pengesan (pengesan) yang saling berhubungan dan berkomunikasi antara satu sama lain. Nod pengesan mempunyai kebolehan untuk mengesan data daripada persekitaran seperti kelembapan, cahaya, berat dan suhu, dan ia juga dilengkapi dengan protokol *TCP/IP* terbenam untuk perangkaian. Setiap nod pengesan dilengkapi dengan mikro-pengawal yang kecil, gabungan pemancar dan penerima, dan satu sumber tenaga. Nod-nod pengesan ini terikat dari segi ingatan dan kuasa pemrosesan disebabkan oleh kos dan saiz fizikal yang terhad. Ciri-ciri ini telah dipertimbangkan amat terhad bagi saiz fizikal nod pengesan untuk berupaya menggunakan protokol *TCP/IP*. Projek ini telah untuk dijalankan untuk membangunkan dua modul nod pengesan yang berupaya untuk mengesan nilai suhu, untuk memprogramkan tindakan *TCP/IP* ke dalam nod pengesan dan mengaplikasikan protokol *SLIP* kedalam tindakan *TCP/IP* tersebut. Satu nod sebagai nod pemancar manakala satu lagi nod sebagai nod penerima. Pengaturcaraan dibangunkan dengan WinAVR, sebuah perkakasan pembangunan *AVR-GCC* dan kod perenambelasan diprogramkan melalui penghubung *AVRISP*. Akhir sekali, penghantaran data di antara nod-nod pengesan ditentukan dan keputusan di antara data dengan wayar dan tanpa wayar dibandingkan.

**TABLE OF CONTENTS**

<b>SUBJECT</b>	<b>PAGE</b>
<b>TITLE</b>	<b>i</b>
<b>DECLARATION</b>	<b>ii</b>
<b>DEDICATION</b>	<b>iii</b>
<b>ACKNOWLEDGEMENT</b>	<b>iv</b>
<b>ABSTRACT</b>	<b>v</b>
<b>ABSTRAK</b>	<b>vi</b>
<b>TABLE OF CONTENTS</b>	<b>vii</b>
<b>LIST OF TABLES</b>	<b>x</b>
<b>LIST OF FIGURES</b>	<b>xi</b>
<b>LIST OF ABBREVIATIONS</b>	<b>xiii</b>
<b>LIST OF APPENDICES</b>	<b>xv</b>
<b>CHAPTER 1 INTRODUCTION</b>	<b>1</b>
1.1 Overview	1
1.2 Introduction to Sensor Network	2
1.3 Problem Statement	3
1.4 Objectives	4
1.5 Scope of Project	4
1.6 Thesis Outline	5

<b>CHAPTER 2 SENSOR NODES ARCHITECTURE</b>	<b>7</b>
2.1 Introduction	7
2.2 Sensor Node (Sensornets)	8
2.3 Sensor Network Developments and Limitations	9
2.4 Application Example	11
2.5 Communication Method in Sensor Network	12
2.6 Sensor Developments	13
2.7 Embedded Operating Systems	14
2.8 TCP/IP Overview	16
2.9 The structure of TCP/IP Protocol in an Operating System	19
2.10 Small TCP/IP Protocol Stack	20
2.11 IP Address and Hostname	25
2.12 Service Port and Socket Addressing	26
2.13 Drivers, Layers and Stacks	27
2.14 Physical Layer	28
2.15 Link Layers – SLIP & PPP	28
2.16 Choosing a Protocol	29
<b>CHAPTER 3        SENSOR NODES DEVELOPMENT</b>	<b>30</b>
3.1 Overview	30
3.2 Hardware Development	31
3.2.1 Processor	35
3.2.2 Temperature Sensor	37
3.2.3 RF Communication	39
3.3 ISP Connector	41
3.4 Software Development	42
3.4.1 uIP Code Modifications	43
3.4.2 Temperature Sensing Flowchart	46
3.4.3 Transmit and Receive Data Flowchart	47

3.5 Code Compiler	49
3.5.1 AVRGCC	50
3.5.2 WinAVR	50
<b>CHAPTER 4 SENSOR NODES VERIFICATION</b>	<b>52</b>
4.1 Overview	52
4.2 Embedded Design Application	53
4.3 Sensor Nodes	54
4.4 ISP Connector	56
4.5 Code Verification	58
4.6 Serial Device Programmer	61
4.7 Converting Data from Analog to Digital Form	63
4.8 Temperature Derivation	64
4.9 Measured Voltage	65
4.9.1 Reset Voltage	66
4.9.2 Temperature Voltage	67
4.10 Data Transmission between Sensor Nodes	70
<b>CHAPTER 5 CONCLUSION &amp; SUGGESTION</b>	<b>75</b>
5.1 Conclusion	75
5.1 Suggestion For Future Work	76
<b>REFERENCES</b>	<b>78</b>
<b>APPENDIX A</b>	<b>82</b>
<b>APPENDIX B</b>	<b>85</b>
<b>APPENDIX C</b>	<b>108</b>
<b>APPENDIX D</b>	<b>112</b>

**LIST OF TABLES**

<b>NO</b>	<b>TITLE</b>	<b>PAGE</b>
2.1	The Conceptual Organization of TCP/IP Protocol	17
2.2	Code size for uIP (AVR) and (x86)	20
4.1	Functions of ISP Connector Pin Header	56
4.2	Comparing Fuses in AT90S8535 and Atmega8535	62

**LIST OF FIGURES**

<b>FIGURE NUMBER</b>	<b>TITLE</b>	<b>PAGE</b>
1.1	Sensor Network Structure	2
2.1	Structure of Sensor Node	9
2.2	Broadcast Mechanism	12
2.3	Structure of Node Application	18
2.4	Example of uIP code size	21
2.5	Interfacing uIP	22
2.6	Sensor Network with Proxy	23
2.7	Sensor Network with DTN-Gateway	24
2.8	Sensor Network with TCP/IP	25
2.9	Communications between Microcontrollers	29
3.1	Sensor Node Proposed Design	31
3.2	Block Diagram for Transmitter and Receiver Node	32
3.3	Schematic Circuit of Transmitter Node	33
3.4	Schematic Circuit of Receiver Node	34
3.5	ATmega8535 Block Diagram	36
3.6	LM335 Pin Configurations	37
3.7	Schematic Circuit for Temperature sensor, LM335	39
3.8	RF transmitter and Receiver Circuit	40
3.9	ISP Connector	41
3.10	Flow of Software Development	43
3.11	Embedded Software Development Process	45

3.12	Flowchart for Temperature Sensing	46
3.13	Flowchart of Transmitting Character String	48
3.14	Flowchart of Receiving Character	49
3.15	AVR-GCC Environment Window	50
3.16	Programmer Notepad in WinAVR	51
4.1	Communications between Microcontrollers	53
4.2	Communications between Microcontroller and PC	53
4.3	Transmitter Node Prototype	54
4.4	Receiver Node Prototype	55
4.5	RF Transmitter and Receiver Module	55
4.4	ISP Cable Downloader	55
4.5	Compiling Code using AVRGCC	56
4.6	Error Status when Failure Occur	57
4.7	ISP Cable Downloader	57
4.8	Compiling Code using AVRGCC	58
4.9	Compile and Link Code using WinAVR	59
4.10	Memory Size Displayed After Code Compiled	61
4.11	Porting Hex Code using PonyProg2000	63
4.12	Measured Supply Voltages	65
4.13	Measured Reset Voltage	66
4.14	Voltage at Temperature 30°C	67
4.15	Voltage Level at Temperature 26°C	68
4.16	Voltage Level at Temperature 23oC	69
4.17	Observed Data during Transmission	71
4.18	Digital Data at Temperature 23oC	72
4.19	Data During Transmission Process (wired)	73
4.20	Data Transmitted from TxD pin	73
4.21	Data Received at Receiver Module	74



**LIST OF ABBREVIATIONS**

ADC	Analog to Digital Conversion
AM	Amplitude Modulation
ARP	Address Resolution Protocol
AVR-GCC	AVR- GNU Compiler Collection
AVR RISC	AVR Reduced Instruction Set Computer
DHCP	Dynamic Host Configuration Protocol
DNS	Domain Name System
DTN	Delay Tolerant Network
EEPROM	Electrically Erasable Programmable Read Only Memory
FTP	File Transfer Protocol
GPRS	Global Packet Radio Service
HTTP	HyperText Transfer Protocol
ICMP	Internet Control Message Protocol
ISP	In-Circuit Serial Programmable
KB	Kilo Byte
LWIP	Light Weight Internet Protocol
LSB	Least Significant Bit
MHz	Megahertz
MSB	Most Significant Bit
OS	Operating System
PPP	Point-to-Point Protocol
RAM	Random Access Memory
RF	Radio Frequency
Rx	Receiver

SLIP	Serial Line Interface Protocol
SMTP	Simple Mail Transport Protocol
SN	Sensor Network
SRAM	Static Random Access Memory
TCP/IP	Transmission Control Protocol/ Internet Protocol
Tx	Transmitter
UDP	User Datagram Protocol
USART	Universal Synchronous Asynchronous Receiver Transmitter

## LIST OF APPENDICES

<b>APPENDIX A : Transmitter and Receiver Node Source Codes</b>	<b>82</b>
<b>APPENDIX B : uIP Modified Codes</b>	<b>85</b>
<b>APPENDIX C : AVRGCC Makefile for uIP Stack</b>	<b>108</b>
<b>APPENDIX D : Serial Device Programmer (Ponyprog2000 Manual)</b>	<b>112</b>

## **CHAPTER I**


### **INTRODUCTION**

#### **1.1 Overview**

Today, most network infrastructures use the Internet Protocol (IP) as its base technology. It is of particular interest to look how sensor networks can be connected to IP network infrastructures (TCP/IP) and methods to interconnect and embed TCP/IP protocol into the sensor device. By directly employ the TCP/IP suite as the communication protocol in the sensor network enable the integration of the sensor network and TCP/IP network. There have been a number of research and development efforts at all levels of development and usage of sensor networks, including applications, operating systems, architectures, middleware, integrated circuit, and system. Sensor network based on TCP/IP has the advantage of being able to directly communicate with an infrastructure consisting either of a wired IP network or of IP-based wireless technology.

## 1.2 Introduction to Sensor Networks

A sensor network consists of many spatially distributed sensor nodes (sensors) which are used to monitor or detect phenomena at different locations, such as temperature changes or pollutant levels. Sensor networks enable information gathering, information processing, and reliable monitoring of a variety of environments for both civil and military applications. These sensor nodes can be spread out in hard accessible areas depends on the application fields. A sensor node combines the abilities to compute, communicate and sense [J.Blumenthal *et al.*, 2002].

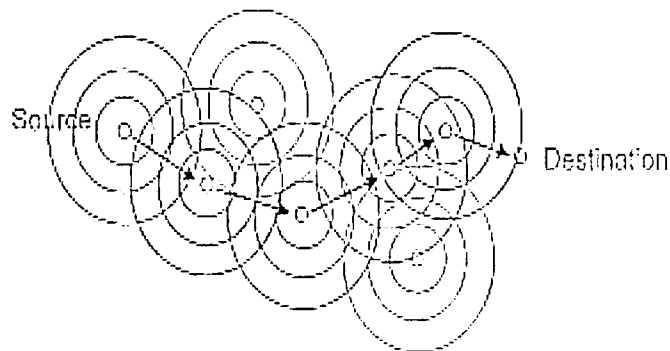

**Figure 1.1** Sensor Network Structure

Applications of sensor networks can be found in such diverse areas as wild-life habitat monitoring, forest fire detection, alarm systems, medicine, and monitoring of volcanic eruptions. Communication can be performed using medium such as wireless, optic or acoustic. For nodes with a far distance range from the source node to the destination, traffic is forwarded by other intermediate nodes.

The development of sensor nodes was influenced by the increasing of the device complexity, high performance of wireless networking technologies, combination of digital signal processing and sensor data acquisition, the advances in the development of micro-electromechanical systems (MEMS) and the availability of high performance development tools. [J.Blumenthal *et al.*, 2002]:

### 1.3 Problem Statement

This project was developed because of:

- i) Limited resources such as size of memory and processing power is said to be the limiting criteria for a sensor node to run the TCP/IP protocol. This project was run in an 8-bit processor with 8KB flash memory, 512 Bytes of SRAM to proof that porting TCP/IP stack is not a problem into the device itself.
- ii) uIP is a small TCP/IP stack developed for small size microcontroller. Because of this, we tried to embed the uIP into the AVR ATmega8535 which has the limited size of memory.
- iii) Data need to be transmitted and received at a specific time. We also need to work on specific device driver that used in the project. The project was carried out to see the performance of data transmission according to the time/period specified in the uIP codes and device driver.
- (4) Normally IP works with Ethernet interface. In this project, the uIP code has been modified to be used with SLIP protocol. We try to observe the transmission of data by using the RF transceiver and direct wire interface at the physical layer.

## 1.4 Objectives

The objectives of this project are as follows:

- i) To develop sensor nodes that able to do sensing, processing and networking. Temperature data from a specific area is collected by one sensor node (defined as transmitter node) before it is transmitted to the other sensor node (defined as receiver node).
- ii) To embed the uIP, a TCP/IP stack protocol into sensor nodes. This is done as to make sure the data can be transmitted and received at specific time. The IP address for each node and the periodic transmission of data is determined in the uIP stack.
- iii) To develop sensor networking (between sensor nodes) using SLIP protocol. By using SLIP protocol, data can be transmitted more flexibly with wired or through the wireless link such as RF.

## 1.5 Scope of Project

The scopes of work for this project are:

- Developing the sensor nodes which implemented TCP/IP protocol using:
  - Processor : AVR microcontroller
  - Sensor type: Temperature sensor
  - Communication link: direct wire, RF transmitter and receiver module

- Frequency involved: 433 MHz
- TCP/IP Protocol: uIP stack
  
- Programming the microcontroller using C/C++, and then compile the source codes using GNU tools, WinAVR (AVR-GCC).
  
- Convert the data collected by the analog temperature sensor into digital representation (A/D Conversion).
  
- Build the AVRISP connector to program the INTEL hex code into the AVR microcontroller.
  
- Write a device driver for target's network device in uIP (serial), and configure the uIP codes to be used in the sensor device.
  
- Embed uIP, a TCP/IP functions into the sensor nodes. This is done to perform a networking between both sensor nodes.

## 1.6 Thesis Outline

This thesis comprises of five chapters. The first chapter briefly overviews the background of sensor network and sensor nodes, objectives and scope of this project.

Chapter 2 deals with the previous research and development of sensor nodes (a.k.a sensor) and its application in sensor networks. The design architecture,