



## Open Archive Toulouse Archive Ouverte (OATAO)

OATAO is an open access repository that collects the work of Toulouse researchers and makes it freely available over the web where possible.

This is an author-deposited version published in: <http://oatao.univ-toulouse.fr/>  
Eprints ID: 18396

**To link to this article** : DOI: 10.1016/j.combustflame.2017.01.032

URL : <http://dx.doi.org/10.1016/j.combustflame.2017.01.032>

**To cite this version:** Guiberti, Thibault and Durox, Daniel and Schuller, Thierry *Flame chemiluminescence from CO<sub>2</sub>- and N<sub>2</sub>-diluted laminar CH<sub>4</sub> /air premixed flames.* (2017) *Combustion and Flame*, vol. 181. pp. 110-122. ISSN 0010-2180

Any correspondence concerning this service should be sent to the repository administrator:  
[staff-oatao@listes-diff.inp-toulouse.fr](mailto:staff-oatao@listes-diff.inp-toulouse.fr)

# Flame chemiluminescence from CO<sub>2</sub>- and N<sub>2</sub>-diluted laminar CH<sub>4</sub>/air premixed flames

T.F. Guibert<sup>a,b,\*</sup>, D. Durox<sup>a</sup>, T. Schuller<sup>a,c</sup>

<sup>a</sup>Laboratoire EM2C, CNRS, CentraleSupélec, Université Paris Saclay, Grande Voie des Vignes, 92290 Châtenay-Malabry, France

<sup>b</sup>King Abdullah University of Science and Technology (KAUST), Clean Combustion Research Center (CCRC), Thuwal, 23955-6900, Saudi Arabia

<sup>c</sup>Institut de Mécanique des Fluides de Toulouse (IMFT), Université de Toulouse, CNRS, INPT, UPS, Toulouse, France

## Keywords:

Chemiluminescence  
Biogas  
Laminar flames  
Premixed flames

## A B S T R A C T

An experimental and numerical investigation of the chemiluminescence signals from OH\*, CH\*, and CO<sub>2</sub>\* is conducted for laminar premixed conical CH<sub>4</sub>/air flames diluted with CO<sub>2</sub> or N<sub>2</sub>. Experiments are conducted either at fixed equivalence ratio or fixed adiabatic flame temperature. An ICCD camera, equipped with different narrow bandpass filters, is used to record flame images at 307 nm (OH\*), 430 nm (CH\*), and 455 nm (CO<sub>2</sub>\*). A spectrometer is also used to correct the OH\* and CH\* emissions from the CO<sub>2</sub>\* broadband background emission. Measured chemiluminescence intensities are then compared to one dimensional freely-propagating-flame direct simulations accounting for the chemistry of the excited radicals. Simulations predict accurately the OH\* chemiluminescence intensity, independently of the diluent nature and concentration. Correction for the CO<sub>2</sub>\* background has a weak influence on the recorded OH\* signal. Predictions of CH\* emissions are also in good agreement with experimental data if the CO<sub>2</sub>\* background intensity is subtracted from intensity measurements. Measured and calculated CO<sub>2</sub>\* emissions lead to acceptable results using a simplified chemistry mechanism for CO<sub>2</sub>\* and an heuristic model for its emission intensity. Finally, it is shown that CO<sub>2</sub> dilution modifies chemiluminescence intensity couples and particularly the OH\*/CO<sub>2</sub>\* intensity ratio. These ratios regularly decrease with CO<sub>2</sub> dilution, a feature which is reproduced by the simulations. It is then shown that the ratio OH\*/CO<sub>2</sub>\* is well suited to infer the CO<sub>2</sub> diluent concentration in diluted CH<sub>4</sub>/air flames, a method which appears not feasible for sensing N<sub>2</sub> in N<sub>2</sub>-diluted CH<sub>4</sub>/air flames.

## 1. Introduction

In premixed hydrocarbon flames, the chemiluminescence from OH\* and CH\* excited radicals is generally intense. These emissions have thus been extensively used to infer properties of the reacting flow such as the heat release rate [1–9] or equivalence ratio [6,10–20], by examining the OH\*/CH\* intensity ratio. However, the OH\* and CH\* emission intensities need generally to be carefully corrected for the broadband CO<sub>2</sub>\* background emission to achieve accurate measurements [6–8,18–22]. Additionally, most of the detailed chemistry mechanisms currently used in numerical simulations do not account for excited radicals chemistry due to the additional computational cost associated to the description of

their complex kinetics [12]. Simulations with simplified chemistry mechanisms are however often used to interpret chemiluminescence measurements with crude approximations on the relationship between non-excited species concentrations calculated by the solver and the excited radical species emission intensities that are measured. There is thus a gap between experiments and simulations with only a limited number of validations of the approximations made.

In this context, efforts are made to understand and model the complex chemistry of the formation and consumption of OH\* [24–28], CH\* [25–27,29–31], and CO<sub>2</sub>\* [1,21,22,32] excited radicals. Comparisons between measurements and simulations in laminar [11,16,33] and turbulent [18–20,34] flames show that the detailed mechanisms developed for the chemistry of these excited radicals yield good results for lean and rich CH<sub>4</sub>/air flames. In a recent work, García-Armingol and Ballester [19] analyzed numerically and experimentally the chemiluminescence of OH\*, CH\*, and CO<sub>2</sub>\* in premixed turbulent swirling flames of CH<sub>4</sub>/CO<sub>2</sub>/H<sub>2</sub>/CO/air blends. They emphasized the large differences in the emission

\* Corresponding author at: King Abdullah University of Science and Technology (KAUST), Clean Combustion Research Center (CCRC), Thuwal, 23955-6900, Saudi Arabia.

E-mail addresses: [thibault.guiberti@kaust.edu.sa](mailto:thibault.guiberti@kaust.edu.sa), [thibault.guiberti@gmail.com](mailto:thibault.guiberti@gmail.com) (T.F. Guibert).

spectra from these flames in comparison to CH<sub>4</sub>/air flames. They conducted 1-D Freely-Propagating-Flame (FPF) simulations as well as 0-D Perfectly-Stirred-Reactor (PSR) simulations to account for the change of turbulent combustion regime and examined effects of a large variety of mixtures and turbulent intensities. In this latter study, differences between measurements and simulations can be interpreted by either imprecisions in the selected detailed chemistry mechanisms or the inadequacy of the models used.

Another issue with turbulent flames is that the instantaneous flame surface area is generally not known. It is then difficult to compare, quantitatively, the measured chemiluminescence intensities to numerical results from 1-D FPF simulations, where the chemiluminescence intensities are computed per unit of flame surface area. This problem can however be circumvented by examining chemiluminescence intensity ratios between different couples of excited radicals. This method allows removing the contribution of the flame surface area [11,14,16,18–20]. In this case, species concentrations cannot however be compared directly.

For all these reasons, we decided to examine experimentally and numerically the chemiluminescence of OH\*, CH\*, and CO<sub>2</sub>\* excited radicals in lean diluted methane/air premixed conical laminar flames, a configuration where the flame surface area is well defined. With proper care, conical laminar flames are readily comparable to adiabatic 1-D FPF direct simulations. Nori and Seitzman [35] studied effects of preheat temperature, pressure, and aerodynamic strain on the CH\* chemiluminescence to sense the equivalence ratio of methane and Jet-A flames burning in air. In the present study, focus is made on effects of CO<sub>2</sub> and N<sub>2</sub> dilutions in CH<sub>4</sub> fuel blends on the chemiluminescence of premixed flames.

CO<sub>2</sub> and N<sub>2</sub> diluted methane fuel blends are relevant for combustion applications powered by biogases, which are produced by methanization [36]. Biogases are classified as low heat value fuels and are mainly composed of CH<sub>4</sub>, CO<sub>2</sub>, and N<sub>2</sub> in variable proportions [37]. There is a growing interest for these renewable resources [38,39], which has led to applied research programs for adapting transport, heat, and power generation technologies to these new fuels [40–45].

Analysis of the chemiluminescence properties of CH<sub>4</sub>/CO<sub>2</sub>/N<sub>2</sub> fuel blends remain scarce. García-Armingol and Ballester [19] found that the increase in CO<sub>2</sub> content in CH<sub>4</sub>/CO<sub>2</sub> mixtures reduces the intensity level of the emission spectra in the near UV and visible ranges, but it does not change the shape of these spectra. They attributed this effect to the weak influence of CO<sub>2</sub> on the chemistry of methane. Their simulations with an extended version of the GRI 3.0 detailed chemistry mechanism [46] reproduce well the evolution of the OH\*/CH\* ratio for mixtures with 25% and 50% (in volume) of CO<sub>2</sub> in CH<sub>4</sub>/CO<sub>2</sub> blends. However, they did not consider emissions from CO<sub>2</sub>\* and focused their work on sensing the equivalence ratio. Hossain and Nakamura [9] studied numerically the influence of N<sub>2</sub> and CO<sub>2</sub> dilution on CH\* chemiluminescence intensity in laminar counterflow diffusion flames. They reported a decrease of the CH\* intensity when increasing the diluent concentration, but numerical results were not compared to experiments. The OH\* and CO<sub>2</sub>\* excited radicals were not examined in their study.

The present study has two main objectives. First, it is intended to determine the accuracy of a simplified chemistry mechanism yielding the OH\*, CH\*, and CO<sub>2</sub>\* chemiluminescence intensities for CO<sub>2</sub>- and N<sub>2</sub>-diluted lean CH<sub>4</sub>/air flames. The second objective is to examine the evolution of the OH\*, CH\*, and CO<sub>2</sub>\* chemiluminescence intensities when CO<sub>2</sub> or N<sub>2</sub> diluent concentrations are varied in the fuel blend and investigate if the diluent concentration may be inferred from these data.

Methods including experimental setup, diagnostics, and numerical models are described in Section 2. Flame images are presented in Section 3.1 together with the way they are post-processed for

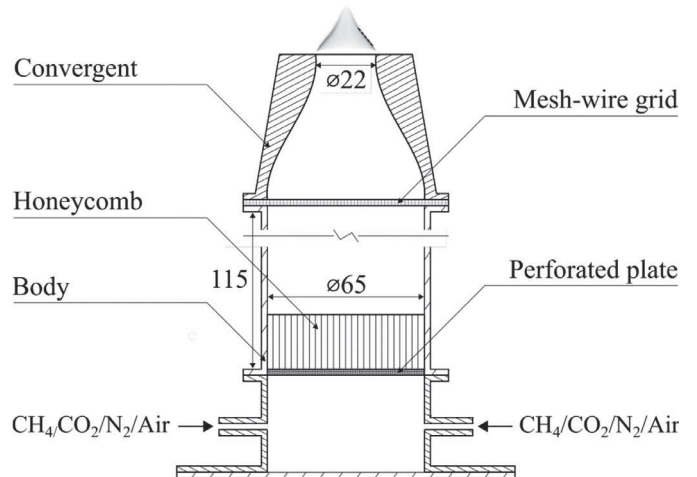


Fig. 1. Schematic of the burner with an example of flame image of a CH<sub>4</sub>/air mixture injected at  $\phi = 0.85$ ,  $U = 57.9 \text{ cm}\cdot\text{s}^{-1}$ , and  $P = 600 \text{ W}$ .

the comparisons with numerical simulations. Results for experiments and simulations conducted at a fixed equivalence ratio are then presented. The influence of the CO<sub>2</sub>\* background emission overlapping the OH\* and CH\* emission bands is characterized in Section 3.2. Effects of CO<sub>2</sub> and N<sub>2</sub> dilution on CO<sub>2</sub>\* emissions are investigated in Section 3.3 and OH\* and CH\* emissions are examined in Section 3.4. These data are used to examine the evolution of intensity ratios in Section 3.5. All the analysis is finally briefly re-conducted for flames diluted at a fixed adiabatic flame temperature in Section 3.6.

## 2. Methods

### 2.1. Experimental setup

The experimental setup shown in Fig. 1 comprises an axisymmetric burner fed by mixtures of methane (CH<sub>4</sub>), carbon dioxide (CO<sub>2</sub>), and air. Alternatively, CO<sub>2</sub> can be replaced by nitrogen (N<sub>2</sub>). The mixture enters the burner through a plenum and subsequently passes through a set of grid/honeycomb/grid before entering an injection nozzle with a cross-section contraction ratio of 8.7 and a 22 mm nozzle outlet diameter. This system yields a top hat velocity profile at the burner outlet with a reduced boundary layer thickness (~1 mm) that allows to stabilize laminar unconfined conical flames. The choice of a rather large exit diameter of 22 mm allows to minimize the influence of heat losses from the base of the flame to the burner rim and reduces effects of aerodynamic strain and flame curvature [47]. Conical flames with a nearly planar front over a large fraction of the flame surface can be stabilized. One example is shown in Fig. 1. Therefore, suitable conditions for comparisons with 1-D FPF direct simulations are reproduced.

The CO<sub>2</sub> dilution in the combustible mixture is expressed by the mole fraction of CO<sub>2</sub> in the CH<sub>4</sub>/CO<sub>2</sub> blend and ranges here from  $X_{\text{CO}_2}^{\text{fuel}} = 0$  to 0.40. When N<sub>2</sub> is used instead of CO<sub>2</sub> to dilute the flame, the diluent mixture fraction is varied between  $0 \leq X_{\text{N}_2}^{\text{fuel}} \leq 0.55$ . These values do not account for the N<sub>2</sub> naturally present in air. The mass flow rates of the different gases injected are regulated by thermal mass flow controllers (Bronkhorst, F-series). The mixture composition and bulk flow velocity  $U$  at the burner outlet are known with a relative accuracy better than 3%. Experiments are conducted at a fixed thermal power  $P = 600 \text{ W}$  for gas injection at room temperature  $T_0 = 300 \text{ K}$  and atmospheric pressure  $p_0 = 1 \text{ atm}$ . In a first set of experiments, flames are diluted by

**Table 1**

Ranges of operating conditions explored for dilution at a fixed equivalence ratio  $\phi = 0.85$  and thermal power  $P = 600$  W, where  $U$  stands for the bulk flow velocity and  $T_{ad}$  for the adiabatic flame temperature.

$X_{\text{diluent}}^{\text{fuel}}$		0	0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55
N <sub>2</sub>	$T_{ad}$ (K)	2071	2065	2059	2052	2045	2036	2026	2015	2002	1987	1969	×
	$U$ (cm.s <sup>-1</sup> )	57.9	58.1	58.4	58.7	59.1	59.5	59.9	60.4	61	61.7	62.6	×
CO <sub>2</sub>	$T_{ad}$ (K)	2071	2061	2051	2040	2027	2013	1997	1979	×	×	×	×
	$U$ (cm.s <sup>-1</sup> )	57.9	58.1	58.4	58.7	59.1	59.5	59.9	60.4	×	×	×	×

**Table 2**

Ranges of operating conditions explored for dilution at a fixed adiabatic flame temperature  $T_{ad} = 2071$  K and thermal power  $P = 600$  W.

$X_{\text{diluent}}^{\text{fuel}}$		0	0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55
N <sub>2</sub>	$\phi$	0.850	0.854	0.859	0.864	0.870	0.876	0.884	0.893	0.904	0.918	0.935	0.957
	$U$ (cm.s <sup>-1</sup> )	57.9	57.9	57.9	57.9	57.9	57.9	57.9	57.9	57.9	57.8	57.8	57.7
CO <sub>2</sub>	$\phi$	0.850	0.857	0.865	0.874	0.884	0.896	0.911	0.928	0.950	×	×	×
	$U$ (cm.s <sup>-1</sup> )	57.9	57.7	57.5	57.3	57.0	56.7	56.4	56.0	55.4	×	×	×

keeping the equivalence ratio constant at  $\phi = 0.85$  and increasing progressively the mole fraction of the diluent  $X_{\text{diluent}}^{\text{fuel}}$  in the fuel mixture (Table 1). Another set of experiments is conducted by fixing the adiabatic flame temperature to  $T_{ad} = 2071$  K and increasing  $X_{\text{diluent}}^{\text{fuel}}$  (Table 2). In this case, the equivalence ratio  $\phi$  is adjusted between the different cases explored. Therefore, the adiabatic flame temperatures  $T_{ad}$  [48] are first calculated for mixtures with both diluents, dilution ratios of the fuel blend  $0 \leq X_{\text{diluent}}^{\text{fuel}} \leq 0.55$ , and equivalence ratios  $0.5 \leq \phi \leq 0.96$  to build a database. A lookup table is then used to match the equivalence ratio  $\phi$  and operate the burner at the correct adiabatic flame temperature  $T_{ad} = 2071$  K for all cases explored in Table 2. The cross symbols in Tables 1 and 2 designate conditions leading to blow-off.

## 2.2. Diagnostics

The flame chemiluminescence is investigated with two diagnostics. The first one is a  $1024 \times 1024$ -pixels ICCD camera (Princeton instruments, PI-Max 3) equipped with a UV lens (UV-NIKKOR, 105 mm,  $f/4.5$ ) and different interferometric filters. A set of three 10 nm bandpass filters is used to collect the chemiluminescence signal from excited OH\*, CH\*, and CO<sub>2</sub>\* radicals, respectively centered at 307 nm (CVI, F10-307.1-4-50.0M), 430 nm (CVI, F10-430.0-4-50.0M), and 455 nm (Optoprim, 455BP10). Mean images are obtained by averaging 350 individual images, each with an exposure time of 3 ms. The total integration time is therefore 1.05 s. The signal-to-noise ratio (SNR) in these experiments is always higher than SNR = 26.

The second optical system is a low resolution inboard spectrometer (Ocean Optics, PC2000+UV-vis), coupled with a UV capable fiber optic, that records the broadband flame emission spectrum in the near-UV and visible ranges. The spectral resolution of this device, which is determined as the full width at half maximum (FWHM) of a He:Ne laser line at 632 nm, is 2.4 nm. Spectra presented in this study are not calibrated in relative intensities. Therefore, comparisons between OH\*, CH\*, and CO<sub>2</sub>\* absolute intensities are not possible. The exposure time is here set to 9 s and the spectrometer collects light over the whole flame region. The minimum SNR at 307 nm, 430 nm, and 455 nm are respectively  $\text{SNR}_{307} = 25$ ,  $\text{SNR}_{430} = 17$ , and  $\text{SNR}_{455} = 8$ .

## 2.3. Numerical model

In addition to experiments, direct simulations of 1-D FPF are conducted with an internally developed solver [48] for the operating conditions shown in Tables 1 and 2. For this purpose, the detailed chemistry mechanism due to Lindstedt [49], without accounting for the NOx chemistry, is extended by including reactions

for the production and consumption of OH\* [26] (9 reactions), CH\* [26] (10 reactions), and CO<sub>2</sub>\* [22] (14 reactions) excited radicals. This extended mechanism includes 32 species and 174 reactions and can be found as [supplementary electronic material](#). The sub-mechanism for OH\* includes 1 production ( $\text{CH} + \text{O}_2 \rightleftharpoons \text{OH}^* + \text{CO}$ ) and 8 consumption reactions, that are divided into 1 chemiluminescence and 7 quenching reactions. The reader is referred to [26] for more details. The excited radical CH\* is produced via two main reactions [26]:  $\text{C}_2\text{H} + \text{O} \rightleftharpoons \text{CH}^* + \text{CO}$  and  $\text{C}_2\text{H} + \text{O}_2 \rightleftharpoons \text{CH}^* + \text{CO}_2$ . Panoutsos et al. [16] made comparisons of simulations with the GRI 3.0 [46] and Lindstedt [49] chemistry mechanisms associated with a range of excited radical sub-mechanisms and found that the use of the Lindstedt mechanism coupled with the OH\* and CH\* mechanisms described in [26] yields the best results for lean CH<sub>4</sub>/air flames. These mechanisms are selected here as well to investigate the chemiluminescence of OH\* and CH\* in diluted CH<sub>4</sub>/air flames.

Two different models are used to simulate the chemistry of CO<sub>2</sub>\*. The first model, designated as detailed model in the following, includes 4 main production reactions [22]:



where M designates a third body partner. Kopp et al. [22] also introduced an additional CO<sub>2</sub>\* production reaction:  $\text{CH}_3\text{CHCO} + \text{OH} \rightleftharpoons \text{CO}_2^* + \text{C}_2\text{H}_5$ . This reaction cannot be included in our extended version of the Lindstedt mechanism because this mechanism does not account for CH<sub>3</sub>CHCO. However, the sensitivity analysis presented in [22] shows that this reaction has only a weak influence in the predicted CO<sub>2</sub>\* mole fraction.

The second model designated here as simplified model uses a different method to simulate the CO<sub>2</sub>\* emission. Studies from Baulch et al. [32] and Kopp et al. [22] indicate that CO<sub>2</sub>\* is mainly produced through Eq. (1):  $\text{CO} + \text{O} (+\text{M}) \rightleftharpoons \text{CO}_2^* (+\text{M})$ . Consequently, the CO<sub>2</sub>\* chemiluminescence intensity  $I_{\text{CO}_2}$  can be expressed as [21]:

$$I_{\text{CO}_2} = I_{\text{CO}_2}^0 [\text{CO}][\text{O}] \quad (5)$$

where [CO] and [O] stand for the concentrations of CO and O respectively and the rate  $I_{\text{CO}_2}^0$  is a function of temperature,  $I_{\text{CO}_2}^0 = 2.5 \times 10^6 \exp[-1600/T]$  [21]. A similar expression is used in [50],



**Table 3**

Reactions yielding the chemiluminescence of OH\*, CH\*, and CO<sub>2</sub>\*. The reaction rate is  $k = AT^\beta \exp(-E/RT)$ . Units are cal, cm, mole, s, and K.  $h$  stands for the Planck constant and  $\nu$  corresponds to light frequency.

Chemiluminescence reaction	$A$	$\beta$	$E$
OH* [26]    OH* → OH + $h\nu$	1.45E+06	0	0
CH* [26]    CH* → CH + $h\nu$	1.85E+06	0	0
CO <sub>2</sub> * [22]    CO <sub>2</sub> * → CO <sub>2</sub> + $h\nu$	1.40E+06	0	0
CO <sub>2</sub> * [21]    CO + O → CO <sub>2</sub> + $h\nu$	2.50E+06	0	3180

but the activation energy  $E$  and the pre-exponential factor  $A$  take different values to fit their measurements for atmospheric syngas/air and methane/air flames.

Table 3 summarizes the reactions yielding the chemiluminescence of OH\*, CH\*, and CO<sub>2</sub>\*. The light emission intensity is expressed here by the product of the Planck constant  $h$  and the emission frequency  $\nu$ . Row 3 in this table corresponds to the detailed model for the calculation of CO<sub>2</sub>\* emission. Row 4 indicates how this emission is calculated with the simplified CO<sub>2</sub>\* model Eq. (5) without accounting for the detailed chemistry of CO<sub>2</sub>\*. This model reduces the cost of simulations. The three first rows in Table 3 indicate that the OH\*, CH\*, and CO<sub>2</sub>\* chemiluminescence intensities are directly proportional to the OH\*, CH\*, and CO<sub>2</sub>\* mole fractions. This is attributed to the fact that the corresponding reaction rates  $k$  do not depend on temperature ( $\beta = E = 0$ ). The chemiluminescence intensity of these radicals is then calculated as the product of this excited radical mole fraction times the pre-exponential factor  $A$ .

### 3. Results and discussion

#### 3.1. Analysis of flame images

It is worth starting the analysis by examining flame images obtained with the setup described in Section 2. Figure 2 shows mean images in false colors obtained with the ICCD camera equipped with the CVI F10-307.1-4-50.0M bandpass filter centered at 307 nm

for increasing concentrations of CO<sub>2</sub> in the fuel blend ranging from  $X_{\text{CO}_2}^{\text{fuel}} = 0$  to 0.35. The equivalence ratio is kept constant to  $\phi = 0.85$ . Because experiments are carried out at a fixed thermal power  $P = 600$  W, the injection bulk flow velocity increases from  $U = 57.9$  cm · s<sup>-1</sup> at  $X_{\text{CO}_2}^{\text{fuel}} = 0$  to  $U = 60.4$  cm · s<sup>-1</sup> at  $X_{\text{CO}_2}^{\text{fuel}} = 0.35$  (see Table 1). The flame length measured along the burner axis increases from  $L = 19.3$  mm at  $X_{\text{CO}_2}^{\text{fuel}} = 0$  to  $L = 30.4$  mm at  $X_{\text{CO}_2}^{\text{fuel}} = 0.35$ . Images in this figure are all normalized by the maximum pixel value reached for the undiluted case shown on the left. The maximum OH\* chemiluminescence intensity recorded thus decreases for increasing CO<sub>2</sub> concentrations. Experiments with N<sub>2</sub> as a diluent, not shown here, exhibit similar trends. Dilution with CO<sub>2</sub> or N<sub>2</sub> is known to alter flame chemistry [50,51] and laminar burning velocity  $S_L$  [47,52,53]. Flame lengthening is associated here to a decrease of the laminar burning velocity.

For each image in Fig. 2, the luminosity along the flame front remains roughly constant except close to the flame tip where it decreases abruptly. The region close to the tip appears less intense than the flame base. In this region, the flame has a high curvature leading to a modified balance between species and heat diffusion and a modified laminar burning velocity [54]. Here, however, the weaker luminosity is mainly attributed to small vertical oscillations of the flame tip position with time due to a buoyancy instability in the burnt gases that surround the flame [55,56]. The region at the flame tip appears thus artificially broadened in the long exposure time images and consequently features on average a lower local signal intensity. This effect limited to a narrow region over a small fraction of the flame surface area barely changes the global chemiluminescence signal intensity integrated over time and over the whole flame region.

Figure 3 shows CO<sub>2</sub>-diluted flame images when the adiabatic flame temperature is kept constant at  $T_{ad} = 2071$  K and the equivalence ratio is modified. Here again, the flame height increases with larger diluent concentrations and reaches  $L = 19.3$  mm at  $X_{\text{CO}_2}^{\text{fuel}} = 0$  and  $L = 23.7$  mm at  $X_{\text{CO}_2}^{\text{fuel}} = 0.35$ . Dilution has however a weaker influence on the flame height than experiments conducted at a constant equivalence ratio shown in Fig. 2. This is attributed to the

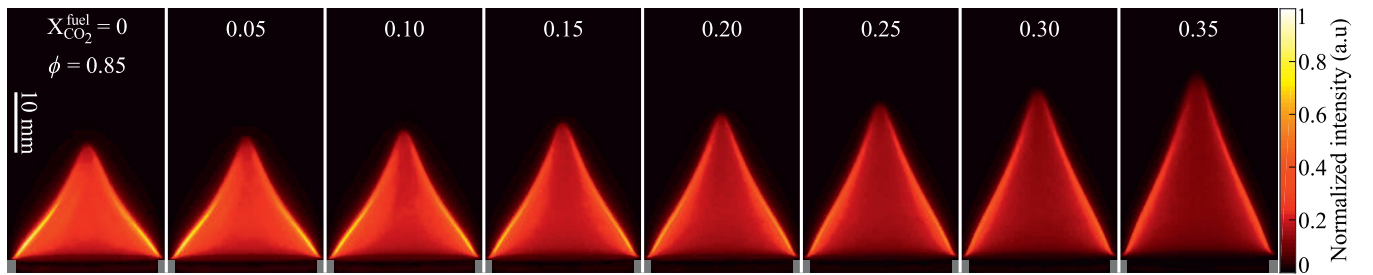


Fig. 2. Mean chemiluminescence images of CH<sub>4</sub>/CO<sub>2</sub>/air flames with  $P = 600$  W,  $\phi = 0.85$ , and varying CO<sub>2</sub> mole fractions in the combustible mixture (see Table (1)). The ICCD camera is equipped with a 10 nm bandpass filter centered at 307 nm.

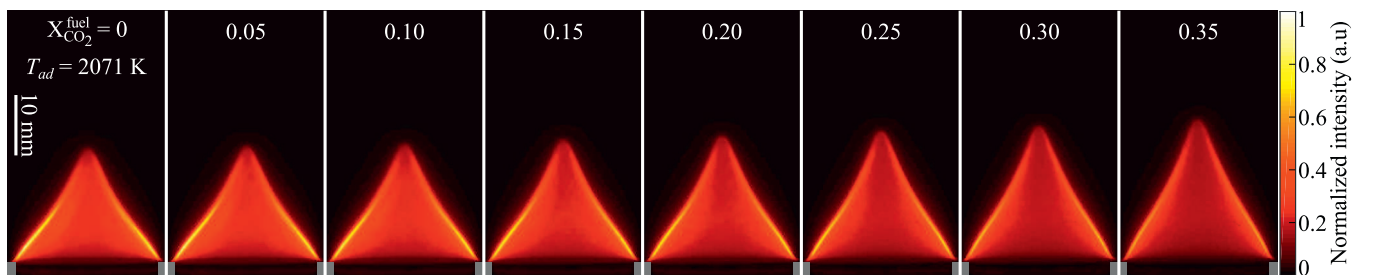


Fig. 3. Mean chemiluminescence images of CH<sub>4</sub>/CO<sub>2</sub>/air flames with  $P = 600$  W,  $T_{ad} = 2071$  K, and varying CO<sub>2</sub> mole fractions in the combustible mixture (see Table (2)). The ICCD camera is equipped with a 10 nm bandpass filter centered at 307 nm.

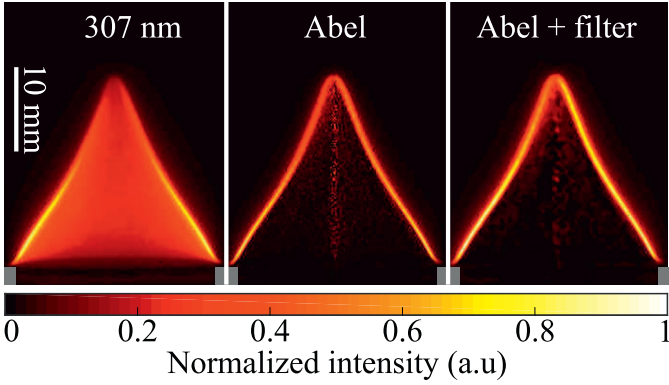


Fig. 4. Example of mean (left), Abel transformed (middle), and filtered (right) chemiluminescence images obtained with the bandpass filter centered at 307 nm for  $P = 600$  W,  $\phi = 0.85$ , and  $X_{\text{CO}_2}^{\text{fuel}} = 0.15$ .

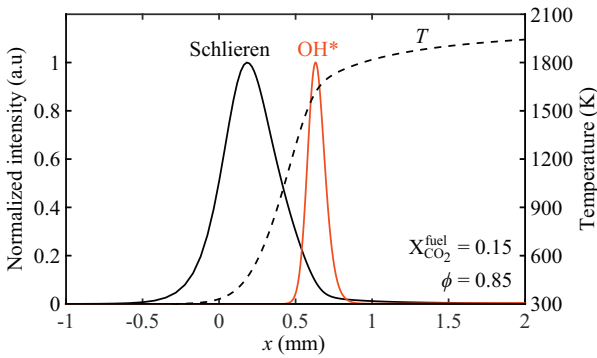


Fig. 5. Computed OH\*, schlieren intensity ( $(1/T^2)(\partial T/\partial x)$ ), and temperature  $T$  profiles for a flame at  $P = 600$  W,  $\phi = 0.85$ , and  $X_{\text{CO}_2}^{\text{fuel}} = 0.15$ .

increase of equivalence ratio (see Table 2) that enhances the laminar burning velocity  $S_L$  and compensates effects of dilution to a certain extent. The same remark can be made for the OH\* chemiluminescence intensity. The OH\* reduction observed in Fig. 3 when the diluent concentration increases is weaker than in Fig. 2. Results for chemiluminescence intensities are compared on a more quantitative basis in the following sections.

To allow comparisons with 1-D direct simulations, experimental data need to be rescaled by the flame surface area, which can be obtained by post-processing the mean chemiluminescence images presented in Figs. 2 and 3. For each operating condition investigated, an Abel transformation is first applied on the raw images recorded by the ICCD camera equipped with the CVI F10-307.1-4-50.0M bandpass filter to determine the OH\* chemiluminescence signal originating from a central vertical plane passing through the burner axis (Fig. 4 left and middle). A  $10 \times 10$ -pixels median filter is then applied on the resulting images to reduce the noise produced by the Abel transformation (Fig. 4 right). A homemade Matlab® routine then computes the flame surface area from the filtered images. In this study, the OH\* signal is used to delineate the flame front position, which is identified as the position of maximum OH\* chemiluminescence intensity. The OH\* signal takes its highest values in the hottest regions of the flame and is offset with respect to the beginning of the preheated region usually used to define the flame surface area [16]. For laminar burning velocity measurements, the schlieren or shadowgraphy techniques are therefore often preferred to infer precisely the flame front position [47,52,57]. Figure 5 shows the computed normalized OH\* chemiluminescence intensity and the temperature profile for a flame at  $P = 600$  W,  $\phi = 0.85$ , and  $X_{\text{CO}_2}^{\text{fuel}} = 0.15$  calculated with the code de-


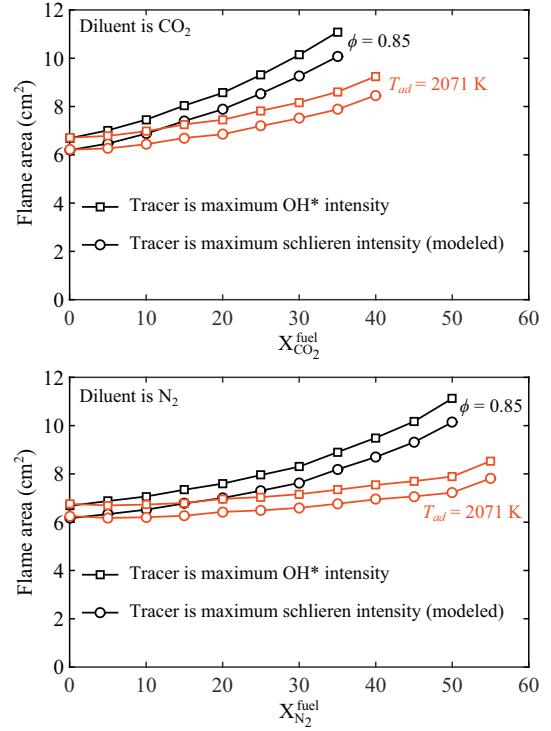



Fig. 6. Measured flame surface area for CH<sub>4</sub>/air flames diluted with CO<sub>2</sub> (top) or N<sub>2</sub> (bottom). Results are presented for dilutions at a fixed equivalence ratio  $\phi = 0.85$  (black) or adiabatic flame temperature  $T_{ad} = 2071$  K (red). The flame front tracer is the maximum OH\* chemiluminescence intensity (square symbols) or the simulated maximum schlieren intensity (circle symbols). (For interpretation of the references to color in this figure legend, the reader is referred to the web version of this article.)

scribed in Section 2.3. A synthetic schlieren signal profile, defined as  $(1/T^2)(\partial T/\partial x)$  [58] with  $T$  and  $x$  being the temperature and the progress along a coordinate normal to the flame front, is also plotted. The origin  $x = 0$  in this figure corresponds to the beginning of the preheat zone. The maximum schlieren intensity lies at a position  $x = 0.18$  mm located 0.45 mm upstream the OH\* peak intensity detected at  $x = 0.63$  mm. Simulations show that the distance between the schlieren and OH\* peaks is always comprised between 0.41 mm and 0.54 mm for the operating conditions investigated in Tables 1 and 2.

Figure 6 shows the measured flame surface area (square symbols) deduced from the OH\* signals as a function of the diluent concentration with CO<sub>2</sub> (top) or N<sub>2</sub> (bottom) for experiments conducted at a fixed equivalence ratio (black) and at a fixed adiabatic flame temperature (red). Knowing the distance  $d = 0.48 \pm 0.6$  mm between the OH\* peak intensity and schlieren front allows to plot a corrected flame surface area (circle symbols) that would be measured by a schlieren technique. Comparison between these two quantities shows that calculations with the OH\* tracer overestimates the flame surface area by about  $9 \pm 1\%$  on average compared to that deduced with a synthetic schlieren signal. This difference remains roughly constant and corresponds to a constant offset for all cases explored. In what follows, all chemiluminescence intensities are normalized by the peak value obtained for the undiluted reference case  $X_{\text{diluent}}^{\text{fuel}} = 0$  at  $\phi = 0.85$ . Due to the roughly constant offset between the flame surface areas deduced from the OH\* and the synthetic schlieren signals, the OH\* signal can, in this study, safely be used to determine the flame surface areas needed to normalize the chemiluminescence data. This procedure is applied to compare results from 1-D PPF simulations with experiments.

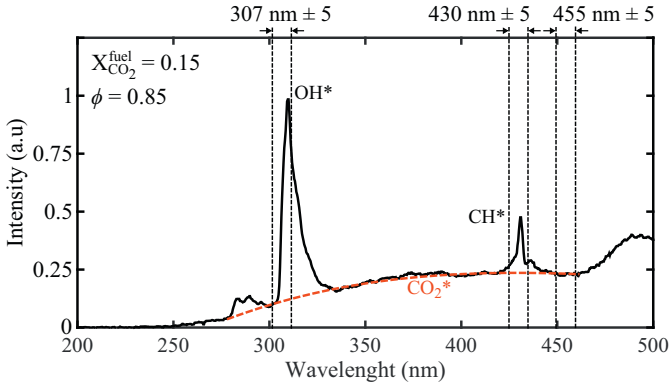

**Fig. 7.** Flame spontaneous emission spectrum for  $P = 600$  W,  $\phi = 0.85$ , and  $X_{\text{CO}_2}^{\text{fuel}} = 0.15$ . Vertical dashed lines show the width of the bandpass filters used during the ICCD experiments.

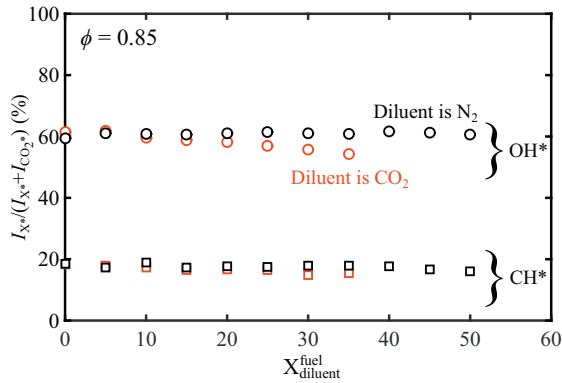

**Fig. 8.** Chemiluminescence intensities emitted by  $\text{OH}^*$  (circle symbols) within [278–336 nm] and  $\text{CH}^*$  (square symbols) within [416–449 nm] and normalized by the total chemiluminescence intensity emitted by both  $\text{OH}^*$  and  $\text{CO}_2^*$  or  $\text{CH}^*$  and  $\text{CO}_2^*$ , respectively. Results are presented as a function of the mole fraction of diluent,  $\text{N}_2$  (black) or  $\text{CO}_2$  (red), in the fuel for  $\phi = 0.85$ . (For interpretation of the references to color in this figure legend, the reader is referred to the web version of this article.)

### 3.2. Effects of $\text{CO}_2^*$ emission background

We now aim at determining effects of  $\text{CO}_2^*$  on flame emission spectra between 200 and 500 nm. Figure 7 shows a spontaneous emission spectrum for a  $\text{CH}_4/\text{CO}_2/\text{air}$  flame at  $\phi = 0.85$  and  $X_{\text{CO}_2}^{\text{fuel}} = 0.15$ . The spectrum exhibits two narrow peaks around 309 nm and 432 nm that are characteristics of  $\text{OH}^*$  and  $\text{CH}^*$  chemiluminescence emissions [14]. One also identifies the broadband continuous light emission from  $\text{CO}_2^*$  [21], that has been fitted here by the red dashed line between 270 and 460 nm. Figure 7 shows that placing the CVI F10-307.1-4-50.0M narrow bandpass filter centered at 307 nm in front of the ICCD camera does not allow to only select the  $\text{OH}^*$  emission because the  $\text{CO}_2^*$  background emission has already a sizable contribution at these wavelengths. This problem was already reported in [7,8,18,19]. The same phenomenon is observed at 430 nm for the  $\text{CH}^*$  excited radical with a larger contribution from the  $\text{CO}_2^*$  background emission intensity to the light recorded by the spectrometer. Figure 7 also shows that a bandpass filter centered at 455 nm allows to select only the chemiluminescence from excited  $\text{CO}_2^*$  radicals.

It is worth examining the contribution of the  $\text{CO}_2^*$  intensity background to  $\text{OH}^*$  and  $\text{CH}^*$  chemiluminescence intensities in more details. Figure 8 plots the  $\text{OH}^*$  intensity,  $I_{\text{OH}^*}$ , recorded in the range [278–336 nm]. This wide spectral width takes most of the  $\text{OH}^*$  emission bands into account as shown in Fig. 7. Results

in Fig. 8 are normalized by the total chemiluminescence intensity emitted by both  $\text{OH}^*$  and  $\text{CO}_2^*$  excited radicals,  $I_{\text{OH}^*} + I_{\text{CO}_2^*}$ , over the same spectral range. Results are presented as a function of the diluent mole fraction in the fuel for  $\phi = 0.85$ . The  $\text{OH}^*$  intensity  $I_{\text{OH}^*}$  is computed as follows:

$$I_{\text{OH}^*} = \int_{278}^{336} [S(\lambda) - B(\lambda)] d\lambda \quad (6)$$

where  $\lambda$  is the wavelength,  $S$  stands for the spectrometer measured intensity (black solid line), and  $B$  represents the fitted  $\text{CO}_2^*$  chemiluminescence intensity (red dashed line)  $I_{\text{CO}_2^*}$ :

$$I_{\text{CO}_2^*} = \int_{278}^{336} B(\lambda) d\lambda \quad (7)$$

For  $\text{N}_2$ -diluted flames, Fig. 8 shows that the  $\text{OH}^*$  chemiluminescence intensity corresponds roughly to 60% of the total chemiluminescence intensity detected in the spectral range [278–336 nm] that includes both the  $\text{OH}^*$  and  $\text{CO}_2^*$  contributions. Increasing  $\text{N}_2$  dilution has only a weak influence on the fraction of light emitted by  $\text{OH}^*$ , but the  $\text{CO}_2^*$  background intensity cannot be neglected. For  $\text{CO}_2$ -diluted flames, the contribution of the  $\text{CO}_2^*$  background intensity increases with the  $\text{CO}_2$  concentration and leads to a drop of  $I_{\text{OH}^*}$  with respect to  $I_{\text{OH}^*} + I_{\text{CO}_2^*}$  in Fig. 8. The ratio  $I_{\text{CO}_2^*}/(I_{\text{OH}^*} + I_{\text{CO}_2^*})$  reaches 46% at  $X_{\text{CO}_2}^{\text{fuel}} = 0.35$ . For large  $\text{CO}_2$  dilution concentrations  $X_{\text{CO}_2}^{\text{fuel}} > 0.40$ , which could not be explored in these experiments due to blow-off issues, the  $\text{CO}_2^*$  chemiluminescence intensity might exceed the  $\text{OH}^*$  chemiluminescence intensity over the range [278–336 nm]. These conditions would correspond to a weak  $\text{OH}^*$  emission peak around 307 nm flooded within a continuous  $\text{CO}_2^*$  background emission. In this case, narrow bandpass filters (FWHM < 10 nm) centered around the wavelength of maximum  $\text{OH}^*$  emission must be preferred. To illustrate it, the chemiluminescence intensity recorded with the CVI F10-307.1-4-50.0M bandpass filter allows to collect more than 77% of the light intensity originating from  $\text{OH}^*$  radicals even at large  $\text{CO}_2$  concentrations  $X_{\text{CO}_2}^{\text{fuel}} = 0.35$ . This large value also proves that it is not necessary to correct the  $\text{OH}^*$  images collected with the F10-307.1-4-50.0M filter that are used to determine the flame surface area. It should also be noted that the values plotted in Fig. 8 cannot be used to correct  $\text{OH}^*$  images because the range of wavelengths used for computations does not match the transmission band of the F10-307.1-4-50.0M filter.

The same analysis is now carried in Fig. 8 for the  $\text{CH}^*$  spontaneous emission band around 430 nm integrated over a 33 nm spectral bandwidth. The  $\text{CH}^*$  chemiluminescence intensity  $I_{\text{CH}^*}$ , detectable in the range [416–449 nm], is computed as follows:


$$I_{\text{CH}^*} = \int_{416}^{449} [S(\lambda) - B(\lambda)] d\lambda \quad (8)$$

where  $I_{\text{CO}_2^*}$  is now:

$$I_{\text{CO}_2^*} = \int_{416}^{449} B(\lambda) d\lambda \quad (9)$$

Independently of the diluent nature and its concentration in the mixture, around 80% of the signal intensity detected in the spectral range [416–449 nm] originates from  $\text{CO}_2^*$  and not from  $\text{CH}^*$ . A narrow bandpass filter centered around the  $\text{CH}^*$  maximum emission peak near 430 nm, like the CVI F10-430.0-4-50.0M filter with a FWHM  $\approx 10$  nm used in this study, allows to reduce the contribution of  $\text{CO}_2^*$  intensity to less than 65%. In any cases, it is necessary to correct for the  $\text{CO}_2^*$  intensity background if the  $\text{CH}^*$  intensity needs to be analyzed precisely. This is illustrated in Fig. 9.

Figure 9 left shows an Abel inverted image of the light recorded with the ICCD camera equipped with the CVI F10-430.0-4-50.0M bandpass filter centered at 430 nm for a  $\text{CO}_2$ -diluted flame at

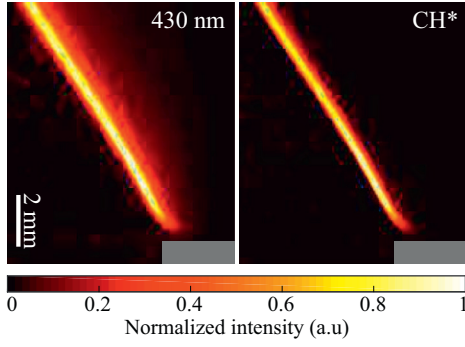

**Fig. 9.** Left: Abel transformed image of the light detected by the ICCD camera equipped with the CVI F10-430.0-4-50.0M bandpass filter centered at 430 nm for a flame at  $P = 600$  W,  $\phi = 0.85$ , and  $X_{\text{CO}_2}^{\text{fuel}} = 0.15$ . Only the region near the flame base is presented. Right: Post-processed image obtained after subtraction of the  $\text{CO}_2^*$  intensity background.

$P = 600$  W,  $\phi = 0.85$ , and  $X_{\text{CO}_2}^{\text{fuel}} = 0.15$ . Only the region close to the flame base is shown in this figure. This image features a relatively broad region with high pixel values revealing light emission over a region extending over more than 1 mm. This is attributed to the emission of  $\text{CO}_2^*$  because the  $\text{CH}^*$  radical cannot be present so far downstream in the burnt gases for these operating conditions [11,16,33,34]. The same setup was used but with the ICCD camera equipped with the Optoprim 455BP10 bandpass filter centered at 455 nm, *i.e.* close to the  $\text{CH}^*$  emission range, to record only the  $\text{CO}_2^*$  emission intensity. This image is then used to remove the  $\text{CO}_2^*$  contribution from the image shown in Fig. 9 left [7,8]. This is suitable because the  $\text{CO}_2^*$  emission spectrum remains roughly flat in the range [420–460 nm] (Fig. 7). The result of this correction is presented in Fig. 9 right. This new image shows a narrow region with high pixel values well delineating the reaction layer and there is no significant signal few tens of millimeters downstream the reaction zone. The signal shown in this image can now be attributed to the  $\text{CH}^*$  emission only.

### 3.3. Effects of $\text{CO}_2$ and $\text{N}_2$ dilution on $\text{CO}_2^*$


Focus is now made on the influence of  $\text{CO}_2$  and  $\text{N}_2$  dilution on the chemiluminescence of  $\text{CO}_2^*$ . The flame surface areas plotted in Fig. 6 are used to normalize the chemiluminescence intensities measured with the ICCD camera equipped with the Optoprim 455BP10 bandpass filter centered at 455 nm. The  $\text{CO}_2^*$  signal measured by the spectrometer over the same spectral bandwidth as

the Optoprim 455BP10 filter is also corrected by the flame surface area to yield  $I_{\text{CO}_2^*} = \int_{450}^{460} S(\lambda) d\lambda$ .

It is first worth examining the evolution of the light intensity in the normal direction to the flame front. Figure 10 shows the normalized profiles of the measured  $\text{CO}_2^*$  chemiluminescence intensity (black solid line) as a function of the distance  $x$  to the flame front for  $\text{CO}_2$ -diluted flames at  $P = 600$  W and  $\phi = 0.85$ . Results are presented for different diluent concentrations  $X_{\text{CO}_2}^{\text{fuel}} = 0, 0.25$ , and 0.35. The location of the maximum  $\text{CO}_2^*$  peak intensity is used here to define the origin of the normal axis  $x = 0$ . Negative values  $x < 0$  correspond to the reactant side. These profiles are probed at a height of 4 mm above the burner lip to minimize both the influence of heat losses to the burner and oscillations of the flame tip position. Starting from the fresh reactants ( $x < 0$ ), one can notice a very sharp increase of the  $\text{CO}_2^*$  chemiluminescence intensity near  $x \approx 0$ . The  $\text{CO}_2^*$  chemiluminescence intensity then slowly decreases in the post-flame region ( $x > 0$ ) and vanishes for  $x > 3$  mm for all diluent concentrations explored. Away from the flame tip and flame base, these features are found to be independent of the height above which the experimental profiles are sampled.


The blue dashed lines in Fig. 10 show results for the normalized  $\text{CO}_2^*$  intensity profiles calculated with the simplified  $\text{CO}_2^*$  chemiluminescence model based on O and CO mole fractions (Table 3, row 4). The location of the  $\text{CO}_2^*$  peak intensity is used to rescale simulations with experiments at  $x = 0$ . The measured and the calculated  $\text{CO}_2^*$  profiles match well for the three dilutions explored. This simplified  $\text{CO}_2^*$  chemiluminescence model is able to accurately reproduce the rate of consumption of  $\text{CO}_2^*$  in the post-flame region due to both chemiluminescence and quenching reactions. The red dashed lines in Fig. 10 show the computed normalized  $\text{CO}_2^*$  chemiluminescence intensity profiles calculated with the detailed chemistry mechanism (Table 3, row 3). This model largely overestimates the consumption rate of  $\text{CO}_2^*$  in the post-flame region and consequently fails to capture the  $\text{CO}_2^*$  chemiluminescence intensity in this region. This remains true over the whole range of dilution ratios examined. At this stage, there is no interpretation for the behavior of the detailed mechanism that fails to capture the  $\text{CO}_2^*$  emission in the burnt gases. The simplified model based on O and CO mole fractions (Table 3, row 4) yields better predictions of  $\text{CO}_2^*$  relative concentrations.

Signals integrated over the whole flame region and normalized by the flame surface area are now examined. Figure 11 top plots the measured  $\text{CO}_2^*$  chemiluminescence intensity as a function of the  $\text{CO}_2$  mole fraction in the fuel when the equivalence ratio is kept constant and equal to  $\phi = 0.85$ . Results are normalized by the value obtained for the undiluted flame when  $X_{\text{CO}_2}^{\text{fuel}} = 0$ . Hollow

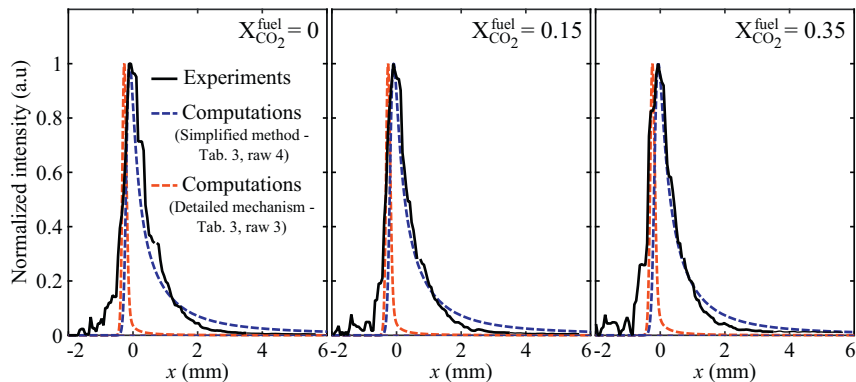

**Fig. 10.** Normalized profiles of the measured (black solid line) and computed (blue and red dashed lines)  $\text{CO}_2^*$  chemiluminescence intensity as a function of the distance to the flame front  $x$  for flames at  $P = 600$  W and  $\phi = 0.85$ . Negative and positive values of  $x$  correspond to the reactant and burnt gases sides, respectively. Results are presented for three flames featuring different dilution ratios  $X_{\text{CO}_2}^{\text{fuel}} = 0$  (left), 0.15 (middle), and 0.35 (right). (For interpretation of the references to color in this figure legend, the reader is referred to the web version of this article.)



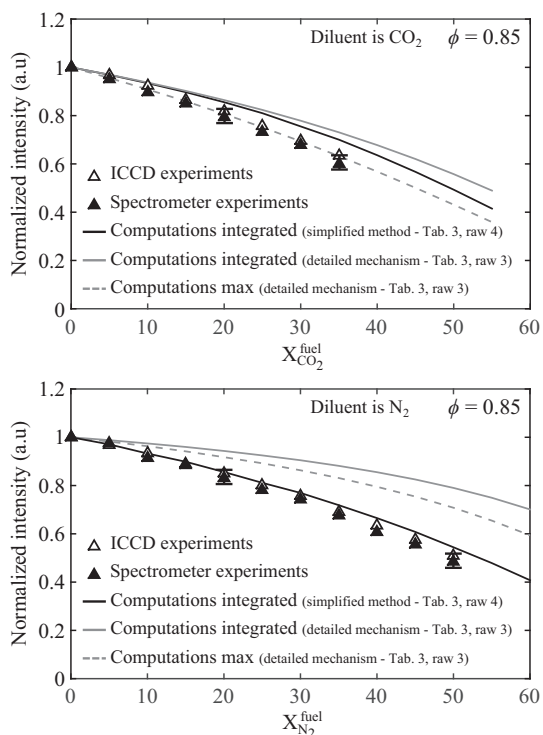

**Fig. 11.** Measured (symbols) and computed (lines) of  $\text{CO}_2^*$  chemiluminescence intensity as a function of the diluent mole fraction in the combustible mixture. Diluent is  $\text{CO}_2$  (top) or  $\text{N}_2$  (bottom).

triangle symbols stand for the chemiluminescence intensity measured by the ICCD camera equipped with the 10 nm Optoprism 455BP10 bandpass filter centered at 455 nm and averaged over the whole flame region. These data are compared with the  $\text{CO}_2^*$  emission intensities recorded by the spectrometer (black triangle symbols) and integrated over the spectral range [450–460 nm]. Experiments with the ICCD camera and the spectrometer yield results that collapse on the same curve up to  $X_{\text{CO}_2}^{\text{fuel}} = 0.35$ . It was also checked that the  $\text{CO}_2^*$  chemiluminescence intensities calculated with the spectrometer data integrated over different spectral ranges produce similar results (see [supplementary electronic material](#)). The spectral distribution of the broadband  $\text{CO}_2^*$  chemiluminescence intensity remains unchanged within the range of operating conditions covered in [Tables 1 and 2](#).

In [Fig. 11](#) and the consecutive figures, error bars are presented for the chemiluminescence intensities recorded with the spectrometer and corrected for the broadband  $\text{CO}_2^*$  background emission (filled symbols). Values for the chemiluminescence intensities are obtained through the post-processing steps described in [Sections 3.1 and 3.2](#) and are therefore sensitive to a number of input parameters such as the order of the polynomial for the fitted  $\text{CO}_2^*$  background intensity, the size of the median filter for the determination of the flame surface area, and the wavelength range chosen for integration of the emission spectra. The magnitude of error bars is therefore determined by assessing the sensitivity of the chemiluminescence intensity to these various input parameters whose most appropriate values are, a priori, not known. Through the paper, variations of measured  $\text{OH}^*$ ,  $\text{CH}^*$ , and  $\text{CO}_2^*$  chemiluminescence intensities as a function of the diluent concentration and diluent nature are considered meaningful if they exceed experimental uncertainties, represented by these error bars.

[Figure 11](#) top shows that dilution with  $\text{CO}_2$  leads to a smooth decrease of the measured  $\text{CO}_2^*$  intensity. This signal drops by 40% when the mole fraction of  $\text{CO}_2$  in the fuel reaches  $X_{\text{CO}_2}^{\text{fuel}} = 0.35$ .


[Figure 11](#) bottom shows that experiments made with the ICCD camera and the spectrometer for  $\text{N}_2$ -diluted  $\text{CH}_4/\text{air}$  flames again lead to the same results up to  $X_{\text{N}_2}^{\text{fuel}} = 0.50$ . The  $\text{CO}_2^*$  emission intensity also decreases for increasing  $\text{N}_2$  concentrations in the fuel blend. For the same equivalence ratio  $\phi = 0.85$ , the  $\text{CO}_2^*$  intensity decays more slowly for  $\text{N}_2$ -diluted fuel blends than with  $\text{CO}_2$  dilution. The  $\text{CO}_2^*$  intensity drops by 40% drop for  $X_{\text{N}_2}^{\text{fuel}} = 0.45$  approximately.

The evolution of the  $\text{CO}_2^*$  intensity, integrated in the normal direction and rescaled for a  $1 \text{ m}^2$  flame surface area, calculated by the numerical solver and the  $\text{CO}_2^*$  detailed mechanism ([Table 3](#), row 3) is plotted in [Fig. 11](#) top as a function of the  $\text{CO}_2$  diluent mole fraction (gray solid line). These simulations also reproduce the decay of the  $\text{CO}_2^*$  chemiluminescence intensity as dilution increases. However, they underestimate the rate of decay of the  $\text{CO}_2^*$  chemiluminescence intensity by approximately 30%. Another attempt was made by plotting as dashed gray lines the evolution of the calculated peak  $\text{CO}_2^*$  intensity reached in each flame. Agreement between experiments and simulations slightly improves for the  $\text{CO}_2$ -diluted flames investigated. Results with the simplified  $\text{CO}_2^*$  model synthesized in [Table 3](#), row 4 are plotted as the solid black curve in [Fig. 11](#) top when the numerical signal is integrated along the normal to the flame front. Agreement between experiments and simulations is acceptable, with relative differences limited to 7%. Results with the simplified  $\text{CO}_2^*$  model are in better agreement with measurements than those found with the detailed mechanism for  $\text{CO}_2^*$ . Calculations of  $\text{CO}_2^*$  chemiluminescence intensities using the values for the activation energy  $E$  and the pre-exponential factor  $A$  from [\[50\]](#) were also carried out and they yield similar results. They are not reproduced here.

When  $\text{CO}_2$  is replaced by  $\text{N}_2$ , [Fig. 11](#) bottom shows that the simplified  $\text{CO}_2^*$  model yields an accurate prediction of the measured evolution of the  $\text{CO}_2^*$  chemiluminescence intensity, while the detailed model for  $\text{CO}_2^*$  fails to predict accurately the drop of  $\text{CO}_2^*$ , independently of the way calculations are post-processed. These tests confirm that the  $\text{CO}_2^*$  intensity can be simulated adequately for  $\text{N}_2$ - and  $\text{CO}_2$ -diluted  $\text{CH}_4$  fuel blends provided that the simplified  $\text{CO}_2^*$  in [Table 3](#) row 4 is used. All the simulations are thus conducted with this model in the remaining parts of this study.

### 3.4. Effects of $\text{CO}_2$ and $\text{N}_2$ dilution on $\text{OH}^*$ and $\text{CH}^*$

Effects of dilution on the  $\text{OH}^*$  and  $\text{CH}^*$  emissions are now examined. Results for the  $\text{CO}_2^*$  excited radical are repeated for comparison purposes. [Figure 12](#) top shows the measured  $\text{CO}_2^*$  (black triangles),  $\text{OH}^*$  (blue circles), and  $\text{CH}^*$  (red squares) intensities as a function of the  $\text{CO}_2$  mole fraction in the fuel for lean flames at a fixed equivalence ratio  $\phi = 0.85$ . Results are again normalized by the value obtained for the undiluted flame. Hollow and solid symbols stand for the chemiluminescence intensities measured with the ICCD camera and the spectrometer, respectively. The  $\text{OH}^*$  and  $\text{CH}^*$  intensity levels measured with the ICCD camera are not corrected for the  $\text{CO}_2^*$  intensity background in this figure. However, the intensities deduced from spectrometer measurements are corrected for the  $\text{CO}_2^*$  intensity background. This figure shows that the emission intensity from these three excited radicals regularly decreases when the  $\text{CO}_2$  concentration in the fuel increases. The  $\text{OH}^*$  chemiluminescence intensity drops by 57% when  $X_{\text{CO}_2}^{\text{fuel}} = 0.35$ . It is known that increasing the  $\text{CO}_2$  concentration in the combustible mixture reduces the concentration of  $\text{CH}$  in the flames [\[59\]](#). The production of  $\text{OH}^*$  is then penalized because this excited radical is mainly produced through the formation reaction:  $\text{CH} + \text{O}_2 \rightleftharpoons \text{OH}^* + \text{CO}$  [\[16,23\]](#). Results for  $\text{OH}^*$  obtained by subtracting the  $\text{CO}_2^*$  background (blue disks) are on average only 4% lower than the measured  $\text{OH}^*$  intensities without correction (blue circles)

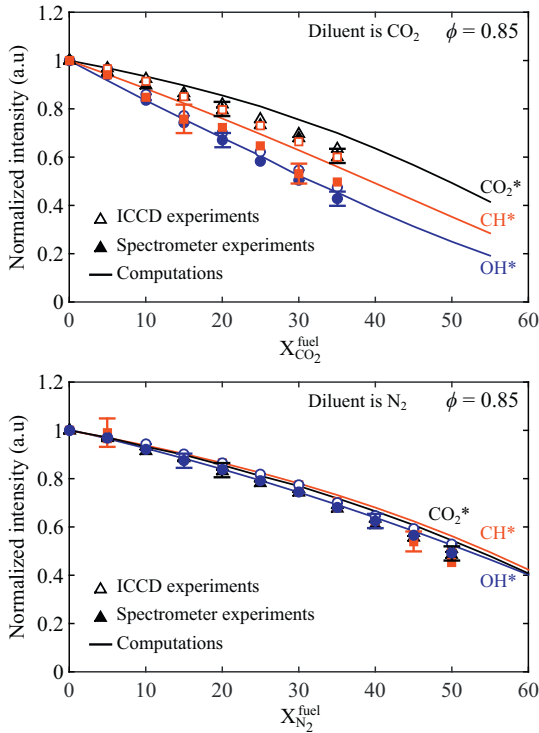

**Fig. 12.** Measured (symbols) and computed (lines) normalized spontaneous emission intensities of OH\* (blue), CH\* (red), and CO<sub>2</sub>\* (black) as a function of the diluent mole fraction in the combustible mixture. Hollow and solid symbols stand for ICCD camera and spectrometer measurements, respectively. Experiments are realized at a fixed equivalence ratio  $\phi = 0.85$ . Diluent is CO<sub>2</sub> (top) or N<sub>2</sub> (bottom). (For interpretation of the references to color in this figure legend, the reader is referred to the web version of this article.)

in Fig. 12 top. As already indicated in the previous section, correction for the CO<sub>2</sub>\* background intensity has only a weak influence in the spectral bandwidth of OH\* spontaneous emission.

Conversely, correction for the CO<sub>2</sub>\* background has a large influence on the measured CH\* emission levels, as shown in Fig. 12 top where data deduced from the spectrometer (filled red squares) lie below those obtained with the ICCD camera (red squares) equipped with the CVI F10-430.0-4-50.0M bandpass filter centered at 430 nm. This is in agreement with results presented in Fig. 8 where the majority of the signal detected by the ICCD camera around 430 nm comes from CO<sub>2</sub>\* emission. Removing the CO<sub>2</sub>\* background intensity reduces the measured CH\* emission level by 10% on average. It is however worth noting that the subtraction of the CO<sub>2</sub>\* background intensity leads to larger error bars for the deduced CH\* intensity levels in Fig. 12 top.

Data for lean N<sub>2</sub>-diluted flames at  $\phi = 0.85$  are presented in Fig. 12 bottom. The OH\*, CH\*, and CO<sub>2</sub>\* measured intensities collapse here on the same curve. The intensity of these excited radicals regularly decreases for increasing N<sub>2</sub> mole fractions in the fuel. A similar effect of N<sub>2</sub> dilution was reported in [9] for the CH\* chemiluminescence intensity. The OH\*, CH\*, and CO<sub>2</sub>\* emission levels drop by approximately 30% and 50% when  $X_{N_2}^{\text{fuel}} = 0.35$  and  $X_{N_2}^{\text{fuel}} = 0.50$ , respectively. For the same mole fraction in the fuel mixture, dilution with N<sub>2</sub> has a smaller effect on the OH\* and CH\* chemiluminescence intensities than dilution with CO<sub>2</sub>.

The black, blue, and red solid lines in Fig. 12 show the computed intensities from CO<sub>2</sub>\*, OH\*, and CH\*, respectively. The CO<sub>2</sub>\* chemiluminescence intensity plotted here is calculated with the simplified model described in Table 3, row 4. Simulations reproduce well experiments for the OH\* signal for both CO<sub>2</sub>- and

N<sub>2</sub>-diluted mixtures. Measurements corrected for the CO<sub>2</sub>\* background emission intensity however only barely reduce relative differences that are limited to 3%.

In the case of CO<sub>2</sub>-diluted flames, differences between measurements and predictions are more important in Fig. 12 (top) for the CH\* emission intensity, with a mean difference of 7%. However, this difference barely exceeds experimental uncertainties. Simulations yield a better match with CH\* experimental data that are not corrected for the CO<sub>2</sub>\* background emission. This may be due to the relatively low ratio between the CH\* signal and the CO<sub>2</sub>\* background intensity leading to large uncertainties in the corrected CH\* chemiluminescence intensities (see Figs. 7 and 8). For N<sub>2</sub>-diluted flames shown in Fig. 12 bottom, simulations reproduce well measurements for the three radicals and over the whole range of dilution explored. The mean relative difference between measurements and simulations only reaches 2%, 5%, and 6% for OH\*, CO<sub>2</sub>\*, and CH\*, respectively.

For most of the operating conditions, the detailed chemistry mechanisms for OH\* and CH\*, as well as the simplified model to compute the CO<sub>2</sub>\* intensity, yield good results. It is also worth noting that the subtraction of the CO<sub>2</sub>\* background intensity has only a weak influence on the integrated results shown in Fig. 12. This is attributed to the comparable influence of dilution on the three excited radicals emission intensities. Their intensity decreases at about the same proportion when the diluent concentration increases, especially for N<sub>2</sub>-diluted flames.


### 3.5. Analysis of OH\*, CH\*, and CO<sub>2</sub>\* intensity ratios

In many applications, the flame surface area is not known and is difficult to measure. This is the case for turbulent flames where the reaction layer has a 3-D structure and fluctuates with time. In such cases, it is difficult to normalize the measured chemiluminescence intensities by the flame surface area. Comparison between measured intensities and 1-D simulations is then more difficult. Consequently, chemiluminescence intensity ratios between different couples of excited radicals are often examined because they allow to remove the contribution of the flame surface area [11,14,16,18–20]. Effects of CO<sub>2</sub> and N<sub>2</sub> dilutions on these ratios are examined here.

Figure 13 shows the measured OH\*/CH\* (black circle), OH\*/CO<sub>2</sub>\* (red squares), and CH\*/CO<sub>2</sub>\* (blue triangles) intensity ratios as a function of the diluent mole fraction in the fuel, after the contribution of the CO<sub>2</sub>\* background has been removed using the spectrometer experiments. Results are presented for CO<sub>2</sub>-diluted (top) and N<sub>2</sub>-diluted (bottom) flames and are normalized by the value obtained for the undiluted case. The experimental data feature larger error bars than in the previous figures due to the cumulative relative errors on the numerator and denominator of the intensity ratios. Error bars are only plotted in this figure for three operating conditions to illustrate the confidence range.

When dilution is made with CO<sub>2</sub> (Fig. 13 top), these three intensity ratios decrease when the mole fraction of CO<sub>2</sub> in the fuel increases. For example, the measured OH\*/CO<sub>2</sub>\* intensity ratio drops by nearly 30% for  $X_{CO_2}^{\text{fuel}} = 0.35$ . The decay rate of two other intensity couples OH\*/CH\* and CH\*/CO<sub>2</sub>\* with CO<sub>2</sub> dilution is the same and takes a lower value than for the OH\*/CO<sub>2</sub>\* couple. When dilution is made with N<sub>2</sub> (Fig. 13 bottom), these chemiluminescence intensity ratios remain roughly constant within the confidence interval when the diluent concentration is increased. All of these features are also well captured by the simulations both for N<sub>2</sub>- and CO<sub>2</sub>-diluted flames, except for large N<sub>2</sub> concentrations  $X_{N_2}^{\text{fuel}} > 0.40$ .

These results indicate that after careful calibration, monitoring the OH\*/CO<sub>2</sub>\* chemiluminescence intensity ratio may allow inferring the CO<sub>2</sub> diluent concentration in lean CH<sub>4</sub>/CO<sub>2</sub>/air flames.

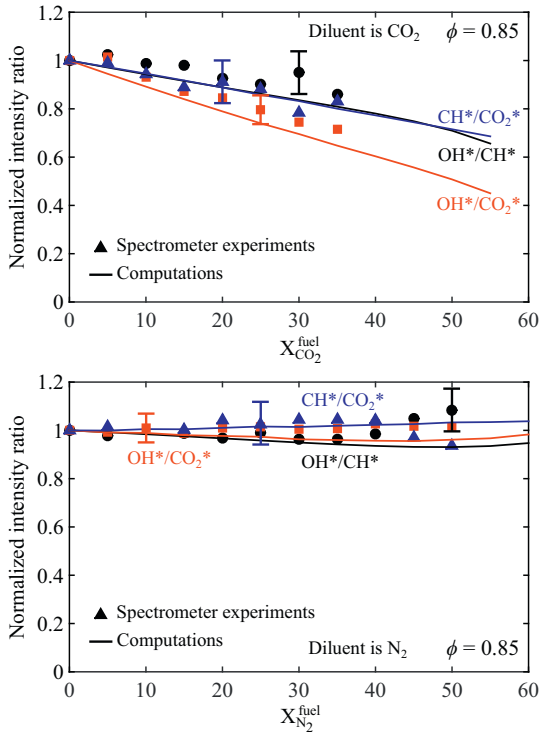


**Fig. 13.** Measured (symbols) and computed (lines) normalized OH\*/CH\* (black), OH\*/CO<sub>2</sub>\* (red), and CH\*/CO<sub>2</sub>\* (blue) intensity ratios as a function of the diluent mole fraction in the combustible mixture for CH<sub>4</sub>/air/diluent mixtures at a fixed equivalence ratio  $\phi = 0.85$ . Diluent is CO<sub>2</sub> (top) or N<sub>2</sub> (bottom). (For interpretation of the references to color in this figure legend, the reader is referred to the web version of this article.)

However, this technique cannot be used for N<sub>2</sub>-diluted CH<sub>4</sub>/air flames.

### 3.6. Analysis of dilution effects at a fixed adiabatic flame temperature

So far the chemiluminescence data for CH<sub>4</sub> fuel blends diluted with N<sub>2</sub> or CO<sub>2</sub> was examined at a fixed equivalence ratio  $\phi = 0.85$ . The influence of dilution on the chemiluminescence intensities for mixtures diluted at a fixed adiabatic flame temperature  $T_{ad} = 2071$  K (see Table 2) is now examined. Figure 14 top plots the measured CO<sub>2</sub>\* (black triangles), OH\* (blue circles), and CH\* (red squares) chemiluminescence intensities as a function of the CO<sub>2</sub> mole fraction in the fuel blend. Results are normalized by the value obtained for the undiluted flame. Hollow and solid symbols stand for the chemiluminescence intensities measured by the ICCD camera and the spectrometer, respectively.

Here again, the OH\* chemiluminescence intensity decreases regularly with the CO<sub>2</sub> dilution ratio. The OH\* intensity drops by approximately 40% at  $X_{CO_2}^{fuel} = 0.40$ . The CH\* emission intensity remains roughly constant even for large CO<sub>2</sub> concentrations while the CO<sub>2</sub>\* chemiluminescence intensity slightly increases with dilution. For example, the CO<sub>2</sub>\* intensity increases by approximately 10% at  $X_{CO_2}^{fuel} = 0.40$  with respect to the signal measured for the undiluted flame. This weak effect of dilution on the CH\* intensity is due to the increase of the equivalence ratio [16] needed to obtain a diluted mixture featuring the same adiabatic flame temperature as a less diluted one. This slight increase of the equivalence ratio compensates the influence of dilution (see Fig. 12). Except for CO<sub>2</sub>\* and large diluent concentrations, the simulations (solid lines) reproduce well measurements (symbols) in Fig. 14 top. The mean relative difference between measurements and simulations reaches 6% for OH\* and 4% for CH\*. Simulations however largely overesti-

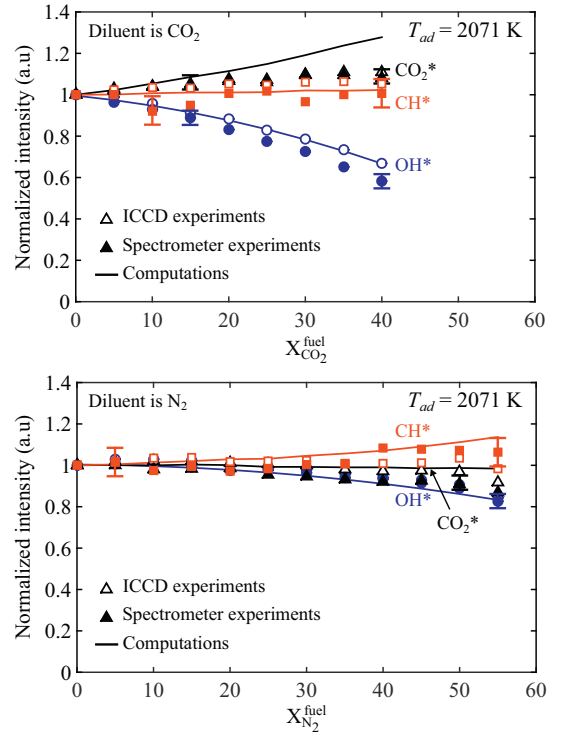


**Fig. 14.** Measured (symbols) and computed (lines) normalized chemiluminescence intensities of OH\* (blue), CH\* (red), and CO<sub>2</sub>\* (black) radicals as a function of the diluent mole fraction in the fuel when dilution is realized at a fixed adiabatic flame temperature  $T_{ad} = 2071$  K. Hollow and solid symbols stand for ICCD camera and spectrometer measurements, respectively. Diluent is CO<sub>2</sub> (top) or N<sub>2</sub> (bottom). (For interpretation of the references to color in this figure legend, the reader is referred to the web version of this article.)

mate the increase of the CO<sub>2</sub>\* emission intensity. Because dilution has here an opposite effect on the OH\* and CO<sub>2</sub>\* intensities, correction of the OH\* chemiluminescence intensity by the CO<sub>2</sub>\* background intensity now has a larger influence on the results than for experiments conducted at a fixed equivalence ratio  $\phi = 0.85$ .

When N<sub>2</sub> is used to dilute the flames, the CO<sub>2</sub>\* intensity remains roughly constant, the CH\* emission level slightly increases, and the OH\* intensity decreases when the concentration of N<sub>2</sub> increases. However, effects of N<sub>2</sub> dilution remain always weak, with variations limited to  $\pm 15\%$  for large diluent concentrations. Simulations better reproduce experiments than for CO<sub>2</sub>-diluted flames with a mean relative difference reaching 2%, 5%, and 4% for OH\*, CO<sub>2</sub>\*, and CH\*, respectively. The detailed chemistry mechanisms for OH\* and CH\* and the simplified model for the CO<sub>2</sub>\* intensity yield overall good results when dilution is made at a fixed adiabatic flame temperature. Independently of the excited radical considered and the diluent nature, the decay of chemiluminescence intensities observed in Fig. 12 when dilution is made at a constant equivalence ratio is attenuated or even canceled-out when the adiabatic flame temperature is kept constant during dilution (see Fig. 14). From that, it is concluded that the temperature reduction induced by dilution at a fixed equivalence ratio is a main contributor to the reduced chemiluminescence intensities observed in Fig. 12. A rough analysis of the reaction paths leading to the formation of excited radicals also points in this direction. For example, Eq. (5) shows that decreasing the temperature decreases the reaction rate of the overall reaction producing CO<sub>2</sub>\* chemiluminescence. Similarly, the concentration of CO and O generally increases with temperature.

Although the influence of dilution with N<sub>2</sub> or CO<sub>2</sub> on excited radicals emissions is studied here, one must be careful when ap-

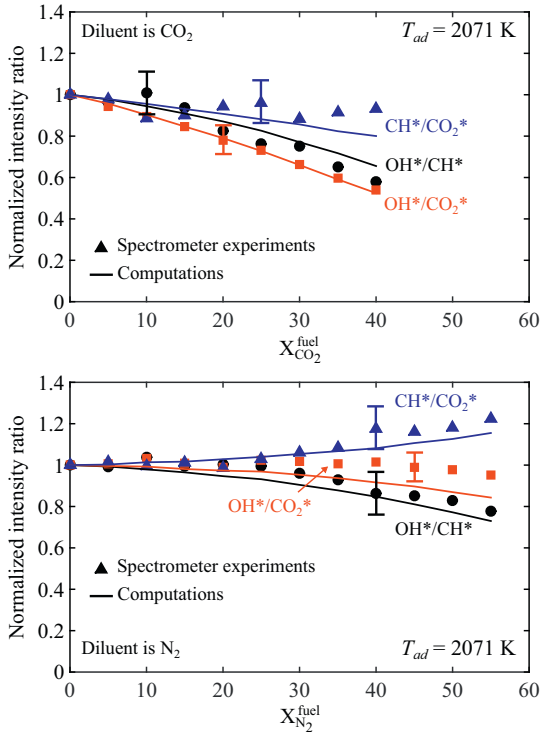

**Fig. 15.** Measured (symbols) and computed (lines) normalized OH\*/CH\* (black), OH\*/CO<sub>2</sub>\* (red), and CH\*/CO<sub>2</sub>\* (blue) intensity ratios as a function of the diluent mole fraction in the fuel when dilution is realized at a fixed adiabatic flame temperature  $T_{ad} = 2071$  K. Diluent is CO<sub>2</sub> (top) or N<sub>2</sub> (bottom). (For interpretation of the references to color in this figure legend, the reader is referred to the web version of this article.)

plying these results to systems such as internal engines with exhaust gas recirculation (EGR). Indeed, the flue gases recirculating in such systems are generally not cooled to a near ambient temperature before injection and are therefore carrying residual enthalpy. After mixing with reactants, the blend temperature is likely to be higher than the temperature with cold diluents, which, as described in the previous paragraph, would most probably benefit excited radicals emissions. In addition, recirculating exhaust gases contain vapor water, whose influence on excited radicals emissions is not studied here.

Taking the sensitivity of chemiluminescence emissions to temperature at face value, additional 1-D PPF simulations that account for heat-losses through thermal radiation are now conducted. A built-in radiation model is used with an optically-thin approximation and thermal radiation from CO<sub>2</sub>, H<sub>2</sub>O, CO, and CH<sub>4</sub> species is included. For large dilution ratios with CO<sub>2</sub>, e.g.  $X_{CO_2}^{fuel} = 0.35$ , the peak temperature is reduced by roughly 3% when the radiation model is activated. In the worst-case scenario, this leads to a reduction of less than 2% of the peak and integrated OH\*, CH\*, and CO<sub>2</sub>\* chemiluminescence emissions. While non-negligible, the influence of radiation lies within experimental uncertainties. Interpretation of the results presented in this study is therefore independent of whether or not radiation is accounted for.

Figure 15 plots the measured OH\*/CH\* (black circle), OH\*/CO<sub>2</sub>\* (red squares), and CH\*/CO<sub>2</sub>\* (blue triangles) intensity ratios as a function of the diluent mole fraction in the fuel for mixtures featuring the same adiabatic flame temperature  $T_{ad} = 2071$  K. Results are here again presented for CO<sub>2</sub>-diluted flames at the top and N<sub>2</sub>-diluted flames at the bottom and are normalized by the value obtained for the undiluted case. As for dilution at a fixed equivalence ratio  $\phi = 0.85$ , the three intensity ratios decrease when the

mole fraction of CO<sub>2</sub> in the fuel increases. The measured OH\*/CO<sub>2</sub>\* intensity ratio drops by more than 40% for  $X_{CO_2}^{fuel} = 0.40$ . This behavior is also well reproduced by the simulations. This behavior confirms that the OH\*/CO<sub>2</sub>\* chemiluminescence intensity ratio is a good indicator to infer the CO<sub>2</sub> diluent concentration. Results for the CH\*/CO<sub>2</sub>\* and OH\*/CH\* couples feature a lower SNR with a larger dispersion of the measurements. Simulations only capture the general trend for these couples.

In contrast to dilution experiments conducted at a fixed equivalence ratio, dilution by N<sub>2</sub> at a fixed adiabatic flame temperature has a slight influence on the OH\*/CH\* and CH\*/CO<sub>2</sub>\* chemiluminescence intensity ratios. The OH\*/CO<sub>2</sub>\* ratio slightly decreases at large N<sub>2</sub> dilution concentrations. The OH\*/CH\* ratio drops by approximately 20% for  $X_{N_2}^{fuel} = 0.55$  and the CH\*/CO<sub>2</sub>\* ratio increases by more than 20% for the same N<sub>2</sub> diluent concentration. These behaviors are relatively well reproduced by the simulations, but the sensitivity of these intensity ratios with respect to dilution remains weak. These indicators cannot be used for sensing N<sub>2</sub> dilution.

#### 4. Conclusion

A combined experimental and numerical analysis was carried out to investigate the OH\*, CH\*, and CO<sub>2</sub>\* chemiluminescence signals in CO<sub>2</sub>- and N<sub>2</sub>-diluted CH<sub>4</sub>/air laminar flames. The main conclusions are:

- For mixtures diluted at a fixed equivalence ratio  $\phi = 0.85$ , the chemiluminescence intensities from OH\* near 307 nm, CH\* near 430 nm, and CO<sub>2</sub>\* near 455 nm regularly decrease with increasing the diluent concentration. For N<sub>2</sub>-diluted flames, the three signals OH\*, CH\*, and CO<sub>2</sub>\* collapse on the same curve when they are normalized by the signal intensity of the undiluted case. For CO<sub>2</sub>-diluted flames, the decay rate differs between the OH\*, CH\*, and CO<sub>2</sub>\* signals. The relative OH\* intensity decreases the fastest, then the CH\*, and then CO<sub>2</sub>\* signals when the CO<sub>2</sub> concentration in the fuel blend is increased.
- The Lindstedt detailed chemistry mechanism [49] extended with sub-mechanisms for the chemistry of OH\* and CH\* [26] allows to simulate accurately effects of N<sub>2</sub> and CO<sub>2</sub> dilution on OH\* and CH\* concentrations. Agreement between experiments and simulations is excellent for OH\*, with relative differences smaller than 3% and lying within experimental uncertainties, except for dilution with CO<sub>2</sub> at a fixed adiabatic flame temperature where relative differences reach 6%. Differences between simulations and measurements slightly increase for CH\* but agreement remains good.
- Because CO<sub>2</sub>\* is mainly produced by a reaction between O and CO species, a model for the CO<sub>2</sub>\* chemiluminescence intensity that does not account for the complex chemistry of CO<sub>2</sub>\* was used in the simulations. Agreement between CO<sub>2</sub>\* chemiluminescence intensity measurements and calculations with this simplified method is overall good. The largest differences are found for large CO<sub>2</sub> diluent concentrations when  $X_{CO_2}^{fuel} > 0.30$ .
- Correction for the CO<sub>2</sub>\* background emission barely alters the measured signal intensity near 307 nm because the contribution of the broadband chemiluminescence from CO<sub>2</sub>\* remains low within the 10 nm bandpass filter centered at 307 nm that is used to examine the OH\* emission. Secondly, N<sub>2</sub> and CO<sub>2</sub> dilutions have similar effects on OH\* and CO<sub>2</sub>\* chemiluminescence signals, reducing the detrimental impact of collecting a fraction of light emitted from CO<sub>2</sub>\* when examining the OH\* signal around 307 nm.
- The influence of the CO<sub>2</sub>\* background emission needs however to be considered when the CH\* emission intensity around 430 nm is investigated. The relatively low CH\* signal with re-



spect to the  $\text{CO}_2^*$  background emission leads to larger imprecisions for estimates of the  $\text{CH}^*$  intensity.

- The ratio between the  $\text{OH}^*$  and  $\text{CO}_2^*$  emission intensities rapidly decreases for  $\text{CO}_2$ -diluted fuel blends. This combination leads to the largest rate of decrease of the signal as the  $\text{CO}_2$  concentration increases. These results indicate that monitoring the  $\text{OH}^*/\text{CO}_2^*$  intensity ratio may be used, with careful initial calibration, to infer the  $\text{CO}_2$  concentration in lean  $\text{CO}_2$ -diluted  $\text{CH}_4/\text{air}$  flames.
- Dilution with  $\text{N}_2$  barely changes the  $\text{OH}^*/\text{CO}_2^*$  intensity ratio. This ratio cannot be envisaged to infer the  $\text{N}_2$  concentration.
- Results are unchanged if radiative heat losses are taken into account in 1-D PFF simulations.

## Acknowledgment

This work was supported by l'Agence Nationale de la Recherche, VALOGAZ project ANR-10-EESI-0005. We would like to thank Y. Le Teno and S. Bouamama from EM2C for their technical assistance. We also thank C. Mirat for his help with some of the experiments.

## Supplementary material

Supplementary material associated with this article can be found, in the online version, at [10.1016/j.combustflame.2017.01.032](https://doi.org/10.1016/j.combustflame.2017.01.032).

## References

- [1] H.N. Najm, P.H. Paul, C.J. Mueller, P.S. Wyckoff, On the adequacy of certain experimental observables as measurements of flame burning rate, *Combust. Flame* 113 (1998) 312–332.
- [2] R. Blonbou, A. Laverdant, S. Zaleski, P. Kuentzmann, Active control of combustion instabilities on a Rijke tube using neural networks, *Proc. Combust. Inst.* 28 (2000) 747–755.
- [3] S. Ducruix, D. Durox, S. Candel, Theoretical and experimental determinations of the transfer function of a laminar premixed flame, *Proc. Combust. Inst.* 28 (2000) 765–773.
- [4] S.-Y. Lee, S. Seo, J. Broda, S. Pal, R. Santoro, An experimental estimation of mean reaction rate and flame structure during combustion instability in a lean premixed gas turbine combustor, *Proc. Combust. Inst.* 28 (2000) 775–782.
- [5] N. Docquier, S. Candel, Combustion control and sensors: a review, *Prog. Energy Combust.* 28 (2002) 107–150.
- [6] Y. Hardalupas, M. Orain, Local measurements of the time-dependent heat release rate and equivalence ratio using chemiluminescent emission from a flame, *Combust. Flame* 139 (2004) 188–207.
- [7] M. Lauer, T. Sattelmayer, On the adequacy of chemiluminescence as a measure for heat release in turbulent flames with mixture gradients, *J. Eng. Gas. Turb. Power* 132 (2010) 061502 p. 8.
- [8] M. Lauer, M. Zellhuber, T. Sattelmayer, C.J. Aul, Determination of the heat release distribution in turbulent flames by a model based correction of  $\text{OH}^*$  chemiluminescence, *J. Eng. Gas. Turb. Power* 133 (2011) 1–8.
- [9] A. Hossain, Y. Nakamura, A numerical study on the ability to predict the heat release rate using  $\text{CH}^*$  chemiluminescence in non-sooting counterflow diffusion flames, *Combust. Flame* 161 (2014) 162–172.
- [10] T. Chou, D.J. Patterson, In-cylinder measurement of mixture maldistribution in a I-hedge engine, *Combust. Flame* 101 (1995) 45–57.
- [11] J. Kojima, Y. Ikeda, T. Nakajima, Spatially resolved measurement of  $\text{OH}^*$ ,  $\text{CH}^*$ , and  $\text{C}_2^*$  chemiluminescence in the reaction zone of laminar methane/air premixed flames, *Proc. Combust. Inst.* 28 (2000) 1757–1764.
- [12] N. Docquier, S. Belhafaoui, F. Lacas, N. Darabiha, C. Rolon, Experimental and numerical study of chemiluminescence in methane/air high-pressure flames for active control applications, *Proc. Combust. Inst.* 28 (2000) 1765–1774.
- [13] B. Higgins, M. McQuay, F. Lacas, J. Rolon, N. Darabiha, S. Candel, Systematic measurements of  $\text{OH}$  chemiluminescence for fuel-lean, high-pressure, premixed, laminar flames, *Fuel* 80 (2001) 67–74.
- [14] N. Docquier, F. Lacas, S. Candel, Closed-loop equivalence ratio control of premixed combustors using spectrally resolved chemiluminescence measurements, *Proc. Combust. Inst.* 29 (2002) 139–145.
- [15] T. Muruganandam, B.-H. Kim, M. Morrell, V. Nori, M. Patel, B. Romig, J. Seitzman, Optical equivalence ratio sensors for gas turbine combustors, *Proc. Combust. Inst.* 30 (2005) 1601–1609.
- [16] C. Panoutsos, Y. Hardalupas, A. Taylor, Numerical evaluation of equivalence ratio measurement using  $\text{OH}^*$  and  $\text{CH}^*$  chemiluminescence in premixed and non-premixed methane–air flames, *Combust. Flame* 156 (2009) 273–291.
- [17] J. Ballester, T. García-Armingol, Diagnostic techniques for the monitoring and control of practical flames, *Prog. Energy Combust.* 36 (2010) 375–411.
- [18] T. García-Armingol, J. Ballester, A. Smolarz, Chemiluminescence-based sensing of flame stoichiometry: influence of the measurement method, *Measurement* 46 (2013) 3084–3097.
- [19] T. García-Armingol, J. Ballester, Influence of fuel composition on chemiluminescence emission in premixed flames of  $\text{CH}_4/\text{CO}_2/\text{H}_2/\text{CO}$  blends, *Int. J. Hydrogen. Energy* 39 (2014) 20255–20265.
- [20] T. García-Armingol, Y. Hardalupas, A. Taylor, J. Ballester, Effect of local flame properties on chemiluminescence-based stoichiometry measurement, *Exp. Therm. Fluid. Sci.* 53 (2014) 93–103.
- [21] J.-M. Samaniego, F.N. Egofoopoulos, C.T. Bowman,  $\text{CO}_2^*$  chemiluminescence in premixed flames, *Combust. Sci. Technol.* 109 (1995) 183–203.
- [22] M. Kopp, M. Brower, O. Mathieu, E. Petersen, F. Güthe,  $\text{CO}_2^*$  chemiluminescence study at low and elevated pressures, *Appl. Phys. B* 107 (2012) 529–538.
- [23] R. Porter, A. Clark, W. Kaskan, W. Browne, A study of hydrocarbon flames, *Symp. (Int.) Combust.* 11 (1967) 907–917.
- [24] K. Walsh, M. Long, M. Tanoff, M. Smooke, Experimental and computational study of  $\text{CH}$ ,  $\text{CH}^*$ , and  $\text{OH}^*$  in an axisymmetric laminar diffusion flame, *Symp. (Int.) Combust.* 27 (1998) 615–623.
- [25] M. Tamura, P.A. Berg, J.E. Harrington, J. Luque, J.B. Jeffries, G.P. Smith, D.R. Crosley, Collisional quenching of  $\text{CH}(A)$ ,  $\text{OH}(A)$ , and  $\text{NO}(A)$  in low pressure hydrocarbon flames, *Combust. Flame* 114 (1998) 502–514.
- [26] J. Luque, J. Jeffries, G. Smith, D. Crosley, K. Walsh, M. Long, M. Smooke,  $\text{CH}(A-X)$  and  $\text{OH}(A-X)$  optical emission in an axisymmetric laminar diffusion flame, *Combust. Flame* 122 (2000) 172–175.
- [27] G.P. Smith, J. Luque, C. Park, J.B. Jeffries, D.R. Crosley, Low pressure flame determinations of rate constants for  $\text{OH}(A)$  and  $\text{CH}(A)$  chemiluminescence, *Combust. Flame* 131 (2002) 59–69.
- [28] S.A. Carl, M.V. Poppel, J. Peeters, Identification of the  $\text{CH} + \text{O}_2 \rightarrow \text{OH}(A) + \text{CO}$  reaction as the source of  $\text{OH}(AX)$  chemiluminescence in  $\text{C}_2\text{H}_2/\text{O}/\text{H}/\text{O}_2$  atomic flames and determination of its absolute rate constant over the range  $T = 296$  to 511 K, *J. Phys. Chem. A* 107 (2003) 11001–11007.
- [29] K. Becker, H. Brenig, T. Tatarczyk, Lifetime measurements on electronically excited  $\text{CH}(A_2\Delta)$  radicals, *Chem. Phys. Lett.* 71 (1980) 242–245.
- [30] K. Devriendt, H.V. Look, B. Ceursters, J. Peeters, Kinetics of formation of chemiluminescent  $\text{CH}(A_2\Delta)$  by the elementary reactions of  $\text{C}_2\text{H}(X_2\Sigma^+)$  with  $\text{O}(3P)$  and  $\text{O}_2(X_3\Sigma_g)$ : A pulse laser photolysis study, *Chem. Phys. Lett.* 261 (1996) 450–456.
- [31] R.M.I. Elsamra, S. Vranckx, S.A. Carl,  $\text{CH}(A_2\Delta)$  formation in hydrocarbon combustion: the temperature dependence of the rate constant of the reaction  $\text{C}_2\text{H} + \text{O}_2 \rightarrow \text{CH}(A_2\Delta) + \text{CO}_2$ , *J. Phys. Chem. A* 109 (2005) 10287–10293. PMID: 16833323.
- [32] D.L. Baulch, D.D. Drysdale, J. Duxbury, S.J. Grant, Evaluated kinetic data for high temperature reactions, Butterworths, London, 1976.
- [33] J. Kojima, Y. Ikeda, T. Nakajima, Basic aspects of  $\text{OH}(A)$ ,  $\text{CH}(A)$ , and  $\text{C}_2(d)$  chemiluminescence in the reaction zone of laminar methane–air premixed flames, *Combust. Flame* 140 (2005) 34–45.
- [34] J. Kojima, Y. Ikeda, T. Nakajima, Multi-point time-series observation of optical emissions for flame-front motion analysis, *Meas. Sci. Technol.* 14 (2003) 1714–1724.
- [35] V.N. Nori, J.M. Seitzman,  $\text{CH}^*$  chemiluminescence modeling for combustion diagnostics, *Proc. Combust. Inst.* 32 (2009) 895–903.
- [36] P. Weiland, Biogas production: current state and perspectives, *Appl. Microbiol. Biotechnol.* 85 (2010) 849–860.
- [37] S. Rasi, A. Veijanen, J. Rintala, Trace compounds of biogas from different biogas production plants, *Energy* 32 (2007) 1375–1380.
- [38] J.D. Murphy, E. McKeogh, G. Kiely, Technical/economic/environmental analysis of biogas utilisation, *Appl. Energy* 77 (2004) 407–427.
- [39] J.B. Holm-Nielsen, T.A. Seadi, P. Oleskowicz-Popiel, The future of anaerobic digestion and biogas utilization, *Bioresour. Technol.* 100 (2009) 5478–5484.
- [40] I. Gokalp, E. Lebas, Alternative fuels for industrial gas turbines (aftur), *Appl. Therm. Eng.* 24 (2004) 1655–1663.
- [41] Y. Lafay, B. Taupin, G. Martins, G. Cabot, B. Renou, A. Boukhalfa, Experimental study of biogas combustion using a gas turbine configuration, *Exp. Fluids* 43 (2007) 395–410.
- [42] B.B. Sahoo, N. Sahoo, U.K. Saha, Effect of engine parameters and type of gaseous fuel on the performance of dual-fuel gas diesel engines—a critical review, *Renew. Sust. Energy Rev.* 13 (2009) 1151–1184.
- [43] K.K. Gupta, A. Rehman, R.M. Sarviya, Bio-fuels for the gas turbine: a review, *Renew. Sust. Energy Rev.* 14 (2010) 2946–2955.
- [44] I.D. Bedoya, S. Saxena, F.J. Cadavid, R.W. Dibble, M. Wissink, Experimental study of biogas combustion in an HCCI engine for power generation with high indicated efficiency and ultra-low nox emissions, *Energ. Convers. Manag.* 53 (2012) 154–162.
- [45] S.E. Hosseini, M.A. Wahid, Development of biogas combustion in combined heat and power generation, *Renew. Sust. Energy Rev.* 40 (2014) 868–875.
- [46] G.P. Smith, D.M. Golden, M. Frenklach, N.W. Moriarty, B. Eitner, M. Goldenberg, C.T. Bowman, R.K. Hanson, S. Song, J.W.C. Gardiner, V.V. Lissianski, Z. Qin, available at [http://www.me.berkeley.edu/gri-mech/\(1999\)](http://www.me.berkeley.edu/gri-mech/(1999)).
- [47] A. Mazas, B. Fiorina, D. Lacoste, T. Schuller, Effects of water vapor addition on the laminar burning velocity of oxygen-enriched methane flames, *Combust. Flame* 158 (2011) 2428–2440.
- [48] S. Candel, T. Schmitt, N. Darabiha, Progress in transcritical combustion : experimentation, modeling and simulation, Proceedings of 23rd ICDERS, Irvine USA (2011).

- [49] P. Lindstedt, Modeling of the chemical complexities of flames, *Symp. (Int.) Combust.* 27 (1998) 269–285.
- [50] V. Nori, Modeling and analysis of chemiluminescence sensing for syngas, methane and Jet-A combustion, Georgia Institute of Technology, 2008 Ph.D. thesis.
- [51] P. Glarborg, L.L.B. Bentzen, Chemical effects of a high CO<sub>2</sub> concentration in oxy-fuel combustion of methane, *Energy Fuels* 22 (2008) 291–296.
- [52] F. Halter, F. Foucher, L. Landry, C. Mounáim-Rousselle, Effect of dilution by nitrogen and/or carbon dioxide on methane and iso-octane air flames, *Combust. Sci. Technol.* 181 (2009) 813–827.
- [53] X. Hu, Q. Yu, J. Liu, N. Sun, Investigation of laminar flame speeds of CH<sub>4</sub>/O<sub>2</sub>/CO<sub>2</sub> mixtures at ordinary pressure and kinetic simulation, *Energy* 70 (2014) 626–634.
- [54] C. Law, D. Zhu, G. Yu, Propagation and extinction of stretched premixed flames, *Symp. (Int.) Combust.* 21 (1988) 1419–1426.
- [55] B.M. Cetegen, T.A. Ahmed, Experiments on the periodic instability of buoyant plumes and pool fires, *Combust. Flame* 93 (1993) 157–184.
- [56] T. Yuan, D. Durox, E. Villermaux, An analogue study for flame flickering, *Exp. Fluids* 17 (1994) 337–349.
- [57] D. Durox, S. Ducruix, Concerning the location of schlieren limit in premixed flames, *Combust. Flame* 120 (2000) 595–598.
- [58] G.S. Settles, *Schlieren and shadowgraph techniques*, Springer-Verlag Berlin Heidelberg, 2001.
- [59] H. Guo, J. Min, C. Galizzi, D. Escudé, F. Baillot, A numerical study on the effects of CO<sub>2</sub>/N<sub>2</sub>/Ar addition to air on liftoff of a laminar CH<sub>4</sub>/Air diffusion flame, *Combust. Sci. Technol.* 182 (2010) 1549–1563.