

ELECTROSPUN MEMBRANE: A REVIEW

NANOFIBER-COATED

Article history

Received

24 August 2016

Received in revised form

10 October 2016

Accepted

7 November 2016

Nurafiqah Rosman^{a,b}, W. N. W. Salleh^{a,c*}, Mohamad Azuwa Mohamed^{a,c}, N. H. Ismail^{a,c}, N. Sazali^{a,c}, J. Jaafar^{a,c}, H. Hasbullah^{a,c}


*Corresponding author
hayati@petroleum.utm.my

^aAdvanced Membrane Technology Research Centre, Universiti Teknologi Malaysia, 81310 UTM Johor Bahru, Johor, Malaysia

^bSchool of Graduate Studies, Universiti Teknologi Malaysia, 81310 UTM Johor Bahru, Johor, Malaysia

^cFaculty of Petroleum and Renewable Energy Engineering, Universiti Teknologi Malaysia, 81310 UTM Johor Bahru, Johor, Malaysia

Graphical abstract



Abstract

The nanofibre development offers various useful applications in many ways including energy and environmental application. Polymeric nanofibre fabricated by electrospinning has been seen as innovative membrane materials for water remediation owing to the high surface area, interconnected porous structure, and light weight. This paper reviews the exciting functionality of nanofibre involving the development of smart heterogeneous approaches in membrane material. These heterogeneous materials allow the water molecules to spontaneously penetrate from one side to another, while blocking penetration in reverse direction due to hydrophilic-hydrophobic differences. Composite membrane containing different features arrangements of nanofibres have been utilised for their ability for water applications especially in membrane distillation.

Keywords: Nanofiber, Coating, Hydrophobic, Hydrophilic

Abstrak

Pembangunan nanofiber menawarkan pelbagai aplikasi berguna, dalam pelbagai cara termasuk aplikasi tenaga dan alam sekitar. Nanofiber polimer diperbuat oleh penspinan elektrik yang dilihat sebagai bahan membran inovatif untuk pemulihan air kerana mempunyai permukaan yang tinggi, struktur berliang yang saling berkait dan ringan. Dalam kertas ini, kita mengkaji semula fungsi yang menarik nanofiber melibatkan pendekatan pembangunan heterogen pintar dalam bahan membran. Bahan-bahan ini mempunyai penembusan air secara spontan dari satu kawasan kepada yang lain, disamping menyekat arah penembusan berbalik yang disebabkan oleh perbezaan hidrofilik-hidrofobik memberi satu makna yang besar. Pelbagai susunan struktur membran komposit yang mengandungi ciri-ciri nanofiber yang berbeza telah menunjukkan kebolehupayaannya untuk aplikasi air terutamanya dalam aplikasi membran penyulingan.

Kata kunci: Fibernano, penyalutan, hidrofobik, hidrofilik

© 2016 Penerbit UTM Press. All rights reserved

1.0 INTRODUCTION

Nanotechnology has become a developing field that is concerned with materials and systems where the configuration and components exhibit novel and significantly improved features (e.g., chemical, biological) due to its nanosized structure [1]. The introduction of nanofibre in membrane application brings a new class of materials useful for many applications. The term nanofibre generally refers to fibre with less than one micrometre in diameter [2]. The nanofibre features of high surface to volume ratio and porosity have attracted its application in membrane filtration for environmental remediation [3], [4]. Most of porous polymer membranes manufactured via conventional phase inversion method have their limitations, for instance, low flux and high fouling tendency owing to its asymmetric void structure of pores formation across the membrane thickness and corresponding pore size distribution [5].

Nanofibre as a support membrane is one of the alternatives that can outperform conventional membranes. Nanofibre has a high porosity value (around 80%), hence giving high permeability, via entirely interconnected fibre with open pore structures [6]. Controllable pore size distribution from micron to submicron for water filtration and high surface to volume ratio are the other significant features of nanofibre. This feature makes these electrospun membranes easy to integrate its special functionality of nanofibre into an excellent absorption process for contaminant removal [3].

The following section reviews the basic fabrication of electrospun nanofibres via electrospinning and the application of nanofibres as filtration and membrane distillation.

2.0 NANOFIBER FABRICATION BY ELECTROSPINNING

The polymeric nanofibre fabrication involves a number of processing techniques such as electrospinning [7]–[9], melt blowing [10]–[13], template synthesis [14]–[18], self-assembly [19]–[21], and nanolithography [22]–[27]. Among these techniques, electrospinning is an effective process that can produce nanofibre from a wide range of polymeric materials. A basic electrospinning involves an electric field, by inducing a high-voltage power supply between polymer solution and a collector (a grounded metal electrode or rotating drum), which is separated at suitable distance (Figure 1). By applying high voltage, electric force would overcome the surface tension of the polymer surface solution and creating the pendent drop at the spinneret tip into a 'Taylor cone', producing the ejection of a thin jet [28]. The charged jet endures a stable stretching at first and starts bending and whipping randomly that leads to further stretching, owing to the effect of solvent evaporation and charge repulsion. Thus, the solidified fibre on the collector can

be in submicron diameter and has a randomly structured non-woven morphology. The morphological electrospun nanofibre is basically governed by these following factors [29]:

1. Molecular weight and molecular weight distribution of polymer.
2. Viscosity, conductivity, and surface tension of polymer solution.
3. Concentration, rate of flow, and electric potential of solution.
4. Temperature and humidity of surroundings.
5. Diameter of needle and distance between capillary to collector.
6. Rotational speed of collector.

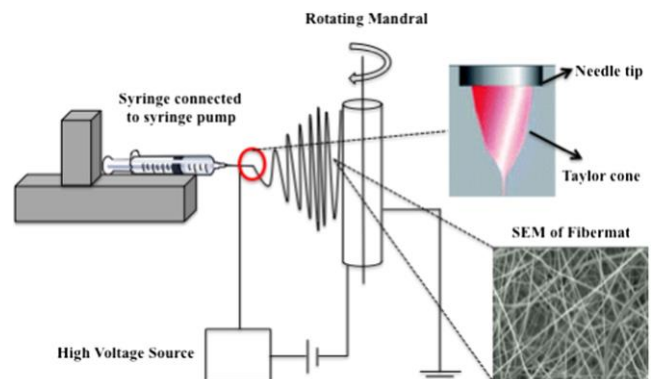


Figure 1 Schematic of a standard horizontal electrospinning setup including at least one syringe pump, a polymer solution, a high voltage supply, a source electrode, and a collector electrode [30]

3.0 NANOFIBER MEMBRANES FOR WATER FILTRATION

For water filtration, the fibrous scaffold structure of nanofibre has attracted much attention due to high filtration efficiency and low resistance provided. The versatility in nanofibre manufacturing process based on controllable pore size and pore size distribution gives an alternative to replace conventional membrane [31]. For instance, Gautman *et al.* demonstrated a solid-liquid clarification of a lignocellulosic hydrolysate and fermentation broth containing yeast cells using nanofibres [32]. Three commercial microfilters (polyethersulfone, polyvinylidene fluoride, and mixed cellulose ester) performed lower flux and higher irreversible fouling compared to the polyimide nanofibre membrane for both applications.

These results in water flux decline. Song *et al.*, 2011 studied the relationship between different membrane structures and their performance of a nanofibre composite (NC) and a homemade phase inversion (PI) membrane for forward osmosis application (Figure 2) [33]. In the study, the tortuous sponge-like structure dramatically inhibits salt diffusion in the porous support of PI membrane and results in low osmotic driving force, while the interconnected pore structure favours salt diffusion in the support layer of NC membrane

resulting in high osmotic driving forces. Thus, the diffusion resistance in FO has greatly reduced the ICP problem in PI membrane. Interconnected fibres break the bottleneck of internal concentration polarization (ICP) of forward osmosis (FO) membrane for high water production rate. FO is driven by osmotic pressure gradient across a semipermeable membrane. All of phase inversion membranes for FO application suffer ICP problem.

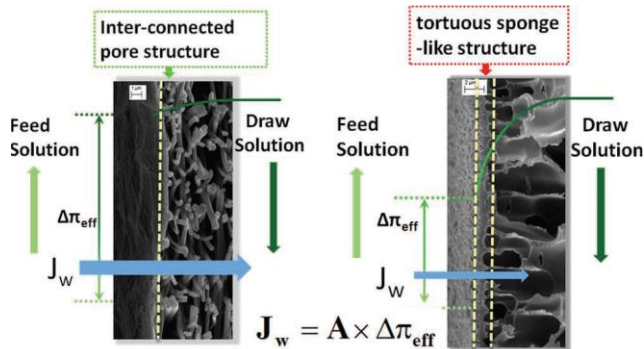


Figure 2 Comparison of the salt diffusion of concentration profile for NC and PI membrane [34]

In another application, the electrospun membrane for oil and water separation shows a vital indicator of their capability to treat oil waste water. The combination of super-hydrophobic and hydrophilic in nanofibrous scaffold structure gives new perspective for membrane application. Tai *et al.*, modified polyacrylonitrile (PAN) electrospun with SiO₂ and coated with silicone oil to produce membrane with ultrahydrophobic and superoleophilic features. The lab scale oil water separation test indicated the membrane had an excellent oil-water separation efficiency. Figure 3 shows the permeate flux of petroleum spirit, iso-octane, and hexane of 3032.4 ± 234.6, 1719.1 ± 36.2, and 2648.8 ± 89.7 L/m²h, respectively [35]. These values are comparable to or even higher than the other oil-water separation filtration membranes such as superhydrophobic polyvinylidene fluoride membrane (700–3500 L/m²h) [36], mineral-coated polypropylene microfiltration membrane (>2000 L/m²h) [37], and crosslinked poly(ethylene glycol) diacrylate-coated membrane (<100 L/m²h) [38].

Nevertheless, the higher density of water compared to most oils makes the position of superoleophobic upon superhydrophilic membrane system desirable. Ding *et al.*, effectively demonstrated the super wetting electrospun nanofibre membrane

that could separate water in oil as well oil in water in micron droplet size [39]. This brings to the conceptual of unidirectional water penetration electrospun composite simulated by Wu *et al.* [40]. A composite of hydrophobic polyurethane (PU) and hydrophilic crosslinked polyvinyl alcohol (c-PVA) fibrous layer was developed. By taking the benefits of the hydrophobic and hydrophilic differences, water can penetrate from hydrophobic side, but blocked on the hydrophilic side.

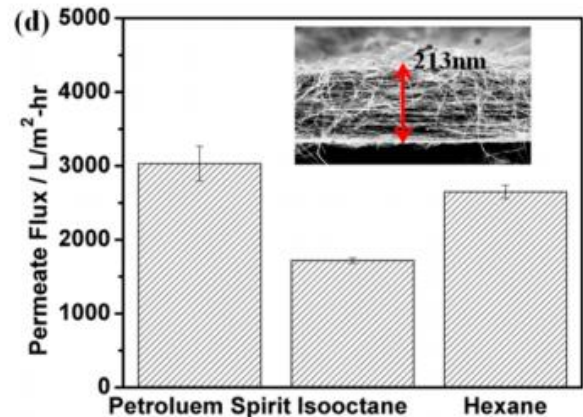


Figure 3 Permeate flux for different types of oils. The inset shows the cross-sectional view of the membrane thickness [35]

Based on Figure 4, water is dropped on the upward hydrophobic PU side and penetrated underneath the c-PVA layer within less than 3.5s. Wu *et al.*, hypothesized that water suffers two opposing forces, which are hydrostatic pressure (HP) and hydrophobic force (HF). HF tends to resist the water's downward penetration due to HP effect. As water goes deeper with the increasing HP (increasing water volume), the HF remains constant. But, once the penetration depth reaches the thickness of PU film, water will contact the lower hydrophilic c-PVA film. Then, capillary force (CF) provided by porous hydrophilic c-PVA film together with HP eases the water penetration and makes this process continuous. However, when water is dropped on the upward hydrophilic c-PVA side, the water spreads to a thin water film under capillarity. When the water reaches the interface of c-PVA and PU, HF provided by porous hydrophobic PU film resists water's further penetration and even not penetrated at all after 7 s of water dropping [40].

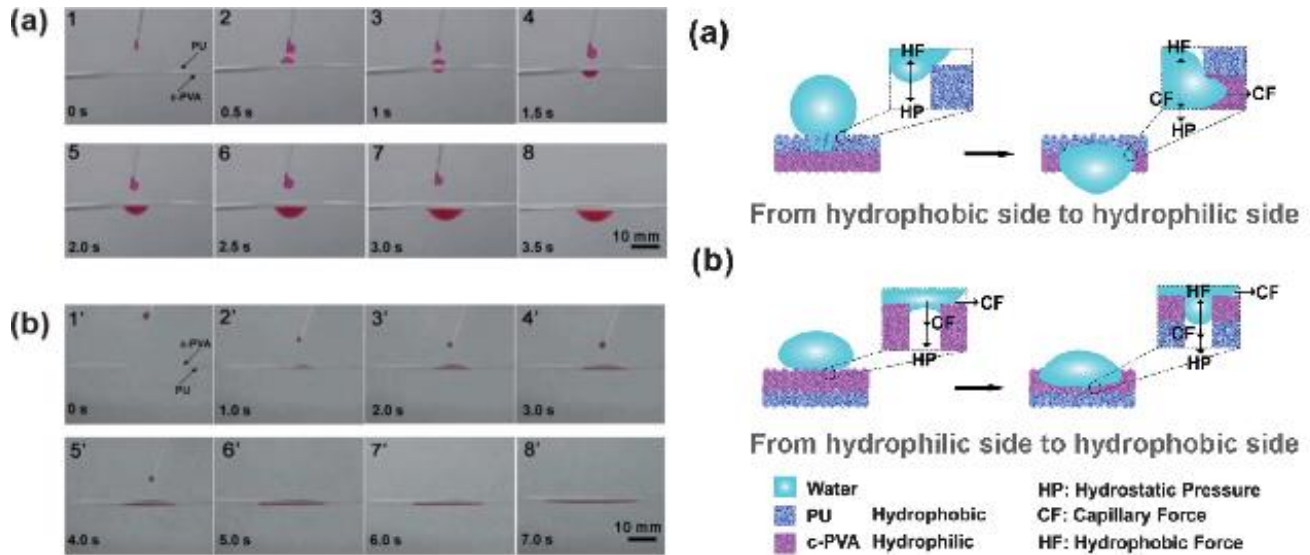


Figure 4 The snapshot of water penetration phenomenon from two side of heterogeneous composite film and mechanism of unidirectional water penetration on a heterogeneous wettable composite film [40]

4.0 NANOFIBER COATING FOR MEMBRANE DISTILLATION APPLICATION

Nanofibre as a membrane coater is one of the techniques in membrane surface modification. These modifications are according to the membrane functionality such as absorption [41]–[44], and photocatalytic [29], [45]–[48]. In fact, the nanofibre brings a different aspect for heterogenous material especially for membrane application. The highlight for heterogeneous conceptual idea/design is based on the distinct hydrophobic–hydrophilic differences that leads to rapid penetration upon the fibrous membrane. This heterogeneous material makes the water spontaneously penetrate through the nanofibre membrane, while blocking penetration in reverse direction due to hydrophilic-hydrophobic differences.

Many studies have concentrated on improving the membranes used in membrane distillation (MD) by increasing its hydrophobicity to avoid pore wetting. Pore wetting is defined as saturated fluid liquid in the membrane pores or vapour condensation phenomenon that leads to flux deterioration. Recently, Efome *et al.* [49] reported the modification of PVDF flat sheet nano-composite membranes by coating with electro-spun PVDF nano-fibres to increase the surface hydrophobicity (Figure 5). It successfully prevented liquid water from penetrating into the pores, hence increasing the liquid entry pressure (LEP_w) and resulting in more stable flux [3]. In addition, desalination of synthetic sodium chloride (NaCl) salt solution via nanofibre coated membranes by MD resulted in stable flux in the long-term testing than the membranes without coating.

Nanofibre application has been adapted by Prince *et al.* [50] by designing an innovative system to minimise pore wetting by proposing nanofibers-based

hydrophilic/hydrophobic membrane with a thin hydrophobic nanofibres layer on the top and a thin hydrophilic nanofibres layer on the bottom of the micro-porous membrane, which were fabricated by conventional phase inversion technique. The modification of hydrophilic/hydrophobic is functioned of surface modifying macromolecule (SMM) that brings into different hydrophobic-hydrophilic potential for preventing pore wetting phenomenon. Based on Figure 6, the highly hydrophobic PVDF nanofibre layer is repelling liquid and the highly hydrophilic PVDF/SMM nanofibre is absorbing the water molecule (condensed vapour) from the intermediate layer, which enhances the vapour flux across the membrane [49]. Both studies proposed that the structure with nanofibre-based hydrophobic/hydrophilic layers could be a promising solution for pore wetting issue in the MD processes.

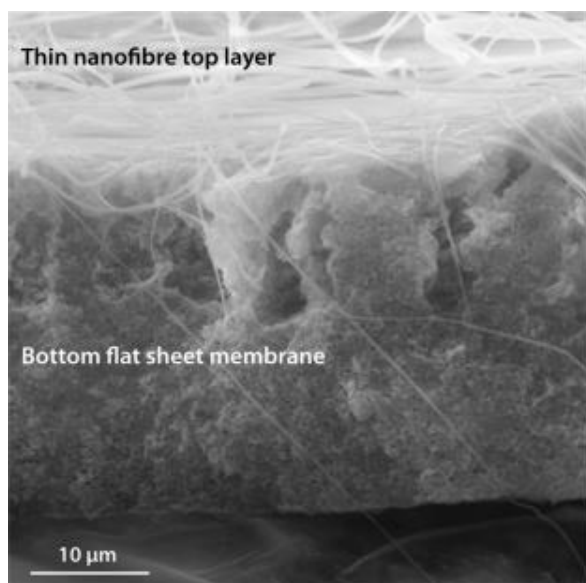


Figure 5 SEM image of the dual layer membrane [50]

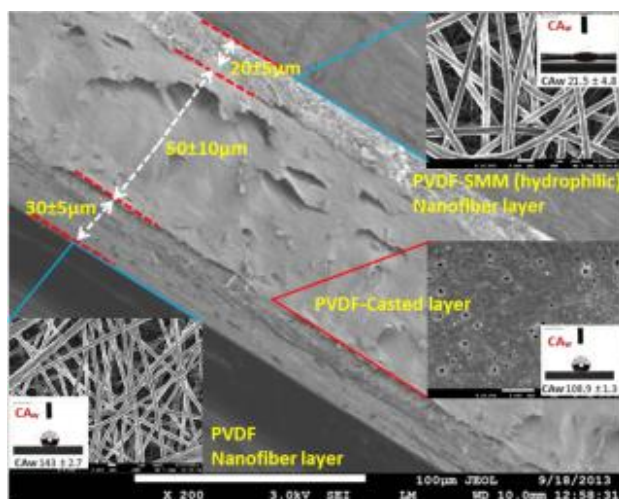


Figure 6 SEM image of the triple layer membrane [49]

5.0 CONCLUSION

Membrane in nanofiber form offers some unique benefits upon conventional membrane due to higher surface-to-volume ratio, controllable interconnected pore size, and easy surface modification. The practicality of nanofiber has been greatly improved with recent advance in membrane application, leading to sustainable and lower cost material consumption. In addition, the fabrication of nanofiber through electrospinning technology has been demonstrated to be a versatile technique in fabricating highly porous fibrous membrane. The innovation and scalable electrospinning process and flexible surface treatment make it particularly suitable for desirable membrane application. The surface modification of nanofiber surface leads to the production of heterogeneous materials by function of two intrinsic properties of hydrophilic and hydrophobic

differences. This review is to highlight the potential of nanofibers into unidirectional water penetration function. It is revealed that these heterogeneous features bring a significant impact especially in desalination for MD processes.

Acknowledgement

The authors gratefully acknowledge the financial support from the Ministry of Higher Education and Universiti Teknologi Malaysia under Higher Institution Centre of Excellence Scheme (Project Number: R.J090301.7846.4J186). The authors would also like to acknowledge technical and management support from Research Management Centre (RMC), Universiti Teknologi Malaysia.

References

- [1] Elnashaie, S. S., F. Danafar, and H. H. Rafsanjani. 2015. *Nanotechnology For Chemical Engineers*. Springer Science Business Media Singapore. 79-179.
- [2] Kosmider, K. and J. Scott. 2002. Polymeric Nanofibre Exhibit An Enhanced Air Filtration Performance. *Filtr. Sep.* 39(6): 20-22.
- [3] Fang, J., H. Niu, T. Lin, and X. Wang. 2008. Applications Of Electrospun Nanofibers. *Chinese Sci. Bull.* 53(15): 2265-2286.
- [4] Wang, X., J. Yu, G. Sun, and B. Ding. 2015. Electrospun Nanofibrous Materials: A Versatile Medium For Effective Oil/Water Separation. *Mater. Today.* 19(7): 403-414.
- [5] Haider, S. and S. Y. Park. 2009. Preparation Of The Electrospun Chitosan Nanofibers And Their Applications To The Adsorption Of Cu(II) And Pb(II) Ions From An Aqueous Solution. *J. Memb. Sci.* 328(1-2): 90-96.
- [6] Obaid, M., Z. Ghori, O. Fadali, K. Khalil, A. A. Almajid, and N. A. M. Barakat. 2015. Amorphous SiO₂ NPs- incorporated Poly(vinylidene fluoride) Electrospun Nanofiber Membrane for High Flux Forward Osmosis Desalination. *ACS Appl. Mater. Interfaces.* 8: 4561-4574.
- [7] Li, X., W. Yang, H. Li, Y. Wang, M. M. Bubakir, Y. Ding, and Y. Zhang. 2015. Water Filtration Properties Of Novel Composite Membranes Combining Solution Electrospinning And Needleless Melt Electrospinning Methods. *J. Appl. Polym. Sci.* 132(10): 1-8.
- [8] Oriero, D. A., I. O. Gyan, B. W. Bolshaw, I. F. Cheng, and D. E. Aston. 2015. Electrospun Biocatalytic Hybrid Silica-PVA-Tyrosinase Fiber Mats For Electrochemical Detection Of Phenols. *Microchem. J.* 118: 166-175.
- [9] Peresin, M. S., A. H. Vesterinen, Y. Habibi, L. S. Johansson, J. J. Pawlak, A. A. Nevzorov, and O. J. Rojas. 2014. Crosslinked PVA Nanofibers Reinforced With Cellulose Nanocrystals: Water Interactions And Thermomechanical Properties. *J. Appl. Polym. Sci.* 131(11): 1-12.
- [10] Han, W., G. S. Bhat, and X. Wang. 2016. Investigation of Nanofiber Breakup in the Melt-Blowing Process. *Ind. Eng. Chem. Res.* 55(11): 3150-3156.
- [11] Yoon, K., K. Kim, X. Wang, D. Fang, B. S. Hsiao, and B. Chu. 2006. High Flux Ultrafiltration Membranes Based On Electrospun Nanofibrous PAN Scaffolds And Chitosan Coating. *Polymer (Guildf).* 47(7): 2434-2441.
- [12] Zhuang, X., L. Shi, K. Jia, B. Cheng, and W. Kang. 2013. Solution Blown Nanofibrous Membrane For Microfiltration. *J. Memb. Sci.* 429: 66-70.
- [13] Liu, R., X. Xu, X. Zhuang, and B. Cheng. 2014. Solution Blowing Of Chitosan/PVA Hydrogel Nanofiber Mats. *Carbohydr. Polym.* 101(1): 1116-1121.
- [14] Wang, Y., M. Zheng, H. Lu, S. Feng, G. Ji, and J. Cao. 2010. Template Synthesis Of Carbon Nanofibers Containing Linear

- Mesocage Arrays. *Nanoscale Res. Lett.* 5(6): 913-916.
- [15] Liang, H. W., Q. F. Guan, L. F. Chen, Z. Zhu, W. J. Zhang, and S. H. Yu. 2012. Macroscopic-Scale Template Synthesis Of Robust Carbonaceous Nanofiber Hydrogels And Aerogels And Their Applications. *Angew. Chemie - Int. Ed.* 51(21): 5101-5105.
- [16] Ikegame, M., K. Tajima, and T. Aida. 2013. Template Synthesis Of Polypyrrole Nanofibers Insulated Within One-Dimensional Silicate Channels: Hexagonal Versus Lamellar For Recombination Of Polarons Into Bipolarons. *Angew. Chemie - Int. Ed.* 42(19): 2154-2157.
- [17] Pender, M. J. and L. G. Sneddon. 2000. An Efficient Template Synthesis Of Aligned Boron Carbide Nanofibers Using A Single-Source Molecular Precursor. *Chem. Mater.* 12(2): 280-283.
- [18] Zelenski, C. M. and P. K. Dorhout. 1998. Template Synthesis of Near-Monodisperse Microscale Nanofibers and Nanotubules of MoS. *J. Am. Chem. Soc.* 120(4): 734-742.
- [19] Gupta, A., D. V Nandanwar, and S. R. Dhakate. 2015. Electrospun Self-Assembled Zn Nanofibers Structures For Photocatalytic Activity In Natural Solar Radiations To Degrade Acid Fuchsin Dye. 6(8): 706-710.
- [20] Paramonov, S. E., H. W. Jun, and J. D. Hartgerink. 2006. Self-Assembly Of Peptide-Amphiphile Nanofibers: The Roles Of Hydrogen Bonding And Amphiphilic Packing. *J. Am. Chem. Soc.* 128(22): 7291-7298.
- [21] Niece, K. L., J. D. Hartgerink, J. J. J. M. Donners, and S. I. Stupp. 2003. P1 Self-Assembly Combining Two Bioactive Peptide-Amphiphile Molecules into Nanofibers by Electrostatic Attraction. 7146-7147.
- [22] Ye, Z., A. S. Nain, and B. Behkam. 2016. Spun-wrapped Aligned Nanofiber (SWAN) Lithography for Fabrication of Micro/Nano-Structures on 3D Objects. *Nanoscale*.
- [23] Mele, E., F. Lezzi, A. Polini, D. Altamura, C. Giannini, and D. Pisignano. 2012. Enhanced Charge-Carrier Mobility In Polymer Nanofibers Realized By Solvent-Resistant Soft Nanolithography TL - 22. *J. Mater. Chem.* 22(34): 18051-18056.
- [24] Miyamura, Y., C. Park, K. Kinbara, F. A. Leibfarth, C. J. Hawker, and T. Aida. 2011. Controlling Volume Shrinkage In Soft Lithography Through Heat-Induced Cross-Linking Of Patterned Nanofibers. *J. Am. Chem. Soc.* 133(9): 2840-2843.
- [25] Park, K. H., S. Lee, K. H. Koh, R. Lacerda, K. B. K. Teo, and W. I. Milne. 2005. Advanced Nanosphere Lithography For The Areal-Density Variation Of Periodic Arrays Of Vertically Aligned Carbon Nanofibers. *J. Appl. Phys.* 97(2): 1-5.
- [26] Pagliara, S., A. Camposeo, E. Mele, L. Persano, R. Cingolani, and D. Pisignano. 2010. Enhancement Of Light Polarization From Electrospun Polymer Fibers By Room Temperature Nanoimprint Lithography. *Nanotechnology*. 21(21): 215304.
- [27] Hungt, A. M. and S. I. Stupp. 2007. Simultaneous Self-Assembly, Orientation, And Patterning Of Peptide-Amphiphile Nanofibers By Soft Lithography. *Nano Lett.* 7(5): 1165-1171.
- [28] Chowdhury, M. and G. Stylios. 2011. Process Optimization And Alignment Of PVA/Fec13 Nano Composite Fibres By Electrospinning. *J. Mater. Sci.* 46(10): 3378-3386.
- [29] Panthi, G., M. Park, H. Y. Kim, S. Y. Lee, and S. J. Park. 2015. Electrospun ZnO Hybrid Nanofibers For Photodegradation Of Wastewater Containing Organic Dyes: A Review. *J. Ind. Eng. Chem.* 21: 26-35.
- [30] Goyal, R., L. K. Macri, H. M. Kaplan, and J. Kohn. 2015. Nanoparticles And Nanofibers For Topical Drug Delivery. *J. Control. Release.* 240: 77-92.
- [31] Homaeigohar, S. and M. Elbahri. 2014. Nanocomposite Electrospun Nanofiber Membranes For Environmental Remediation. *Materials (Basel)*. 7(2): 1017-1045.
- [32] Gautam, A. K., C. Lai, H. Fong, and T. J. Menkhaus. 2014. Electrospun Polyimide Nanofiber Membranes For High Flux And Low Fouling Microfiltration Applications. *J. Memb. Sci.* 466: 142-150.
- [33] Song, X., Z. Liu, and D. D. Sun. 2011. Nano Gives The Answer: Breaking The Bottleneck Of Internal Concentration Polarization With A Nanofiber Composite Forward Osmosis Membrane For A High Water Production Rate. *Adv. Mater.* 23(29): 3256-3260.
- [34] Song, X., Z. Liu, and D. D. Sun. 2013. Energy Recovery From Concentrated Seawater Brine By Thin-Film Nanofiber Composite Pressure Retarded Osmosis Membranes With High Power Density. *Energy Environ. Sci.* 6: 1199.
- [35] Tai, M. H., P. Gao, B. Yong, L. Tan, D. D. Sun, and J. O. Leckie. 2014. Highly Efficient and Flexible Electrospun Carbon-Silica Nanofibrous Membrane for Ultrafast Gravity-Driven Oil-Water Separation. *ACS Appl. Mater. Interfaces.* 6(12): 9393-9401.
- [36] Zhang, W., Z. Shi, F. Zhang, X. Liu, J. Jin, and L. Jiang. 2013. Superhydrophobic And Superoleophilic PVDF Membranes For Effective Separation Of Water-In-Oil Emulsions With High Flux. *Adv. Mater.* 25(4): 2071-2076.
- [37] Chen, P.-C. and Z.-K. Xu. 2013. Mineral-Coated Polymer Membranes With Superhydrophilicity And Underwater Superoleophobicity For Effective Oil/Water Separation. *Sci. Rep.* 3: 2776.
- [38] B. Chakrabarty, A. K. Ghoshal, and M. K. Purkait. 2008. Ultrafiltration Of Stable Oil-In-Water Emulsion By Polysulfone Membrane. *J. Memb. Sci.* 325(1): 427-437.
- [39] Huang, M., Y. Si, X. Tang, Z. Zhu, B. Ding, L. Liu, G. Zheng, W. Luo, and J. Yub. 2013. Gravity Driven Separation Of Emulsified Oil-Water Mixtures Utilizing In Situ Polymerized Superhydrophobic And Superoleophilic Nanofibrous Membranes. *J. Mater. Chem. A.* 1(1407): 14071-14074.
- [40] J. Wu, N. Wang, L. Wang, H. Dong, Y. Zhao, and L. Jiang. 2012. Unidirectional Water-Penetration Composite Fibrous Film Via Electrospinning. *Soft Matter.* 8(22): 5996.
- [41] Lee, H., M. Alcoutlabi, J. V. Watson, and X. Zhang. 2013. Electrospun Nanofiber-Coated Separator Membranes For Lithium-Ion Rechargeable Batteries. *J. Appl. Polym. Sci.* 129(4): 1939-1951.
- [42] Liu, H. and Y. L. Hsieh. 2006. Preparation Of Water-Absorbing Polyacrylonitrile Nanofibrous Membrane. *Macromol. Rapid Commun.* 27(2): 142-145.
- [43] Zhang, H., H. Nie, D. Yu, C. Wu, Y. Zhang, C. J. B. White, and L. Zhu. 2010. Surface Modification Of Electrospun Polyacrylonitrile Nanofiber Towards Developing An Affinity Membrane For Bromelain Adsorption. *Desalination.* 256(1-3): 141-147.
- [44] Neghlani, P. K., M. Rafizadeh, and F. A. Taromi. 2011. Preparation Of Aminated-Polyacrylonitrile Nanofiber Membranes For The Adsorption Of Metal Ions: Comparison With Microfibers. *J. Hazard. Mater.* 186(1): 182-189.
- [45] Nor, N. A. M., J. Jaafar, A. F. Ismail, M. A. Mohamed, M. A. Rahman, M. H. D. Othman, W. J. Lau, and N. Yusof. 2015. Preparation And Performance Of PVDF-Based Nanocomposite Membrane Consisting Of TiO2 Nanofibers For Organic Pollutant Decomposition In Wastewater Under UV Irradiation. *Desalination.* 1-9.
- [46] Zhang, Y., M. W. Lee, S. An, S. Sinha-Ray, S. Khansari, B. Joshi, S. Hong, J. H. Hong, J. J. Kim, B. Pourdeyhimi, S. S. Yoon, and A. L. Yarin. 2013. Antibacterial Activity Of Photocatalytic Electrospun Titania Nanofiber Mats And Solution-Blown Soy Protein Nanofiber Mats Decorated With Silver Nanoparticles. *Catal. Commun.* 34: 35-40.
- [47] Liu, Z., D. D. Sun, P. Guo, and J. O. Leckie. 2007. An Efficient Bicomponent TiO2/SnO2 Nanofiber Photocatalyst Fabricated By Electrospinning With A Side-By-Side Dual Spinneret Method. *Nano Lett.* 7(4): 1081-1085.
- [48] Wang, C., C. Shao, Y. Liu, and L. Zhang. 2008. Photocatalytic Properties BiOCl And Bi2O3 Nanofibers Prepared By Electrospinning. *Scr. Mater.* 59(3): 332-335.
- [49] Prince, J. a, D. Rana, T. Matsuura, N. Ayyanar, T. S. Shanmugasundaram, and G. Singh. 2014. Nanofiber Based Triple Layer Hydro-Philic/-Phobic Membrane - A Solution For Pore Wetting In Membrane Distillation. *Sci. Rep.* 4: 6949.
- [50] Efone, J. E., D. Rana, T. Matsuura, and C. Q. Lan. 2016. Enhanced Performance Of PVDF Nanocomposite Membrane By Nano Fiber Coating: A Membrane For Sustainable Desalination Through. *Water Research.* 89: 39-49.