


Publication Year	2020
Acceptance in OA@INAF	2023-02-13T15:21:21Z
Title	Instrument Delta E2E Test Report
Authors	DEL MONTE, Ettore; TOBIA, ANTONINO; TROIS, ALESSIO; SANTOLI, Francesco; parissenti, guido; et al.
Handle	http://hdl.handle.net/20.500.12386/33419
Number	I2C-IAPS-AIT-REP-011







Issue: i01p00 PA

PAGE: 1/26

IXPE ITALIAN CONTRIBUTION

Instrument Delta E2E Test Report

AT-003

Written by	Responsibi	lity
Ettore Del Monte	Instrument PO Manager	Sthore Rel Monte
Antonino Tobia	Electrical Calibration Set-Up	Antoma Tor
Alessio Trois	GSE-AIV-T Manager	Dois tin
Francesco Santoli	Instrument System Engineer	Fromas and
Guido Parissenti	Senior System AIV/AIT	Guido Parivent
Carlo Lefevre	Structural & Thermal Engineer	Colo La
Daniele Brienza	Instrument PA Manager	Daniele Braenza
Primo Attinà	Italian PM	Prime Attine
Fabio Muleri	Project scientist	EL M
Yuri Evangelista	Du electronic I/F Eng.	fafre
Sergio Fabiani	Calibration scientist	Sorris Folim
Alessandro Di Marco	Calibration support & data analysis	ALG.th
Fabio La Monaca	Calibration support scientist	Filio La Kousa

IXPE ITALIAN TEAM





REFERENCE:I2C-IAPS-AIT-REP-011**DATE**:4 Mar 2020

Issue: i01p00

PAGE: 2/26

John RankinData analysisSoftwardPaolo SoffittaItalian PIPaolo Sof	~
Paolo Soffitta Italian PI	_
	fite
Raffaele Piazzolla Mechanical Engineer Roffdele Pi	1270/e
Alfredo Morbidini Mechanical support A glub A	orbilm'
Alda Rubini Electronic & test supervisor) yl~~
Pasqualino Loffredo Document manager	flim
Ajay Ratheesh Data analysis	
Enrico Costa Senior Italian Co-PI E	r_
Fabrizio Amici PA /QA Manager Folinio	Ami
Matteo Bachetti Calibration pipeline Motteo T	Pochitti
Mauro Centrone Calibration support set-up	2hun
Sergio Di Cosimo Procurement and contract administrator	Sim
Giuseppe Di Persio Software support	Pernio
Riccardo Ferrazzoli Scientific simulation <i>Biccardo</i>	Terrazzols
Maura Pilia Calibration and science analysis	2.9.0
Fei Xie Scientific simulation	Lie
Verified by	
Fabio Muleri Italian Project Scientist	H
Daniele Brienza Instrument PA Manager	Bruenza
Francesco Santoli Instrument System Engineer Francesco Santoli	Ell
Approved by	

IXPE ITALIAN TEAM





REFERENCE :		I2C-IAPS-	-AIT-REP-011
DATE :		4 Mar 20	20
ISSUE:	i01p00	PAGE:	3/26

Paolo Soffitta	Italian PI	Peolo Soffite
Luca Baldini	Italian Co-Pi	Live Besti-
Primo Attinà	Italian PM	Prime Attine
Pasqualino Loffredo	Italian Documentation Manager	Lafrato Deftim



Referen	CE:	I2C-IAPS	-AIT-REP-011	
DATE :		4 Mar 20)20	
ISSUE:	i01p00	PAGE:	4/26	

CHANGE RECORDS

ISSUE	DATE	§ CHANGE RECORDS	AUTHOR
i01p00	4-Mar-2020	First issue	E. Del Monte, A. Trois, A. Tobia

IXPE ITALIAN TEAM



REFEREN	CE:	I2C-IAPS	-AIT-REP-011	
DATE :		4 Mar 20	020	
ISSUE:	i01p00	Page:	5/26	


TABLE OF CONTENTS

1.	TABL	E OF ANNEX INTRODUCTION7
	1.1	Scope7
	1.2	Applicability7
	1.3	Document Roadmap7
2.	LINK	ED DOCUMENTS
	2.1	Applicable Documents
	2.2	Reference Documents
	2.3	Standards/Handbooks9
3.	DESC	RIPTION OF THE EXPERIMENTAL SET-UP
	3.1	The Electrical Ground Support Equipment (EGSE)10
	3.2	The AIV/T Calibration Equipment (ACE)
	3.3	Detector Service Unit
	3.4	Detector Unit
	3.5	Heritage
	3.6	Electrical Interfaces
	3.7	Grounding14
	3.8	Mechanical Ground Support Equipment16
	3.9	List of SW for the End to End Test17
4.	PART	TICIPANTS
5.	CON	STRAINTS

IXPE ITALIAN TEAM



6.	TEST SUCCESS CRITERIA
7.	PRELIMINARY PROCEDURES
8.	TEST RESULTS
9.	ANOMALIES
10.	CONCLUSIONS
11.	LIST OF ACRONYMS
1.	POTENTIOMETER VALUES FOR THE DU FMS



1. TABLE OF ANNEX INTRODUCTION

1.1 Scope

This document describes the test set-up, the methods, the procedures and the results of the Delta Instrument End to End Test. The aim of this test is to verify the functionality and the performance of the Instrument after the rework of the DSU PFM in the disposition of the Non Conformance Report I2C-OHBI-ISE-NCR-076 (see [AD 17]). We test the Instrument in a representative configuration: DSU PFM with DU FM1, DU FM3 and DU FM4.

We used the electrical ground support equipment (EGSE) and the TSC interface to send sequences of telecommand to configure and perform functional tests and to retrieve the telemetry produced by the Instrument. The EGSE collects both data fluxes: scientific and ancillary (Housekeeping). All the functionalities have been validated in flight-like conditions of data stream and activities. For this test we followed the procedures contained in [AD 16].

1.2 Applicability


This document forms, with its applicable documents, the binding document for the Italian Team in charge of the development and implementation of Instrument models needed for the realization of the IXPE mission.

This document is applicable in the framework of phase C/D activities.

1.3	Document	Roadmap

Chapter	Content
1	Introduction to the document & explanation of its contents and scope.
2	List of the documentation linked to the procedure
3	Description of the experimental set-up
4	Participants
5	Constraints
6	Test success criteria
7	Preliminary procedures
8	Test Results

IXPE ITALIAN TEAM



REFERENCE :		I2C-IAPS	-AIT-REP-011	
DATE :		4 Mar 20)20	
ISSUE:	i01p00	PAGE:	8/26	

9	Anomalies
10	Conclusions
11	List of acronyms

2. LINKED DOCUMENTS

2.1 Applicable Documents

[AD 1]	I2C-INFN-ISE-TEC-004	DU User Manual, i02p03, 28 Oct 2019
[AD 2]	I2C-OHBI-IOP-TEC-004	PFM DSU User Manual, Issue: 01, 9 Dec 2019
[AD 3]	I2C-OHBI-ISE-TEC-007	IXPE EGSE USER MANUAL, Issue: 2, Date: 10 May 2019
[AD 4]	I2C-IAPS-ISE-SPC-004	Instrument Test Specifications, i04p01, 2 May 2019
[AD 5]	I2C-IAPS-ISE-REP-002	Instrument Design Report, i03p00, 30 Apr 2019
[AD 6]	I2C-OHBI-ISE-REP-008	DSU Design Report, Issue:03, 11/06/2018
[AD 7]	I2C-OHBI-ISE-REP-009	IXPE DSU/DU EGSE Design Report, Issue:4, 01/03/2019
[AD 8]	I2C-OHBI-ISE-TEC-009	DSU FPGA DESIGN DESCRIPTION, Issue: 01, 09 Sep 2019
[AD 9]	I2C-OHBI-ISE-ICD-002	Electrical Interface Control Document (EICD), issue 5, 19 Aug 2019
[AD 10)] I2C-IAPS-IPA-PLN-003	Instrument PA Plan, i04p01, 30 Mar 2018
[AD 11	I] I2C-IAPS-ISE-SPC-001	Instrument Technical Specification, i07p00, 30 Apr 2019
[AD 12	2] I2C-OHBI-ISE-ICD-003	IXPE DSU-DU EGSE Interface Control Document, i04p00, 11 Mar 2019
[AD 13	3] I2C-OHBI-ISW-ICD-002	IXPE Software Telemetry-Telecommand Definitions, Issue: 4, 11 Feb 2020
[AD 14	I2C-IAPS-ISE-PRC-019	Instrument E2E Test Procedures, issue 2
[AD 15	5] I2C-IAPS-ISE-REP-010	Instrument End to End Test Report, i01p00, 27 Feb 2020
[AD 16	5] I2C-IAPS-ISE-PRC-021	Instrument Functional Test and Comprehensive Performance Test, i01p00
[AD 17	7] I2C-OHBI-ISE-NCR-076	PFM DSU - DUs switch on failure @hot plateau during TVTC test
	_	


2.2 Reference Documents

[RD 1]	I2C-IAPS-ISE-REP-012
[RD 2]	I2C-OHBI-AIT-REP-012
[RD 3]	I2C-OHBI-AIT-REP-014
[RD 4]	I2C-OHBI-AIT-REP-011
[RD 5]	I2C-OHBI-AIT-REP-013
[RD 6]	I2C-IAPS-ISE-VCD-001

[RD 7] I2C-IAPS-ISE-TEC-004

Instrument Calibration Equipment ICE, i01p00, DU FCW FM2 INTEGRATION AND TEST REPORT, Issue 1, 6 Aug 2019 DU FCW FM4 INTEGRATION AND TEST REPORT, Issue 1, 8 Aug 2019 DU FCW FM1 INTEGRATION AND TEST REPORT, Issue 1, 31 May 2019 DU FCW FM3 INTEGRATION AND TEST REPORT, Issue 1, 02 Sep 2019 Instrument Verification Control Document, i02p00 Instrument Timing Management, Issue 1

IXPE ITALIAN TEAM

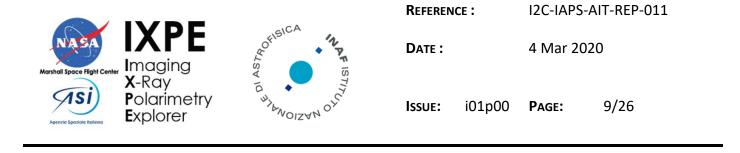


2.3 Standards/Handbooks

[SD 1] ECSS-E-ST-10-03C

Space Engineering - Testing

IXPE ITALIAN TEAM



3. DESCRIPTION OF THE EXPERIMENTAL SET-UP

The activities are conducted at IAPS/INAF facility inside an ISO 7 cleanroom, the setup is composed by:

- Electrical Ground Support Equipment
- Assembly and calibration equipment (ACE)
- Test Harness
- X-Ray tubes
- Metrological tools

3.1 The Electrical Ground Support Equipment (EGSE)

In this scenario the IXPE Instrument EGSE is used to test the whole Instrument, composed of the DSU PFM and three DU FMs: DU FM1, DU FM3 and DU FM4. EGSE provides the missing interfaces normally provided by the Spacecraft (Figure 3-1).

As such the EGSE for DSU testing performs:

- the simulation of the missing I/F normally provided by the S/C:
 - TM/TC packet management
 - Scientific data acquisition and verification with a dedicated tool that can validate the received science data
 - Pulse-per-second generation
 - Power supply

The main EGSE elements involved in this test context are identified in the following image:

IXPE ITALIAN TEAM

	-	Referen	CE:	I2C-IAPS-	AIT-REP-011	
Marshall Space Flight Center		Date :		4 Mar 20	20	
Agentic Spaziale Iteliana Polarim Explore		ISSUE:	i01p00	Page:	11/26	


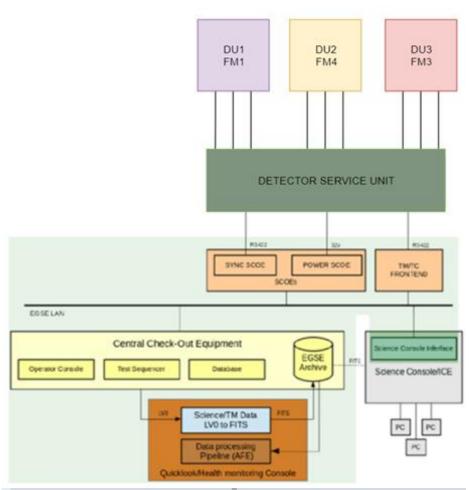


Figure 3-1 DSU EGSE logical breakdown

- The Central Check-Out Equipment (CCOE) is the core of the DSU EGSE, from which all testing is prepared, controlled (Test Sequencer) and results archived (EGSE Archive). It presents the main man machine interface (Operator console), and single point of control, for the supporting of all aspects of the test of the DSU.
- The TM/TC Data Frontend Equipment (TM/TC FE) handles the Telemetry and Telecommand communication between the DSU under test and the missing UUT TM/TC interfaces.
- The Specific Check-Out Equipment (SCOEs) provides the DSU under test with the missing interfaces with UUT, such as synchronization signal and power for the unit itself.
- The Quicklook/Health monitoring console contains a Data Processing Pipeline (AFE) and Science/TM data converter that produces LV0a FITS file from the acquired data of the UUT.
- The Science Console I/F allows the basic control of the DU testing. The EGSE archived data are also available to the Science Console, not part of this contract, for further analysis.



3.2 The AIV/T Calibration Equipment (ACE)

The Assembly and Calibration Equipment is the facility assembled for the ground activity of AIV-T at instrument level. The facility is equipped with X-Ray sources needed during end to end tests activities for the evaluation of scientific performance of entire instrument. The facility is located at IAPS/INAF in a ISO 7 cleanroom.

3.3 Detector Service Unit

The equipment under test is the IXPE Detectors Service Unit Protoflight model (DSU PFM). The Figure 3-2 shows the external DSU connectors configuration positioned on front (S/C side) and back (DUs side) panels; the position of the unit bonding stud is also shown.

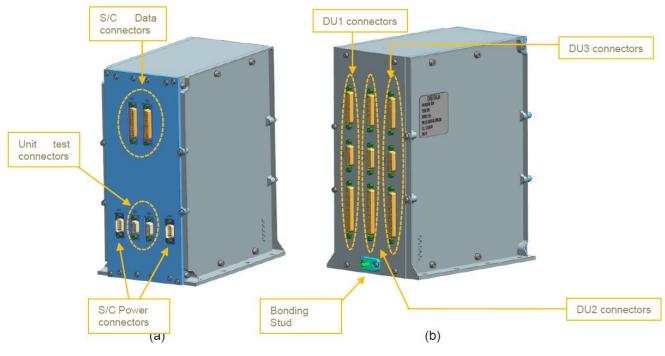


Figure 3-2 DSU PFM mechanical box: front (a) and rear (b) view

3.4 Detector Unit

The Detector Unit (DU) is the unit containing the polarization sensitive sensor (Gas Pixel Detector, GPD) and all the electric boards, thermal and mechanical items required by the GPD. The flight model of the Detector Unit, hereafter DU FM, is

IXPE ITALIAN TEAM



connected to the DSU PFM using the three interfaces: Power, Data and FCW. In Figure 3-3 is reported the rendering of the rear view of DU with the 4 interfaces in evidence.

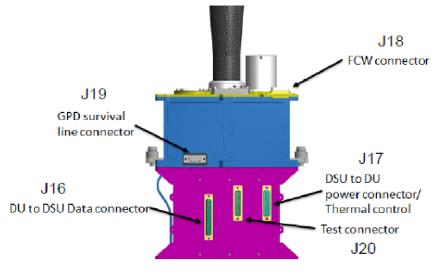


Figure 3-3 DU FM mechanical box: rear view

3.5 Heritage

INAF personnel started training with the EGSE since the beginning of 2019, when the first EGSE was delivered to INFN-Pisa for the integration of the DUs. The training followed during the dry run of ICE before starting the calibration of the DU FMs. In this test we followed the procedures included in [AD 16].

3.6 Electrical Interfaces

The electrical interfaces are described in User Manual ([AD 2] and [AD 3]) and ICD ([AD 10]).


The DSU interfaces can be divided into two subgroups:

- External I/Fs
- Internal I/Fs

The DSU external interfaces with S/C are the following:

- A. Nominal Power Supply
 - Power line: 32V + RTN (From IXPE S/C to DSU)
- B. Redundant Power Supply
 - Power line: 32V + RTN (From IXPE S/C to DSU)

IXPE ITALIAN TEAM



R EFERENCE :		I2C-IAPS	-AIT-REP-011	
DATE :		4 Mar 20)20	
ISSUE:	i01p00	Page:	14/26	

- C. Nominal I/O digital data interface
 - CMDs & TOD (From IXPE S/C to DSU)
 - PPS (From IXPE S/C to DSU)
 - H&S (From DSU to IXPE S/C)
 - Science Data (From DSU to IXPE S/C)
- D. Redundant I/O digital data interface
 - CMDs & TOD (From IXPE S/C to DSU)
 - PPS (From IXPE S/C to DSU)
 - H&S (From DSU to IXPE S/C)
 - Science Data, Clock and Enable (From DSU to IXPE S/C)

For each of the above interfaces (A, B, C, D) the DSU provides a dedicated connector (see Figure 3-3).

The DSU internal interfaces are the ones between the DSU and the DU, namely:

- DU Data link
 - o CCI Command Control Interface
 - o SDI Serial Data Interface
 - RESET and auxiliary
 - o PPS Pulse per Second
 - o 1MHz clock
- DU Power
 - Power supply rails (+5V and +25V)
 - Heater supply rails
 - Peltier supply rails
 - Temperature sensors (PT1000)
 - DU Filter & Calibration Wheel
 - Motor phases (Nom / Red)
 - o Motor Temperature sensors (PT100) (Nom / Red)
 - o Hall sensors
 - o Potentiometer

Details about connectors, cables and pin allocation of electrical and power interfaces are reported in [AD 7] about interfaces between EGSE and DSU and [AD 10] about interfaces between DSU and DU

3.7 Grounding

The Figure 3-4 shows the system grounding diagram, with the internal redundancy and the board division; cables and relevant shielding are also shown. The S/C will be simulated by EGSE during functional tests.

The DSU grounding has the following characteristics:

- A star point inside DSU
- DSU secondary returns connected together near the DC/DC transformer
- In the digital lines, cable shields are connected to the driver (TX) ground; on receiver side, shield is floating
- Cables between DSU and DU have over shields connected to chassis (360° conn.)

IXPE ITALIAN TEAM



- 3 cables between DSU and each DU (Data, Power, FCW)
- DSU secondary ground (nominal & redundant) are connected together on backplane ground plane.

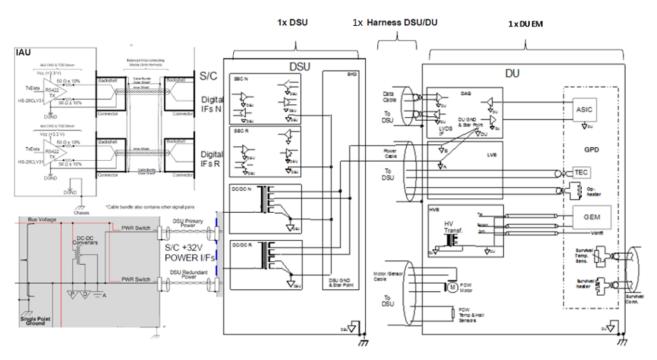



Figure 3-4 Instrument grounding scheme.

The ACE setup reproduce in part the grounding scheme required by the instrument, in particular DSU and DU are bonded to the Optical Bench (conductive surface) and in continuity to the Grounding Box of clean room. Following in Figure 3-5 Grounding of the ACE is reported the block scheme of grounding circuit.

IXPE ITALIAN TEAM



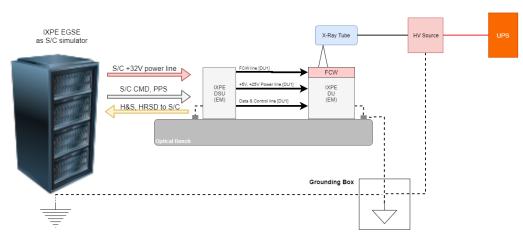


Figure 3-5 Grounding of the ACE


3.8 Mechanical Ground Support Equipment

A description of the mechanical interfaces in the ACE is reported in [RD 1].

During the tests 3 DUs and the DSU are accommodated on the same optical bench. Such bench is provided of an aluminum structure on top where three X-ray tube sources (Figure 4-6) can be fixed. Any tube is collimated by a cylinder tube with a pinhole at the end. Each cylinder tube has the capability, by X and Y motorised stages, to center the axes tube respect to the X-Ray flow. During the alignment procedure the X-Ray flux is aligned to the normal of the ASIC plane. It is possible to measure directly, by a portable measuring arm, the coordinated of the two axes.

The DSU is operated on the same optical bench and is located at almost 1m distance from the EGSE (Figure 3-7).

IXPE ITALIAN TEAM

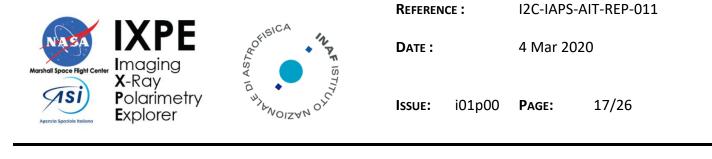

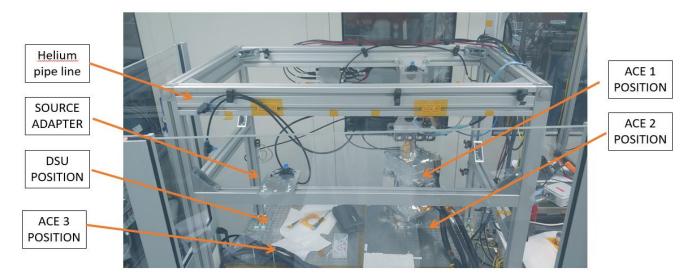


Figure 3-6 ACE E2E description

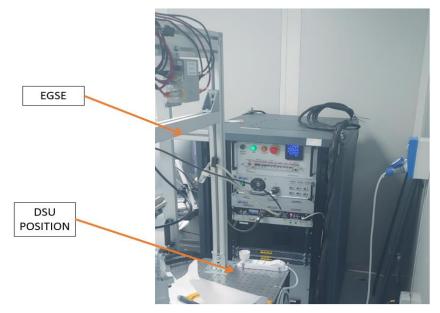


Figure 3-7 DSU and EGSE position

3.9 List of SW for the End to End Test

All the SWs used during the E2E test are maintained under control configuration in the official repository (

IXPE ITALIAN TEAM



REFERENCE :		I2C-IAPS-	AIT-REP-011
DATE :		4 Mar 20	20
	.04 00		10/20
ISSUE:	i01p00	PAGE:	18/26

https://bitbucket.org/%7Bdfa78ca9-2a91-4797-a98c-786a3460c452%7D/).

Software	Version
build_ixpe_tmparser	18-02-2020 version
build_ixpe_correction	18-02-2020 version
gpdsw	18-02-2020 version
dqmpipeline	18-02-2020 version
ixpehealth	18-02-2020 version

Ū.

4. PARTICIPANTS

The E2E Test and the data analysis are under INAF responsibility. INAF conducted the test and set up the facility as described in this procedure. Tests have been performed under QA surveillance, in compliance with the PA Plan [AD 10]. INAF QA witnessed the test in order to ensure that the procedure is strictly followed and the step-by step sheets are comprehensively filled and signed by relevant personnel, test facility and required tools are conform to the requirements.

5. CONSTRAINTS

During the test described in the current document, we equipped the DU FMs and the DSU PFM with connector savers. The data will be analyzed using the software listed in section 3.9.

6. TEST SUCCESS CRITERIA

We list in Table 6-1 the tests and their success criteria.

Table 6-1 Success criteria

Functionalities	Success Criteria
DSU POWER ON/OFF	 Boot OK Boot Report Telemetry generation OK Safe/Stand-By operative mode OK HK apid 1200 generation
DSU - HKs checks and rates management	 HK apid 1200 generation HKs rates change OK main parameters within the limits


IXPE ITALIAN TEAM





REFERENCE :		I2C-IAPS	-AIT-REP-011
DATE :		4 Mar 20)20
ISSUE:	i01p00	PAGE:	19/26

DSU - memory checks and management	 Maintenance operative mode OK read/write MRAM with dedicated TC OK
DU 5V Power ON/OFF	 BEE 5V ON success HK apid 1321 generation HK apid 1324 generation main parameters within the limits
DU - HKs check and rates management	 HK apid 1321 generation HK apid 1324 generation HKs rates change OK main parameters within the limits
DU - Configuration	 TC BEE setup success HK apid 1324 checks OK main parameters within the limits
Instrument Observation - DU pixel scan (Charge Injection)	 TC Pixel Mask Procedure OK Events acquisition (Packets 1119 generation) Packets 1203 generation (scientific Ratemeters) Scientific Data quality success
FCW rotation	 Position OK power consumption OK
DU Thermal Control	- Peltier OK - Heater OK
HV Management	 HV Power ON OK HV ramp up procedure OK HV ramp down procedure OK main parameters in the limits
Instrument Observation - Nominal acquisition	 Events acquisition (Packets 1118 generation) Packets 1203 generation (scientific Ratemeters) Scientific Data quality success Orphan Removal ON
Instrument SAA Mode	 Events inhibition HV ramp down HV ramp up after SAA

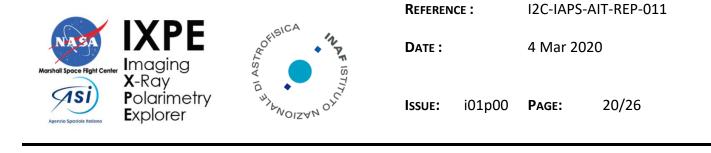

Instrument Timing Management	 TOD receiving ok PPS management ok Timing test internal trigger ok (DSU on board management) checks time-tag events ok
Performance Test	 Completion of orbital cycles including Observation and SAA operative modes





R EFERENCE :		I2C-IAPS-AIT-REP-011		
Date :		4 Mar 2020		
ISSUE:	i01p00	Page:	21/26	

7. PRELIMINARY PROCEDURES

STEP	Operation	Expected value	Measured Value	Remarks
1.	Check environmental conditions of test facility	ок		
1.1	Record temperature of the test facility	19°C < T < 25°C	ОК	
1.2	Record relative humidity of the test facility	45% < T < 65%	ОК	
2.	Unpack (if needed) and check EGSE readiness for test	ок	ок	
3.	Unpack (if needed) and check harness readiness for test	ок	ОК	
4.	Unpack (if needed) and check DSU unit readiness for test	ок	ок	
5.	Prepare the test setup implementing the connection between DSU and EGSE with the relative test harness as described in [AD 13]	ОК	ОК	
6.	Prepare the test setup implementing the connection between DSU and DU with the relative test harness as described in [AD 10]	ОК	ОК	
7.	Check the test setup grounding	ОК	ОК	See Figure 3-5 for EUT grounding scheme
7.1	Check DSU grounding measuring DC electrical resistance of unit bonding with respect to laboratory earth	< 1Ω	0.7	
7.2	Check DUs grounding measuring DC electrical resistance of unit bonding with respect to laboratory earth	< 1Ω	0.7	
7.3	Check EGSE grounding measuring DC electrical resistance of unit bonding with respect to laboratory earth	< 1Ω	0.7	

IXPE ITALIAN TEAM



8. TEST RESULTS

The "as run" procedure of the Delta End to End Test, for both Nominal and Redundant sections of the DSU PFM, is the file I2C-IAPS-ISE-PRC-021_i01p00_Instrument_FT_CPT_AS RUN.pdf.

9. ANOMALIES

No NCRs for the Instrument have been issued at the end of the Delta End to End Test.


Similarly to the End to End Test (see [AD 15] for more details), during the test, we found a misalignment on the DU-DSU SDI interface. In some cases, the DUs produce events with wrong roi indexes. These events cause a block on the DSU processing algorithm (orphan pixel removal). When this block occurs the DSU SW resets the SDI interface after 1 second and automatically restart the acquisition. Consequently, no operations are needed from ground. During orbital cycles we detected 4 of these process blocks over 108×10^6 events on the main section and 1 over 19×10^6 events on the redundant section.

10. CONCLUSIONS

During the Delta End to End Test we tested the IXPE Instrument in a representative configuration, composed of the DSU PFM, the DU FM1, DU FM3 and DU FM4, after the rework of the DSU PFM in the disposition of the Non Conformance Report I2C-OHBI-ISE-NCR-076 (see [AD 17]). We verified that the DU FM1, DU FM3 and DU FM4 can be successfully connected to the DSU PFM for electrical, telecommand and telemetry interfaces. In addition, we verified that the operative modes designed for the DUs in orbit can be successfully employed and the orbital cycles, composed of OBSERVATION, passage in the SAA and calibration using the FCW, can be successfully reproduced.

At the completion of the Delta End to End Test we declare that the Instrument is still compliant to the requirements reported in the [RD 6]. No open issues nor NCRs have been found for the Instrument related to the Delta End to End Test.

IXPE ITALIAN TEAM

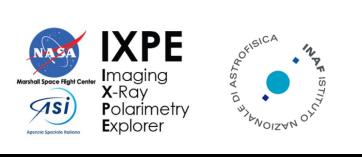

R EFERENCE :		I2C-IAPS-AIT-REP-011		
DATE :		4 Mar 2020		
ISSUE:	i01p00	PAGE:	23/26	

11. LIST OF ACRONYMS

ADC	Analog to Digital Converter
AIT	Assembly, Integration and Test
BB	Breadboard
CPU	Central Processing Unit
ECSS	European Cooperation for Space Standardization
EGSE	Electrical Ground Support Equipment
EM	Engineering Model
ELM	Electrical Model Model
FDIR	Fault Detection, Isolation and Recovery
FFT	Full Functional Test
FM	Flight Model
GSE	Ground Support Equipment
H/W	Hardware
НК	Housekeeping
IF	Interface
MGSE	Mechanical Ground Support Equipment
Mol	Moment of Inertia
N/A	Not Applicable
OCOE	Overall Checkout Equipment
PA	Product Assurance

IXPE ITALIAN TEAM



REFERENCE :		I2C-IAPS-AIT-REP-011		
DATE :		4 Mar 2020		
ISSUE:	i01p00	PAGE:	24/26	

PFM	Proto Flight Model
RD-n	Reference Document n
RTDB	Run Time Database
FR	Flight Representative
S/C	Spacecraft
SFT	Short Functional Test
S/W	Software
SMM	Structural Mathematical Model
011111	Structural Mathematical Model
STM	Structural Thermal Model
-	
STM	Structural Thermal Model
STM TBC	Structural Thermal Model To Be Confirmed
STM TBC TBD	Structural Thermal Model To Be Confirmed To Be Defined
STM TBC TBD TBW	Structural Thermal Model To Be Confirmed To Be Defined To Be Written



APPENDICES : Annex 1

1. POTENTIOMETER VALUES FOR THE DU FMS

In table below are reported the values of potentiometers collected during FCWs verification tests.

		DU FM1	DU FM2	DU FM3	DU FM4
		FCW sn2	FCW sn4	FCW sn1	FCW sn3
Position	ltem	Potentiometer	Potentiometer	Potentiometer	Potentiometer
0	OPEN	1.71 V	1.71 V	1.70 V	1.68 V
1	GRAY	2.44 V	2.44 V	2.42 V	2.40 V
2	SOURCE A	3.16 V	3.16 V	3.14 V	3.12 V
3	SOURCE C	3.88 V	3.88 V	3.86 V	3.85 V
4	CLOSED	4.61 V	4.60 V	4.59 V	4.58 V
5	SOURCE D	0.26 V	0.25 V	0.25 V	0.22 V
6	SOURCE B	0.99 V	0.98 V	0.98 V	0.95 V

According to I2C-OHBI-AIT-REP-012, I2C-OHBI-AIT-REP-014, I2C-OHBI-AIT-REP-011 and I2C-OHBI-AIT-REP-013, the measured output voltages are within the expected value with a tolerance of ±20%.

IXPE ITALIAN TEAM





REFERENCE :		I2C-IAPS-AIT-REP-011		
DATE :		4 Mar 2020		
ISSUE:	i01p00	PAGE:	26/26	

END OF DOCUMENT

IXPE ITALIAN TEAM