

**Numerical robustness of single-layer method with  
Fourier basis for multiple obstacle acoustic scattering in  
homogeneous media**

Hélène Barucq, Juliette Chabassier, Ha Pham, Sébastien Tordeux

► **To cite this version:**

Hélène Barucq, Juliette Chabassier, Ha Pham, Sébastien Tordeux. Numerical robustness of single-layer method with Fourier basis for multiple obstacle acoustic scattering in homogeneous media. *Wave Motion*, Elsevier, 2017, 77, pp.40-63. 10.1016/j.wavemoti.2017.10.011 . hal-01667176

**HAL Id: hal-01667176**

**<https://hal.archives-ouvertes.fr/hal-01667176>**

Submitted on 3 Jan 2018

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Numerical robustness of single-layer method with Fourier basis for multiple obstacle acoustic scattering in homogeneous media

Hélène Barucq<sup>1,2</sup>, Juliette Chabassier<sup>1,2</sup>, Ha Pham<sup>1,2</sup>, Sébastien Tordeux<sup>2,1</sup>

---

## Abstract

We investigate efficient methods to simulate the multiple scattering of obstacles in homogeneous media. With a large number of small obstacles on a large domain, optimized pieces of software based on spatial discretization such as Finite Element Method (FEM) or Finite Difference lose their robustness. As an alternative, we work with an integral equation method, which uses single-layer potentials and truncation of Fourier series to describe the approximate scattered field. In the theoretical part of the paper, we describe in detail the linear systems generated by the method for impenetrable obstacles, accompanied by a well-posedness study. For the numerical performance study, we limit ourselves to the case of circular obstacles. We first compare and validate our codes with the highly optimized FEM-based software Montjoie. Secondly, we investigate the efficiency of different solver types (direct and iterative of type GMRES) in solving the dense linear system generated by the method. We observe the robustness of direct solvers over iterative ones for closely-spaced obstacles, and that of GMRES with Lower-Upper Symmetric Gauss-Seidel and Symmetric Gauss-Seidel preconditioners for far-apart obstacles.

*Keywords:* Multiple scattering, small obstacle acoustic scattering, single layer methods, preconditioning in multiple scattering.

---

## 1. Introduction

In this paper, we study efficient numerical methods to simulate the multiple acoustic scattering by a large number of small obstacles in a two-dimensional large and homogeneous media. In the presence of obstacles, an incident wave  $u^{\mathbf{I}}$  is scattered, and the total field  $u^{\mathbf{T}}$  is given as a superposition of the incident field  $u^{\mathbf{I}}$  and the scattered one denoted by  $u$ , i.e.  $u^{\mathbf{T}} = u^{\mathbf{I}} + u$ , see Figure 1.

---

*Email addresses:* [helene.barucq@inria.fr](mailto:helene.barucq@inria.fr) (Hélène Barucq),  
[juliette.chabassier@inria.fr](mailto:juliette.chabassier@inria.fr) (Juliette Chabassier), [ha.howard@inria.fr](mailto:ha.howard@inria.fr) (Ha Pham),  
[sebastien.tordeux@inria.fr](mailto:sebastien.tordeux@inria.fr) (Sébastien Tordeux)

<sup>1</sup>INRIA Bordeaux Sud-Ouest Research Center. Team Project Magique-3D.

<sup>2</sup>Université de Pau et des Pays de l'Adour, France.

For a time-harmonic acoustic wave  $u^{\mathbf{I}}(x) e^{i2\pi f t}$  (of frequency  $f$ ), propagating in a homogeneous medium with wave speed  $c$ , the waves are required to solve the Helmholtz equation

$$(-\Delta - \kappa^2) w = 0$$

in  $\mathbb{R}^2$  for  $u^{\mathbf{I}}$ , and in the domain outside the obstacles, defined by  $\Omega_{\text{ext}}$ , for  $u^{\mathbf{T}}$  and  $u$ . Here, wavenumber  $\kappa$  is determined by the dispersion relation  $\kappa = \frac{2\pi f}{c}$  and the corresponding wavelength  $\lambda$  is given by  $\lambda = \frac{2\pi}{\kappa}$ . The scattered field  $u$  also needs to satisfy the  $\kappa$ -outgoing condition at infinity to ensure that it does not re-enter the domain of interest.



Figure 1: Scattering of a plane wave by various and non-overlapping obstacles.  $\Omega_{\text{ext}}$  is the domain outside the obstacles.

We denote by  $\Omega_{\text{hetero}}$  the smallest open set outside of which the medium is homogeneous, i.e.  $\Omega_{\text{hetero}}$  should contain all of the heterogeneities of the problem, in our case, the obstacles. For the approximate wave  $u_h$ , we denote by  $\Omega_{\text{dist}}$  the domain of discretization<sup>3</sup>, and by  $\Omega_{\text{visu}}$  the domain of visualization represented by a structured grid,  $\Omega_{\text{visu}} \subset \Omega_{\text{dist}}$ . The sizes of the domain and the obstacles are considered relatively to the wavelength  $\lambda$  of the incident wave.

In this paper, we consider configurations with one or a combination of the following factors: large ( $\geq 100\lambda$ )  $\Omega_{\text{visu}}$  (**F.1**), with small obstacles (radius  $\leq 0.3\lambda$ ) (**F.2**), and with a great number ( $\geq 10^2$ ) of such small obstacles (**F.3**). Our focus will be more on **F.2** and **F.3**. That the continuous problem is defined on an unbounded domain is not a major concern and can be handled efficiently with various existing methods<sup>4</sup> for domain truncation (i.e. to render  $\Omega_{\text{dist}}$  finite). The usual tools on configurations with a small number of sizable obstacles are highly optimized software based on volume discretization together with a numerical method for domain truncation. An example of these is Montjoie ([montjoie.gforge.inria.fr](http://montjoie.gforge.inria.fr)) using spectral FEM and Perfectly Matched Layer (PML)<sup>5</sup>.

<sup>3</sup>This is only relevant for volume discretization methods e.g. FEM, Finite difference (FD), Finite Volume (FV), etc. For impenetrable obstacles, as in our problem, the inside of the obstacles is not meshed, i.e.  $(\Omega_{\text{hetero}} \setminus \Omega_{\text{Obs}}) \subset \Omega_{\text{dist}}$ . Here  $\Omega_{\text{Obs}}$  is the union of the interior of the obstacles.

<sup>4</sup>For a review of this subject, see [1, 2]. A more current trend is to couple (in various ways) Boundary Integral Equation (BIE) with a volume discretization method, c.f. [3, 4, 5] for a review and the references therein. BIE is efficient in handling (homogeneous) infinity since they are (volume) mesh-free and produce Ansatzs by using layer potentials which satisfy automatically the radiation condition at infinity.

<sup>5</sup>In 2D, Montjoie can handle reasonably well domains of size  $\leq 100$  wavelengths. Problems beyond this size call for methods without the need of (volume) meshing.

However, outside of these above circumstances (in particular in the case of **F.2** and **F.3**), a volume-discretization method inside  $\Omega_{\text{hetero}}$  generates large linear systems due to its need for meshing<sup>6,7</sup>. To overcome these difficulties, we follow a method in the family BIE which has been used by [6] for Dirichlet condition and extended to other boundary conditions in [7], for configurations of up to 2500 obstacles of size  $0.02\lambda$ . In this method, the scattered response is written as a superposition of waves scattered by each obstacle and expressed in the form of acoustic Single-Layer Potentials (SLPs), the Helmholtz equation and the radiation condition are thus satisfied automatically. When there are  $N$  non-overlapping obstacles  $\Omega_I$  with boundary denoted by  $\Gamma_I$ ,  $1 \leq I \leq N$ , we write

$$u(x) = \sum_{I=1}^N (\mathcal{S}_I \tilde{v}_I)(x) := \sum_{I=1}^N \int_{\Gamma_I} G_\kappa(x, y) \tilde{v}_I(y) dy \quad , \quad \tilde{v}_I \in \mathcal{C}(\Gamma_I). \quad (1)$$

Here  $G_\kappa$  is the outgoing fundamental solution at wavenumber  $\kappa$ , and is given in terms of the Hankel function of the first kind  $H_0^{(1)}$ ,

$$G_\kappa(x, y) := \frac{i}{4} H_0^{(1)}(\kappa |x - y|) \quad , \quad x \neq y. \quad (2)$$

The unknowns of the multi-scattering problem are now the single-layer densities  $\tilde{v}_J$ . The discretized scattered waves are obtained by a truncation of the Fourier Series of the single-layer densities. An approximation order  $\mathbf{m}$  of the method uses  $2\mathbf{m} + 1$  Fourier nodes between  $-\mathbf{m}$  and  $\mathbf{m}$ . For these reasons and convenience, we call the method (by a non standard name) Fourier Series single-layer (FSSL).

In a related approach, [8] uses a combination of double and single-layer potentials for configurations of up to 400 obstacles of size  $\lambda$ . Using T-matrix, [9] studies scattering for up to 2000 obstacles of radius  $\leq 1.6\lambda$ . More sophisticated methods (coupling BIE with FEM etc.) are considered for the scattering by a low number ( $\sim 2, 3$ ) of medium-sized obstacles, c.f. [10, 11, 5]. For very small obstacles, there is the possibility of using asymptotic methods, c.f. [12, 13] and the references therein. For extensive discussion on the use of integral equations and other methods in multiple-scattering, we refer to the book [14] with update [15]. For applications of multiple-scattering problem, see also [6, 7] and the references therein.

We choose to work with the single-layer operator  $\mathcal{S}$ , since it gives rise to simple integral equations among other choices of layer operators and modified ones, c.f. [16, 8]. The intrinsic problem of  $\mathcal{S}$  regarding invertibility (and hence instability) does not arise with small obstacles, e.g. when the exterior wavenumber

---

<sup>6</sup> In the case of small obstacles, the mesh needs to be refined around the obstacles in order to describe accurately their interaction with the incident wave. When there is a large number of them, the meshing of the obstacles may not be straightforward and requires some effort.

<sup>7</sup>  $\Omega_{\text{hetero}}$  can be quite large if there are lot of obstacles (even very small) that are spaced far apart, e.g. Experiment 5. When the obstacles are close to one another (Exp 4c),  $\Omega_{\text{hetero}}$  is around  $40\lambda$ , however when they are remote from one another,  $\Omega_{\text{ext}}$  extends to  $146\lambda$ .

$\kappa$  satisfies

$$\kappa \times \frac{\text{Obstacle}}{\text{radius}} < 2 \quad (\Leftrightarrow \frac{\text{Obstacle}}{\text{radius}} < \lambda \pi^{-1} \sim 0.3\lambda), \quad (3)$$

c.f. Remark 2. In general, apart from the set of Dirichlet eigenvalues, which  
 40 is a discrete and infinite subset of the positive real line, the linear problem  
 obtained from using single-layer Ansatz is invertible, c.f. Prop 2. For a theoret-  
 ical study of the spectral and condition number of the single-layer operator, we  
 refer to [17, 18]. With the choice of Fourier Series basis, acceptable precision  
 ( $\sim 10^{-7}$ ) can be obtained with low approximation order ( $< 4$ ). As a result, the  
 45 linear systems generated by FSSL, whose unknowns are the generalized Fourier  
 Series coefficients of the single-layer densities, however dense<sup>8</sup>, are generally  
 small (compared to that produced by FEM at the same precision). For a self-  
 contained discussion, we compute the linear systems for all boundary conditions  
 (Dirichlet, Neumann, and Impedance), with a study of their well-posedness and  
 50 Fredholmness. These formulations are used for  $C^2$  and convex obstacles.

For numerical experiments, we limit ourselves to the scattering of disc-  
 shaped obstacles. In this geometry, a single-layer potential with Fourier Series  
 basis as densities can be written as a superposition of multipoles; as a result, the  
 linear systems have explicit expressions, c.f. Section 3. Despite the existence  
 55 of pieces of software for this type of simulation, e.g. the Matlab toolbox  $\mu$ -diff  
 [19], see also [9] for a review of available packages, we would like to develop a  
 high-performance computing software that can work on clusters<sup>9</sup>. Our codes  
 offer choices of the direct solvers (Mumps, Lapack and Scalapack), and GM-  
 RES (with restart) solvers [20] with various preconditioners. While they can be  
 60 applied to general configurations of circular obstacles, we restrict our numerical  
 tests to periodic ones of equal size<sup>10</sup>, inspired by I2M physical experiments, e.g.  
 Numerical Result 3.

In literature, iterative solvers seem to be a more popular choice for resolving  
 the multiple-scattering linear systems, e.g. [8, 7, 6, 21, 9]. Most relevant to our  
 65 work is the study done for random configurations in [7, 21, 6], which suggests  
 that the GMRES solvers are much more effective than direct solver (Gauss  
 elimination), with considerable lead in the case of more than 1000 obstacles,  
 c.f. [21, Figure 4]. They also suggest that iterative solvers will maintain this  
 robustness as the media become denser, i.e. with more obstacles and with the  
 70 obstacles close to one another. While Gauss elimination is not a very competitive  
 representative of the robust direct family, this raises the question whether, for  
 very large configurations, other direct solvers also perform as poorly compared  
 to iterative ones, and whether parallelization and shared-memory architectures  
 can narrow the performance gap. This question is posed, with the application  
 75 of inverse problem<sup>11</sup> in mind. For this reason, we carry out a detailed numerical

---

<sup>8</sup>A property shared in general by methods in the boundary integral equation family.

<sup>9</sup>This also adds flexibility to our work, which is part of a research program in collaboration with the Institut de Mécanique et d'Ingénierie at Bordeaux university (I2M).

<sup>10</sup>With the exception of Num. Exp.1. See Footnote 18 and 27.

<sup>11</sup>An example of this is reconstruction of location of small defects. For this type of appli-

comparison between direct solvers (Mumps, Lapack and Scalapack) and iterative solvers, in Section 5, for closely-spaced and far-apart obstacles. The random configuration in [21, 6] corresponds more to our ‘closely-spaced’ experiments. The seven preconditioners in our study include two that are mentioned in [21, 6],  
80 the block Jacobi and one which is comparable to our 2nd-order Jacobi.

The paper is organized in two parts. The theoretical part studies the linear systems given by FSSL and their well-posedness in Section 2-3. The numerical comparisons are separated in two groups: those with Montjoie are in Section 4, and the solver comparison in Section 5.

## 85 2. Single-Layer Potential formulation of the multi scattering problem

The multiple obstacle scattering problem of a time-harmonic incident wave is formulated as an exterior boundary-value problem (BVP) for impenetrable obstacles, i.e. where the wave is fully reflected. To write down the mathematical problems, we first fix the sign convention for the trace operators. The normal vector  $n(x)$  along a smooth interface  $\Gamma$  is chosen to point outward. The zero-th, first order traces for  $f \in \mathcal{C}^2$  at  $\Gamma$  is defined as: for  $x \in \Gamma$ ,

$$\begin{aligned} \gamma_0^+ f(x) &:= \lim_{h \rightarrow 0^+} f(x + h n(x)) \quad ; \quad \gamma_0^- f(x) := \lim_{h \rightarrow 0^-} f(x - h n(x)); \\ \gamma_1^- f(x) &:= \lim_{h \rightarrow 0^+} n(x) \cdot \nabla f(x - h n(x)); \\ \frac{\partial}{\partial n} f(x) &= \gamma_1^+ f(x) := \lim_{h \rightarrow 0^+} n(x) \cdot \nabla f(x + h n(x)). \end{aligned} \quad (4)$$

We denote by  $\Omega_{\text{ext}}$  the region outside of the obstacles, by  $\Omega_I$  the region occupied by the  $I$ -th obstacle, and by  $\Gamma_I$  its boundary, i.e.  $\Gamma_I = \partial \overline{\Omega_I}$ . The Boundary value problems we consider are the following.

$$\begin{cases} (-\Delta - \kappa^2) u = 0 & , \text{ in } \Omega_{\text{ext}} , \\ \gamma_{0,I}^+ (u + u^{\mathbf{I}}) = 0 & , 1 \leq I \leq N , \\ \lim_{r \rightarrow \infty} \sqrt{r} (\partial_r u - i \kappa u) = 0 & , r = |x| , \end{cases} \quad \text{Exterior Dirichlet Problem (EDP)} \quad (5)$$

For the impedance problem, we denote by  $\lambda$  the impedance parameter.

$$\begin{cases} (-\Delta - \kappa^2) u = 0 & , \text{ in } \Omega_{\text{ext}} , \\ \left( \gamma_{1,I}^+ + i \lambda \gamma_{0,I}^+ \right) (u + u^{\mathbf{I}}) = 0 & , 1 \leq I \leq N , \\ \lim_{r \rightarrow \infty} \sqrt{r} (\partial_r u - i \kappa u) = 0 & , r = |x| , \end{cases} \quad \text{Exterior Impedance Problem (EIP)} \quad (6)$$

When  $\lambda = 0$ , we have the Neumann problem (ENP). The Dirichlet and Neumann problems are also called soft and hard scattering problem, respectively.

The BVPs can be written as equivalent problems on a bounded domain, by replacing the outgoing radiation condition with an exact boundary condition

---

cation, it is preferable to use highly optimized direct solvers (Mumps, Lapack and Scalapack). See also Footnote 20 in Section 4 and Footnote 36 and 37 in Conclusion.

90 using the Dirichlet-to-Neumann operator, c.f. [22, Lemma 5.24]. To show the  
existence and uniqueness of these equivalent problems, for Dirichlet problem, see  
[22, p.105], for impedance problem [23, Lemma 2.1] under the same assumption  
listed in in Theorem 4 in Appendix A. We note that the well-posedness results  
in [24] allow for multi-component interior domains, as in our setting, c.f. [24,  
95 Section 2.1].

### 2.1. Potential theory notations

We list some facts of potential theory needed in our paper. We consider  
interfaces (along which the layer potentials are defined) that are closed, simple  
and  $C^2$  curves. The acoustic single-layer potential along  $\Gamma_I$  at wavenumber  $\kappa$   
and with density  $\phi \in \mathcal{C}(\Gamma_I)$  is defined as,

$$(\mathcal{S}_{I,\kappa} \phi)(x) := \int_{\Gamma_I} \phi(y) G_\kappa(x, y) d\sigma(y) \quad , \quad x \in \mathbb{R}^2 \setminus \Gamma_I .$$

Here  $G_\kappa$  is the fundamental solution in (2). The single-layer potential defines  
outgoing solutions on  $\mathbb{R}^2 \setminus \Gamma_I$ . It extends to the following map: for  $-1 \leq s \leq 1$ ,

$$\mathcal{S}_{I,\kappa} : H^{s-1/2}(\Gamma_I) \longrightarrow H_{\text{loc}}^{s+1}(\mathbb{R}^2) \text{ is bounded.} \quad (7)$$

**Remark 1.** *Since each obstacle is assumed to be simply-connected, we will  
follow [25, Section 8.2] to define the Sobolev spaces on its boundary. They are  
defined so that their pull-back to  $[0, 2\pi)$  via a  $2\pi$ -periodic parametrization of the  
100 boundary gives the usual Sobolev spaces on  $[0, 2\pi)$ .*

To describe the traces of the layer potentials (along the interface where it is  
defined), we will need the following surface operators: for  $x \in \Gamma_I$ ,  $\phi \in \mathcal{C}(\Gamma_I)$ ,

$$\begin{aligned} (\mathcal{S}_{I,\kappa} \phi)(x) &:= \int_{\Gamma_I} \phi(y) G_\kappa(x, y) ds(y) ; \\ (\mathcal{D}'_{I,\kappa} \phi)(x) &:= \int_{\Gamma_I} \phi(y) \frac{\partial}{\partial n(x)} G_\kappa(x - y) ds(y) . \end{aligned}$$

They extend to the following maps, c.f. [22, Theorem 7.3]: for  $-1 \leq s \leq 1$

$$\begin{aligned} \mathcal{S}_{\kappa,I} : H^{s-1/2}(\Gamma_I) &\longrightarrow H^{s+1/2}(\Gamma_I) \quad \text{is bounded and} \\ \mathcal{D}'_{I,\kappa} : H^{s-1/2}(\Gamma_I) &\longrightarrow H^{s-1/2}(\Gamma_I) \quad \text{is compact and bounded.} \end{aligned} \quad (8)$$

We denote by  $\{\gamma_{0,I}^\pm, \gamma_{1,I}^\pm\}$  the traces (4) along the boundary  $\Gamma_I$  of obstacle  $I$ .  
The traces of the single-layer potentials satisfy: for  $-1 \leq s \leq 1$ ,

$$\begin{aligned} \gamma_{0,I}^+ \mathcal{S}_{I,\kappa} \phi &= \gamma_{0,I}^- \mathcal{S}_{I,\kappa} \phi = \mathcal{S}_{I,\kappa} \phi \quad , \quad \phi \in H^{-1/2+s}(\Gamma_I) ; \\ \gamma_{1,I}^- \mathcal{S}_{I,\kappa} &= \mathcal{D}'_{I,\kappa} + \frac{1}{2} \text{Id} \quad , \quad \gamma_{1,I}^+ \mathcal{S}_{I,\kappa} = \mathcal{D}'_{I,\kappa} - \frac{1}{2} \text{Id} \quad , \quad \phi \in H^{-1/2+s}(\Gamma_I) . \end{aligned} \quad (9)$$

To describe the multi-scattering problem, we will also need these follow-  
ing surface operators. Since the kernel of  $\mathcal{S}_{I,\kappa}$  is smooth on  $\mathbb{R}^2 \setminus \Gamma_I$ , for

$\phi \in H^{-1/2}(\Gamma_I)$ , we have  $\mathcal{S}_{I,\kappa}\phi \in \mathcal{C}^\infty(\mathbb{R}^2 \setminus \Gamma_I)$ . As a result, the function and its normal derivative are continuous across  $\Gamma_J$  for  $J \neq I$ . Thus, without having to distinguish between interior or exterior traces, we define

$$\begin{aligned} \mathbf{S}_{IJ,\kappa}\phi &:= \gamma_{0,I}\mathcal{S}_{\kappa,J}\phi \quad , \quad \mathbf{D}'_{IJ}\phi := \gamma_{1,I}\mathcal{S}_{\kappa,J}\phi \quad , \\ &\text{for } \phi \in H^{-1/2}(\Gamma_J), I \neq J. \end{aligned} \quad (10)$$

## 2.2. Linear systems

As introduced, in the FSSL method, the scattered response is written as a superposition of waves scattered by each obstacle and expressed in the form of acoustic single-layer potentials,

$$u = \sum_{J=1}^N \mathcal{S}_{J,\kappa} \tilde{v}_J \quad , \quad \tilde{v}_J \in H^{-1/2}(\Gamma_J). \quad (11)$$

This has the advantage that, as each single-layer potential satisfies the Helmholtz equation and the radiation condition, so does  $u$ , it thus remains to choose the densities  $\tilde{v}_J$  so that the boundary conditions are satisfied. This is how the exterior problems (EDP, EIP) are reduced to equivalent problems the obstacle boundaries, and how the multiple-scattering linear systems are obtained. To label the BVPs, we write  $\alpha = \text{D}$  (Dirichlet),  $\text{N}$  (Neumann), and  $\text{Im}$  (Impedance).

We have denoted by  $\{\gamma_{0,I}^\pm, \gamma_{1,I}^\pm\}$  the family of traces along the boundary  $\Gamma_I$  of obstacle  $I$ . Using the identities (9), we write the traces of the scattered wave  $u$  along  $\Gamma_I$  as

$$\gamma_{0,I}^+ u = \sum_{J=1}^N \gamma_{0,I}^+ \mathcal{S}_{J,\kappa} \tilde{v}_J = \sum_{J=1}^N \mathbf{S}_{IJ,\kappa} \tilde{v}_J; \quad (12)$$

$$\gamma_{1,I}^+ u = \sum_{J=1}^N \gamma_{1,I}^+ \mathcal{S}_{J,\kappa} \tilde{v}_J = (\mathbf{D}'_{I,\kappa} - \frac{1}{2} \text{Id}) \tilde{v}_I + \sum_{J=1; J \neq I}^N \mathbf{D}'_{IJ,\kappa} \tilde{v}_J. \quad (13)$$

For the following discussion, we assume that the incident wave  $u^{\mathbf{I}}$  is smooth, and drop the distinction ‘+’ and ‘-’ from the notation of its traces, since they agree from both sides of a  $\mathcal{C}^2$  interface.

**Proposition 1.** *The BVPs (EDP, EIP, and ENP) are equivalent correspondingly to the following linear problems*

$$\mathbf{A}_\alpha \mathbf{V} = \mathbf{F}_\alpha \quad , \quad \mathbf{V} = (\tilde{v}_J)_{1 \leq J \leq N} \quad , \quad \mathbf{F} = (\mathbf{F}_{\alpha;J})_{1 \leq J \leq N} \quad , \quad (14)$$

having as unknowns the single-layer densities  $\mathbf{V}$ . The coefficient operator is called the multi-scattering operator  $\mathbf{A}_\alpha$  with

$$\mathbf{A}_\alpha = \begin{pmatrix} \mathbf{A}_{\alpha;11} & \mathbf{A}_{\alpha;12} & \dots & \mathbf{A}_{\alpha;1(N-1)} & \mathbf{A}_{\alpha;1N} \\ \mathbf{A}_{\alpha;21} & \mathbf{A}_{\alpha;22} & \dots & \mathbf{A}_{\alpha;2(N-1)} & \mathbf{A}_{\alpha;2N} \\ \vdots & \dots & \dots & \ddots & \vdots \\ \mathbf{A}_{\alpha;(N-1)1} & \mathbf{A}_{\alpha;(N-1)2} & \dots & \mathbf{A}_{\alpha;(N-1)(N-1)} & \mathbf{A}_{\alpha;(N-1)N} \\ \mathbf{A}_{\alpha;N1} & \mathbf{A}_{\alpha;N2} & \dots & \mathbf{A}_{\alpha;N(N-1)} & \mathbf{A}_{\alpha;NN} \end{pmatrix}.$$



The diagonal operator  $\mathbf{A}_{\alpha;I}$ , describing self-reflection by obstacle  $I$ , is given by

$$\mathbf{A}_{\alpha;I} = \begin{cases} \mathbf{S}_{I,\kappa} & , \alpha = D, \\ \mathbf{D}'_{I,\kappa} - \frac{1}{2} \text{Id} + i\lambda \mathbf{S}_{I,\kappa} & , \alpha = \text{Im}, \\ \mathbf{D}'_{I,\kappa} - \frac{1}{2} \text{Id} & , \alpha = N. \end{cases} \quad (15)$$

The off-diagonal  $\mathbf{A}_{\alpha;IJ}$  with  $I \neq J$  describes the diffraction by obstacle  $I$  wave emitted by  $J$ ,

$$\mathbf{A}_{\alpha;IJ} = \begin{cases} \mathbf{S}_{IJ,\kappa} & , \alpha = D, \\ \mathbf{D}'_{IJ,\kappa} + i\lambda \mathbf{S}_{IJ,\kappa} & , \alpha = \text{Im}, \\ \mathbf{D}'_{IJ,\kappa} & , \alpha = N. \end{cases} \quad (16)$$

The right hand side of (14) is defined in terms of the incident wave  $u^{\mathbf{I}}$ ,

$$\mathbf{F}_{\alpha;I} = - \begin{cases} \gamma_{0,I} u^{\mathbf{I}} & , \alpha = D, \\ (\gamma_{1,I} + i\lambda \gamma_{0,I}) u^{\mathbf{I}} & , \alpha = \text{Im}, \\ \gamma_{1,I} u^{\mathbf{I}} & , \alpha = N. \end{cases} \quad (17)$$

*Proof. Dirichlet problem* : The scattered wave  $u$  of the form (11) solves the EDP (5), if and only if  $\{\tilde{v}_I\}$  satisfies  $\gamma_{0,I}^+ u = -\gamma_{0,I}^+ u^{\mathbf{I}}$ , for  $1 \leq I \leq N$ . Using (12), this equation is equivalent to

$$\sum_{J=1}^N \mathbf{S}_{IJ,\kappa} \tilde{v}_J = -\gamma_{0,I} u^{\mathbf{I}}. \quad (18)$$

**Impedance problem** : The scattered wave  $u$  of the form (11) solves the EIP (6), if and only if  $\{\tilde{v}_I\}$  satisfies correspondingly the following equations,

$$(\gamma_{1,I}^+ + i\lambda \gamma_{0,I}^+) u = -(\gamma_{1,I}^+ + i\lambda \gamma_{0,I}^+) u^{\mathbf{I}}, \quad 1 \leq I \leq N.$$

Using (12) and (13), these above equations are equivalent to

$$(\mathbf{D}'_{I,\kappa} - \frac{1}{2} \text{Id} + i\lambda \mathbf{S}_{I,\kappa}) \tilde{v}_I + \sum_{J=1, J \neq I}^N (\mathbf{D}'_{IJ,\kappa} + i\lambda \mathbf{S}_{IJ,\kappa}) \tilde{v}_J = -(\gamma_{1,I} + i\lambda \gamma_{0,I}) u^{\mathbf{I}}. \quad (19)$$

When  $\lambda = 0$  in (19), we obtain the Neumann problem. □

### 2.3. Mapping properties, Fredholmness and Invertibility

In this section, we study the mapping properties of the multi-scattering operator  $\mathbf{A}_{\alpha}$ . Applying those of layer potentials (7) to the components of  $\mathbf{A}_{\alpha}$ , we obtain readily that

$$\begin{aligned} \mathbf{A}_{\alpha} & : \mathbb{H}_{1/2}(\mathbf{\Gamma}_{\text{Obs}}) \longrightarrow \mathbb{H}_{1/2}(\mathbf{\Gamma}_{\text{Obs}}), \quad \alpha = \text{Im}, N, \\ \mathbf{A}_{\alpha} & : \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \longrightarrow \mathbb{H}_{1/2}(\mathbf{\Gamma}_{\text{Obs}}), \quad \alpha = D, \end{aligned} \quad (20)$$

where

$$\mathbb{H}_s(\Gamma_{\text{Obs}}) := H^s(\Gamma_1) \times \dots \times H^s(\Gamma_N). \quad (21)$$

115 Here  $H^s(\Gamma_I)$  is the Sobolev space of order  $s$  on the boundary of an obstacle  $I$ , see also Remark 1. When  $s = 0$ , we write  $\mathbb{L}^2(\Gamma_{\text{Obs}})$ . While the single-layer surface operator  $\mathbf{S}$  is compact and is thus not invertible, we will show that apart from the set of Dirichlet eigenvalues, the linear problems (14) obtained from using single-layer Ansatz are well-posed. This is obtained by first showing that  $\mathbf{A}_\alpha$  120 is Fredholm, see Lemma 5 in Appendix A. Secondly, we show  $\mathbf{A}_\alpha$  is injective, if the exterior wavenumber  $\kappa$  is not the square root of an interior Dirichlet eigenvalue, see Lemma 6 in Appendix A. By Fredholmness, invertibility follows from injectivity, and we obtain

**Proposition 2.** *If  $\kappa^2$  is not a Dirichlet eigenvalue for  $-\Delta$  inside domain  $\Omega_I$  with  $1 \leq 1 \leq N$ , then  $\mathbf{A}_\alpha$  is invertible, with  $\alpha = D, N$  and  $Im$ .* 125

**Remark 2** (Small obstacles). *Since our applications focus on very small obstacles, it would be useful to know numerically how small the obstacles should be, in order to be in the region of invertibility.*

1. For a disc domain of radius  $R$ , the Dirichlet eigenvalues (DEV) are

$$\lambda_{n,m} = \left( \frac{j_{n,m}}{R} \right)^2, \quad n \geq 0, \quad m \geq 1.$$

Here,  $j_{n,m}$  the  $m$ -th positive root of  $J_n(\cdot) = 0$ , and  $J_n$  is the Bessel function of the first kind at integer order  $n$ , for definition c.f. [26, p. 355]. The first 4 roots are

$$j_{0,1} \sim 2.40, \quad j_{1,1} \sim 3.83, \quad j_{2,1} \sim 5.13, \quad j_{1,2} \sim 5.52.$$

For invertibility in the case of circular obstacles, we require

$$\kappa \times (\text{Obs radius}) \neq j_{n,m}.$$

2. For general domains, the (Rayleigh-Faber-Krahn) Isoperimetric inequality gives the lower bound of the first interior DEV,

$$\lambda_1(\Omega) = \inf_{u \in H_0^1(\Omega) \setminus \{0\}} \frac{\int_\Omega |\nabla u|^2 dx}{\int_\Omega u^2 dx} \geq \frac{\pi}{|\Omega|} j_{0,1}^2, \quad |\Omega| = \text{area of } \Omega.$$

Equality is attained if and only if the membrane is circular. As a result, if  $\kappa$  satisfies

$$\kappa \times R(\Omega) < 2, \quad R(\Omega) = \text{the radius of } \Omega,$$

then  $\kappa^2$  is not a DEV on  $\Omega$ . This is due to

$$j_{0,1} \sim 2.40 > 2 \quad \text{and} \quad \kappa^2 < \frac{\pi \times 2^2}{\pi R(\Omega)} < \frac{\pi \times 2^2}{|\Omega|} < \frac{\pi}{|\Omega|} j_{0,1}^2 < \lambda_1(\Omega).$$

#### 2.4. Variational forms and general discrete problems

For  $\alpha = D$ , from the proof of Lemma 5 in Appendix A, we obtain the decomposition  $\mathbf{A}_\alpha = \tilde{\mathbf{A}}_\alpha + \mathbf{K}_\alpha$ , where  $\tilde{\mathbf{A}}_\alpha$  is coercive with respect to  $\mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}})$ , and  $\tilde{\mathbf{A}}_\alpha : \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \rightarrow \mathbb{H}_{1/2}(\mathbf{\Gamma}_{\text{Obs}})$  is bounded and invertible, while  $\mathbf{K}_\alpha : \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \rightarrow \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}})$  is bounded and compact. Each of these operators corresponds to a sesquilinear form as follows,

$$\begin{aligned} \mathbf{a}_\alpha &: \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \times \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \rightarrow \mathbb{C} & ; \mathbf{a}_\alpha(\psi, \phi) &:= \langle \mathbf{A}_\alpha \psi, \phi \rangle_{\mathbb{H}_{1/2}, \mathbb{H}_{-1/2}} ; \\ \tilde{\mathbf{a}}_\alpha &: \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \times \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \rightarrow \mathbb{C} & ; \tilde{\mathbf{a}}_\alpha(\psi, \phi) &:= \langle \tilde{\mathbf{A}}_\alpha \psi, \phi \rangle_{\mathbb{H}_{1/2}, \mathbb{H}_{-1/2}} ; \\ \mathbf{k}_\alpha &: \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \times \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \rightarrow \mathbb{C} & ; \mathbf{k}_\alpha(\psi, \phi) &:= \langle \mathbf{K}_\alpha \psi, \phi \rangle_{\mathbb{H}_{1/2}, \mathbb{H}_{-1/2}} . \end{aligned}$$

130 We have  $\mathbf{a}_\alpha = \tilde{\mathbf{a}}_\alpha + \mathbf{k}_\alpha$ .

Similarly, for  $\alpha = \text{Im}$  and  $N$ , we obtain the decomposition  $\mathbf{A}_\alpha = \frac{1}{2}\mathbf{Id} + \mathbf{K}_\alpha$ , with corresponding forms  $\mathbf{a}_\alpha$  and  $\mathbf{k}_\alpha$ ,

$$\begin{aligned} \mathbf{a}_\alpha, \mathbf{k}_\alpha &: \mathbb{H}_{1/2}(\mathbf{\Gamma}_{\text{Obs}}) \times \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \longrightarrow \mathbb{C} \\ \mathbf{a}_\alpha(\psi, \phi) &:= \frac{1}{2} \langle \psi, \phi \rangle_{\mathbb{H}_{1/2}, \mathbb{H}_{-1/2}} + \mathbf{k}_\alpha(\psi, \phi) . \end{aligned}$$

We define the linear function corresponding to the RHS  $\mathbf{F}_\alpha$ ,

$$\begin{aligned} \ell_\alpha &: \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \longrightarrow \mathbb{C} \\ \ell_\alpha(\varphi) &= \langle \mathbf{F}_\alpha, \varphi \rangle_{\mathbb{H}_{1/2}, \mathbb{H}_{-1/2}} = \sum_{I=1}^N \langle \mathbf{F}_{\alpha, I}, \varphi_I \rangle_{H^{1/2}(\Gamma_I), H^{-1/2}(\Gamma_I)} . \end{aligned} \quad (22)$$

As a result, the problems (14) can be put in the following variational form,

$$\begin{aligned} \text{For } \mathbf{F}_\alpha \in \mathbb{H}_{1/2}(\mathbf{\Gamma}_{\text{Obs}}), \text{ find } \psi_\alpha \in \begin{cases} \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) & \text{for } \alpha = D, \\ \mathbb{H}_{1/2}(\mathbf{\Gamma}_{\text{Obs}}) & \text{for } \alpha = \text{Im}, N \end{cases} & \quad (23) \\ \text{such that } \mathbf{a}_\alpha(\psi, \varphi) = \ell_\alpha(\varphi) \quad , \quad \forall \varphi \in \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}). \end{aligned}$$

The discretization of the variational problem (23) is via a dense sequence of finite-dimensional spaces in  $\mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}})$  (for  $\alpha = D$ ) or  $\mathbb{H}_{1/2}(\mathbf{\Gamma}_{\text{Obs}})$  (for  $\alpha = \text{Im}, N$ ). Let  $\{V_l\}_{l \in \mathbb{N}}$  be a dense sequence of finite-dimensional subspaces in  $H^{-1/2}(\Gamma)$  for  $\alpha = D$ , and  $H^{1/2}(\Gamma)$  for  $\alpha = \text{Im}, N$ . Write

$$\mathbb{V}_{\mathbf{m}} := V_{\mathbf{m}}(\Gamma_1) \times \dots \times V_{\mathbf{m}}(\Gamma_N) .$$

With  $\ell_\alpha$  defined in (22), the discretized version of the problem (23) for approximation of order  $\mathbf{m}$  is written as :

$$\begin{aligned} \text{For } \mathbf{F}_\alpha \in \mathbb{H}_{1/2}(\mathbf{\Gamma}_{\text{Obs}}), \text{ find } \psi_h \in \mathbb{V}_{\mathbf{m}} & \\ \text{such that } \mathbf{a}_\alpha(\psi_h, \varphi) = \ell_\alpha(\varphi) \quad , \quad \forall \varphi \in \mathbb{V}_{\mathbf{m}}. & \quad (24) \end{aligned}$$

**Remark 3** (General well-posedness of the discrete problem). *The above decompositions of  $\mathbf{a}_\alpha$  satisfy the hypothesis of [27, Thm 4.2.9, p.229]. As a result, the well-posedness of the approximate problems (24) are obtained, when injectivity is satisfied. The latter is guaranteed when  $\kappa^2$  is not an interior DEV for  $\Omega_I$ ,  $1 \leq I \leq N$ , c.f. Lemma 6. Results in [27, Thm 4.2.9, p.229] also give a C ea-type estimate for the approximation error.*

135

### 2.5. Fourier Series Galerkin Basis

We can write the single-layer densities in terms of the Fourier series on the boundary of the obstacles. Fix a  $\mathcal{C}^2$   $2\pi$ -periodic parametrization  $\phi_I$  of  $\Gamma_I$  (boundary of obstacle I), the basis functions  $\mathbf{w}_{I,k}$  on  $\Gamma_I$  are defined<sup>12</sup> so that

$$\phi_I : [0, 2\pi) \rightarrow \Gamma_I \subset \mathbb{R}^2 \quad , \quad (\mathbf{w}_{I,k} \circ \phi_I)(\theta) = e^{ik\theta} . \quad (25)$$

As a result, their linear combinations with complex coefficients, when pulled back to  $[0, 2\pi)$  via  $\phi_J$ , give the set of trigonometric polynomials on  $[0, 2\pi)$ ,

$$\bigcup_{\mathbf{m} \in \mathbb{N}} \left\{ \sum_{k=-\mathbf{m}}^{\mathbf{m}} a_k e^{ik\theta} , a_k \in \mathbb{C} \right\} .$$

Note this set is dense in  $H^r(0, 2\pi)$  for all  $r \in \mathbb{R}$ .

**FSSL method.** The exact diffracted wave  $u$  and approximate  $u_h$  are written in this basis with the Fourier coefficients  $\mathbf{V} = (V_{J,k})_{1 \leq J \leq N, k \in \mathbb{Z}}$  as

$$u_h = \sum_{J=1}^N \mathcal{S}_J \sum_{k=-\mathbf{m}}^{\mathbf{m}} V_{J,k} \mathbf{w}_{J,k} \xrightarrow{\mathbb{L}^2(\Gamma_{\text{Obs}})} u = \sum_{J=1}^N \mathcal{S}_J \sum_{k=-\infty}^{\infty} V_{J,k} \mathbf{w}_{J,k} .$$

The convergence is in norm  $\|\cdot\|_{\mathbb{L}^2(\Gamma_{\text{Obs}})}$ , defined in (21). Substituting the above form of  $u$  and  $u_h$  in (23), we obtain the linear system for  $\{V_{J,k}\}$ ,

$$\sum_{J=1}^N \sum_{k=-\mathbf{m}}^{\mathbf{m}} V_{J,k} \mathbf{a}_\alpha(\mathcal{S}_J \mathbf{w}_{J,k}, \mathbf{w}_{I,l}) = \ell_\alpha(\mathbf{w}_{I,l}) , \quad \forall 1 \leq I \leq N , l \in \mathbb{Z} . \quad (26)$$

Recall that  $\ell_\alpha$  is defined in (22), corresponding to  $\mathbf{F}_\alpha \in \mathbb{H}_{1/2}(\Gamma_{\text{Obs}})$  in (17). As a result, the multi-scattering problem (14) can be written as

$$\mathbf{A}_\alpha \mathbf{V} = \mathbf{F}_\alpha \quad , \quad \mathbf{V} = (V_{J,k})_{1 \leq J \leq N, k \in \mathbb{Z}} . \quad (27)$$

Although we use the same notations as in (14), the multi-scattering operator  $\mathbf{A}_\alpha$  is now an infinite matrix, composed of  $N \times N$  blocks, each being an infinite matrix. Similarly, the RHS is composed of  $N$  blocks, with each being an infinite vector. Their components are given by

$$(\mathbf{A}_{\alpha,IJ})_{lk} := \mathbf{a}_\alpha(\mathcal{S}_J \mathbf{w}_{J,k}, \mathbf{w}_{I,l}) \quad , \quad (\mathbf{F}_\alpha)_{Il} := \ell_\alpha(\mathbf{w}_{I,l}) , \quad (28)$$

$$1 \leq I, J \leq N , k, l \in \mathbb{Z} .$$

The discretized problem at order  $\mathbf{m}$  is a linear system of size  $2\mathbf{m} + 1$

$$\mathbf{A}_{\alpha,h} \mathbf{V}_h = \mathbf{F}_{\alpha,h} \quad , \quad \mathbf{V}_h = (V_{J,k})_{1 \leq J \leq N, -\mathbf{m} \leq k \leq \mathbf{m}} , \quad (29)$$

---

<sup>12</sup>This is related to the idea of using  $2\pi$ -periodic parametrization to define Sobolev spaces on the boundary of the obstacles, see Remark 1.

where  $\mathbf{A}_{\alpha,h}$  is a truncated version of  $\mathbf{A}_\alpha$ , composed of  $N \times N$  blocks, each block being a matrix of size  $(2\mathbf{m} + 1) \times (2\mathbf{m} + 1)$ , and  $\mathbf{F}_{\alpha,h}$  is a truncated version of  $\mathbf{F}_\alpha$  composed of  $N$  blocks, each being a vector of size  $2\mathbf{m} + 1$ ,

$$\begin{aligned} (\mathbf{A}_{\alpha,h,II})_{lk} &:= \mathbf{a}_\alpha(\mathcal{S}_J \mathbf{w}_{J,k}, \mathbf{w}_{I,l}) \quad , \quad -\mathbf{m} \leq k, l \leq \mathbf{m}, 1 \leq I, J \leq N; \\ (\mathbf{F}_{\alpha,h})_{II} &:= \boldsymbol{\ell}_\alpha(\mathbf{w}_{I,l}) \quad , \quad -\mathbf{m} \leq l \leq \mathbf{m}, 1 \leq I \leq N. \end{aligned} \quad (30)$$

For convenience, we refer to this method as Fourier Series - Single Layer (FSSL).

<sup>140</sup> **Remark 4** (Convergence). *The above approximation is a case of a projection method. Hence, in addition to Remark 3, another general error analysis can be obtained from projection theory, c.f. [16, Section 5].*

### 3. Multiple scattering for the disc-shaped obstacles

<sup>145</sup> When the obstacles (denoted by  $\Omega_I$ ,  $1 \leq I \leq N$ ) are circular, the single-layer potential with the basis element  $\mathbf{w}_{J,l}$  as density and its traces have explicit descriptions in terms of multipoles, c.f. (32) - (36). We will use these expansions to calculate explicitly the components of the linear systems (29). They use Bessel functions and Hankel functions of the first kind  $J_l$  and  $H_l^{(1)}$ , see definition e.g. in [26, p. 355].

We assume the circular obstacle  $I$  is of radius  $r_I$  and centered at  $\mathbf{x}_I \in \mathbb{R}^2$ . Denote the polar coordinates relative to  $\mathbf{x}_I$  by  $(r_I(\cdot), \theta_I(\cdot))$ ,

$$x = \mathbf{x}_I + r_I(x) (\cos \theta_I(x), \sin \theta_I(x)). \quad (31)$$

Denote by  $d_{IJ}$  the distance between the centers of obstacle  $I$  and  $J$ , and by  $\theta_{IJ}$  and  $\theta_{JI}$  their relative polar coordinates,

$$\mathbf{x}_I = \mathbf{x}_J + d_{IJ} (\cos \theta_{JI}, \sin \theta_{JI}); \quad \mathbf{x}_J = \mathbf{x}_I + d_{IJ} (\cos \theta_{IJ}, \sin \theta_{IJ}).$$

<sup>150</sup> The non-overlapping assumption is given by  $d_{IJ} > r_I + r_J$ .

In this section, we remove  $\kappa$  from the notation of the single-layer potential, and simply write  $\mathcal{S}_J$ . For  $I \neq J$ , at points  $x$  such that  $r_I(x) < d_{IJ}$ , the single-layer potential  $\mathcal{S}_J \mathbf{w}_{J,l}$ , in polar coordinates relative to  $\mathbf{x}_I$ , is given by

$$\begin{aligned} (\mathcal{S}_J \mathbf{w}_{J,l})(r_I(x), \theta_I(x)) &= \\ \frac{i\pi r_J}{2} J_l(\kappa r_J) \sum_{m=-\infty}^{\infty} H_{l-m}^{(1)}(\kappa d_{IJ}) e^{i(l-m)\theta_{JI}} J_m(\kappa r_I(x)) e^{im\theta_I(x)}. \end{aligned} \quad (32)$$

Taking the exterior zero-th and first order traces along  $\Gamma_I$ ,

$$\begin{aligned} \left( \gamma_{0,I}^+ \mathcal{S}_J \mathbf{w}_{J,l} \right) (\theta_I(x)) &= \\ \frac{i\pi r_J}{2} J_l(\kappa r_J) \sum_{m=-\infty}^{\infty} H_{l-m}^{(1)}(\kappa d_{IJ}) e^{i(l-m)\theta_{JI}} J_m(\kappa r_I) e^{im\theta_I(x)}, \end{aligned} \quad (33)$$

and

$$\begin{aligned} & \left( \gamma_{1,I}^+ \mathcal{S}_J \mathbf{w}_{J,l} \right) (\theta_I(x)) = \\ & \frac{i\pi r_J \kappa}{2} J_l(\kappa r_J) \sum_{m=-\infty}^{\infty} H_{l-m}^{(1)}(\kappa d_{IJ}) e^{i(l-m)\theta_{JI}} J'_m(\kappa r_I) e^{im\theta_I(x)}. \end{aligned} \quad (34)$$

For  $I = J$ , for points  $x \notin \Omega_I$ , the single-layer potential  $\mathcal{S}_J \mathbf{w}_{J,l}$  in polar coordinates relative to  $\mathbf{x}_I$ , is given by,

$$(\mathcal{S}_J \mathbf{w}_{J,l})(r_I(x), \theta_I(x)) = \frac{i\pi r_J}{2} e^{il\theta_J(x)} J_l(\kappa r_J) H_l^{(1)}(\kappa r_J(x)). \quad (35)$$

Taking the exterior zero-th and first order traces along  $\Gamma_I$  ( $I = J$ ),

$$\begin{aligned} \left( \gamma_{0,I}^+ \mathcal{S}_J \mathbf{w}_{J,l} \right) (\theta_I(x)) &= \frac{i\pi r_J}{2} e^{il\theta_J(x)} J_l(\kappa r_J) H_l^{(1)}(\kappa r_J); \\ \left( \gamma_{1,I}^+ \mathcal{S}_J \mathbf{w}_{J,l} \right) (\theta_I(x)) &= \frac{i\pi r_J \kappa}{2} e^{il\theta_J(x)} J_l(\kappa r_J) H_l^{(1)'}(\kappa r_J). \end{aligned} \quad (36)$$

See [28, Appendix B3 , B4] for their derivation.

As incident wave, we consider a plane wave with incident angle  $\alpha_{\text{inc}}$ ,

$$u_{\text{pw}}(x) = e^{i\kappa x \cdot (\cos \alpha_{\text{inc}}, \sin \alpha_{\text{inc}})}. \quad (37)$$

Using (31), we can write this in terms of the polar coordinates with respect to obstacle  $\mathbf{x}_I$ ,

$$u_{\text{pw}}(x) = u_{\text{pw}}(\mathbf{x}_I) e^{i\kappa r_I(x) \cos(\theta_I(x) - \alpha_{\text{inc}})}.$$

The exponential term is developed using the Jacobi expansion [14, Eq. 2.17]

$$u_{\text{pw}}(x) = u_{\text{pw}}(\mathbf{x}_I) \sum_{l=-\infty}^{\infty} i^l J_l(\kappa r_I(x)) e^{il(\theta_I(x) - \alpha_{\text{inc}})}. \quad (38)$$

Taking the exterior zero-th and first order traces along  $\Gamma_I$ ,

$$\begin{aligned} \left( \gamma_{0,I}^+ u_{\text{pw}} \right) (\theta_I(x)) &= u_{\text{pw}}(\mathbf{x}_I) \sum_{l=-\infty}^{\infty} i^l J_l(\kappa r_I) e^{il(\theta_I(x) - \alpha_{\text{inc}})}; \\ \left( \gamma_{1,I}^+ u_{\text{pw}} \right) (\theta_I(x)) &= \kappa u_{\text{pw}}(\mathbf{x}_I) \sum_{l=-\infty}^{\infty} i^l J'_l(\kappa r_I) e^{il(\theta_I(x) - \alpha_{\text{inc}})}. \end{aligned} \quad (39)$$

These above expansions are the main ingredients to arrive at the linear system for the multiple-scattering of circular obstacles, for more details of the proof, see [28, Section 4.1].

**Proposition 3** (Circular Obstacles). *The exact scattered wave  $u$  and the approximate one  $u_h$  at order  $\mathbf{m}$  given by FSSL method are*

$$u(x) := \sum_{I=1}^{\mathbf{N}} \sum_{k=-\infty}^{\infty} V_{I,k}(\mathcal{S}_I \mathbf{w}_{I,k})(x); \quad u_h(x) := \sum_{I=1}^{\mathbf{N}} \sum_{k=-\mathbf{m}}^{\mathbf{m}} V_{I,k}(\mathcal{S}_I \mathbf{w}_{I,k})(x); \quad (40)$$

with

$$(\mathcal{S}_I \mathbf{w}_{I,k})(r_I(x), \theta_I(x)) = \frac{i\pi r_I}{2} e^{ik\theta_I(x)} J_k(\kappa r_I) H_k^{(1)}(\kappa r_I(x)). \quad (41)$$

The unknowns for the exact solution are the Fourier coefficients of the single-layer densities  $\mathbf{V} = (V_{I,k})_{1 \leq I \leq N, k \in \mathbb{Z}}$ , and for the approximate solution the truncated one  $\mathbf{V}_h = (V_{I,k})_{1 \leq I \leq N, -\mathbf{m} \leq k \leq \mathbf{m}}$ . For  $\alpha = D, N$ , and  $Im$ , they have to satisfy the following linear system

$$\mathbf{A}_\alpha \mathbf{V} = \mathbf{F}_\alpha \quad ; \quad \mathbf{A}_{\alpha,h} \mathbf{V}_h = \mathbf{F}_{\alpha,h}. \quad (42)$$

The coefficient matrix  $\mathbf{A}_\alpha$  is composed of  $N \times N$  blocks. Its diagonal blocks  $\mathbf{A}_{\alpha,I}$  are diagonal infinite matrices, with diagonal components given by

$$(\mathbf{A}_{\alpha,I})_{ll} = \frac{i\pi r_I J_l(\kappa r_I)}{2} \times \begin{cases} H_l^{(1)}(\kappa r_I) & , \alpha = D \\ \kappa H_l^{(1)'}(\kappa r_I) & , \alpha = N \\ i\lambda H_l^{(1)}(\kappa r_I) + \kappa H_l^{(1)'}(\kappa r_I) & , \alpha = Im \end{cases} \quad (43)$$

For  $I \neq J$ , the components of the off-diagonal block  $\mathbf{A}_{\alpha,IJ}$  are given by,

$$(\mathbf{A}_{\alpha,IJ})_{lm} = \frac{i\pi r_J}{2} J_m(\kappa r_J) H_{m-l}^{(1)}(\kappa d_{IJ}) e^{i(m-l)\theta_{JI}} \times \begin{cases} J_l(\kappa r_I) & , \alpha = D \\ \kappa J_l'(\kappa r_I) & , \alpha = N \\ i\lambda J_l(\kappa r_I) + \kappa J_l'(\kappa r_I) & , \alpha = Im \end{cases} \quad (44)$$

For the scattering of the plane wave (37), the components of the RHS of (42) are given by

$$(\mathbf{F}_\alpha)_{I,l} = -u_{pw}(\mathbf{x}_I) i^l e^{-il\alpha_{inc}} \times \begin{cases} J_l(\kappa r_I) & , \alpha = D, \\ \kappa J_l'(\kappa r_I) & , \alpha = N, \\ i\lambda J_l(\kappa r_I) + \kappa J_l'(\kappa r_I) & , \alpha = Im. \end{cases} \quad (45)$$

155 The coefficient matrix  $\mathbf{A}_{\alpha,h}$  and the RHS  $\mathbf{F}_{\alpha,h}$  of the approximate problem are truncated versions of the exact ones, as given in (30).

**Remark 5.** 1. The above results can be rewritten entirely using Multipole Theory without mentioning single-layer potentials, see e.g. [28, Remark 5].

160 2. For a fixed wavelength and small enough obstacles, it is expected that the rate of convergence increases as the radius of the obstacles and the distance between them reduce, and decreases with increasing number of the obstacles. For more details, see [28, Section 4.3].

#### 4. Validation of codes and comparison with Montjoie

165 In this section, we compare the computational time between FSSL (using  
 direct solver Mumps or Lapack) and the software Montjoie (MJ). These serve  
 to validate the observed shortcomings of a volume FE-based method for con-  
 figurations with one or a combination of the factors **F.1-F.3** defined in the In-  
 troduction. The numerical results of FSSL were generated by codes written in  
 170 **Fortran90**, and those by Montjoie codes in **C++**, both with double precision and  
 a parallel architecture<sup>13</sup>. Montjoie computes the solution of Helmholtz equation  
 in a finite domain bounded with Perfectly Matched Layers, on a quadrangular  
 mesh refined around the obstacles. Its bases are Lagrange spectral high order  
 curved finite elements based on Gauss-Lobatto points. The inversion of the linear  
 175 system uses Mumps. In the following discussion (concerning Montjoie), we  
 write QN to denote the N-th order FE on quadrangular meshes.

To evaluate the time costs, we distinguish between pre-processing (used for  
 construction and resolution of linear systems of unknowns), and post-processing  
 time (to evaluate the diffracted wave on a visualization grid). For FSSL, pre-  
 processing solves the linear systems (42) for unknowns  $(V_{I,k})$ , which are the  
 Fourier coefficients of the single-layer densities on the boundary of each obstacle,  
 while post-processing evaluates the diffracted field of the form,

$$\sum_{I=1}^{N_{\text{Obs}}} \frac{i\pi r_I}{2} \sum_{k=-\mathbf{m}}^{\mathbf{m}} V_{Ik} e^{ik\theta_I(x)} J_k(\kappa r_I) H_k^{(1)}(\kappa \|x - \mathbf{x}_I\|), \quad (46)$$

for each point in the visualization grid. To compare the post-processing results  
 (the approximate total or diffracted wave on the domain of visualization or at  
 receivers) between FSSL and Montjoie, we use (discrete)  $L^2$  norms. All results  
 obtained by Montjoie can only be compared via this norm. On the other hand,  
 for results obtained by FSSL, and for comparisons within FSSL (e.g. among  
 different orders of discretization to obtain convergence curves, see discussion  
 below, or to compare among different solvers as done in Section 5), we only  
 have to compare the pre-processing results (the single-layer densities) in the  
 norm<sup>14</sup>  $\mathbb{H}_{1/2} = \mathbb{H}_{1/2}(\Gamma_{\text{Obs}})$  defined in (21). For circular obstacles, this norm  
 can be written as

$$\|\mathbf{V}_h\|_{\mathbb{H}_s} = \sum_{I=1}^N \sum_{k=-\mathbf{m}}^{\mathbf{m}} |V_{I,k}|^2 (1+k^2)^s, \quad \mathbf{V}_h = (V_{I,k})_{1 \leq I \leq N, -\mathbf{m} \leq k \leq \mathbf{m}}. \quad (47)$$

FSSL method is mesh-free and can be used with low approximation orders,  
 since an order 2 or 3 generally gives a precision around order  $10^{-2}$  in  $\mathbb{H}^{1/2}$   
 of the single-layer densities, c.f. the convergence curve done for Experiment 1

<sup>13</sup>Our tests were run on the cluster Plafrim ([www.plafrim.fr](http://www.plafrim.fr)).

<sup>14</sup>This norm can be more ‘pessimistic’, i.e. a precision in norm  $\mathbb{H}_{1/2}$  of the densities  
 translates to a higher one in  $L^2$  norm of the final solutions.



180 and 2. As a result, the linear systems generated by FSSL, which are of size  $N \times (2 \times \mathbf{m} + 1)$  for approximation order  $\mathbf{m}$ , are although dense<sup>15</sup>, but much smaller than those generated by Montjoie (for the same precision). For the latter method, assuming the mesh is fine enough to describe the obstacles, a good approximation order is between  $\frac{5(\text{mesh size})}{\text{wavelength}}$  to  $\frac{10(\text{mesh size})}{\text{wavelength}}$ , called ‘5-10 points per  
185 wavelength’ rule. In addition, Montjoie’s precision is constrained by the width and order of the PML layer, which is not the case for FSSL. These factors keep the pre-processing time for FSSL drastically low compared to that for Montjoie.

In evaluating the diffracted field (46) for post-processing in FSSL, the most expensive<sup>16</sup> operation is the computation of Hankel functions at distances between each evaluation point and each obstacle. The time cost increases with the definition of the visualization grid and the number of obstacles<sup>17</sup>. To diminish this drawback of FSSL, when the visualization grid is two-dimensional, we use Hermite cubic spline interpolation (with interpolation step size chosen so that the precision is  $10^{-5}$ ), see description in Appendix B. Nevertheless, we will see  
190 in below experiments that FSSL even with exact evaluation is still faster due to its pre-processing time being drastically small.

We consider three numerical experiments, exploring the benefits of FSSL under the various factors (**F.1-3**),

Exp 1 : **F.2**, <sup>soft-</sup>scattering, Exp 2 : **F.2-3**, <sup>soft-</sup>scattering, Exp 3 : **F.1**, <sup>hard-</sup>scattering.

The experiments are done for obstacles with the same radius, equally spaced horizontally and vertically<sup>18</sup>, with the exception of Exp.1. We denote by  $r$  the obstacle radius,  $d$  the distance between the centers of two adjacent obstacles, and  
200 by  $\lambda$  the wavelength of the plane wave. For the first two experiments, while the size of the visualization domains is within the acceptable range for Montjoie<sup>19</sup>, being  $11\lambda \times 16\lambda$  and  $31\lambda \times 23\lambda$  respectively, the obstacles are much smaller than the wavelength, being  $\frac{1}{16}\lambda$  and  $\frac{1}{21}\lambda$  respectively. The third experiment is designed to estimate the time cost of a ‘forward problem’, if FSSL or Montjoie is employed  
205 in a full-waveform inversion algorithm<sup>20</sup>. In this experiment, the obstacles are only  $\frac{1}{6}\lambda$ , but the domain is greater than  $100\lambda$ , due to the required distance between the obstacles and the receivers (coming from physical experiments). While a lower time cost with FSSL is observed in all three experiments, it is in the third experiment that we see a spectacular gap between the two methods,  
210 with FSSL more than 2000 times faster than Montjoie, c.f. Table 3. This is due

<sup>15</sup>A property shared in general by methods in the boundary integral equation family.

<sup>16</sup>See Footnote 39.

<sup>17</sup>See Footnote 40.

<sup>18</sup> However neither the code nor the method exploits these specificities (equal-sized obstacles and periodic spacing), and the same results should be observed for configurations with different sized obstacles as long as they are within the current smallness assumption (3).

<sup>19</sup>See Footnote 5 in Introduction.

<sup>20</sup> The goal of inverse problem is to reconstruct the true parameters which give rise to the observed data. The ‘forward problem’ gives simulated data corresponding to a guessed set of parameters. In full waveform inversion (or quantitative inversion in general), one will need to solve the ‘forward problem’ a great number of times.

to the fact that in the third experiment the visualization domain is quite big for Montjoie ( $> 100\lambda$ ), and secondly, the final solution is evaluated at 128 points rather than on a two-dimensional grid<sup>21</sup>.

**Numerical experiment 1.** We consider the soft-scattering of  $0^\circ$  plane wave (PW) with  $\kappa = 1.0$ , by 6 very small obstacles on a domain of size  $11\lambda \times 16\lambda$ . The ratio between the obstacle radius  $r = 0.4$ , the distance between the centers of two adjacent obstacles  $d$  with  $2 \leq d \leq 2.9$ , and the incident wavelength  $\lambda \sim 6.3$  are

$$\kappa \times r = 0.4 \quad , \quad \frac{\lambda}{r} \sim 16 \quad , \quad 5 \leq \frac{d}{r} \leq 7 \quad , \quad 2 \leq \frac{\lambda}{d} \leq 3 .$$

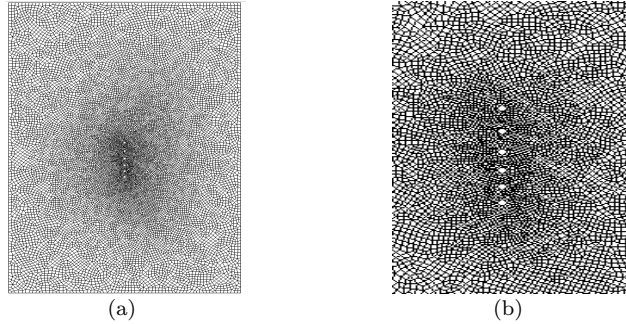


Figure 2: (a) MJ initial mesh with mesh size 0.679. (b) Mesh zoomed around obstacles. (**Num. Exp. 1**)

*Comparison at precision  $10^{-6}$*  We choose MJ Q15 and FSSL 12 as reference solutions (at precision tolerance  $10^{-12}$ ), c.f. Figure 3. Using the convergence curves in Figure 4, we compare between MJ Q5 and FSSL order 3, at precision  $10^{-6}$ . This choice is confirmed by their relative  $L^2$  error compared to the reference solutions (shown below),

Compare between		Rel. $L^2$ error	Hermite interpolation precision is $10^{-6}$	
FSSL 12	FSSL 3	$2.0 \times 10^{-6}$	Compare between	
MJ Q15	MJ Q5	$4.18 \times 10^{-7}$	FSSL 3 Inter	FSSL 3
MJ Q3	FSSL 3	$1.98 \times 10^{-6}$	FSSL 3 Inter	MJ Q5
				Rel. $L^2$ error
				$3.92 \times 10^{-6}$
				$4.40 \times 10^{-6}$

From the comparison shown in Table 1, at a precision of  $10^{-6}$ , FSSL using Hermite interpolation is more than 50 times faster than Montjoie.

**Numerical Experiment 2.** Here we also consider the soft-scattering by very small obstacles on a medium domain of size  $31\lambda \times 23\lambda$ , but with a much larger number of obstacles (200) than in Experiment 1. The specific ratios are

$$\kappa \times r = 0.3 \quad , \quad \frac{\lambda}{r} \sim 21 \quad , \quad \frac{d}{r} \sim 10 \quad , \quad \frac{\lambda}{d} \sim 2 .$$

<sup>21</sup>This is the typical size (one dimensional rather than two) of simulated data in inversion.

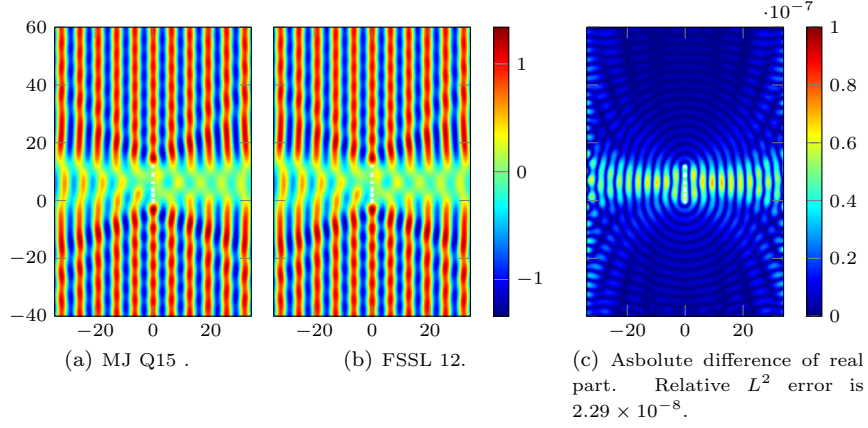


Figure 3: Real part of reference solution (total wave) in the soft-scattering of angle  $0^\circ$  PW with  $\lambda \sim 6.3$  by 6 obstacles with  $r = 0.4$  and  $2 \leq d \leq 2.9$ . (**Num. Exp. 1**)

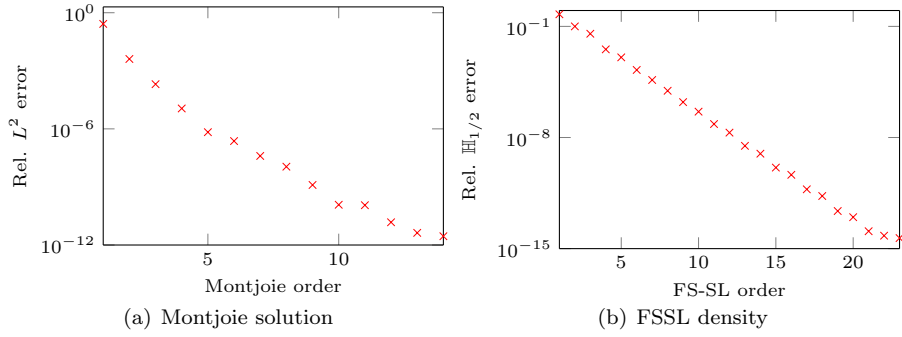


Figure 4: Numerical Convergence using consecutive relative error (**Num. Exp. 1**).

Pre-processing by Mumps	FSSL Order 3	Montjoie CG Q5	Evaluation on $400 \times 400$ grid		
Size of lin. sys.	42	435580			
Task	Time (s)		Exact eval	Inter-polation	MJ Q5
Construction	$1.08 \times 10^{-4}$	1.61	0.26	0.059	0.29
Factorization	$6.95 \times 10^{-4}$	12.12			
Resolution	$1.03 \times 10^{-4}$	0.35			
Total time	$1.45 \times 10^{-3}$	14.09	0.26	0.061	14.76

Table 1: Computational time comparison. At precision  $10^{-6}$ , FSSL using Hermite interpolation (0.06 s) takes 56 times less than MJ (14.7 s). (**Num. Exp. 1**)

We choose Montjoie Q17 shown in Figure 5 and FSSL order 14 in Figure 6 as reference solutions at precision tolerance  $10^{-8}$ . The numerical convergence for both methods is shown in Figure 7. For 200 obstacles, it takes a lot of memory to obtain the convergence curve for Montjoie<sup>22</sup>.

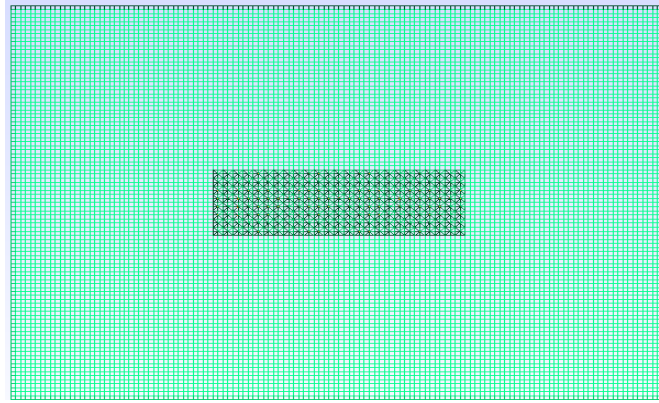


Figure 5: Initial MJ mesh with mesh size 0.13 (**Num. Exp. 2**)

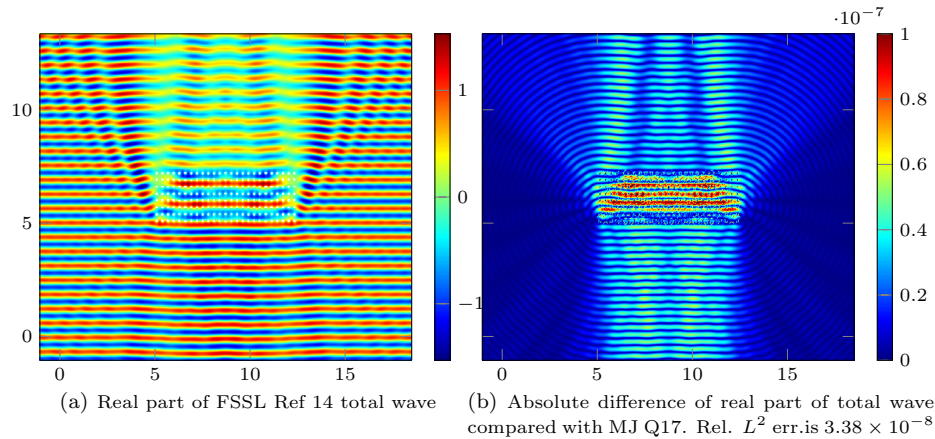


Figure 6: Soft-scattering of PW of angle  $90^\circ$  with  $\kappa = 10$ ,  $\lambda \sim 0.63$  by 200 obstacles with  $r = 0.03$  and  $d = 0.3$ . (**Num. Exp. 2**)

Comparison at precision  $10^{-3}$  Using the convergence curves in Figure 4, we compare between Montjoie Q6 and FSSL order 2. This choice is confirmed by

<sup>22</sup>In fact we stopped at consecutive precision  $10^{-7}$ . At order 16, the overall simulation with Montjoie takes 21.39 GiB.

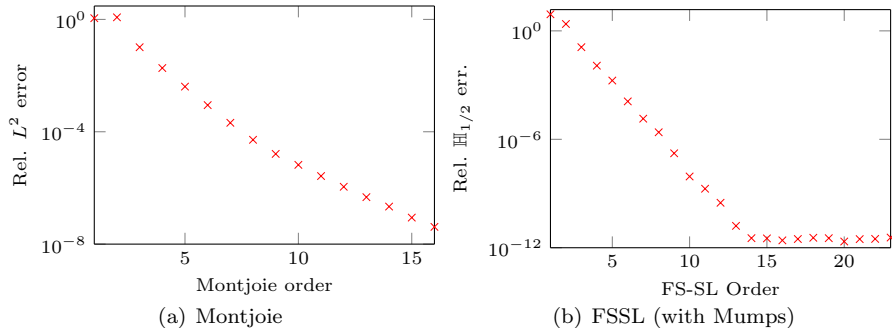


Figure 7: Numerical Convergence using consecutive relative error (**Num. Exp. 2**).

Pre-processing by Mumps	FSSL Order 2	MJ Q6	Evaluation on $400 \times 400$ grid			
Size of lin. sys.	1000	842677		Exact eval	Inter- -polation	MJ Q6
Task	Time (s)					
Construction	0.055	1.97				
Factorization	0.44	29.8	Post-proc.	26.2	4.30	0.72
Resolution	0.003	0.35	Pre-proc. + Post-proc.	<b>26.70</b>	<b>4.80</b>	<b>33.82</b>
Total time	<b>0.498</b>	<b>32.12</b>				

Table 2: Computational time comparison. At precision  $10^{-3}$ , FSSL using Hermite interpolation (4.8 s) takes 7 times less than MJ (33.8 s). (**Num. Exp. 2**)

their relative  $L^2$  error compared to the reference solutions shown below,

Compare between		Rel. $L^2$ error	Hermite interpolation precision is $10^{-6}$		
FSSL 14	FSSL 2	$4.65 \times 10^{-5}$	Compare between		Rel. $L^2$ error
MJ Q17	MJ Q6	$6.52 \times 10^{-4}$	FSSL 2 Inter	FSSL 2	$1.76 \times 10^{-5}$
MJ Q6	FSSL2	$6.84 \times 10^{-4}$	FSSL 2 Inter	MJ Q6	$6.85 \times 10^{-4}$

220 From the comparison shown in Table 2, we obtain the same conclusion as in Experiment 1. The cost of Hankel evaluation is quite large due to the high number of obstacles. However, with either kind of evaluation, FSSL still takes less time than Montjoie. In particular, for precision of  $10^{-3}$ , FSSL with Hermite interpolation takes 7 times less than Montjoie.

**Numerical experiment 3.** This experiment corresponds to a medium-sized physical experiment, in which acoustic vibration produced by an array of transducers - receivers<sup>23</sup> is diffracted by 35 thin aluminum wires immersed in water, as shown in Figure 8. The transducer is placed at a required distance from the obstacles so that its signal<sup>24</sup> can be approximated as a plane wave (of angle

<sup>23</sup>The transducer also acts as receiver.

<sup>24</sup>The central frequency of the input pulse is 500 kHz, and the speed of sound in water  $c$  is  $1478 \text{ m s}^{-1}$ . The corresponding wavenumber  $\kappa$  is  $2125.57 \text{ m}^{-1}$  and spatial wavelength  $\lambda$  is  $2.96 \times 10^{-3} \text{ m}$ .

90°). The diffraction of this signal by thin wires is then approximated as the hard scattering of acoustic sound in fluid. The distance between the obstacles and the receivers results in a bigger domain (of interest)  $117\lambda \times 87\lambda$ . The ratios between the quantities in considerations are given by,

$$\kappa \times r \sim 1.1 \quad , \quad \frac{d}{r} \sim (23, 19) \quad , \quad \frac{\lambda}{r} \sim 5.912 \quad , \quad \frac{\lambda}{d} \sim 0.3 .$$

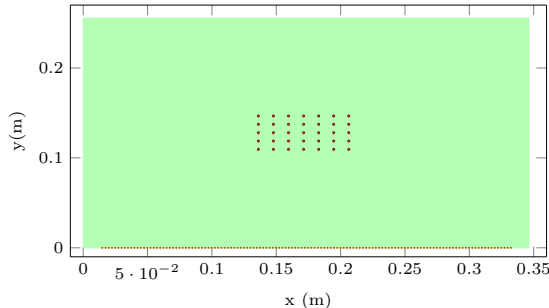


Figure 8: Obstacle and Receptor configurations. The 35 obstacles of radius 0.5 mm are spaced horizontally by 11.7 mm and vertically by 9.28 mm and are immersed in water. The 128 receptors are equally spaced by 2.5 mm. (**Num. Exp 3**)

225 Comparison at precision  $10^{-4}$  Regarding the value of the diffracted wave at 128 receptors, for FSSL (with Lapack), the relative  $L^2$  error between order 12 and order 4 is  $2.82 \times 10^{-6}$ , for Montjoie, the relative  $L^2$  error between Q12 and Q8 with one time mesh refinement<sup>25</sup>, called MJ Q8 Ref 2, is  $1.42 \times 10^{-4}$ . Thus for a precision of order  $10^{-4}$ , we can choose FSSL order 4 and MJ Q8 Ref2, whose relative  $L^2$  error is  $1.4808 \times 10^{-4}$ , c.f. Figure 9. From the comparison 230 shown in Table 3, at a precision  $10^{-4}$ , FSSL with exact post-processing (0.003 s) is more than 2000 faster than Montjoie (61.4 s).

	Size of LS	Pre-proc. Time	Post-proc. at 128 receivers	Total time
<b>FSSL 4</b>	315	$2.40 \times 10^{-2}$	$6.58 \times 10^{-3}$	$3.06 \times 10^{-2}$
<b>MJ Q8 Ref 2</b>	993870	61.27	0.13	61.4

Table 3: Computational time comparison. At precision  $10^{-4}$ , FSSL with exact post-processing (0.003 s) is 2046 times faster than MJ (61.4 s). (**Num. Exp. 3**)

**Remark 6.** If we collect the data of the above experiment on a  $400 \times 400$  grid, then the post-processing time for MJ is 1.16s, for FSSL with exact evaluation 7.59s, and with Hermite interpolation 2.34s. As a result, the total time 235

<sup>25</sup>In order to improve the precision of MJ, we can increase the order of approximation, or refine the mesh. The latter is generally less costly.

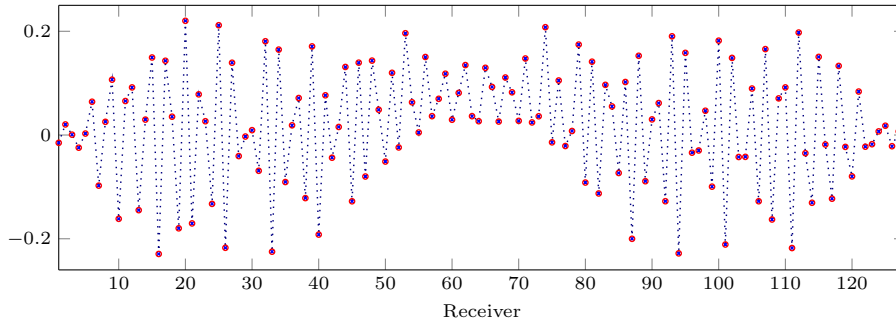


Figure 9: Real part of hard-diffracted wave at 128 receptors for FSSL 4  $\cdots$  and MJ Q8 Raf  $\circ$ . Rel  $L^2$  error is  $1.48 \times 10^{-4}$ . (**Num. Exp. 3**)

*cost for MJ Q8 Raf 2 is 62.43s, for FSSL with exact evaluation 7.63s (thus 8 times faster), and with interpolation Hermite interpolation 2.39 s (thus 26 times faster).*

## 5. Solvers performance comparison within FSSL codes

240 As motivated in the introduction, we need to address the questions, when using FSSL, whether a direct or an iterative solver is better, and within the iterative family which kind of preconditioner will give the fastest convergence. We will see that different formations of obstacles require different solvers to obtain optimality or even just convergence (for the iterative ones).

245 The numerical comparisons between direct solvers (Mumps, Lapack and Scalapack) and iterative solvers in the family of GMRES with restart are carried out for closely-spaced obstacles<sup>26</sup>, characterized by the ratios  $\frac{d}{r} = 10$  and  $\frac{\lambda}{d} = 2$ , and for far-apart obstacles by  $\frac{d}{r} = 200$ ,  $\frac{\lambda}{d} = 0.3$ . The random configuration in [6, 21] corresponds more to our ‘closely-spaced’ experiments<sup>27</sup>. For both types  
250 of configuration, we will assume soft-scattering, however the same result should be expected for hard-scattering.

The comparison is done for preconditioners associated to Jacobi and Gauss-Seidel and for each of them we consider a left or right conditioning position. For brevity, we add  $L_*$  or  $R_*$  to the name of the preconditioners to indicate this. Each

<sup>26</sup>As in previous sections, we assume that the obstacles are of the same radius, equally spaced horizontally and vertically. We have denoted by  $r$  the obstacle radius,  $d$  the distance between the centers of two adjacent obstacles, and by  $\lambda$  the wavelength of the plane wave. As noted before, neither the code nor the method makes use of these assumptions (equal radius, equal spacing)

<sup>27</sup>Intuitively, the configuration of equally and closely spaced obstacles should give more ill-conditioned multi-scattering matrix than in a randomly spaced one, because of the enhanced interaction of the obstacles.

inversion with GMRES with restart comes with parameters: precision tolerance, maximum number of iterations, and Krylov space size (also called restart). We refer readers to [28, Appendix C] and [20] and the references cited therein for a more detailed discussion of the method. Intuitively, a preconditioner  $\mathcal{P}$  to a linear equation with coefficient  $A$ , is defined such that its inverse  $\mathcal{P}^{-1}$  approximates  $A^{-1}$ . Denote by  $L, D, U$  the strictly lower, the diagonal and the strictly upper part of matrix  $A$ . We write

$$M_u = U + D, N_u = -L; M_l = L + D, N_l = -U; R = -L - U.$$

As a result, we have the following splittings of  $A$ ,

$$A = L + D + U = M_u - N_u = M_l - N_l = D - R.$$

1. The **backward Gauss-Seidel (BGS)** preconditioner is  $\mathcal{P} = M_u$ .
2. The **forward Gauss-Seidel (FGS)** preconditioner is  $\mathcal{P} = M_l$ .
3. The **Jacobi** preconditioner is  $\mathcal{P} = D$ .
4. The **2nd-order Jacobi (2Jacobi)** preconditioner is defined as

$$\mathcal{P}^{-1} = D^{-1}(R + D)D^{-1}. \quad (48)$$

The action of the inverse can also be described as applying two Jacobi iterations; in particular,  $u = \mathcal{P}^{-1}f$  is the solution<sup>28</sup> to

$$D\tilde{u} = f; Du = R\tilde{u} + f.$$

255

The above operator can be formally seen as a ‘second-order’ approximation of the Neumann series of  $A^{-1}$  via the splitting<sup>29</sup>  $A = D - R$ .

5. The **2nd-order Forward Gauss-Seidel (2FGS)** preconditioner is

$$\mathcal{P}^{-1} = M_l^{-1}(N_l + M_l)M_l^{-1}. \quad (49)$$

The action of its inverse is such that  $u = \mathcal{P}^{-1}f$  is the solution<sup>30</sup> to

$$\text{Forward GS : } M_l \tilde{u} = f; \text{ Forward GS : } M_l u = N_l \tilde{u} + f.$$

Similarly to 2Jacobi, the above operator can be seen as a ‘second-order’ approximation of the Neumann series of  $A^{-1}$  via the splitting  $A = M_l - N_l$ .

6. The **Symmetric Gauss-Seidel (SGS)** preconditioner is defined as

$$\mathcal{P} = M_u D^{-1} M_l \quad (\text{Symmetric GS preconditioner}). \quad (50)$$

The action of its inverse is such that  $u = \mathcal{P}^{-1}f$  is the solution<sup>31</sup> to

$$\text{Backward GS : } M_u \tilde{u} = f; \text{ Forward GS : } M_l u = N_l \tilde{u} + f.$$

<sup>28</sup>This is seen as  $u = \mathcal{P}^{-1}f = D^{-1}(R + D)D^{-1}f$ .

<sup>29</sup>This is seen as  $A = D - R = D(\text{Id} - D^{-1}R) \Rightarrow A^{-1} = (\text{Id} - D^{-1}R)^{-1}D^{-1} = D^{-1} + D^{-1}RD^{-1} + \sum_{k=2}^{\infty} (D^{-1}R)^k D^{-1}$ .

<sup>30</sup>This is seen as  $u = \mathcal{P}^{-1}f = M_l^{-1}(N_l + M_l)M_l^{-1}f$ .

<sup>31</sup>This is seen as  $u = M_l^{-1}N_l M_u^{-1}f + M_l^{-1}f = M_l^{-1}(N_l + M_u)M_u^{-1}f = M_l^{-1}DM_u^{-1}f$ .



7. The **Lower-Upper Symmetric Gauss-Seidel (LUSGS)** preconditioner is

$$\mathcal{P} = M_l D^{-1} M_u \quad (\text{LU SGS Preconditioner}). \quad (51)$$

The action of its inverse is such that  $u = \mathcal{P}^{-1}f$  is the solution<sup>32</sup> to

$$\text{Forward GS: } M_l \tilde{u} = f ; \text{ Backward GS: } M_u u = N_u \tilde{u} + f .$$

260 The seven preconditioners in our study include two that are mentioned in [6, 21]: the block Jacobi and one which is comparable<sup>33</sup> to our 2nd-order Jacobi. We incorporate the GMRES (with restart) library [20] in our Fortran codes and use its feature which allows users to add routines to define multiplication by coefficient matrices, preconditioners and matrix vector multiplication.

**Numerical Experiment 4.** To have a feel for the convergence of the preconditioners in closely-spaced configurations, we first start with a reasonable number of obstacles (200 in Exp. 4a), then increase to a very large number of them (1616 in Exp. 4b) in order to see how their convergence changes. This process selects the most robust preconditioners. These comparisons are carried out in sequential execution<sup>34</sup>. In the last experiment of this group (Exp. 4c), a more ‘practical’ comparison is done, taking into consideration the possibility of parallelization of the direct family, to give a realistic user’s time cost for simulating very large configurations (2000 obstacles). The results of Exp 4a and 4b are listed in Table 4, 4c in Table 5. The ratios of the configuration are

$$\kappa \times r = 0.3 \quad , \quad \frac{\lambda}{r} \sim 21 \quad , \quad \frac{d}{r} = 10 \quad , \quad \frac{\lambda}{d} \sim 2 .$$

Note that  $\kappa \times r < 2$  hence we are in the invertible region.

265 For 200 obstacles, we obtain convergence for all listed choices with or without preconditioning. In general, the direct solvers take less time than the iterative ones, with the exception of the SGS and LUSGS family which are as fast as Mumps. The iterative solvers give lower precision density (with precision  $10^{-3}$ ) compared to that by direct solvers (at precision  $10^{-12}$ ). The performance of the  
270 GMRES solvers falls into 4 distinct groups, with big performance gaps between them: no pre-conditioning takes 820 iterations, (left and right) preconditioning with Jacobi and 2Jacobi taking  $\sim 500$  iterations, (left and right) preconditioning BGS, FGS, and 2FGS takes  $\sim 199$  iterations, the most efficient group being with SGS and LUSGS which takes  $\sim 76$  iterations. The Jacobi family (Jacobi and  
275 2Jacobi), containing only the information of diagonal blocks, does not perform as well as Gauss-Seidel ones, the latter containing informations of off-diagonal blocks. The first group has difficulty converging, even for 200 obstacles, and does not converge for 1616 obstacles. Intuitively, with the strong interaction

<sup>32</sup>This is seen as  $u = M_u^{-1}N_u\tilde{u} + M_u^{-1}f = M_u^{-1}(N_u + M_l)M_l^{-1}f = M_u^{-1}DM_l^{-1}f$ .

<sup>33</sup>However, we did not use a sparsified version of the preconditioner as is done in [6, 21].

<sup>34</sup>This is a ‘fairer’ comparison (than Exp. 4c) since the current GMRES codes can only be run in sequential.

among closely-spaced obstacles, the coefficient matrix ceases to be diagonally  
 280 dominant, with the off-diagonal blocks (describing interaction between different  
 obstacles) comparable in size to the diagonal ones (describing self-interaction).  
 This confirms the need for preconditioning of the multi-scattering matrix.

For the case of 1616 obstacles, we only obtain convergence for SGS and  
 LUSGS, confirming the fact that this group is the most appropriate choice of  
 285 preconditioner for a multiple-scattering setting. However, with a large number  
 of obstacles, the number of iterations needed for GMRES to converge increases  
 drastically, taking  $\sim 880$  iterations (compared with only  $\sim 76$  for 200 obstacles).  
 As a result, the direct solvers are much more efficient than the GMRES ones,  
 with Lapack being the optimal choice. Mumps while not adapted for dense  
 290 matrices is still faster compared to the GMRES solvers in this case.

Name Method	Case 200 obstacles				Case 1616 obstacles			
	Cv	$\delta_{\text{err}}$ in $\mathbb{H}_{1/2}$	$\#$ Iter	Time (s)	Cv	$\delta_{\text{err}}$ in $\mathbb{H}_{1/2}$	$\#$ Iter	Time (s)
Mumps	n/a	0	n/a	0.5	n/a	0	n/a	130
Lapack	n/a	$10^{-12}$	n/a	0.1	n/a	$10^{-10}$	n/a	42.7
	GMRES parameters ( $10^{-6}$ , 2000,100)				GMRES parameters ( $10^{-6}$ , 2000,150)			
NoPreCond	Y	$5 \times 10^{-3}$	820	0.9	N	n/a	n/a	n/a
L_Jacobi	Y	$5 \times 10^{-3}$	656	0.8	N	n/a	n/a	n/a
L_FGS	Y	$2 \times 10^{-3}$	239	0.5	N	n/a	n/a	n/a
L_BGS	Y	$4 \times 10^{-3}$	197	0.4	N	n/a	n/a	n/a
L_2Jacob	Y	$5 \times 10^{-3}$	594	2.21	N	n/a	n/a	n/a
L_2FGS	Y	$1 \times 10^{-3}$	169	1.0	N	n/a	n/a	n/a
<b>L.SGS</b>	Y	$2 \times 10^{-3}$	76	0.3	Y	$4 \times 10^{-1}$	757	274
<b>L.LUSGS</b>	Y	$1 \times 10^{-3}$	77	0.3	Y	$1 \times 10^{-1}$	897	325
R_Jacobi	Y	$4 \times 10^{-3}$	660	1.05	N	n/a	n/a	n/a
R_FGS	Y	$3 \times 10^{-3}$	199	0.5	N	n/a	n/a	n/a
R_BGS	Y	$3 \times 10^{-3}$	198	0.4	N	n/a	n/a	n/a
R_2Jaco	Y	$4 \times 10^{-3}$	600	1.70	N	n/a	n/a	n/a
R_2FGS	Y	$3 \times 10^{-3}$	155	0.9	N	n/a	n/a	n/a
<b>R.SGS</b>	Y	$3 \times 10^{-3}$	75	0.3	Y	$2 \times 10^{-1}$	886	321
<b>R.LUSGS</b>	Y	$3 \times 10^{-3}$	74	0.3	Y	$2 \times 10^{-1}$	897	325

Table 4: Soft-scattering of PW with  $90.0^\circ$  and  $\kappa = 10$  by obstacles with  $r = 0.03$  and  $d = 0.3$ . FSSL method order=2. ‘Cv’ = Convergence. For full results, see also [28, page 42, 44] (**Numerical result 4a-4b**)

For 2000 obstacles, we limit the comparison to the robust Lower-Upper Sym-  
 metric Gauss-Seidel (LUSGS) and Symmetric Gauss-Seidel (SGS) precondition-  
 ers and the direct solvers. For this experiment, we add a comparison in  $L^2$  norm  
 of the final field, since the relative error in  $\mathbb{H}_{1/2}$  can be pessimistic; secondly,  
 295 the comparison is done in parallel execution and with solver Scalapack. Due  
 to the denseness of the matrix, parallelization does not improve the execution

time for Mumps. On the other hand, the time gain obtained with Lapack is further increased by its parallel version Scalapack. In order to simulate multiple-scattering by 2000 small and closely-spaced obstacles, the optimal choice is using  
 300 Scalapack and Hermite interpolation, which takes a total of 1 min and 10 secs for a visualization of the solution on a  $800 \times 800$  grid. The results are listed in Table 5.

Solver	Post-proc (n16)	Rel $\mathbb{H}_{1/2}$ diff	Rel $L^2$ diff	# iter	Pre-proc. time (s)	Post-proc. time (s)	Total (s)
Mumps (n16)	Exact	$3 \times 10^{-10}$	$8 \times 10^{-14}$	n/a	242	96.0	338
Mumps (n16)	Inter	$3 \times 10^{-10}$	$9 \times 10^{-6}$	n/a	242	36.0	278
Lapack (n1)	Exact	0	0	n/a	80.4	96.0	176
Lapack (n1)	Inter	0	$9 \times 10^{-6}$	n/a	80.4	37.5	118
R.LUSGS (n1)	Exact	$1 \times 10^{-1}$	$4 \times 10^{-5}$	1146	573	95.8	669
R.LUSGS (n1)	Inter	$1 \times 10^{-1}$	$4 \times 10^{-5}$	1146	573	36.2	609
R.SGS (n1)	Exact	$1 \times 10^{-1}$	$4 \times 10^{-5}$	1151	598	95.8	694
R.SGS (n1)	Inter	$1 \times 10^{-1}$	$4 \times 10^{-5}$	1151	598	36.2	635
Scala (n16)	Exact	$3 \times 10^{-10}$	$8 \times 10^{-14}$	n/a	34.6	95.6	130
Scala (n16)	Inter	$3 \times 10^{-10}$	$9 \times 10^{-6}$	n/a	34.6	36.1	70.9

Table 5: Soft-scattering of PW with  $90^\circ$  and  $\kappa = 10.0$  by 2000 obstacles with  $r = 0.03$ , and  $d = 0.30$ . FS-SL method order =2. Matrix size =  $10^4 \times 10^4$ . For parallel execution, the number after  $-n$  indicates the number of processors. GMRES parameters ( $10^{-6}$ , 5000, 400). For full results, see also [28, page 49] (**Num. Exp. 4c**)

**Numerical Result 5.** With incident PW of the same wavelength and same number (2000) obstacles as in Exp. 4c, we now consider a configuration in which the obstacles are further apart. The specific ratios are

$$\kappa \times r = 0.1 \quad , \quad \frac{\lambda}{r} \sim 63 \quad , \quad \frac{d}{r} = 200 \quad , \quad \frac{\lambda}{d} \sim 0.3.$$

The number of iterations for GMRES drastically drop, taking only 56 iterations. This is the same number of iterations needed for 200 closely-spaced obstacles.  
 305 In fact, GMRES with LUSGS preconditioner is twice as fast as Lapack, and is almost comparable in performance to Scalapack running on 16 processors. On the other hand, the distance between obstacles has small impact on the direct solvers. Their performance time stays approximately the same. As a result, for the case where the obstacles are far-way, under low precision, one has the option  
 310 of using GMRES with either LUSGS or SGS as preconditioners. The results are listed in Table 6.

Solver	Post-proc (n16)	Rel $\mathbb{H}_{1/2}$ diff	Rel $L^2$ diff	# iter	Pre-proc. time (s)	Post-proc. time (s)	Total (s)
Mumps (n1)	Exact	0.0	0.0	n/a	251	96.0	347
Mumps (n1)	Inter	0.0	$1 \times 10^{-5}$	n/a	251	37.5	289
Lapack (n1)	Exact	$4 \times 10^{-12}$	$2 \times 10^{-15}$	n/a	79.9	96.0	176
Lapack (n1)	Inter	$4 \times 10^{-12}$	$1 \times 10^{-5}$	n/a	79.9	37.5	118
R.LUSGS (n1)	Exact	$3 \times 10^{-4}$	$1 \times 10^{-7}$	57	37.5	96.0	134
R.LUSGS (n1)	Inter	$3 \times 10^{-4}$	$1 \times 10^{-5}$	57	<b>37.5</b>	<b>37.5</b>	<b>75.3</b>
R.SGS (n1)	Exact	$4 \times 10^{-4}$	$1 \times 10^{-7}$	56	37.0	96.0	133
R.SGS (n1)	Inter	$4 \times 10^{-4}$	$1 \times 10^{-5}$	56	<b>37.0</b>	<b>37.5</b>	<b>74.6</b>
Scala (n16)	Exact	$1 \times 10^{-11}$	$4 \times 10^{-15}$	n/a	34.9	96.0	131
Scala (n16)	Inter	$1 \times 10^{-11}$	$1 \times 10^{-5}$	n/a	<b>34.9</b>	<b>37.5</b>	<b>72.5</b>

Table 6: Soft-scattering of PW with  $90.0^\circ$  and  $\kappa = 10.0$  by 2000 obstacles with  $r = 0.01$ , and  $d = 2.00$ . FSSL method order 2. Matrix size =  $10000 \times 10000$ . GMRES Solver ( $10^{-7}$ , 5000,500). For parallel execution, the number after  $-n$  indicates the number of processors. For full results, see also [28, page 51] (**Num. Exp. 5**)

**Numerical Result 6.** The only solver that can handle very large number of small obstacles is currently the robust direct solver Scalapack. With the same ratios, from Experiment 4, for the soft-scattering of 10000 small closely-spaced obstacles, FSSL with Scalapack takes 24 mins 40 secs on 48 processors, see Figure 10. Most of this cost is pre-processing, 22 mins 20 secs.

**Remark 7.** As noted from experiment 5 that the distance between the obstacles has small impact on the performance of direct solvers, we should expect the same time cost, if these obstacles are far-apart (e.g. with the ratios of Exp 5). In addition, the same results should be expected for hard-scattering.

**Observations from the solver comparisons.** For closely-spaced configuration and FSSL of order 2, our results with 200, 1616 and 2000 obstacles show a definitive lead in performance for the direct family (Mumps, Lapack and Scalapack) compared with the GMRES family (with or without preconditioning). In particular, Lapack and its parallel version Scalapack lead in efficiency, with a great gap between them and the iterative family. While Mumps is less adapted because of the denseness of the multi-scattering linear systems, it still takes less time than the iterative family; the latter has difficulties converging for 1616 and 2000 obstacles. For 2000 obstacles and a visualization on a  $800 \times 800$  grid, Scalapack (on 16 cores) with Hermite interpolation (on 16 cores) takes 1 min 10 secs, c.f. Table 5.

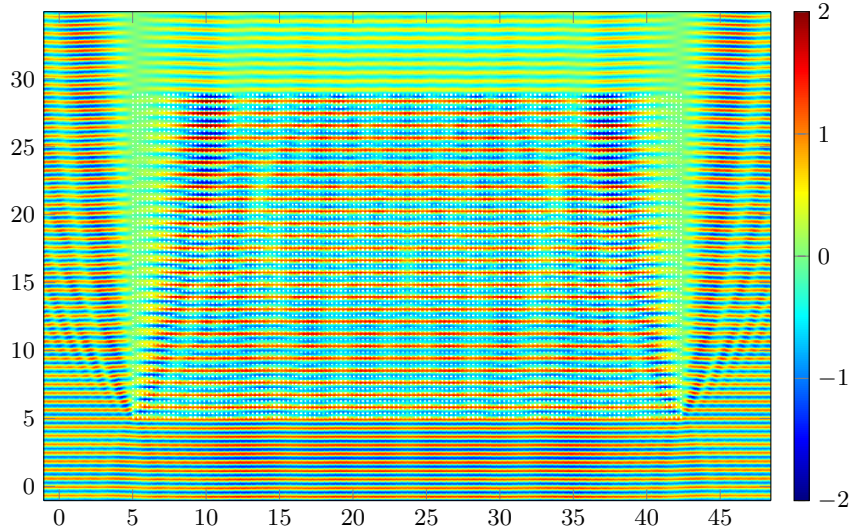


Figure 10: (Real part of) soft-scattered total wave of a PW of  $90^\circ$  with  $\lambda \sim 0.63$  by 10000 obstacles with  $r = 0.03$  and  $d = 0.3$ . FSSL approx order = 2. Matrix size =  $50000 \times 50000$ . Resolution by Scalapack on 48 processors. Visualization is  $800 \times 800$  grid on domain  $79\lambda \times 57\lambda$ . Total time  $\sim 25$  mins. (**Num. Exp. 6**)

It is in the setting of far-apart obstacles, that we observe the advantage of the iterative solvers. We note the prominent robustness of the Lower-Upper Symmetric Gauss-Seidel (LUSGS) and Symmetric Gauss-Seidel (SGS) preconditioners above the rest. These preconditioners are twice as fast as Lapack, and are almost comparable in performance to Scalapack. This robustness of iterative solvers was observed in [21, 6], however for their dense media. Thus we have arrived a different conclusion regarding the robustness of the direct and iterative families. In addition, among the family of preconditioners, we did not observe the robustness of the Jacobi preconditioner, as noted in [21, 6]. As mentioned, it is the LUSGS and SGS that are very robust, being head-to-head with Scalapack on several processors for far-apart obstacles, and when the obstacles are close together, being the only preconditioners that converge. We also tested to see up to how many obstacles FSSL and its solvers can handle within a ‘reasonable’ implementation time. For  $10^4$  small and closely-spaced circular obstacles, the linear system is of size 50000, and the only<sup>35</sup> solvers that can handle this case is Scalapack with calculation time on 48 cores is  $\sim 25$  mins, c.f. Exp. 6.

In [8], iterative solvers are also used to resolve the multiple scattering linear

<sup>35</sup>However, this might change with the parallelization and optimization of the codes for the iterative solvers with SGS and LUSGS solvers. Since the codes for the iterative solvers are currently sequential, with optimization and parallelization their performance can be improved (for far-apart obstacles).

350 systems (associated with the modified layer Ansatz), and the (pre-processing)  
CPU time for circular (but larger, with radius  $\lambda$ ) obstacles are substantially  
longer than what is observed for our experiments and in [6] for the same number  
of (smaller) obstacles. Our codes do not take advantage of the Toeplitz structure  
of the off-diagonal blocks as in [6, 9], a point which should be incorporated in  
future work. Our performance time for solver Lapack is comparable to that  
355 reported in [9] (for closely-spaced obstacles).

## 6. Conclusion

Our numerical experiments have shown the robustness of FSSL method in  
solving the multiple scattering problem for small circular obstacles in large ho-  
mogeneous media. Being mesh-free, it can handle efficiently a large number  
360 of obstacles on an infinite homogeneous domain, while allowing the size of the  
obstacles to be very small compared to the incident wavelength. In addition,  
the linear systems generated by the method have simple definition, and thus  
enable easy coding and implementation.

For optimality, different formations of obstacles require different solver types.  
365 Direct Solvers (Lapack and Scalapack) are more efficient than iterative solvers  
in treating the cases where the obstacles are close together. On the other hand,  
iterative solvers are more preferable when the obstacles are far apart; in par-  
ticular, GMRES methods with preconditioners LUSGS and SGS outperform  
Lapack and are head-to-head with parallel Scalapack. In the family of precon-  
370 ditioners, we note the prominent robustness of LUSGS and SGS preconditioners,  
above the rest (especially in comparison to Jacobi). In both settings, due to  
parallelization, Scalapack takes the least time among the solvers.

However, the choice of an optimal solver also depends on the type of appli-  
cations. In inverse problems where one needs the value of the diffracted field  
375 at a line array of receivers, the evaluation cost is low, the weakness of FSSL  
(post-processing cost) is thus diminished. This makes FSSL more adapted than  
a FEM-based method. Regarding the choice of solvers within the FSSL, in ad-  
dition to their robustness shown in the paper, the direct solvers (Lapack and  
Scalapack) are additionally ideal for the pragmatic reasons that they provide  
380 higher precision and allow multi-rhs<sup>36</sup>, and that the forward and adjoint prob-  
lem use the same factorization<sup>37</sup>. Since their performance does not vary as  
that of iterative ones with the distance of the obstacles, and Scalapack is faster  
than GMRES in either configuration, it is the ideal solver for our application.

---

<sup>36</sup> In inverse problem, e.g. with Full waveform inversion, one has to solve many forward  
problems (see Footnote 20 in Section 4). With several acquisition data, e.g. when there  
are different types of sources (for the same wavenumber), each of these forward problems  
comes with multiple right hand sides. As a result, a solver with multi-rhs feature shortens the  
resolution time for each forward problem, and thus the overall implementation time for the  
inversion.

<sup>37</sup> Unlike the iterative family, they can shorten the resolution time for the adjoint problem  
by reusing the factorization of the coefficient matrix, already obtained in the forward problem.

Another appeal of this solver is that, with parallelization and shared memory  
 385 architecture, it can handle a larger number of obstacles; an extreme example  
 was shown for the case of  $10^4$  small and closely spaced obstacles which can only  
 be handled by FSSL with Scalapack (on 48 processors), for a total cost of 25  
 minutes.

*Current and future problems.* Due to their observed robustness, we are currently  
 390 applying FSSL using direct solvers to reconstruct the positions of multiple de-  
 fects in a homogeneous media by full-waveform inversion. A future work will  
 treat the transmission problems for both acoustic-acoustic and acoustic-elastic  
 interaction. A mathematical discussion for acoustic inclusions can be found in  
 [28, 7]. For extensions to general geometries, to maintain the robustness ob-  
 395 served for disc geometry, we will need an efficient integration quadrature rule  
 to numerically evaluate the components of the multiple-scattering linear sys-  
 tems<sup>38</sup> and handle the weak singularity of the Green kernel. This should be  
 compared with other methods e.g. Nystrom, collocation, and in view of the  
 results and more sophisticated methods in [11, 5, 29, 10] for a low number of  
 400 obstacles. In addition, future optimization of the codes should take into account  
 the Toeplitz structure of the multiple-scattering matrix, and be bench-marked  
 with the performance in [9].

## Acknowledgement

This work is part of a research program partially funded by Le Conseil  
 405 Régional Nouvelle Aquitaine and the European Union's Horizon 2020 research  
 and innovation program under the Marie Skłodowska-Curie grant agreement No  
 644602. The authors would like to thank MBarek Fares for providing us the  
 original codes of GMRES. The authors would also like to thank the referee and  
 reviewers for their constructive comments.

## 410 Appendix A. Lemma for Fredholmness

We will need the following uniqueness results (for the proof of Lemma 6).

**Theorem 4** (Uniqueness). *Hypothesis for the boundary* :  $\Gamma_{Obs} \in \mathcal{C}^2$ .

1. The EDP (5) and ENP have at most one solution.
2. The EIP (6) has at most one solution if  $\text{Im}(\bar{\kappa}i\lambda) \geq 0$ , on  $\Gamma_{Obs}$ .

---

<sup>38</sup>The RHS of (28) is a double line integral. For example, when  $\alpha = D$ ,

$$\begin{aligned} (\mathbf{A}_{D,IJ})_{lk} &= \int_{\Gamma_I} \mathbf{w}_{I,l} \int_{\Gamma_J} \overline{G_\kappa(x,y) \mathbf{w}_{J,k}} ds(\Gamma_J) ds(\Gamma_I) \\ &= \int_0^{2\pi} \int_0^{2\pi} e^{il\theta} \overline{G_\kappa(\gamma_I(\theta), \gamma_J(\tilde{\theta}))} e^{-ik\tilde{\theta}} |\phi'_I(\theta)| |\phi'_J(\tilde{\theta})| d\tilde{\theta} d\theta. \end{aligned}$$

415 For the proof of EDP and ENP, we refer to [24, Thm 3.13]; for EIP, we refer to  
 [24, Theorem 3.37]. For our investigation, we will only consider real and positive  
 parameters, as a result, uniqueness is guaranteed.

The invertibility of the multiple-scattering linear system in Proposition 2  
 needs Lemmas 5 for Fredholmnes of  $\mathbf{A}_\alpha$  and 6 for their injectivity. Their proofs  
 420 rely on the mapping properties of the surface operator, listed in (8) and the  
 following, for their proof see [22, Theorem 7.3]. For the following discussion, we  
 drop the first index (denoting the interface) in their notation in (7) and write  
 $\mathbf{S}_\kappa$ ,  $\mathbf{D}_\kappa$ , and  $\mathbf{D}'_\kappa$  for the surface potentials along a simple and closed curve  $\Gamma$  at  
 wavenumber  $\kappa$ .

1. When  $\kappa = i$  (with  $i^2 = -1$ ),  $\mathbf{S}_i$  is  $H^{-1/2}(\Gamma)$  - coercive, i.e.

$$\langle \mathbf{S}_i \phi, \phi \rangle_{H^{1/2}(\Gamma), H^{-1/2}(\Gamma)} \geq C \|\phi\|_{H^{-1/2}(\Gamma)}^2.$$

425 2. If  $\kappa^2$  is not a Dirichlet eigenvalue of  $-\Delta$  in  $\Omega$ , then the SL potential  
 at wavenumber  $\kappa$ ,  $\mathbf{S}_\kappa : H^{-1/2}(\Gamma) \rightarrow H^{1/2}(\Gamma)$  is an isomorphism with  
 bounded inverse.

3. For  $-1 \leq s \leq 1$ , the following operators are compact and bounded

$$\mathbf{S}_\kappa : H^{s-1/2}(\Gamma) \longrightarrow H^{s-1/2}(\Gamma), \quad \mathbf{S}_\kappa - \mathbf{S}_i : H^{-1/2}(\Gamma) \longrightarrow H^{1/2}(\Gamma), \quad (\text{A.1})$$

We will also use following properties of the jump of single-layer potentials,

$$\llbracket \gamma_0 \mathbf{S}_\kappa \psi \rrbracket = 0 \text{ in } H^{1/2}(\Gamma) \quad , \quad \llbracket \gamma_1 \mathbf{S}_\kappa \psi \rrbracket = -\psi \text{ in } H^{-1/2}(\Gamma).$$

The sign convention on the jump is

$$\llbracket \gamma_0 f \rrbracket := \gamma_0^+ f - \gamma_0^- f ; \quad \llbracket \gamma_1 f \rrbracket := \gamma_1^+ f - \gamma_1^- f = \llbracket \nabla f \rrbracket \cdot \mathbf{n}.$$

**Lemma 5.** For  $\alpha = D, Im$  and  $N$ , the operator  $\mathbf{A}_\alpha$  is Fredholm.

*Proof.* For each type of boundary conditions, we will show that  $\mathbf{A}_\alpha$  can be  
 430 written as a product of an invertible operator and a compact perturbation of  
 the identity map. We recall the notation that  $\mathbf{S}_{I,i}$  is the single-layer potential,  
 along boundary  $\Gamma_I$  of obstacle  $I$ , at wavenumber  $i$ .

**Dirichlet** : Decompose  $\mathbf{A}_D$  as follows,

$$\mathbf{A}_D = \mathbf{B} + \mathbf{C}_D \quad , \quad \mathbf{B} := \mathbf{diag} (\mathbf{S}_{1,i}, \mathbf{S}_{2,i}, \dots, \mathbf{S}_{N,i}) . \quad (\text{A.2})$$

Here  $\mathbf{B}$  is zero except along its diagonal block. Since its components  $\mathbf{S}_{I,i} : H^{-1/2}(\Gamma_I) \rightarrow H^{1/2}(\Gamma_I)$  are invertible with bounded inverse  $\mathbf{S}_{I,i}^{-1}$ , operator  $\mathbf{B}$  is invertible with bounded inverse

$$\mathbf{B}^{-1} = \mathbf{diag} (\mathbf{S}_{1,i}^{-1}, \mathbf{S}_{2,i}^{-1}, \dots, \mathbf{S}_{N,i}^{-1}) : \mathbb{H}_{1/2}(\mathbf{\Gamma}_{\mathbf{Obs}}) \longrightarrow \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\mathbf{Obs}}) . \quad (\text{A.3})$$

We next consider the remainder  $\mathbf{C}$ . Its components are given by

$$\mathbf{C}_{IJ} = \mathbf{S}_{IJ,\kappa} , \quad I \neq J ; \quad \mathbf{C}_{IJ} = \mathbf{S}_{I,\kappa} - \mathbf{S}_{I,i} , \quad I = J .$$



Since  $\mathbf{S}_{IJ,\kappa} : H^{-1/2}(\Gamma_J) \rightarrow H^{1/2}(\Gamma_I)$ , with  $I \neq J$ , and  $\mathbf{S}_{I,\kappa} - \mathbf{S}_{I,i} : H^{-1/2}(\Gamma_I) \rightarrow H^{1/2}(\Gamma_I)$  are bounded and compact, so is  $\mathbf{C}_{IJ} : H^{-1/2}(\Gamma_J) \rightarrow H^{1/2}(\Gamma_I)$ , and

$$\mathbf{K} := \mathbf{B}^{-1}\mathbf{C} : \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \longrightarrow \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \text{ is bounded and compact.}$$

As a result,  $\mathbf{A}_D$  is a Fredholm operator with

$$(\mathbf{A}_D)_{\mathbb{H}_{-1/2} \rightarrow \mathbb{H}_{1/2}} = \mathbf{B}_{\mathbb{H}_{-1/2} \rightarrow \mathbb{H}_{1/2}} (\mathbf{Id}_{\mathbb{H}_{-1/2} \rightarrow \mathbb{H}_{-1/2}} + \mathbf{K}_{\mathbb{H}_{-1/2} \rightarrow \mathbb{H}_{-1/2}}). \quad (\text{A.4})$$

**Impedance and Neumann** : For  $\alpha = I$  and  $N$ , we can readily decompose

$$\mathbf{A}_\alpha = -\frac{1}{2}(\mathbf{Id} - \mathbf{K}_\alpha) \quad , \quad \mathbf{K}_{IJ} = 2\mathbf{D}'_{IJ,\kappa} + 2i\lambda\mathbf{S}_{IJ,\kappa}. \quad (\text{A.5})$$

Since  $\mathbf{S}_{IJ,\kappa}$ ,  $\mathbf{D}'_{IJ,\kappa} : H^{-1/2}(\Gamma_J) \rightarrow H^{-1/2}(\Gamma_I)$  is bounded and compact,

$$\mathbf{K}_\alpha : \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \longrightarrow \mathbb{H}_{-1/2}(\mathbf{\Gamma}_{\text{Obs}}) \text{ is bounded and compact.}$$

□

**Lemma 6.** *If  $\kappa^2$  is not a Dirichlet eigenvalue for  $-\Delta$  inside domain  $\Omega_I$  with  $1 \leq I \leq N$ , then  $\mathbf{A}_\alpha$  is injective, with  $\alpha = D, N, Im$ .*

*Proof.* We will make extensive use of the well-posedness of the exterior boundary values problems listed in Theorem 4. For  $\psi_I \in H^{-1/2}(\Gamma_I)$  such that

$$\mathbf{A}_\alpha \psi = 0 \quad , \quad \psi = (\psi_1, \dots, \psi_N) \quad ,$$

we want to show that  $\psi = 0$ . This would follow, if  $u$  defined as

$$u := \mathcal{S}_{1,\kappa}\psi_1 + \dots + \mathcal{S}_{2,\kappa}\psi_N \quad , \quad (\text{A.6})$$

is zero in  $\Omega_{\text{ext}}$ . This can be seen as follows. Since  $\mathcal{S}_I$  extends to all  $\mathbb{R}^2$ ,  $u$  as defined solves  $(-\Delta - \kappa^2)u = 0$  both in  $\Omega_{\text{ext}}$  and  $\Omega_I$ ,  $1 \leq I \leq N$ . Under the assumption that  $u = 0$  in  $\Omega_{\text{ext}}$ , we have  $\gamma_{0,I}^+ u = 0$ ,  $1 \leq I \leq N$ . By the continuity of zero-th order trace of the single layers, we have  $\gamma_{0,I}^- u = \gamma_{0,I}^+ u = 0$ . This means that  $u$  solves the interior Dirichlet problem at wavenumber  $\kappa$  with zero boundary value in each domain  $\Omega_I$ . By assumption,  $\kappa^2$  is not a Dirichlet eigenvalue on  $\Omega_I$ , this forces  $u = 0$  in  $\Omega_I$ . As a result,  $\gamma_{1,I}^- u = 0$ ,  $1 \leq I \leq N$ . On the other hand, under the current assumption  $u = 0$  in  $\Omega_{\text{ext}}$ , we have

$$\llbracket \gamma_{1,I} u \rrbracket = 0 \quad , \quad I = 1, \dots, N.$$

Now, we can use the jump identity for single layer,  $\llbracket \gamma_{1,I} \mathcal{S}_{I,\kappa}\psi_I \rrbracket = \psi_I$  and  $\llbracket \gamma_{1,I} \mathcal{S}_{J,\kappa}\psi_J \rrbracket = 0$ ,  $I \neq J$ , c.f. (9), to obtain

$$\llbracket \gamma_{1,I} u \rrbracket = \llbracket \gamma_{1,I} \mathcal{S}_1 \psi_1 \rrbracket + \dots + \llbracket \gamma_{1,I} \mathcal{S}_2 \psi_N \rrbracket = \psi_I.$$

As a result, we have shown that, if  $u$  defined in (A.6) is zero in  $\Omega_{\text{ext}}$ , and under non-Dirichlet eigenvalue assumption on  $\kappa^2$ , then the jump  $\psi_I = \llbracket \gamma_{1,I} u \rrbracket = 0$  and thus  $\psi = 0$ .

Now it remains to prove that this assumption on  $\kappa^2$ ,  $u$  as defined in (A.6) in  $\Omega_{\text{ext}}$  is zero, for each case  $\alpha = \text{D}$ ,  $\text{Im}$ , and  $\text{N}$ .

**Dirichlet** : That  $\psi$  is in the kernel of  $\mathbf{A}_D$  implies  $\gamma_{0,I}u = \gamma_{0,I}^-u = \gamma_{0,I}^+u = 0$ ,  $I = 1, \dots, N$ . This means  $u$  solves the exterior Helmholtz equation at  $\kappa$  with zero Dirichlet boundary. By the well-posedness of this problem, we obtain  $u = 0$  for  $\Omega_{\text{ext}}$ .

**Impedance (and Neumann for  $\lambda = 0$ )** : For  $\alpha = \text{Im}$  and  $N$ , that  $\psi$  is in the kernel of  $\mathbf{A}_\alpha$  implies that  $(\gamma_{0,I}^+ + i\lambda\gamma_{1,I}^+)u = 0$ ,  $I = 1, \dots, N$ . This means  $u$  solves the exterior Helmholtz equation at  $\kappa$  with zero Impedance (Neumann for  $\lambda = 0$ ) boundary value. By the well-posedness of this problem, we obtain  $u = 0$  for  $\Omega_{\text{ext}}$ .

450

□

## Appendix B. Hermite cubic interpolation for Hankel functions

In evaluating the diffracted field (46) for post-processing in FSSL, the most expensive<sup>39</sup> operation is the computation of Hankel functions at distances between each evaluation point and each obstacle. In particular, consider  $N$  obstacles and a domain of interest  $[a, b] \times [c, d]$  meshed by a  $M \times M'$  structured grid. For every  $x$  on this grid,  $1 \leq I \leq N$  and  $0 \leq k \leq \mathbf{m}$ , we need to calculate

$$\mathbf{H}_k^{(1)}(\kappa\|x - \mathbf{x}_I\|). \quad (\text{B.1})$$

If we ignore<sup>40</sup> the cost of several orders  $k$ , the cost is

$$\text{Total cost} \sim (\text{Cost for one eval of (B.1)}) \times M \times M' \times N. \quad (\text{B.2})$$

Following is a discussion of the method<sup>41</sup> we chose in this paper to reduce the cost associated with the factor  $M \times M'$ . Denote by  $\Omega_{\text{visu}}$  the set of points of the visualization grid which are outside the obstacles.

In our codes, we use the intrinsic functions `Bessel_JN` and `Bessel_YN` of `Fortran90`<sup>42</sup>. The recurrence relation and identity, c.f. [26, Chapter 9 p.361], followed by Bessel functions of integer orders, are also used

$$Z_{k-1}(z) + Z_{k+1}(z) = \frac{2k}{z} Z_k(z) \quad , \quad (\text{B.3})$$

$$Z_{-k}(z) = (-1)^k Z_k(z). \quad (\text{B.4})$$

<sup>39</sup> Remark 9 shows that the cost of computing  $\exp(i\cdot)$  and the Hankel functions are much more expensive than standard operations (multiplication, addition). For the current codes, we only focus on reducing the cost of Hankel functions, since this one is about twice the cost of the exponential.

<sup>40</sup> Higher order Hankels are calculated by recurrence relations, thus the cost due to the order of approximation (generally  $< 4$ ) is less substantial than other factors.

<sup>41</sup>This is just one of the many ways to reduce the cost.

<sup>42</sup>Their description can be found at [https://gcc.gnu.org/onlinedocs/gfortran/BESSEL\\_005fJN.html](https://gcc.gnu.org/onlinedocs/gfortran/BESSEL_005fJN.html) and [https://gcc.gnu.org/onlinedocs/gfortran/BESSEL\\_005fYN.html](https://gcc.gnu.org/onlinedocs/gfortran/BESSEL_005fYN.html). These two functions allow vectorization in one of the input variables, either the order or the point of evaluation. For the exact post-processing, we take advantage of the first option, while for the interpolation, we use the latter.

455 In the above expressions,  $Z = J$  (the Bessel function of the first kind) or  $Y$  (Bessel function of the second kind). In the following discussion, the current order of approximation is  $\mathbf{m}$ .

*Step 1.* We create a grid on which the exact value of the Hankel and its derivatives for order  $k$  with  $0 \leq k \leq \mathbf{m}$  are calculated for each node.

- Estimate a lower bound  $r_{\min}$  and an upper bound  $r_{\max}$  of the set

$$\{ \|x - \mathbf{x}_I\| \mid 1 \leq I \leq N, x \in \Omega_{\text{visu}} \}.$$

460 This is the set of possible distances between any point in  $\Omega_{\text{visu}}$  to the center of any of the obstacles.

- For our experiments, we use interpolation step size<sup>43</sup>  $h_{\text{inter}} = 0.1$ . Create a vector  $V_{\text{inter}}$  with endpoints  $\kappa \times r_{\min}$  and  $\kappa \times r_{\max}$  and increment  $h_{\text{inter}}$ , i.e.  $V_{\text{inter}} = [\kappa \times r_{\min} : h_{\text{inter}} : \kappa \times r_{\max}]$ . This vector is of length

$$L = \left\lceil \frac{\kappa \times r_{\max} - \kappa \times r_{\min}}{h_{\text{inter}}} \right\rceil + 1, \lceil \cdot \rceil \text{ is the floor function.}$$

Also denote by  $t_i$  the components of  $V_{\text{inter}}$ , i.e.  $t_i = \kappa \times r_{\min} + i \times h_{\text{inter}}$ .

- We call `Bessel_YN(0, V_inter)` and `Bessel_YN(1, V_inter)` to obtain the values of  $Y_0$  and  $Y_1$  at each node of vector  $V_{\text{inter}}$ . Higher orders  $2 \leq k \leq \mathbf{m}+1$  are calculated by using the recurrence relation (B.3) ‘upwardly’. Order  $\mathbf{m}+1$  is used for calculating derivatives of the Bessel functions in the next step. The calculation for Bessel  $J$  is carried similarly but ‘downward’<sup>44</sup>.
- The Hankel function of the first kind  $H_n^{(1)}$  and its derivatives  $H_n^{(1)'}$  on each node of  $V_{\text{inter}}$  and for orders  $0 \leq k \leq \mathbf{m}$  are obtained by the identities, c.f. [26, Chapter 9 p.361]

$$H_k^{(1)} = J_k + i Y_k, \quad 2 H_k^{(1)'} = H_{k-1}^{(1)} - H_{k+1}^{(1)}, \quad H_0^{(1)'} = -J_1 - i Y_1.$$

*Step 2.* After having obtained the value  $H_k^{(1)}$  and its derivative for each node point  $t_i$  of  $V_{\text{inter}}$ , we next calculate the function  $\mathbf{p}_k$  which gives the interpolating value of  $H_k^{(1)}$  at any point  $t \in [t_1, t_L]$ . We use Hermite cubic interpolation,

<sup>43</sup>This step size corresponds to a precision of  $10^{-5}$  in our numerical experiments. This is the relative difference in (discrete)  $L^2$  norm between the result obtained by exact evaluation and interpolated one.

<sup>44</sup>We call `Bessel_JN(m+1, V_inter)` and `Bessel_JN(m, V_inter)`. Orders  $k$  with  $0 \leq k \leq \mathbf{m} - 1$  are calculated using the recurrence relation (B.3) in the downward direction. The reason for choosing ‘downward’ or ‘upward’ is due to numerical stability. For  $Y_k$  the upward recurrence (B.3) is stable, while for  $J_k$  it is the downward direction that is stable, c.f. [30, p. 301]

and follow the discussion in [31, p. 48]. The interpolating function  $\mathbf{p}_k$  on each interval  $[t_i, t_{i+1}]$  is equal to the cubic polynomial  $\mathbf{p}_{k,i}$  defined by the properties

$$\begin{aligned} \mathbf{p}_{k,i}(t_i) &= \mathbf{H}_k^{(1)}(t_i) \quad , \quad \mathbf{p}_{k,i}(t_{i+1}) = \mathbf{H}_k^{(1)}(t_{i+1}) \\ \mathbf{p}'_{k,i}(t_i) &= \mathbf{H}_k^{(1)'}(t_i) \quad , \quad \mathbf{p}'_{k,i}(t_{i+1}) = \mathbf{H}_k^{(1)'}(t_{i+1}) \quad . \end{aligned} \quad (\text{B.5})$$

We write  $\mathbf{p}_{k,i}$  (which is also  $\mathbf{p}_k|_{[t_i, t_{i+1}]}$ ) as

$$\mathbf{p}_{k,i}(t) = a_{k,i;0} + a_{k,i;1}(t-t_i) + (t-t_i)(t-t_{i+1}) [a_{k,i;2}(t-t_i) + a_{k,i;3}(t-t_{i+1})] \quad , \quad (\text{B.6})$$

and calculate its coefficients  $a_{k,i;0}, \dots, a_{k,i;3}$  by formula (10.10) in [31, p. 48].

*Step 3.* For each  $k$  with  $0 \leq k \leq \mathbf{m}$ ,  $I$  with  $1 \leq I \leq N$ , and each point  $x$  on the  $M \times M'$  structured grid, we calculate  $\mathbf{H}_k^{(1)}(\kappa \|x - \mathbf{x}_I\|)$  as follows. We first determine the interval in which  $\kappa \|x - \mathbf{x}_I\|$  belongs; in particular,

$$\kappa \|x - \mathbf{x}_I\| \in [t_i, t_{i+1}] \quad \text{with} \quad i = \left\lceil \frac{\kappa \|x - \mathbf{x}_I\| - t_1}{h_{\text{inter}}} \right\rceil + 1. \quad (\text{B.7})$$

Since  $\mathbf{H}_k^{(1)}$  is approximated by the interpolating polynomial  $\mathbf{p}_{k,i}$  on this interval, we use

$$\mathbf{H}_k^{(1)}(\kappa \|x - \mathbf{x}_I\|) \sim \mathbf{p}_{k,i}(\kappa \|x - \mathbf{x}_I\|) \quad .$$

The negative orders  $-\mathbf{m} \leq k < 0$  are calculated using Identity (B.4).

<sup>470</sup> **Remark 8.** *In practice, to speed up the implementation, Step 1-2 is ‘vectorized’, and Step 3 is parallelized.*

**Remark 9** (CPU time of some intrinsic functions in `Fortran90`). *For a real vector  $\mathbf{z}$  of length  $2 \times 10^7$  whose components are randomly chosen, we list CPU time for the following intrinsic operations computed by `Fortran90` with compiler `mpi90`,*

Operation	Time (s)	Operation	Time (s)	Operation	Time (s)
$\mathbf{z} + \mathbf{z}$	0.03	$\cos(\mathbf{z})$	1.95	$\mathbf{J}_0(\mathbf{z})$	3.51
$\mathbf{z}^2$	0.15	$\sin(\mathbf{z})$	1.96	$\mathbf{J}_1(\mathbf{z})$	3.55
$\exp(\mathbf{z})$	1.63	$\cos(\mathbf{z}) + i \sin(\mathbf{z})$	3.80	$\mathbf{Y}_0(\mathbf{z})$	3.55
$\exp(i\mathbf{z})$	1.14			$\mathbf{Y}_0(\mathbf{z})$	3.63

Time costs for calculating  $\mathbf{Y}_k(\mathbf{z})$  and  $\mathbf{J}_k(\mathbf{z})$  for all (integer) orders  $k$  between 0 and 4, using upward recurrence (B.3), (described in Step 1c), are 8.01 s and 7.91 s respectively. These two costs give the overall one for  $\mathbf{H}_k^{(1)}(\mathbf{z})$  (obtained by adding the cost of Bessel  $\mathbf{J}_k$  and that of Bessel  $\mathbf{Y}_k$ ) which is 16.30 s. <sup>475</sup>

## Bibliography

- [1] D. Givoli, Numerical methods for problems in infinite domains, Vol. 33, Elsevier, 2013.

- 480 [2] F. Nataf, Absorbing boundary conditions and perfectly matched layers in wave propagation problems (2013).
- [3] F.-J. Sayas, The validity of Johnson–Nédélec’s BEM–FEM coupling on polygonal interfaces, *SIAM Journal on Numerical Analysis* 47 (5) (2009) 3451–3463.
- 485 [4] A. Kirsch, P. Monk, An analysis of the coupling of finite-element and Nyström methods in acoustic scattering, *IMA Journal of numerical analysis* 14 (4) (1994) 523–544.
- [5] M. Ganesh, C. Morgenstern, High-order FEM–BEM computer models for wave propagation in unbounded and heterogeneous media: Application to time-harmonic acoustic horn problem, *Journal of Computational and Applied Mathematics* 307 (2016) 183–203.
- 490 [6] X. Antoine, K. Ramdani, B. Thierry, Wide frequency band numerical approaches for multiple scattering problems by disks, *Journal of Algorithms & Computational Technology* 6 (2) (2012) 241–259.
- [7] B. Thierry, Analyse et simulations numériques du retournement temporel et de la diffraction multiple, Ph.D. thesis, Université Henri Poincaré–Nancy I (2011).
- 495 [8] M. Ganesh, S. C. Hawkins, An efficient algorithm for simulating scattering by a large number of two dimensional particles, *ANZIAM Journal* 52 (2011) 139–155.
- 500 [9] F. A. Amirkulova, A. N. Norris, Acoustic multiple scattering using recursive algorithms, *Journal of Computational Physics* 299 (2015) 787–803.
- [10] S. Falletta, G. Monegato, Exact nonreflecting boundary conditions for exterior wave equation problems, *Publications de l’Institut Mathématique* 96 (110) (2014) 103–123.
- 505 [11] M. Ganesh, I. Graham, A high-order algorithm for obstacle scattering in three dimensions, *Journal of Computational Physics* 198 (1) (2004) 211–242.
- [12] A. Bendali, P.-H. Cocquet, S. Tordeux, Approximation by multipoles of the multiple acoustic scattering by small obstacles in three dimensions and application to the foldy theory of isotropic scattering, *Archive for Rational Mechanics & Analysis* 219 (3) (2016).
- 510 [13] D. P. Challa, M. Sini, On the justification of the Foldy–Lax approximation for the acoustic scattering by small rigid bodies of arbitrary shapes, *Multiscale Modeling & Simulation* 12 (1) (2014) 55–108.
- 515 [14] P. Martin, *Multiple Scattering: Interaction of Time-Harmonic Waves with N Obstacles*, Cambridge University Press, 2006.

- [15] P. Martin, Corrections and additions.
- [16] R. Kress, Boundary integral equations in time-harmonic acoustic scattering, *Mathematical and Computer Modelling* 15 (3) (1991) 229–243.
- 520 [17] X. Antoine, B. Thierry, Spectral and condition number estimates of the acoustic single-layer operator for low-frequency multiple scattering in dilute media, *Computer Methods in Applied Mechanics and Engineering* 265 (2013) 242–256.
- [18] B. Thierry, X. Antoine, Spectral and condition number estimates of the acoustic single-layer operator for low-frequency multiple scattering in dense media, *Journal of Computational and Applied Mathematics* 239 (2013) 380–395.
- 525 [19] B. Thierry, X. Antoine, C. Chniti, H. Alzubaidi,  $\mu$ -diff: an open-source Matlab toolbox for computing multiple scattering problems by disks, *Computer Physics Communications* 192 (2015) 348–362.
- 530 [20] V. Frayssé, L. Giraud, S. Gratton, J. Langou, A set of GMRES routines for real and complex arithmetics on high performance computers, Tech. rep., CERFACS, tR/PA/03/3 (1997).
- [21] X. Antoine, K. Ramdani, B. Thierry, Étude numérique de la résolution par équations intégrales de la diffraction multiple par des disques, in: 10ème Congrès Français d’Acoustique, 2010.
- 535 [22] F. Cakoni, D. Colton, *A Qualitative Approach to Inverse Scattering Theory*, Springer, 2014.
- [23] F. Hettlich, Fréchet derivatives in inverse obstacle scattering, *Inverse problems* 11 (2) (1995) 371.
- 540 [24] D. Colton, R. Kress, *Integral Equation Methods in Scattering Theory*, SIAM, Society for Industrial and Applied Mathematics, Philadelphia, 2013.
- [25] R. Kress, *Linear Integral Equation*, 3rd Edition, Springer, 2014.
- [26] M. Abramowitz, I. A. Stegun, *Handbook of mathematical functions: with formulas, graphs, and mathematical tables*, Vol. 55, Courier Corporation, 1964.
- 545 [27] S. Sauter, C. Schwab, *Boundary Element Methods*, Springer, 2011.
- [28] H. Barucq, J. Chabassier, H. Pham, S. Tordeux, A study of the numerical robustness of single-layer method with Fourier basis for multiple obstacle scattering in homogeneous media, Research Report RR-8988, Inria Bordeaux Sud-Ouest (Dec. 2016).
- 550 [29] M. Ganesh, S. C. Hawkins, Simulation of acoustic scattering by multiple obstacles in three dimensions, *ANZIAM Journal* 50 (2008) 31–45.

- 555
- [30] W. H. Press, Numerical recipes: The art of scientific computing, Cambridge university press, 2007.
  - [31] E. Hairer, W. Gerhard, Introduction à l'Analyse Numérique, Université de Genève - Section de mathématiques, 2005.  
URL <https://archive-ouverte.unige.ch/unige:12656>