
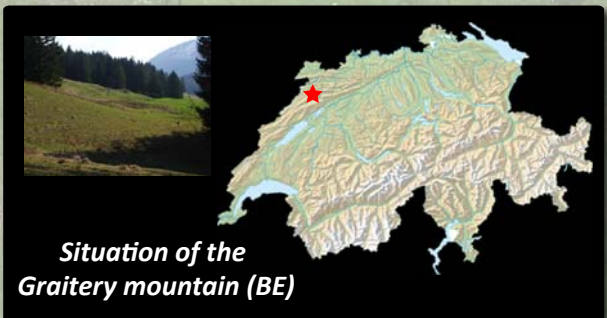


# Coupling GIS and field data for landslide hazard predisposition assessment and mapping, using 3D geological modelling

Case study of the Graitery mountain, Canton of Berne, Switzerland

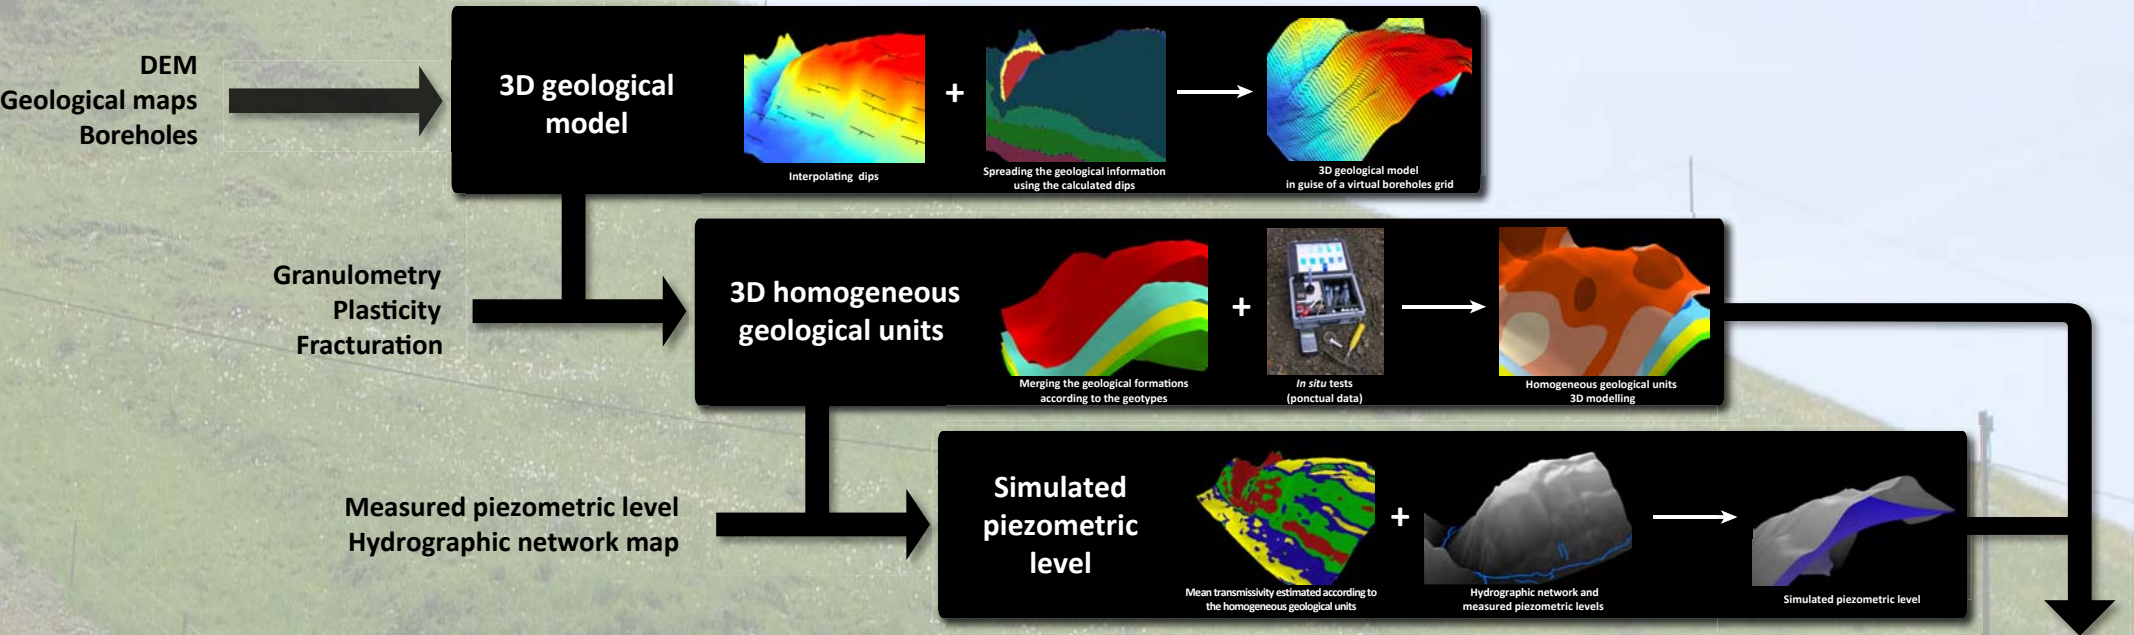

**3D factor of safety**  
 (calculated for each virtual borehole of the model at several depths, keeping the lowest value)

$$FS = \frac{c + \{[(\gamma \cdot \cos \alpha) - u] \cdot \tan \phi\}}{(\gamma \cdot \sin \alpha) + (\gamma_w \cdot i)}$$

c: cohesion (Pa)  
 γ: unit weight of the formations (N.m<sup>-3</sup>)  
 α: slope (°)  
 u: pore water pressure (Pa)  
 φ: internal friction angle (°)  
 γ<sub>w</sub>: unit weight of the water (N.m<sup>-3</sup>)  
 i: hydraulic potential gradient (-)

Elevation  
 Aspect  
 Vegetation  
 Pre-existing mitigation work



Contact: Séverine Bilgot  
 EPFL ENAC IIC GEOLEP  
 Station 18  
 1015 Lausanne  
 Suisse

E-mail: [severine.bilgot@epfl.ch](mailto:severine.bilgot@epfl.ch)  
 Tel: (+41) 021 693 23 51