



(11) **EP 1 664 953 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
14.07.2010 Bulletin 2010/28

(21) Application number: **04761906.9**

(22) Date of filing: **08.09.2004**

(51) Int Cl.:
G05B 23/02 (2006.01) G05B 13/02 (2006.01)

(86) International application number:
PCT/CH2004/000566

(87) International publication number:
WO 2005/024535 (17.03.2005 Gazette 2005/11)

(54) **METHOD OF CONVERTING A RESOURCE INTO A PRODUCT**

VERFAHREN ZUM UMSETZEN EINER RESSOURCE IN EIN PRODUKT

PROCEDE DE CONVERSION D'UNE RESSOURCE EN PRODUITS

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PL PT RO SE SI SK TR

(30) Priority: **08.09.2003 EP 03405654**

(43) Date of publication of application:
07.06.2006 Bulletin 2006/23

(73) Proprietor: **ABB Research Ltd.**
8050 Zürich (CH)

(72) Inventors:
• **ANTOINE, Marc**
CH-5412 Gebenstorf (CH)
• **HOVLAND, Geir**
Santa Lucia QLD. 4072 (AU)

(74) Representative: **ABB Patent Attorneys**
C/o ABB Schweiz AG
Intellectual Property (CH-LC/IP)
Brown Boveri Strasse 6
5400 Baden (CH)

(56) References cited:

- **DIEULLE L ET AL: "Continuous time predictive maintenance scheduling for a deteriorating system" 2001 PROCEEDINGS OF THE ANNUAL RELIABILITY AND MAINTAINABILITY SYMPOSIUM. THE INTERNATIONAL SYMPOSIUM ON PRODUCT QUALITY AND INTEGRITY. RAMS. PHILADELPHIA, PA, JAN. 22 - 25, 2001, ANNUAL RELIABILITY AND MAINTAINABILITY SYMPOSIUM, NEW YORK, NY : IEEE., 22 January 2001 (2001-01-22), pages 150-155, XP010531052 ISBN: 0-7803-6615-8**
- **S.C.GÜLEN ET AL REAL TIME ON-LINE PERFORMANCE DIAGNOSTICS OF HAEVY DUTY INDUSTRIAL GAS TURBINES . TRANSACTIONS OF THE ASME, vol. 124, October 2002 (2002-10), pages 910-921, XP008043586 cited in the application**
- **VASSILIADIS C G ET AL: "On the interactions of chemical-process design under uncertainty and maintenance-optimisation" RELIABILITY AND MAINTAINABILITY SYMPOSIUM, 1998. PROCEEDINGS., ANNUAL ANAHEIM, CA, USA 19-22 JAN. 1998, NEW YORK, NY, USA, IEEE, US, 19 January 1998 (1998-01-19), pages 302-307, XP010554902 ISBN: 0-7803-4362-X**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 664 953 B1

Description

FIELD OF THE INVENTION

5 **[0001]** The invention relates to the field of converting a resource into a product via and maintenance scheduling for engines suffering a continuous degradation in performance, and in particular to the scheduling of maintenance actions for a compressor of a gas turbine.

BACKGROUND OF THE INVENTION

10 **[0002]** The performance of a gas turbine is subjected to deterioration due to compressor fouling and corrosion, inlet filter clogging, thermal fatigue, and oxidisation of hot gas path components. The performance deterioration results in loss in power output and/or increase in fuel consumption and impacts both revenues and equipment life cycle costs.

15 **[0003]** The performance degradation attributed to compressor fouling is mainly due to deposits formed on the blades of the first compressor stages by particles carried in by the air that are not large enough to be blocked by the inlet filter. These particles may comprise sludge or pollen in rural areas, dust, rust and soot particles or hydrocarbon aerosols in industrial areas, salt in coastal areas or simply water droplets. The deposits result in a reduction of compressor mass flow rate, efficiency, and pressure ratio. As about half of the energy contained in the fuel burned by the gas turbine is consumed by the compressor, a noticeable increase in fuel consumption has to be accepted in order to maintain a constant power output.

20 **[0004]** Compressor fouling is a recoverable degradation that can be alleviated by periodic on-line or off-line compressor washes. In an on-line wash, distilled or at least demineralised water is injected into the compressor while the gas turbine is running. Complete performance recovery can only be achieved by an off-line wash (requiring plant shutdown) where distilled water, together with a detergent, is sprayed into the gas turbine and stays in contact with the compressor blades and vanes. Currently, the washing schedule is made manually by the utility operator and the washing is typically scheduled in connection with other planned shutdowns. Alternatively, the washing is scheduled in the slack periods, when the revenues from electricity sales are low.

25 **[0005]** Inlet filter clogging reduces the gas turbine air flow and compressor inlet pressure and thus adversely affects gas turbine performance. Replacing the old filter with a new or cleaned one can recover the lost performance. However the performance degradation associated with frictional wear and/or concerning hot gas path components is referred to as non-recoverable, the only remedy being an engine overhaul.

30 **[0006]** In the article "Real Time On-Line Performance Diagnostics of Heavy-Duty Industrial Gas Turbines" by S.C. Gülen et al., Journal of Engineering for Gas Turbines and Power, October 2002, Vol. 124, p. 910-921, a maintenance schedule for the compressor washing and inlet filter replacement balances the maintenance costs against lost revenue and extra fuel costs. The optimal future time to do the washing is found when the integrated cost due to compressor fouling (extra fuel burned and power lost) equals the costs for the maintenance process. However, neither the evolution of the fuel price in the near future, nor logical constraints such as planned outages and part load, are taken into account.

35 **[0007]** Compressor maps are graphical representations of functions or functional relationships relating e.g. the mass flow of a working fluid through a compressor or turbine and/or the efficiency of the compressor or turbine process to measured or estimated process states such as temperatures, pressures or speeds. Generally, the manufacturers of the compressors or turbines have sufficient experimental data to estimate e.g. the non-recoverable efficiency degradation, also known as "guarantee curve". On the other hand, the turbine operator himself can approximate or estimate the non-recoverable efficiency η_E , e.g. by means of an interpolation of a particular process state recorded at the restart following a limited number of off-line washing events.

40 **[0008]** In the European Patent Application 02405844.8 a method based on State Augmented Extended Kalman Filtering techniques is disclosed which allows to obtain and continuously update estimates of the above compressor maps or functions on-line, i.e. during process operation. In the Kalman Filter, the computed output is compared with the measured outputs and the actual (i.e. taking into account recoverable degradation) efficiency η as an augmented state (parameter estimate) is updated. One important aspect in this procedure is the correction of all measured data to standard temperature and pressure conditions for dry air. Despite of the fact that the load level may change several times in-between two washing events, the foregoing procedures generally assume the turbine to work constantly on full or base load and do not take into account part load.

45 **[0009]** In the absence of any maintenance action, both the actual efficiency η and the estimated efficiency η_E follow an exponential law trend in output degradation. An eventual saturation or levelling off is assumed to be due to the stabilization of the thickness and shape of the blade deposits.

50 **[0010]** More generally, any system comprising engines or other pieces of equipment that suffer from a continuous degradation in efficiency can be at least temporarily relieved by maintenance actions. However, the scheduling of the latter is not a straightforward task if time-dependent constraints influence on the optimal timing. This is the case in a

system that converts a resource into a product where both the resource and the product are each attached different time-dependent properties. These properties are normalized and equivalent to an objective quantity per unit of measure. In the case of a gas turbine as outlined above, the normalized properties are costs or prices per unit of mass or energy (i.e. per kg or per MWh) for the fuel and the electricity generated.

5 **[0011]** In a different case, the system may comprise a generator and other equipment for producing electrical energy from renewable energy sources such as the sun, wind or water, which are all intermittent or time-dependent by nature. The normalized properties in this case are the natural power, i.e. the energy per unit of time delivered by the resource, and the electrical power produced according to a demand by one or a plurality of consumers.

10 **[0012]** Because of the decreasing efficiency and the time-dependent normalized properties, the objective quantity introduced above is the subject of a certain balance between the resource end and the product end in the conversion process. There is generally a difference between the amount of the objective quantity entering the system and the amount leaving the system. Correspondingly, the objective quantity may accumulate at the system, or equally, be diverted and used for other purposes than the basic conversion.

15 DESCRIPTION OF THE INVENTION

[0013] It is therefore an object of the invention to maximize, over a predetermined time horizon, the accumulation of an objective quantity at a system converting a resource into a product as described above. These objectives are achieved by a method for converting a resource into a product according to claim 1, a computer program for scheduling a maintenance action for an engine according to claim 11 as well as a method for scheduling a compressor washing event for a compressor of a gas turbine according to claim 12. Further preferred embodiments are evident from the dependent patent claims.

20 **[0014]** The performance of an engine or other piece of equipment can be improved by a single or a succession of maintenance actions, thus increasing the efficiency of a system comprising the engine and converting or refining a primary resource into a product. An expenditure for the maintenance event and forecasts for the evolution of a time-dependent property of both the resource and the product over a predetermined time horizon are taken into account and constitute the main ingredients of an objective function representing the change in accumulation of an objective quantity at the system due to a continued degradation in performance of the engine. The objective function further depends on at least one state variable related to a maintenance event at a first time step, and is minimized or solved with respect to this state variable in order to determine the advisability and/or type of a maintenance action. Thus, a flexible maintenance scheduling approach is provided, where a future evolution of the respective properties of the resource and the product influences the decision at present, and from which optimised maintenance schemes or plans covering an arbitrary time span are obtained.

30 **[0015]** In a first embodiment of the invention, the system converts natural power from an intermittent renewable energy source such as the sun, wind or water, into electric power to meet a time dependent demand in electric power. The objective quantity in this case is energy, and the normalized property per unit time corresponds to the aforementioned natural or electric power. Likewise, the maintenance expenditure is expressed in the same physical units as the objective quantity, i.e. as an amount of energy that has to be spent and thus has to be considered in the overall energy balance. Maximizing the accumulation of the objective quantity according to the invention in this case is equivalent to minimizing the amount of renewable energy needed for conversion and maintenance in order to meet the abovementioned demand in electrical power.

40 **[0016]** In a second embodiment of the invention, the system converts a more or less permanently available fuel such as gas or oil and represented by a time-dependent disbursement into electricity represented by a time-dependent revenue for the product. The objective quantity in this case are costs, and the change in accumulation of the objective quantity at the system are additional system costs.

45 **[0017]** In a first preferred variant of the second embodiment of the invention, the maintenance planning takes into account a cost-forecast of a quantitative measure for the product, i.e. the planned output based on a future demand of the product. Hence, fluctuating outputs as well as zero outputs implied by additional constraints such as a system shut-down or a (non-)availability of a maintenance tool or team can be considered in a straightforward way.

50 **[0018]** In a second preferred variant of the second embodiment of the invention, the objective function involves a sum over the costs at individual future time steps as well as corresponding state variables. The minimization procedure then covers all these state variables at the same time. Thus the impact of future maintenance actions at later time steps is inherently taken into account when evaluating the advisability of a maintenance action at present time.

55 **[0019]** In addition, maintenance actions can be hard constrained, i.e. the corresponding state variables are set manually and are not determined via the general minimization procedure. Such a predetermined constraint is based on the knowledge of a planned system shut-down or a (non-)availability of a maintenance tool or team at a particular future time step (e.g. on the following Sunday), and its impact for earlier time steps preceding the constraint can be considered in a straightforward way.

[0020] In a further preferred embodiment of the second embodiment of the invention, two or more different types of maintenance actions are provided and represented by two or more corresponding state variables of preferably Boolean or Integer type. Different costs and performance benefits associated with the plurality of maintenance actions greatly enhance the flexibility of the inventive method and potential savings.

[0021] The minimisation procedure of the objective function with respect to an extended state vector comprising both Integer / Boolean state variables and continuous variables has to respect certain rules or constraints interrelating the variables. Mixed Integer Linear Programming (MILP) is then preferably employed for implementing and carrying out the optimisation procedure.

[0022] The degrading performance of the engine is approximated via a linear model for an efficiency measure in combination with corresponding rules or constraints. Even an intrinsically nonlinear behaviour of a degradation can be captured without introducing too much complexity during the mathematical/digital implementation of the optimisation procedure.

[0023] The inventive method is suited in particular for scheduling the washing events of a compressor of a gas turbine.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] The subject matter of the invention will be explained in more detail in the following text with reference to preferred exemplary embodiments which are illustrated in the attached drawings, of which

Fig.1 shows the degradation of compressor efficiency and turbine output,

Fig.2 is an example of a cost/revenue forecast,

Fig.3 depicts the evolution of the compressor efficiency according to the invention, and

Fig.4 is a calendar with scheduled washing events.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0025] In the following detailed description, a compressor of a gas turbine is the preferred engine in need of regular maintenance actions. As mentioned initially, the inlet filter of this compressor constitutes another such engine having to be replaced according to a certain schedule. The proposed method may equally well be applied to gas pipelines comprising several compressors along the pipeline. These compressors increase the pressure of the gas, resulting in an increased mass transport and increased revenues. However, in order to maintain the maximum pressure, the compressors need to be overhauled periodically, generating costs and down-time. The optimum maintenance scheme for these compressors can be determined according to the same general principles as outlined below in the case of a compressor of a gas turbine. Accordingly, it is to be understood that the conversion process referred to includes not only a conversion of the resource into a materially different product, but also a simple transportation of the resource, the difference in cost and price in this case resulting from geographical imbalances.

[0026] In order to illustrate the underlying problem, Fig.1 depicts the compressor efficiency η of a gas turbine as a function of time t and according to an exemplary compressor washing schedule including an off-line washing at t_1 and an on-line washing at t_3 . In particular, curve 1 represents the non-recoverable degradation (in the absence of any blade deposits) and curve 2 represents the recoverable degradation (without any washing at all) of the compressor efficiency. Curve 3 depicts the "real" efficiency according to the exemplary washing schedule, comprising three distinct sections separated by the two washing events. Efficiency curve 3 first follows curve 2, and at the end of the off-line washing at t_2 , momentarily climbs to curve 1 before degrading again. On the other hand, the gain in efficiency following an on-line washing between t_3 and t_4 is less pronounced, i.e. curve 1 is not attained at time t_4 .

[0027] At the same time, the power output P at constant fuel rate, i.e. provided the operator does not burn more fuel in order to compensate for any loss in efficiency in order to fulfil his contracts, follows a similar trend as the efficiency curves. During the off-line washing, no output power is produced, i.e. the hatched energy area A2 is "lost" in terms of revenues. However, following the first wash, the output power is increased, i.e. the area A3 is gained. During the on-line wash between t_3 and t_4 , power is still produced at part load (energy area A4), but the gain (area A5) is less pronounced. Comparing the energy areas allows to crudely approximate the economical impact of the washing events. However, in reality, the optimisation procedure has to consider other costs associated with the washing, such as the consumption of the washing chemicals and the usage of material due to the shutdown and startup operations, e.g. the equivalent operating hours (EOH) associated therewith.

[0028] The optimisation problem includes the following variables:

$t_i =$ Time (e.g. hours) at optimisation step i .

$C_1(t_i) =$ Predicted cost (\$) of chemicals, water and energy as well as predicted equipment lifetime costs related to off-line washing at time t_i

EP 1 664 953 B1

5	$C_2(t_i) =$	Predicted cost (\$) of chemicals, water and energy as well as predicted equipment lifetime costs related to <i>on-line</i> washing at time t_i
	$\delta_1(t_i) =$	Boolean variable. Equals 1 if off-line washing made at time t_i , 0 otherwise
	$\delta_2(t_i) =$	Boolean variable. Equals 1 if on-line washing made at time t_i , 0 otherwise
	$P_{PWR}(t_i) =$	Planned or forecasted power output (MW) at time t_i
	$P_{Price}(t_i) =$	Predicted sales price (\$/MWh) for produced or acquired power at time t_i
	$D_1(t_i) =$	Predicted duration (hours) of an off-line washing at time t_i
	$D_2(t_i) =$	Predicted duration (hours) of an on-line washing at time t_i
	$C_{fuel}(t_i) =$	Predicted fuel costs (\$/kg) at time t_i
10	$\Delta f_{fuel}(t_i, \eta(t_i), P_{PWR}(t_i)) =$	Modelled additional fuel flow (kg/hour) due to degradation as a function of efficiency η and power output at time t_i
	$\eta_E(t_i) =$	Predicted expected (isentropic) efficiency at time t_i
	$\eta(t_i) =$	Predicted actual (isentropic) efficiency at time t_i

15 **[0029]** The *expected* efficiency η_E is the efficiency that a clean compressor would yield and which can only be achieved after an off-line washing. The degradation of η_E is illustrated by the slowly decreasing curve 1 in Fig.1, and cannot be recovered simply by a washing process. The *actual* efficiency η is the expected efficiency η_E minus a recoverable performance degradation since the last washing.

20 **[0030]** Constraints representing e.g. real physical or logical facts interrelate the abovementioned variables and/or translate into corresponding boundary conditions or rules. By way of example, if there is a planned plant shutdown at time t_i , the planned power output $P_{PWR}(t_i)$ will be zero. Furthermore, as on-line and off-line washing cannot be made at the same time step, the following rule R1 will be needed:

$$25 \quad 0 \leq \delta_1(t_i) + \delta_2(t_i) \leq 1. \quad (R1)$$

[0031] An instantaneous cost function at time step t_i can now be defined as follows:

$$30 \quad C(t_i) = C_1(t_i)\delta_1(t_i) + (P_{PWR}(t_i)D_1P_{Price}(t_i))\delta_1(t_i) + C_2(t_i)\delta_2(t_i) + \\ (\Delta P_{PWR}(t_i)D_2P_{Price}(t_i))\delta_2(t_i) + C_{fuel}(t_i)f_{fuel}(t_i)(t_{i+1} - t_i)(1 - \delta_1)$$

35 **[0032]** The first and third terms represent the costs in resources of an off-line or on-line washing event, respectively. The second and fourth terms represent the cost due to the "lost" output power, or the disbursements of the operator for power acquired from a second source. ΔP_{PWR} indicates the possibility of a reduced, albeit non-zero, power output during on-line washings. The fifth term equals the fuel costs due to continued operation, based on the power P_{PWR} to be delivered and the actual efficiency η via the modelled fuel flow f_{fuel} .

40 **[0033]** The benefits of a compressor washing is the ability to produce the future power output with less fuel. A prospective cost function taking into account the effect of a washing at time t_i in future time steps t_j is defined as follows.

$$45 \quad R(t_i) = \sum_{t_j}^{N_j} C_{fuel}(t_j)\Delta f_{fuel}(t_j, \eta(t_j), P_{PWR}(t_j))(t_{j+1} - t_j)$$

50 **[0034]** This prospective cost function relies on the extra fuel flow due to the difference between the actual compressor efficiency η and the nonrecoverable efficiency η_E . The time steps t_j have to be carefully chosen and generally comprise only a limited number of terms.

[0035] An objective function F as the sum of the two aforementioned terms is then subject to an optimisation criterion which aims at minimising the overall costs over a predefined and limited time horizon $N_i \geq 1$, i.e.:

55

$$F(\delta_1, \delta_2) = \sum_i^{N_i} (R(t_i) + C(t_i))$$

$$\min[F(\delta_1, \delta_2)]$$

5
10
15
20
25
30
35

[0036] Taking into account all relevant rules, constraints or boundary conditions, the Boolean variables $\delta_1(t_i)$ and $\delta_2(t_i)$, $i = 1..N_i$, are to be solved for and the maintenance schedule set up correspondingly. The indices i and j as well as the number of terms N_i , N_j in the above expressions for F and R , respectively, are generally different from one another. If the model for fuel flow is calculated on an hourly basis (j -index in the prospective cost function R) while the optimisation problem is computed on a daily basis (i -index in the objective function F), then the sum for R will typically contain $N_j = 24$ elements.

[0037] Preferably, from the optimisation procedure outlined above, only the optimal solution for the first time step at t_1 (i.e. $\delta_1(t_1)$ and $\delta_2(t_1)$) is retained and all further solutions at chronologically later time steps t_i , $i = 2..N_i$ are disregarded. Subsequently and/or following the execution of a maintenance action according to the solution at t_i , costs and price forecasts are readjusted and degradation values/rates are corrected if possible/necessary. The time horizon is shifted one step forward (hence the sum for the objective function F still comprises N_i terms) and- the optimisation problem is repeated with the actual efficiency η at t_2 as a starting value. Advantageously, the procedure may be repeated in advance for e.g. every day of a month, and a maintenance schedule for a longer period of time may thus be generated.

[0038] In the following, further details, aspects and/or simplifications of the inventive method will be presented.

[0039] In order to estimate the dependence of the fuel flow f_{Fuel} on the efficiency and thus to compute the benefits in fuel savings after a washing, the following equations are needed:

$$f_{fuel} = \frac{1}{C_g} (Power + P_{PWR})$$

$$Power = (T_{ac} - T_{amb}) f_a C_a$$

$$(T_{ac} - T_{amb}) = \frac{1}{\eta_{is}} (T_{is} - T_{amb})$$

40
45
50

[0040] where $Power$ is the power consumed by the compressor (MW), P_{PWR} is the total output power from the plant (MW), C_g is the fuel capacity (MWh/kg), C_a is the specific heat of the compressor air (MWh/(kgK)), f_a is the massflow of the compressor air, T_{ac} and T_{amb} are the temperature at the compressor outlet and inlet, respectively, and η_{is} is the compressor isentropic efficiency.

[0041] If an offline washing is made, the efficiency increases from η to η_E . As the compressor degradation due to dirt particles on the compressor blades is typically in the order of 1-2%, the fuel benefit model assumes that η and η_E do not differ greatly and that in a first approximation, f_a and T_{is} are the same for η and η_E . It is further assumed that P_{PWR} is constant and independent of the compressor efficiency. Hence,

$$\Delta f_{fuel} = \frac{1}{C_g} f_a C_a (T_{is} - T_{amb}) \Delta \left[\frac{1}{\eta_{is}} \right]$$

55
60

[0042] In a second approximation, a nominal efficiency variable η_0 known from e.g. standard compressor maps and a constant γ ($0 < \gamma < 1$) describing the effectiveness of the online washing operation ($\gamma = 1$ for offline washing) are introduced, and the final fuel benefit model is then given by.

$$\Delta f_{fuel} \approx \frac{1}{C_g} Power * \frac{\gamma}{\eta_0} (\eta_E - \eta)$$

5
[0043] Both the actual efficiency η and the estimated efficiency η_E do decrease in an exponential-like manner before eventually levelling off. Nevertheless a linear model of efficiency degradation as a function of time and of on/off-line washings, introducing new help variables α_r, α_n , is capable of reproducing the nonlinear behaviour of the degradation.
 10 The parameters of this linear degradation model $\varepsilon_r, \varepsilon_n, \gamma, \alpha_r(0), \alpha_n(0)$ must be tuned in such a way that the modelled degradation curves for η_E and η then match the real degradation curves of the compressor under consideration and may be updated frequently.

[0044] With the following notation

- 15 $\alpha_r(0)$ = Initial degradation level (recoverable)
 $\alpha_n(0)$ = Initial degradation level (non-recoverable)
 $\alpha_r(t_i)$ = recoverable degradation at time i
 $\alpha_n(t_i)$ = non-recoverable degradation at time i
 ε_r = degradation rate (recoverable),
 20 ε_n = degradation rate (non-recoverable)
 γ = on-line washing effectiveness ($\gamma < 1$)

the degradation of the continuous state variables / efficiencies are modelled by the following rules

25

$$\begin{aligned} \eta(t_{i+1}) &= \eta(t_i) - \alpha_r(t_i) \\ \eta_E(t_{i+1}) &= \eta_E(t_i) - \alpha_n(t_i) \end{aligned} \quad (R2)$$

30 with the degradation rates (non-negative by definition)

35

$$\begin{aligned} \alpha_r(t_{i+1}) &= \alpha_r(t_i) - \varepsilon_r \\ \alpha_n(t_{i+1}) &= \alpha_n(t_i) - \varepsilon_n \end{aligned} \quad (R3)$$

[0045] In the event of a washing process at t_i , a predicted increase in isentropic efficiency is modelled by replacing the previously calculated values as follows:

40

$$\begin{aligned} \delta_1(t_i) = 1 &\rightarrow \eta(t_i) = \eta_E(t_i) & \alpha_n(t_i) &= \alpha(0) \\ \delta_2(t_i) = 1 &\rightarrow \eta(t_i) = \eta(t_i) + \gamma(\eta_E(t_i) - \eta(t_i)) & \alpha_n(t_i) &= \alpha(0) \end{aligned} \quad (R4)$$

45

[0046] In a more refined version of the inventive method known as "hybrid system model", an extended state vector x including, apart from the washing states δ_1 and δ_2 as introduced above, further Boolean states δ_3 and δ_4 representing a normal working state and an idle state respectively. In addition, the non-Integer or continuous variables η and η_2 for current and recoverable efficiency, and z_1, z_2, z_3 for the cost of online washing, offline washing and the cost of extra fuel due to degradation, are introduced. The objective function becomes $F(x) = z_1 + z_2 + z_3$, with $x = (\delta_1, \delta_2, \delta_3, \delta_4, \eta, \eta_2, z_1, z_2, z_3)$ the extended state vector.

[0047] The above rules R2, R3, R4 for η and η_E remain valid, while the original rule R1 is to be replaced by the modified rule R1' of the form $\delta_1 + \delta_2 + \delta_3 + \delta_4 = 1$. As above, $z_1 = \delta_1 C_1$ and $z_2 = \delta_2 C_2$, whereas the rule for z_3 is significantly simplified and takes the linear form known from the fuel benefit model above, i.e. $z_3 = P_5 (\eta - \eta_2)$, where P_5 is the product of the fuel price, the time step, and the constants in the expression for Δf_{fuel} derived above. In addition, the time steps of the optimisation problem and the fuel benefit model are preferably assumed to be of equal length and identical to one day.

[0048] The decision problem is formulated as a receding horizon optimisation (also known as Model-Predictive Control). The Integer/Boolean and continuous variables are comprised in a state vector x , which is then duplicated for each time step t_i within a predetermined finite time horizon. In addition, the aforementioned rules R1...R4 as well as the objective function F are duplicated for each time step. In the subsequent Mixed Integer Programming (MIP) approach, only a limited amount of N time steps ahead are considered. The optimal solution for the first time step at t_i is retained and executed by the plant operator. After the execution has completed, the plant operator readjusts costs and price forecasts and corrects degradation values/rates if possible/necessary, shifts the time horizon one step forward and repeats the optimisation problem with the actual efficiency η at t_i as a starting value. If a maintenance schedule for a longer period of time is required, the procedure/operator will iterate through the calendar day by day, shifting the time horizon one step forward and retaining only the optimal solution for the first time step in each iteration. Again, the latter is recycled as the initial value for the next iteration step.

[0049] The procedure outlined in the foregoing involves both integer (such as δ) and continuous (such as η or the cost variables z) state variables, and is therefore based on a hybrid or mixed logical dynamical system model. In addition to the optimisation function, the abovementioned rules, constraints or boundary conditions have to be observed. As long as both of them are linear, as e.g. the fuel benefit model and the approximated efficiency degradation disclosed above, the procedure is called a Mixed Integer Linear Programming (MILP) approach or optimisation framework.

[0050] Given a linear dependence of the objective function F on a state vector x comprising both integer and continuous variables, a cost vector g can be defined and the cost function F is rewritten as $F(x) = g^T x$. With the inequalities building up a constraint matrix A , the MILP formulation for the state vector x is as follows:

$$\text{Min } F(x), \text{ subject to } Ax < b$$

[0051] Alternatively, if the cost function F involves quadratic terms in the state vector x as represented by a cost matrix Q , Mixed Integer Quadratic Programming (MIQP) might be applied. The objective function takes the form $F(x) = x^T Q x + g^T x$.

[0052] The cost matrix Q , cost vector g and the constraint matrix A are fed to a robust and reliable optimisation problem solver, such as e.g. the commercially available optimiser for solving linear, mixed-integer and quadratic programming problems called CPLEX (<http://www.ilog.com/products/cplex/>). Alternatively, if the optimisation function F and/or the constraints were allowed to involve general nonlinear terms in the state vector x , mixed integer nonlinear programming (MINLP) might be applied.

[0053] The availability of reliable forecasts for the prices of power (to be sold) and fuel (to be purchased) is essential for the successful implementation of the method. Such price forecasts can be bought commercially from various suppliers (<http://www.bmreports.com>), and example being depicted in Fig.2. On the top graph, a fuel price forecast C_{fuel} is shown, and on the bottom graph, a power price forecast P_{Price} (\$/MWh) for one year.

[0054] The benefit of the inventive method is visible from Fig.3. The top curve 1 shows the non-recoverable efficiency η_E , while the bottom curve 2 shows the efficiency degradation when every day is hard constrained to normal operation and no washing at all is foreseen. The model converges to an efficiency difference of about 3% between the two steady-state efficiency levels. The objective function with everyday washing amounts to a certain amount of money spent mainly on chemicals, whereas without any washing these costs roughly double. This amount corresponds to the extra money spent on fuel that the plant owner must pay due to the difference of compressor efficiency compared to the nonrecoverable efficiency level. The curve 3 in the middle shows the same resulting efficiency when all the hard constraints are removed and the system is determining the frequency and type of washing events, resulting in an increased online washing frequency when the-fuel prices are-high (around day 200). The minimized objective function in this case comprises a combination of outlays on washing detergents and on extra money spent on fuel due to degradation. Because the cost of an offline washing is very high due to the loss of electricity sales, no offline washings is made in this example.

[0055] Fig.4 finally shows an optimised washing schedule for the month of April 2003. The days marked with a tick (\checkmark) stand for normal operation of the system, whereas the symbol \emptyset signifies online washing. The schedule shows that the optimal washing frequency is every 2nd or 3rd day, depending on the fuel prices. Again, no offline washing is envisaged, as the costs associated with offline washing are so high (due to lost power sales) that it is never economical to shut down the plant only for the washing. However, the utility owner can hard-constrain the optimiser to do offline washings on specific calendar days when the plant is shut down for other reasons, for example maintenance of the generator.

[0056] To summarize, in the inventive method of scheduling a maintenance action for an engine suffering from a degradation in performance, wherein the engine is part of a system converting a resource into a product, and wherein the maintenance action increases the performance of the engine, the following steps are performed:

- a) introducing a state variable (δ_1) representing a maintenance action at a first time step (t_1) and an efficiency measure (η) representing the degrading performance of the engine,
 b) providing a cost-estimate of a price for the maintenance action (C_1) and an initial value for the efficiency measure ($\eta(t_1)$), and providing for $N_j > 1$ discrete time steps (t_j) into the future, a cost-forecast of a disbursement ($C_{\text{fuel}}(t_j)$) for the resource and of a revenue ($P_{\text{Price}}(t_j)$) for the product,
 c) setting up an objective function F including the additional system costs related to the degradation in performance, based on the cost-estimate (C_1), the efficiency measure (η), the cost-forecasts ($C_{\text{fuel}}(t_j)$, $P_{\text{Price}}(t_j)$), and the state variable (δ_1),
 d) minimising the objective function F with respect to the state variable (δ_1), and scheduling a maintenance action at the first time step (t_1) accordingly.

[0057] In this way, a flexible and economically optimised scheduling approach is provided, where a future evolution of the market prices influences the decision at present, and from which optimised maintenance schemes or plans covering an arbitrary time span are obtained.

Claims

1. A method of converting a resource into a product, wherein the resource and the product are each represented by a time-dependent normalized property (P_{IN} , C_{fuel} ; P_{OUT} , P_{Price}) equivalent to an objective quantity per unit of measure, wherein a performance of a system converting the resource into the product is represented by an efficiency measure (η), and wherein the performance is degrading continuously and can be increased by a maintenance action applied to the system, **characterized in that** the method comprises

- a) introducing a state variable (δ_1) representing a maintenance action at a first time step (t_1) and estimating a maintenance expenditure (C_1) for said maintenance action,
 b) providing an initial value for the efficiency measure ($\eta(t_1)$) as well as a model of the system for predicting, for $N_j > 1$ discrete time steps (t_j) into the future, the efficiency measure ($\eta(t_j)$) both with and without said maintenance action,
 c) providing, for $N_j > 1$ discrete time steps (t_j) into the future, a forecast of the normalized property ($P_{\text{IN}}(t_j)$, $C_{\text{fuel}}(t_j)$) representing the resource and a forecast of the normalized property ($P_{\text{OUT}}(t_j)$, $P_{\text{Price}}(t_j)$) representing the product,
 d) setting up an objective function F including a change in accumulation of the objective quantity at the system related to the degradation in performance, and based on the maintenance expenditure (C_1), the efficiency measure (η), the normalized property forecasts ($P_{\text{IN}}(t_j)$, $C_{\text{fuel}}(t_j)$; $P_{\text{OUT}}(t_j)$, $P_{\text{Price}}(t_j)$), and the state variable (δ_1),
 e) minimising the objective function F with respect to the state variable (δ_1), and scheduling a maintenance action at the first time step (t_1) accordingly.

2. The method according to claim 1, **characterized in that** the resource is an intermittent renewable energy source represented by a time-dependent supply power (P_{IN}) and **in that** the product is electricity represented by a time-dependent demand power (P_{OUT}).

3. The method according to claim 1, **characterized in that** step a) comprises providing a cost-estimate of a price for the maintenance action (C_1), step c) comprises providing a cost-forecast of a disbursement ($C_{\text{fuel}}(t_j)$) representing the resource and a cost-forecast of a revenue ($P_{\text{Price}}(t_j)$) for the product, and step d) comprises setting up an objective function F for the additional system cost related to the degradation in performance as the change in accumulation of the objective quantity at the system.

4. The method according to claim 3, **characterized in that** for the $N_j > 1$ discrete time steps (t_j) into the future, a forecast of a quantitative measure of the product ($P_{\text{PWR}}(t_j)$) is provided and **in that** the objective function F is also based thereupon.

5. The method according to claim 3, **characterized in that** the objective function F comprises the costs ($C(t_i)+R(t_i)$; z_4) at $N_i > 1$ future time steps (t_i), as well as state variables ($\delta_1(t_i)$) representing each a maintenance action at a corresponding future time step (t_i), and **in that** the objective function F is minimized with respect to all these state variables ($\delta_1(t_i)$).

6. The method according to claim 5, **characterized in that** the minimization procedure is constrained in the case of a predetermined maintenance action at a future time step (t_m) by setting the corresponding state variable ($\delta_1(t_m)$) to a fixed value.
- 5 7. The method according to claim 5, **characterized in that** at least two different maintenance actions with different impact on the performance of the engine are possible and **in that** their presence or absence is represented by at least two different Boolean state variables (δ_1, δ_2).
- 10 8. The method according to claim 7, **characterized in that** an extended state vector (x) comprises the Boolean state variables (δ_1, δ_2) as well as continuous state variables ($\eta, \eta_2, z_1, z_2, z_3$), and **in that** rules (R1, R1', R2 - R4) are interrelating these state variables.
- 15 9. The method according to claim 7, **characterized in that** the degradation in performance is modelled via a linear model for the efficiency measure (η) resulting in a set of corresponding rules (R2 - R4) interrelating the efficiency measure (η) with the Boolean state variables (δ_1, δ_2).
- 20 10. The method according to one of claims 3-9, **characterized in that** the system is a gas turbine converting gaseous fuels as a resource into mechanical or electrical energy as a product, and **in that** the engine is a compressor suffering a degradation in efficiency (η) and the maintenance action is a compressor washing event.
- 25 11. A computer program for scheduling a maintenance action for an engine suffering from a degradation in performance which is loadable and executable on a data processing unit and which computer program, when being executed, performs the steps according to the method of converting a resource into a product as claimed in one of the preceding claims.
- 30 12. A method of scheduling a compressor washing event for a compressor suffering from a degradation in efficiency (η), wherein the compressor is part of a gas turbine converting gaseous fuels into mechanical or electrical energy, and wherein the compressor washing event increases the efficiency of the compressor, comprising the steps of
- 35 a) introducing a state variable (δ_1) representing a compressor washing event at a first time step (t_1),
 b) providing a cost-estimate of a price for the compressor washing event (C_1) and an initial value for the efficiency ($\eta(t_1)$), and providing for $N_j > 1$ discrete time steps (t_j) into the future, a cost-forecast of a disbursement ($C_{fuel}(t_j)$) for the gaseous fuels and of a revenue ($P_{Price}(t_j)$) for the mechanical or electrical energy,
 c) setting up an objective function F for the additional system costs related to the degradation in efficiency, based on the cost-estimate (C_1), the efficiency (η), the cost-forecasts ($C_{fuel}(t_j), P_{Price}(t_j)$), and the state variable (δ_1),
 d) minimising the objective function F with respect to the state variable (δ_1), and scheduling a compressor washing event at the first time step (t_1) accordingly.

Patentansprüche

- 45 1. Verfahren zum Umsetzen einer Ressource in ein Produkt, wobei die Ressource und das Produkt jeweils durch eine zeitabhängige normierte Eigenschaft ($P_{IN}, C_{fuel}, P_{OUT}, P_{Price}$) äquivalent einer objektiven Menge pro Maßeinheit dargestellt werden, wobei eine Leistung eines Systems, das die Ressource in das Produkt umsetzt, durch ein Effizienzmaß (η) dargestellt wird, und wobei die Leistung sich ständig verschlechtert und durch eine auf das System ausgeübte Wartungsaktion heraufgesetzt werden kann, **dadurch gekennzeichnet, daß** das Verfahren folgendes umfaßt:
- 50 a) Einführen einer Zustandsvariablen (δ_1), die eine Wartungsaktion bei einer ersten Zeitstufe (t_1) darstellt, und Schätzen einer Wartungsausgabe (C_1) für die Wartungsaktion,
 b) Bereitstellen eines Anfangswerts für das Effizienzmaß ($\eta(t_1)$) sowie ein Modell des Systems zum Vorhersagen des Effizienzmaßes ($\eta(t_j)$) sowohl mit der als auch ohne die Wartungsaktion für $N_j > 1$ diskrete Zeitschritte (t_j) in die Zukunft,
 55 c) Bereitstellen einer Vorhersage der normierten Eigenschaft ($P_{IN}(t_j), C_{fuel}(t_j)$), die die Ressource darstellt, und eine Vorhersage der normierten Eigenschaft ($P_{OUT}(t_j), P_{Price}(t_j)$), die das Produkt darstellt, für $N_j > 1$ diskrete Zeitschritte (t_j) in die Zukunft,
 d) Erstellen einer Zielfunktion F mit einer Änderung der Akkumulation der Zielmenge bei dem System, die

EP 1 664 953 B1

Leistungsverschlechterung betreffend, und basierend auf der Wartungsausgabe (C_1), dem Effizienzmaß (η), den normierten Eigenschaftsvorhersagen ($P_{IN}(t_j)$, $C_{fuel}(t_j)$; $P_{OUT}(t_j)$, $P_{Price}(t_j)$) und der Zustandsvariablen (δ_1),
e) Minimieren der Zielfunktion F bezüglich der Zustandsvariablen (δ_1) und entsprechendes Planen einer Wartungsaktion bei dem ersten Zeitschritt (t_1).

- 5
2. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, daß** die Ressource eine intermittierende erneuerbare Energiequelle ist, die durch eine zeitabhängige Stromversorgung (P_{IN}) dargestellt ist, und daß das Produkt Elektrizität ist, die durch eine zeitabhängige Nachfrageleistung (P_{OUT}) dargestellt ist.
- 10
3. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, daß**
Schritt **a)** das Bereitstellen einer Kostenschätzung eines Preises für die Wartungsaktion (C_1) umfaßt,
Schritt **c)** das Bereitstellen einer Kostenvorhersage einer Ausgabe ($C_{fuel}(t_j)$), die die Ressource darstellt, und einer Kostenvorhersage einer Einnahme ($P_{Price}(t_j)$) für das Produkt darstellt, umfaßt, und
Schritt **d)** das Erstellen einer Zielfunktion F für die zusätzlichen Systemkosten, die Leistungsverschlechterung betreffend, als die Änderung bei der Akkumulation der Zielmenge bei dem System umfaßt.
- 15
4. Verfahren nach Anspruch 3, **dadurch gekennzeichnet, daß** für die $N_j > 1$ diskreten Zeitschritte (t_j) in die Zukunft eine Vorhersage eines quantitativen Maßes des Produkts ($P_{PWR}(t_j)$) bereitgestellt wird und daß auch die Zielfunktion F darauf basiert.
- 20
5. Verfahren nach Anspruch 3, **dadurch gekennzeichnet, daß** die Zielfunktion F die Kosten ($C(t_i) + R(t_i; z_4)$) bei $N_j > 1$ zukünftigen Zeitschritten (t_j) umfaßt, sowie Zustandsvariablen ($\delta_1(t_j)$), die jeweils eine Wartungsaktion bei einem entsprechenden zukünftigen Zeitschritt (t_j) darstellen, und daß die Zielfunktion F bezüglich aller dieser Zustandsvariablen ($\delta_1(t_j)$) minimiert wird.
- 25
6. Verfahren nach Anspruch 5, **dadurch gekennzeichnet, daß** die Minimierungsprozedur in dem Fall einer vorbestimmten Wartungsaktion bei einem zukünftigen Zeitschritt (t_m) eingeschränkt wird durch Setzen der entsprechenden Zustandsvariablen ($\delta_1(t_m)$) auf einen festen Wert.
- 30
7. Verfahren nach Anspruch 5, **dadurch gekennzeichnet, daß** mindestens zwei verschiedene Wartungsaktionen mit unterschiedlicher Auswirkung auf die Leistung des Motors möglich sind und daß ihre Anwesenheit oder Abwesenheit durch mindestens zwei verschiedene Boolesche Zustandsvariablen (δ_1, δ_2) dargestellt wird.
- 35
8. Verfahren nach Anspruch 7, **dadurch gekennzeichnet, daß** ein erweiterter Zustandsvektor (x) die Booleschen Zustandsvariablen (δ_1, δ_2) sowie stetige Zustandsvariablen ($\eta, \eta_2, z_1, z_2, z_3$) umfaßt und daß Regeln ($R1, R1', R2 - R4$) diese Zustandsvariablen verknüpfen.
- 40
9. Verfahren nach Anspruch 7, **dadurch gekennzeichnet, daß** die Leistungsverschlechterung über ein lineares Modell für das Effizienzmaß (η) modelliert wird, was zu einer Menge von entsprechenden Regeln ($R2 - R4$) führt, die das Effizienzmaß (η) mit den Booleschen Zustandsvariablen (δ_1, δ_2) verknüpfen.
- 45
10. Verfahren nach einem der Ansprüche 3 - 9, **dadurch gekennzeichnet, daß** das System eine Gasturbine ist, die gasförmige Treibstoffe als eine Ressource in mechanische oder elektrische Energie als ein Produkt umsetzt und daß der Motor ein Kompressor ist, der eine Verschlechterung der Effizienz (η) erleidet und daß die Wartungsaktion ein Kompressorwaschereignis ist.
- 50
11. Computerprogramm zum Planen einer Wartungsaktion für einen Motor, der unter einer Leistungsverschlechterung leidet, das geladen und auf einer Datenverarbeitungseinheit ausgeführt werden kann, und wobei das Computerprogramm bei Ausführung die Schritte gemäß dem Verfahren zum Umsetzen einer Ressource in ein Produkt nach einem der vorhergehenden Ansprüche ausführt.
- 55
12. Verfahren zum Planen eines Kompressorwaschereignisses für einen Kompressor, der unter einer Verschlechterung der Effizienz (η) leidet, wobei der Kompressor Teil einer Gasturbine ist, die gasförmige Kraftstoffe in mechanische oder elektrische Energie umsetzt, und wobei das Kompressorwaschereignis die Effizienz des Kompressors heraufsetzt, umfassend die folgenden Schritte:
- a) Einführen einer Zustandsvariablen (δ_1), die ein Kompressorwaschereignis darstellt, bei einem ersten Zeitschritt (t_1),

b) Liefere eine Kostenschätzung eines Preises für das Kompressorwaschereignis (C_1) und eines Anfangswerts für die Effizienz ($\eta(t_1)$) und bereitstellen einer Kostenvorhersage einer Ausgabe ($C_{\text{fuel}}(t_j)$) für die gasförmigen Kraftstoffe und einer Einnahme ($P_{\text{Price}}(t_j)$) für die mechanische oder elektrische Energie für $N_j > 1$ diskrete Zeitschritte (t_j) in die Zukunft,

c) Erstelle eine Zielfunktion F für die zusätzlichen Systemkosten, die Effizienzverschlechterung betreffend, auf der Basis der Kostenschätzung (C_1), der Effizienz (η), den Kostenvorhersagen ($C_{\text{fuel}}(t_j)$, $P_{\text{Price}}(t_j)$) und der Zustandsvariablen (δ_1),

d) Minimiere die Zielfunktion F bezüglich der Zustandsvariablen (δ_1) und entspreche dem Planen eines Kompressorwaschereignisses bei dem ersten Zeitschritt (t_1).

Revendications

1. Procédé de conversion d'une ressource en un produit, dans lequel la ressource et le produit sont chacun représentés par une propriété normalisée dépendant du temps (P_{IN} , $C_{\text{carburant}}$; P_{OUT} , P_{Prix}) équivalente à une grandeur objectif par unité de mesure, dans lequel la performance d'un système convertissant la ressource en le produit est représentée par une mesure de rendement (η), et dans lequel la performance se dégrade continuellement et peut être augmentée par une action de maintenance appliquée au système, **caractérisé en ce que** le procédé consiste à :

a) introduire une variable d'état (δ_1) représentant une action de maintenance en un premier pas de temps (t_1) et estimer une dépense de maintenance (C_1) pour ladite action de maintenance,

b) fournir une valeur initiale pour la mesure de rendement ($\eta(t_1)$) ainsi qu'un modèle du système permettant de prédire, pour $N_j > 1$ pas de temps discrets (t_j) dans le futur, la mesure de rendement ($\eta(t_j)$) avec et sans ladite action de maintenance,

c) fournir, pour $N_j > 1$ pas de temps discrets (t_j) dans le futur, une prévision de la propriété normalisée ($P_{\text{IN}}(t_j)$, $C_{\text{carburant}}(t_j)$) représentant la ressource et une prévision de la propriété normalisée ($P_{\text{OUT}}(t_j)$, $P_{\text{Prix}}(t_j)$) représentant le produit,

d) fixer une fonction objectif F comprenant une variation d'accumulation de la grandeur objectif dans le système, liée à la dégradation de la performance, et basée sur la dépense de maintenance (C_1), la mesure de rendement (η), les prévisions de propriétés normalisées ($P_{\text{IN}}(t_j)$, $C_{\text{carburant}}(t_j)$; $P_{\text{OUT}}(t_j)$, $P_{\text{Prix}}(t_j)$) et la variable d'état (δ_1),

e) minimiser la fonction objectif F par rapport à la variable d'état (δ_1) et planifier en conséquence une action de maintenance au premier pas de temps (t_1).

2. Procédé selon la revendication 1, **caractérisé en ce que** la ressource est une source d'énergie renouvelable intermittente représentée par une puissance d'alimentation dépendant du temps (P_{IN}) et **en ce que** le produit est de l'électricité représentée par une puissance demandée dépendant du temps (P_{OUT}).

3. Procédé selon la revendication 1, **caractérisé en ce que**

l'étape a) consiste à fournir une estimation d'un prix pour l'action de maintenance (C_1),

l'étape c) consiste à fournir une prévision du coût d'une dépense ($C_{\text{carburant}}(t_j)$) représentant la ressource et une prévision du montant d'une recette ($P_{\text{Prix}}(t_j)$) pour le produit, et

l'étape d) consiste à fixer une fonction objectif F pour le coût système supplémentaire lié à la dégradation de la performance sous la forme de la variation d'accumulation de la grandeur objectif dans le système.

4. Procédé selon la revendication 3, **caractérisé en ce que** pour les $N_j > 1$ pas de temps discrets (t_j) vers le futur, une prévision d'une mesure quantitative du produit ($P_{\text{PWR}}(t_j)$) est fournie et **en ce que** la fonction objectif F est également basée sur celle-ci.

5. Procédé selon la revendication 3, **caractérisé en ce que** la fonction objectif F comprend les coûts ($C(t_j) + R(t_j)$; z4) en $N_j > 1$ pas de temps futurs (t_j), ainsi que des variables d'état ($\delta_1(t_j)$) représentant chacun une action de maintenance en un pas de temps futur correspondant (t_j), et **en ce que** la fonction objectif F est minimisée par rapport à toutes ces variables d'état ($\delta_1(t_j)$).

6. Procédé selon la revendication 5, **caractérisé en ce que** la procédure de minimisation est contrainte dans le cas d'une action de maintenance prédéterminée en un pas de temps futur (t_m) en fixant la variable d'état correspondante ($\delta_1(t_m)$) à une valeur fixe.

7. Procédé selon la revendication 5, **caractérisé en ce qu'**au moins deux actions de maintenance différentes ayant

des impacts différents sur la performance du moteur sont possibles et **en ce que** leur présence ou leur absence est représentée par au moins deux variables d'état Booléennes différentes (δ_1 , δ_2).

- 5
8. Procédé selon la revendication 7, **caractérisé en ce qu'**un vecteur d'état étendu (x) comprend les variables d'état Booléennes (δ_1 , δ_2) ainsi que des variables d'état continues (η , η_2 , z_1 , z_2 , z_3) et **en ce que** des règles (R1, R1', R2-R4) relient entre elles ces variables d'état.
- 10
9. Procédé selon la revendication 7, **caractérisé en ce que** la dégradation de performance est modélisée par l'intermédiaire d'un modèle linéaire pour la mesure de rendement (η) conduisant à un ensemble de règles correspondantes (R2 - R4) reliant entre elles la mesure de rendement (η) et les variables d'état Booléennes (δ_1 , δ_2).
- 15
10. Procédé selon l'une des revendications 3 à 9, **caractérisé en ce que** le système est une turbine à gaz convertissant des carburants gazeux, en tant que ressource, en de l'énergie mécanique ou électrique, en tant que produit, et **en ce que** le moteur est un compresseur subissant une dégradation du rendement (η) et **en ce que** l'action de maintenance est un événement de lavage du compresseur.
- 20
11. Programme informatique destiné à planifier une action de maintenance pour un moteur subissant une dégradation de performance, qui peut être chargé et exécuté sur une unité de traitement de données, lequel programme informatique, lorsqu'il est exécuté, met en oeuvre les étapes du procédé de conversion d'une ressource en un produit selon l'une des revendications précédentes.
- 25
12. Procédé de planification d'un événement de lavage d'un compresseur subissant une dégradation du rendement (η), dans lequel le compresseur fait partie d'une turbine à gaz convertissant des carburants gazeux en de l'énergie mécanique ou électrique, et dans lequel l'événement de lavage du compresseur fait croître le rendement du compresseur, comprenant les étapes consistant à :
- 30
- a) introduire une variable d'état (δ_1) représentant un événement de lavage du compresseur en un premier pas de temps (t_1),
- b) fournir une estimation du prix d'un événement de lavage du compresseur (C_1) et une valeur initiale du rendement ($\eta(t_1)$), et fournir, pour $N_j > 1$ pas de temps discrets (t_j) dans le futur, une prévision du coût d'une dépense ($C_{\text{carburant}}(t_j)$) pour les carburants gazeux et d'une recette ($P_{\text{prix}}(t_j)$) pour l'énergie mécanique ou électrique,
- 35
- c) fixer une fonction objectif F pour les coûts supplémentaires du système liés à la dégradation du rendement, sur la base de l'estimée du coût (C_1), du rendement (η) des prévisions de coût ($C_{\text{carburant}}(t_j)$, $P_{\text{prix}}(t_j)$), et de la variable d'état (δ_1), d) minimiser la fonction objectif F par rapport à la variable d'état (δ_1), et planifier en conséquence un événement de lavage du compresseur au premier pas de temps (t_1).
- 40
- 45
- 50
- 55

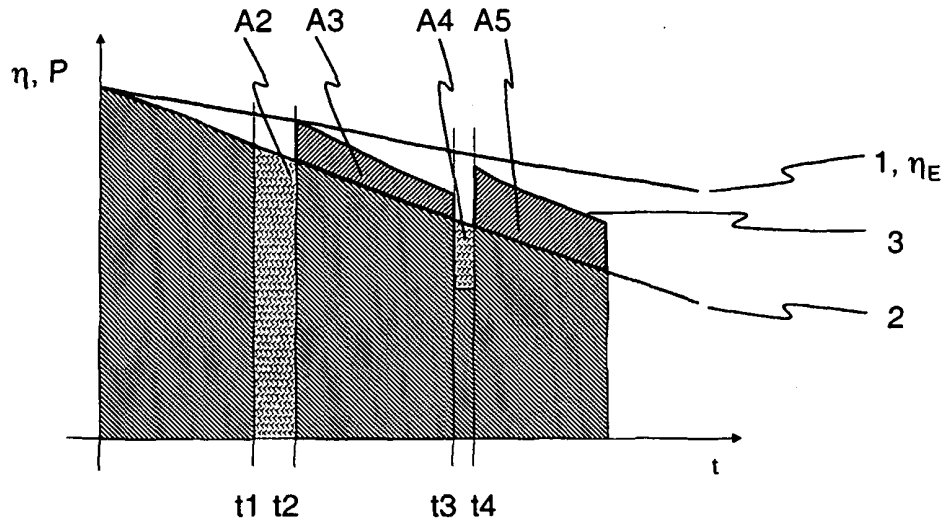


Fig. 1

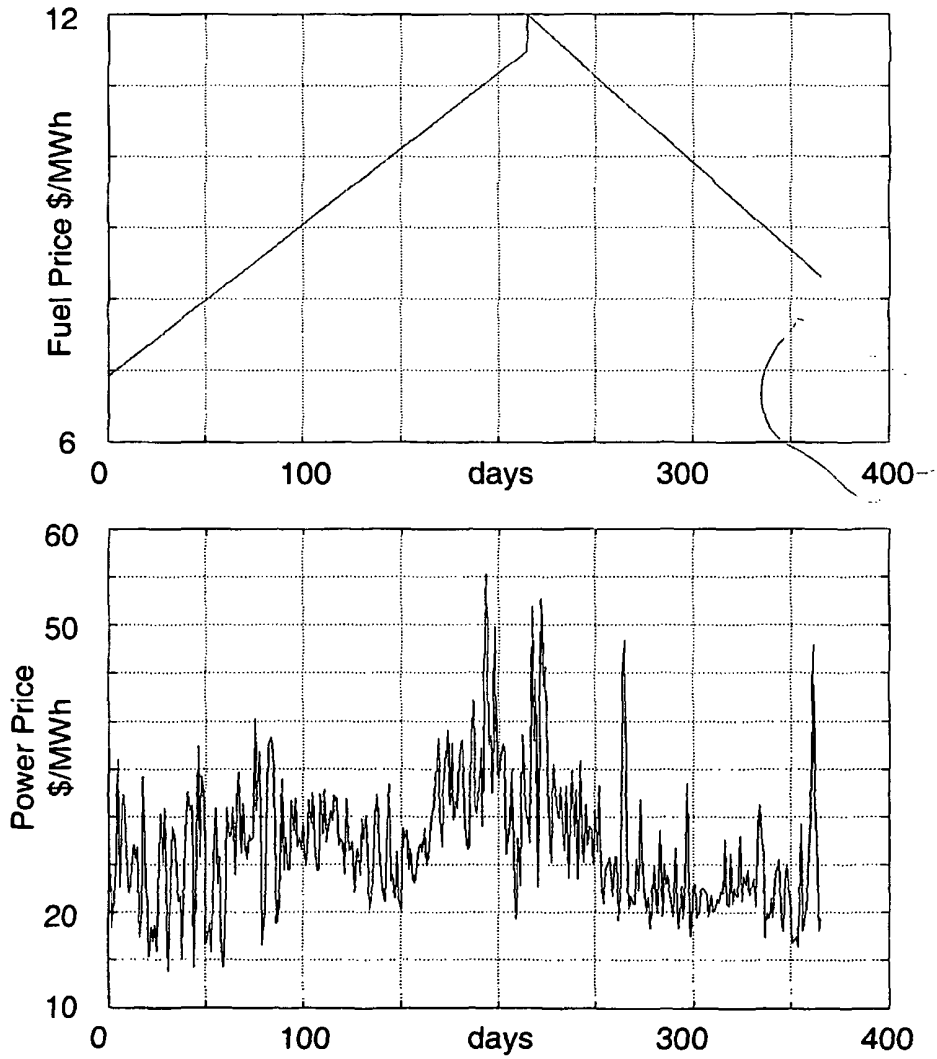


Fig. 2

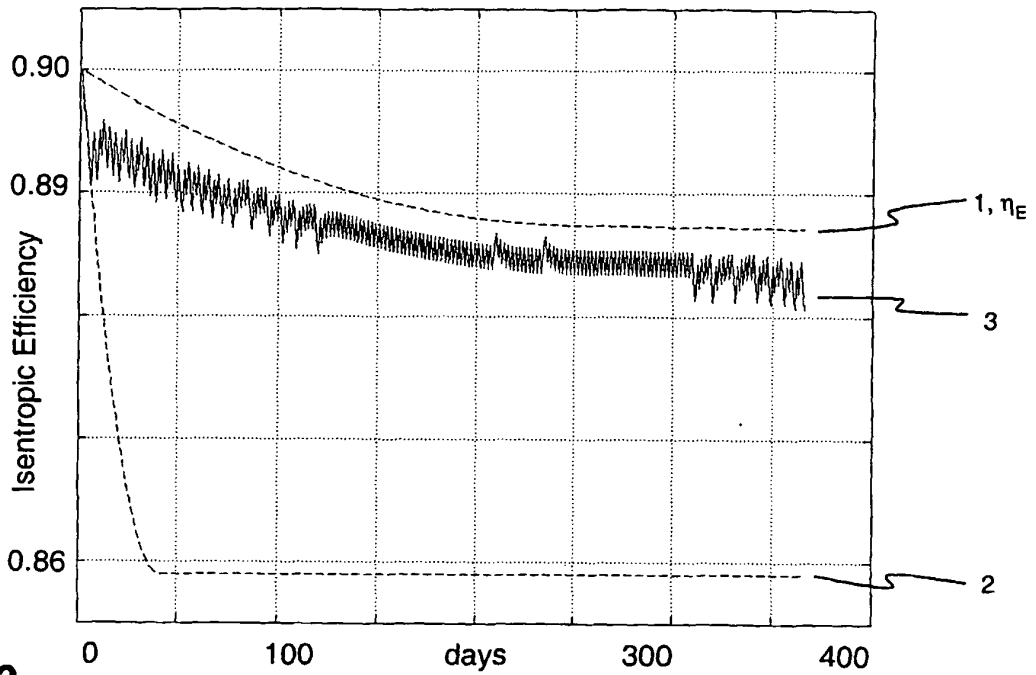


Fig. 3

April, 2003

Mo	Tu	We	Th	Fr	Sa	Su
31	√ 1	∅ 2	√ 3	∅ 4	√ 5	√ 6
∅ 7	√ 8	√ 9	∅ 10	√ 11	√ 12	∅ 13
√ 14	∅ 15	√ 16	√ 17	∅ 18	√ 19	√ 20
∅ 21	√ 22	∅ 23	√ 24	√ 25	∅ 26	√ 27
√ 28	∅ 29	√ 30	1	2	3	4

Fig. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 02405844 A [0008]

Non-patent literature cited in the description

- **S.C. Gülen et al.** Real Time On-Line Performance Diagnostics of Heavy-Duty Industrial Gas Turbines. *Journal of Engineering for Gas Turbines and Power*, October 2002, vol. 124, 910-921 [0006]