



**Michigan
Technological
University**

Michigan Technological University
Digital Commons @ Michigan Tech

Dissertations, Master's Theses and Master's Reports

2015

**IMPACT OF ANTECEDENT GROUNDWATER HEADS AND
TRANSIENT AQUIFER STORAGE ON FLOOD PEAK ATTENUATION
IN AN UNCONFINED KARST AQUIFER: STUDY OF THE UPPER
SUWANNEE RIVER, FLORIDA, USA.**

Jeremy Loucks
Michigan Technological University, jmloucks@mtu.edu


Copyright 2015 Jeremy Loucks

Recommended Citation

Loucks, Jeremy, "IMPACT OF ANTECEDENT GROUNDWATER HEADS AND TRANSIENT AQUIFER STORAGE ON FLOOD PEAK ATTENUATION IN AN UNCONFINED KARST AQUIFER: STUDY OF THE UPPER SUWANNEE RIVER, FLORIDA, USA.", Open Access Master's Thesis, Michigan Technological University, 2015.

<https://digitalcommons.mtu.edu/etdr/29>

Follow this and additional works at: <https://digitalcommons.mtu.edu/etdr>

 Part of the [Geology Commons](#), and the [Hydrology Commons](#)

IMPACT OF ANTECEDENT GROUNDWATER HEADS AND TRANSIENT AQUIFER
STORAGE ON FLOOD PEAK ATTENUATION IN AN UNCONFINED KARST AQUIFER:
STUDY OF THE UPPER SUWANNEE RIVER, FLORIDA, USA.

By
Jeremy M. Loucks

A THESIS

Submitted in partial fulfillment of the requirements for the degree of

MASTER OF SCIENCE

In Geology

MICHIGAN TECHNOLOGICAL UNIVERSITY

2015

© 2015 Jeremy M. Loucks

This thesis has been approved in partial fulfillment of the requirements for the Degree of MASTER OF SCIENCE in Geology.

Department of Geological and Mining Engineering and Sciences

Thesis Advisor: *Dr. Jason Gulley*

Committee Member: *Dr. John Gierke*

Committee Member: *Dr. Alexandria Guth*

Department Chair: *Dr. John Gierke*

Table of Contents

Acknowledgements.....	4
Abstract.....	5
Introduction.....	6
Geologic Setting.....	9
Methods.....	13
Results.....	15
<i>Flood Analysis</i>	15
<i>Well and Stage Data</i>	19
<i>Flood peak attenuation and antecedent water table elevation in wells</i>	20
Discussion.....	26
<i>Flood Prediction</i>	29
<i>Implications for aquifer processes</i>	31
Conclusions.....	32
References.....	33

Acknowledgements

I would like to thank Steph, Angela, Erin, and Katrina for their unwavering support and for keeping me going through this project. I would also like to thank my family and friends throughout the world who have given me strength, and my committee for seeing this through to the end.

Abstract

Flood peak attenuation is an important aspect of understanding flooding and its effects. Few studies exist that look at the effects of ground-surface water interactions in regards to peak attenuation, and fewer still focus on karst environments. In the karstic, variably confined Suwannee River Basin, discharge, river stage, and water table data that were collected over a ten-year period were analyzed to determine the relationship between antecedent groundwater head and flood peak attenuation. Flooding causes high hydraulic heads in the river, which rise faster than corresponding groundwater heads. Springs which normally feed groundwater into the river reverse flow, and conduits allow for large amounts of river water to be absorbed into the aquifer matrix. Peak discharge in floods that occurred when antecedent groundwater heads were low were attenuated downstream. In contrast, peak discharge in floods that occurred when antecedent groundwater heads were high lacked attenuation. Because most flood discharge models do not consider how transient storage of floodwaters in aquifers can attenuate flood peaks, predictions and flood warnings may be inaccurate in basins that promote peak attenuation, such as unconfined karstic basins. In addition, understanding these interactions is paramount in determining pollution risks to karst aquifer systems.

Introduction

Floods kill more people in the United States than any other weather phenomenon (Mogil et al 1978) and cause \$2.67 billion of damage annually (Changnon 2008).

Improved flood prediction capabilities are needed as population and infrastructure investment increase in flood prone regions.

Commonly used flood prediction models are generally successful at predicting peak flood discharges in river basins where peak flood discharge increases downstream. Discharge increases downstream because an increasingly large number of tributaries contribute flow to the main stem of the river. Because discharge at downstream locations is a function of rainfall amount and runoff from upstream locations, flood peaks at downstream locations can be predicted using a combination of historical flow data during floods, advanced precipitation modeling, basin characteristics, stage heights, runoff, and discharge (Knebl et al 2005).

Flood prediction models are less successful at predicting peak flood discharges in basins where flood peaks decrease with distance downstream (flood peak attenuation). Basins with attenuation can break the direct relationship between rainfall, runoff, and downstream discharge because some flood waters can be diverted to temporary storage, often as bank or aquifer storage. Temporary storage of flood waters attenuates the peak discharge and spreads it out over time, lessening the flood's impact downstream (Chen and Chen 2003, Chen et al 2006). While flood models take into account many variables, storage such as this is not considered and can have a significant impact on flood events (Zanon et al 2010).

Storage and flood peak attenuation is well understood when storage occurs in surface storage elements. Lowland rivers have been found to attenuate floods when rivers overtop their banks, allowing large volumes of water to be stored in floodplains (Woltemade and Potter 1994, Stewart et al 1999, Burt et al 2002). This excess water flows back into the river after the flood peak passes.

Storage and flood peak attenuation is less well understood when storage of flood waters occurs in aquifers. In river basins where water flows from catchments underlain by low-permeability rocks, such as mountain slopes, onto catchments underlain by higher permeability rocks, such as alluvial valleys, runoff from impermeable rocks can rapidly increase river stage downstream (Montaldo et al 2004). If runoff increases river stage faster than infiltration of rainfall can increase groundwater heads, then normal hydraulic gradients between the river and aquifer can be reversed, causing flood waters to flow from the river into the aquifer (Lauber et al 2014). Under these circumstances, flood waters can flow from the channel and be stored within the vadose zone of river banks (bank storage), attenuating peak flood discharge at downstream locations. Antecedent groundwater heads are an important control on aquifer storage capacity, as the elevation of the water table relative to river stage controls the direction and magnitude of water exchange between the river and aquifer. Additionally, magnitudes of storage are limited by the permeability of the vadose zone substrate, which controls exchange rates of river water, and effective porosity, which controls the storage capacity (Chen and Chen 2003, Chen et al 2006).

Transient aquifer storage of floodwaters, and hence flood peak attenuation, should be particularly enhanced where rivers flow over karst aquifers. Conduits and cave systems in karst aquifers increase connectivity between rivers and aquifers (Alberic

2004, Gulley et al 2013) and can store large volumes of water where they are air-filled (Baffaut and Benson 2009). Consequently, the capacity for flood peak attenuation should be high relative to rivers that do not flow over karst aquifers, however, little work has investigated the role of transient aquifer storage on flood peak attenuation in karst aquifers.

Most work on transient aquifer storage in karstic watersheds has emphasized understanding surface and groundwater exchange in sink-rise systems, where water enters an upstream conduit and discharges downstream via springs (Martin and Dean 2001, Bailly-Comte et al 2011, Gulley et al 2011). In these systems, flood peaks are attenuated as floodwaters are temporarily forced out of conduits and into the aquifer, attenuation peak discharge and diffusing discharge over longer time periods at the spring. Consequently, flood peaks at downstream springs are attenuated due to transient aquifer storage.

While springs are typically conceptualized as unidirectional discharge points of karst aquifers, many karst springs reverse flow during floods (Katz et al 1997, Crandall et al 1999, Alberic 2004). For example, in karst catchments that receive runoff from adjacent catchments that are underlain by low permeability rocks, runoff can increase river stage faster than local infiltration of rainfall can increase groundwater heads, causing springs to reverse to flow (Grubbs 1998). Because reversing springs are connected to extensive cave systems, conduits allow flood waters to penetrate deep into aquifers where flood waters can exchange with, and be stored in, the matrix (Grubbs 1998, Crandall et al 1999, Alberic 2004, Gulley et al 2011). Air-filled and water-filled caves differ in their storage location once the water reaches deep into the aquifer. In air-filled caves, storage can be in conduit, as well as matrix, porosity. In water-filled cave

systems, storage occurs when floodwater flows from conduits into the matrix, locally elevating the water table; storage thus occurs in the vadose matrix porosity (Martin and Sreaton 2001, Bailly-Comte et al 2011). Consequently, whether they are air or water filled, conduits that are characteristic of karst aquifers should thus allow for greater exchange of floodwaters and aquifers, and hence flood peak attenuation, than in rivers that flow over rocks with similar hydraulic properties, but lack conduits.

In this study we investigate the impact of surface-groundwater interactions and transient aquifer storage of floodwaters on flood peak attenuation in a reach of the karstic Upper Suwannee River basin, in north-central Florida. Understanding surface water-groundwater interactions are critical in creating accurate flooding models for the region, as current ones do not take into account their exchange. We also quantify the role of antecedent groundwater heads on flood peak attenuation by determining if there was a correlation between the two. This was done by analyzing the relationship of antecedent groundwater heads to flooding events and discharge volumes in this basin. In addition, a better understanding of the processes that lead to spring reversals, aquifer storage and bank storage allow for a greater understanding of pollution risks involved in rapid aquifer infiltration.

Geologic Setting

The Suwannee River basin drains 25,830 km² and discharges water to the Gulf of Mexico (Planert 2007). This study emphasizes an 84 km stretch of the Suwannee River-between the Ellaville and Branford gaging stations operated by the United States

Geological Survey (USGS 2319500 and USGS 2320500, respectively) (Figure 1). The total catchment area for the Branford gaging station is approximately 20,400 km². This reach of the Suwannee River is underlain by three major lithological units that make up a large portion of the Upper Floridian Aquifer: The Hawthorn Formation, which consists mostly of clays, sands and other siliciclastics, the Suwannee Limestone, and the Ocala Limestone. The Hawthorn Formation overlies the Suwannee and Ocala limestones and frequently acts as a confining unit when present. Erosion has removed the Hawthorn Formation in the southern portion of the basin, leaving the highly porous Ocala Limestone exposed at the surface. Where erosion has removed the protective layer of siliciclastics, limestone has been highly karstified. Both the Suwannee and Ocala limestones are heavily eroded and have high porosity, permeability, and aquifer transmissivity (Scott 1992). Due to these conditions, the Ocala and Suwannee limestones are able to store and move large quantities of water through conduits and aquifer matrices.

Figure 1



Figure 1: Map of the Lower Suwannee River, with stream gage and well locations, and a rough outline of the Cody Scarp. Modified from www.ArcGis.com.

As the Suwannee River flows from its northern reaches, it crosses the Cody Scarp, the geologic boundary of the confined portion of the upper Floridian aquifer. The Cody Scarp also serves as the boundary between the Upper and Lower Suwannee River Basins. The formations upstream of this dividing line have low permeabilities and protective Hawthorn Formation surficial clay deposits, facilitating flooding. Downstream from the Cody Scarp, the Ocala and Suwannee Limestones are unconfined and their high permeability allows for rapid infiltration of rainfall. High permeability limits surface

water ponding, and, consequently, surface water only exists where the water table intersects low points in the surface topography, such as karst windows or the eroded river channels (Gulley et al. 2014). As a result, only two rivers exist on top of the unconfined aquifer, the Suwannee River and its tributary, the Santa Fe River.

During base flow, the lower Suwannee River is a gaining stream, with discharge increasing due to groundwater inflow from the upper Florida aquifer. Most of this inflow comes from conduit-fed springs, with lesser contributions from non-conduit matrix permeability (Pittman et al 1997). For example, between the Dowling Park and Branford gaging stations, base flow discharge increases by 50%, with 40% of the increase coming from monitored springs alone (Pittman et al 1997, Katz et al 1997).

Flooding in the lower Suwannee River occurs when storm runoff from the upper basin crosses the Cody Scarp. During flooding, the rapid increase in river stage causes a reversal in normal head gradients between the river and aquifer, leading to spring reversals. Spring reversals and transient storage of floodwaters in the aquifer have been confirmed by geochemical studies in wells (Crandall et al 1999, Katz et al 1997), studies in conduits and direct measurement of spring discharge magnitude and direction (Gulley et al 2013, Gulley et al 2014). These spring reversals cause the Suwannee River to transition from a gaining stream during baseflow to a losing stream during floods. The transition from gaining to losing stream indicates flood peaks are being attenuated as a result of transient aquifer storage. Intuitively, floods that occur immediately after dry periods should experience more attenuation than a similar magnitude flood occurring after a wet period. Greater attenuation should result because lower water tables following dry periods should increase storage capacity for flood waters and result in steeper hydraulic gradients between the river and the aquifer during flooding. We are

not, however, aware of any studies that have investigated the role of antecedent groundwater heads in controlling magnitudes of flood peak attenuation in karstic watersheds.

Methods

We used average daily river discharge and stage data from select gaging stations in the Suwannee River basin to relate magnitudes of flood peak attenuation to antecedent groundwater heads. Data was analyzed from between January 1, 2003 and December 31, 2013. This period was selected on the basis of well data availability and because the USGS had not approved discharge data newer than December 31, 2013 at the time this study began.

We downloaded daily average discharge and stage data from the USGS water watch database (www.waterwatch.usgs.gov) from the Ellaville (USGS 02319500), Luraville (USGS 02320000), and Branford (USGS 02320500) gaging stations. All three gages use the 1929 NGVD datum, with Ellaville and Branford's gages located 8.3m and 1.5m above it, respectively. The Ellaville and Branford gage data were then corrected to the 1929 NGVD datum. Data were collected every fifteen minutes and reported as daily averages.

We obtained water table elevation data from wells from the Suwannee River Water Management District website (www.mysuwanneeriver.org/portal/groundwater.htm). We obtained water table elevations from a well (S015334013) located 9.6 km upstream of the Branford discharge gage and 0.16 km. Water table elevations in wells were measured at coarser intervals than river data. From 2003 to 2011 dates, water table elevations were measured roughly

once a month, varying from a few days to nearly two months, while from 2012 to 2013 they were measured only six total times. There was only one well measurement for all of early 2013, during February.

Well data were used to determine if the elevation of the water table was above or below the average elevation prior to a flood event. For the purposes of this study, we define a flood as events where the instantaneous discharge at each gaging station attained a minimum of $300 \text{ m}^3/\text{s}$, which is approximately three times the base level flow. For brevity, we refer to these events hereafter as “floods,” although the events might not have overtopped the stream banks. Twenty floods occurred during the study period. Flood events were cross-referenced against the well data to determine which events had both river discharge and water table elevation data within two months prior to the event. Based on these criteria, we identified eleven events.

We assessed groundwater heads immediately prior to a flood using two complementary measurements, water table elevations in wells and river. The well data is clearly a direct indication of groundwater heads, but as discussed above, coarse sampling intervals limited data availability. Consequently, we also used river stage, which is recorded continuously, as an indicator of antecedent groundwater heads. During base flow conditions, the Suwannee River is the lowest head in the aquifer (Crane 1986), meaning river stage prior to floods can be used as an indicator of groundwater heads in the Suwannee River Basin.

We plotted the ratio of discharge from Ellaville to Branford against antecedent well elevations and river stages to determine if any relationships existed. Ellaville was chosen as the upstream measuring station because all discharge from the upper basin flows through it after passing over the Cody Scarp. Branford is the final gaging station at

the end of an 84km stretch between Ellaville and the nearest tributary, the Santa Fe River, enters the Suwannee.

Relating the ratio of discharge at Branford and Ellaville to the antecedent groundwater head allows us to determine if the magnitude of flood peak attenuation is related to water table elevation prior to flood events. A discharge ratio of one means that the stream neither gains nor loses water between gaging stations. A ratio above one means that the river gains water as the flood peak moves downstream. A ratio below one means that the surge attenuates downstream and the river loses water. If this relationship between discharge ratio and antecedent groundwater heads varies systematically, then antecedent groundwater heads may control flood peak attenuation.

Understanding the record of accuracy for National Weather Service (NWS) flood warnings allows us to determine if integrating transient aquifer storage could allow for greater accuracy in future forecasts. We cross-referenced the flood events as determined by our study with a database of NWS past issued warnings, using the Iowa State University website (mesonet.agron.iastate.edu/wx/afos/). Five floods were sufficiently large to warrant warnings being issued. For those floods, we gathered stage height predictions between one and seven days in advance of the peak discharge.

Results

Flood Analysis

River discharge downriver at Branford varied from a low of 35 m³/s in May 2012 to a high of 1,184 m³/s in April 2009. Between 2003 and 2013, there were eleven flood events that had discharges of over 300 m³/s at all gaging stations while also having

matching antecedent well data during the study period (Fig. 2) Ranking by discharge upstream, at Ellaville, the floods were, from smallest to largest: August 2003 (331 m³/s), February 2006 (348 m³/s), February 2004 (388 m³/s), June 2005 (402 m³/s), February 2010 (521 m³/s), March 2008 (572 m³/s), March 2013 (810 m³/s), March 2003 (872 m³/s), October 2004 (932 m³/s), April 2005 (1,133 m³/s), and April 2009 (1,597 m³/s).

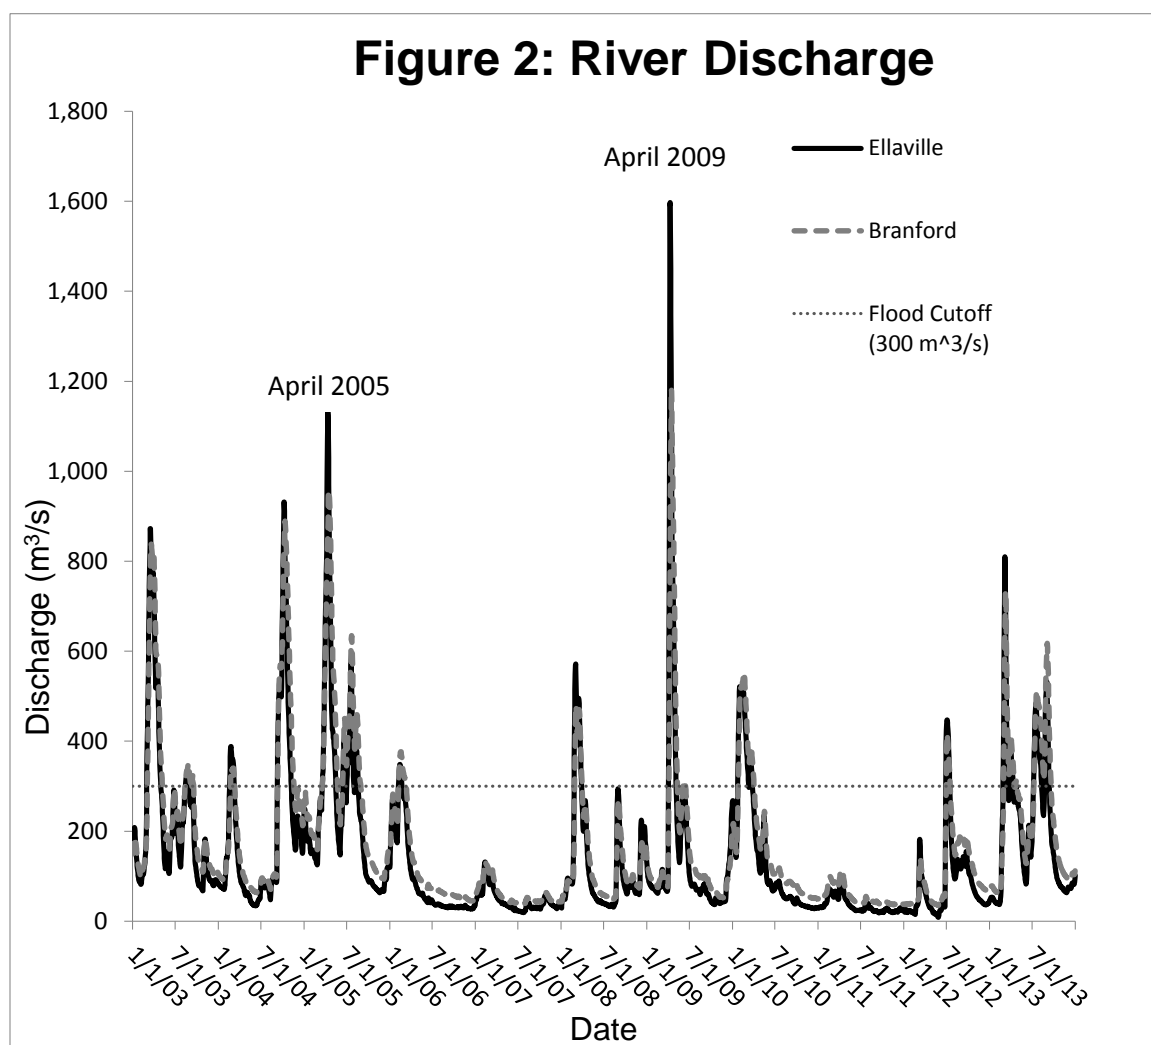


Figure 2: Discharge data, in m³/s from Ellaville, Luraville, and Branford gaging stations over the study time period. The dashed line at 300 m³/s represents the discharge cutoff

line for identifying flood events. Note the extreme floods of April 2005 and April 2009, as well as the significant drought periods of mid 2006 - early 2008 and mid 2010 – late 2012.

Of the eleven flood events with both stage and well data that were used in the study, eight of them showed attenuation as flood peaks moved downstream (Fig 2). Of these eight, six had well heights below average, and five had stage heights below average. Floods that showed attenuation had discharges that spanned a wide range (387-1,597 m³/s) at Ellaville. In contrast, the three floods that showed no attenuation all had above average well and stage heights. Non-attenuating floods had a more uniform distribution, varying only from 331-402 m³/s at Ellaville. Floods where peak discharge increases downstream were associated with lower magnitude events whereas peak discharge decreased downstream for larger magnitude events (Fig 3). For example, the August 2003 flood, peak discharge at Ellaville was 331 m³/s and discharge increased by 20 m³/s downstream (Figure 3A). In contrast, in the March 2013 flood (Figure 3B), discharge at Ellaville was 810 m³/s and it decreased by 77 m³/s downstream.

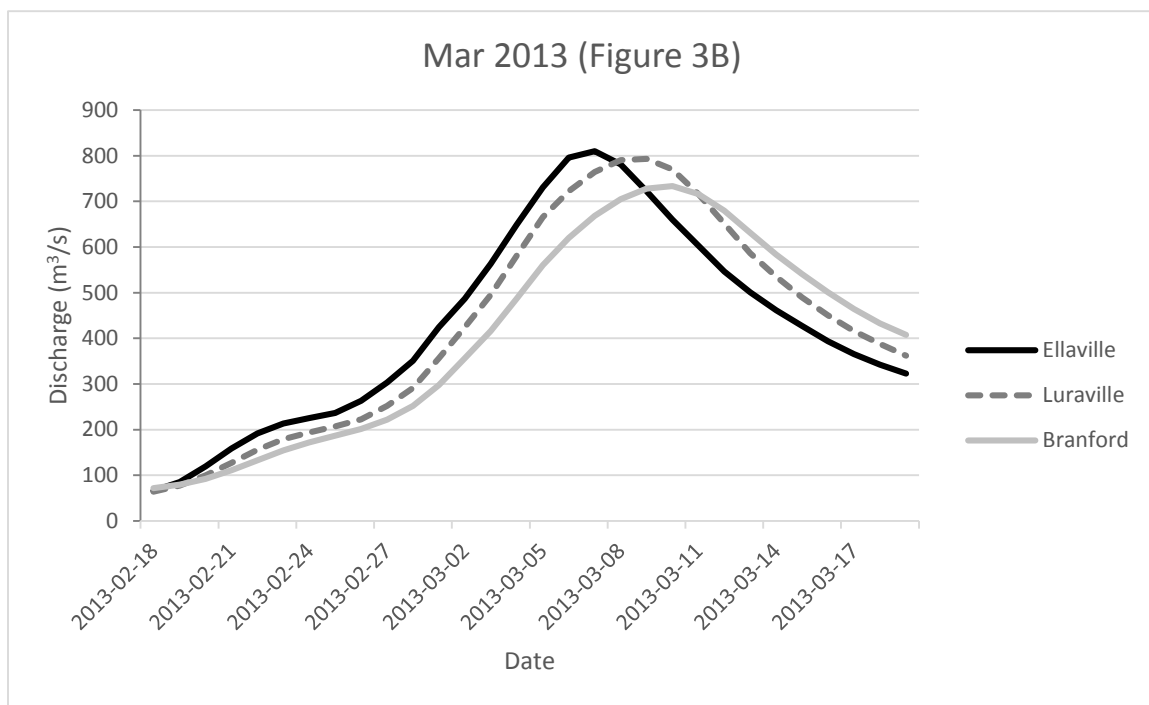
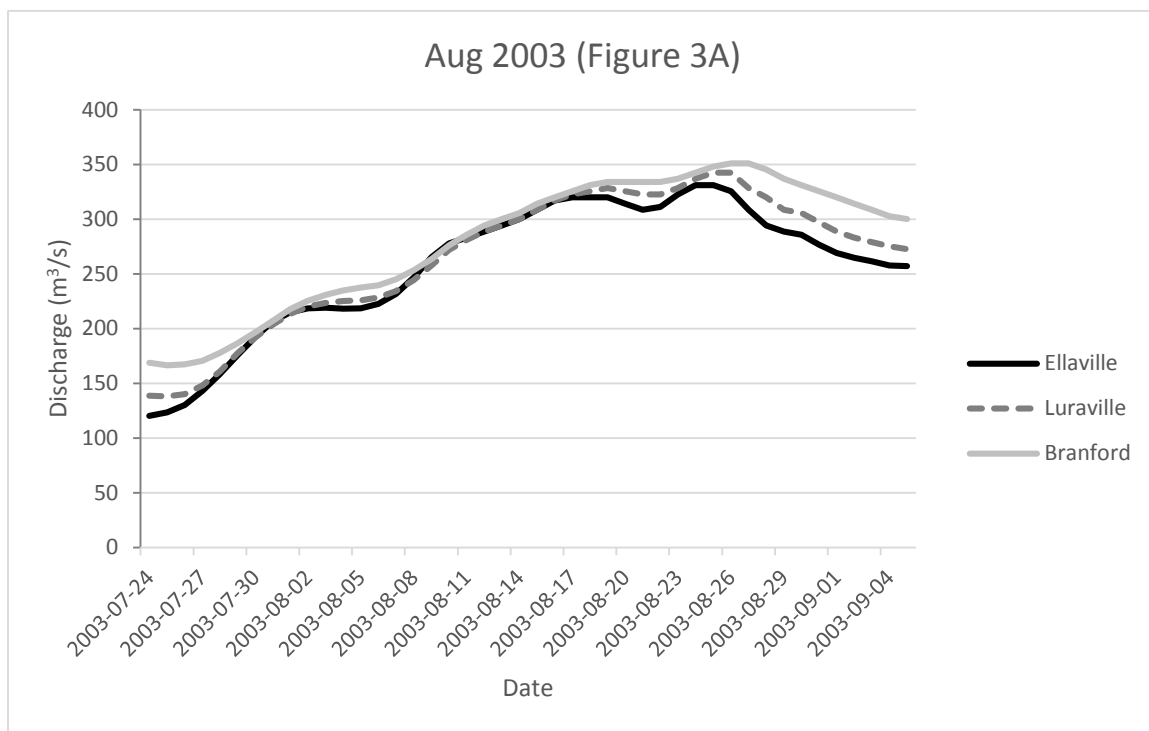


Figure 3: Hydrographs of flood events on the Suwannee River. **A)** During the August 2003 flood, discharge increases downstream from Ellaville to Branford, where Branford exhibits peak flow. **B)** During the March 2013 flood where discharge decreases downstream from Ellaville to Bradford and exhibits significant attenuation from peak flow.

Well and Stage Data

Water table elevations measured in wells fluctuated with river stage (Fig 4). The average measured water table elevation during the period of study was 4.68 meters (NGVD 1929 Datum), but was higher during floods and lower during droughts. The highest water table elevation was 9.48 m (April 2005) and the lowest was 3.02 m (January 2012). River stage at Branford for those measurements was 8.90 m and 2.05 m, respectively. Lengthy droughts in 2006-2008 and mid 2010-2012 in particular resulted in low water table elevations.

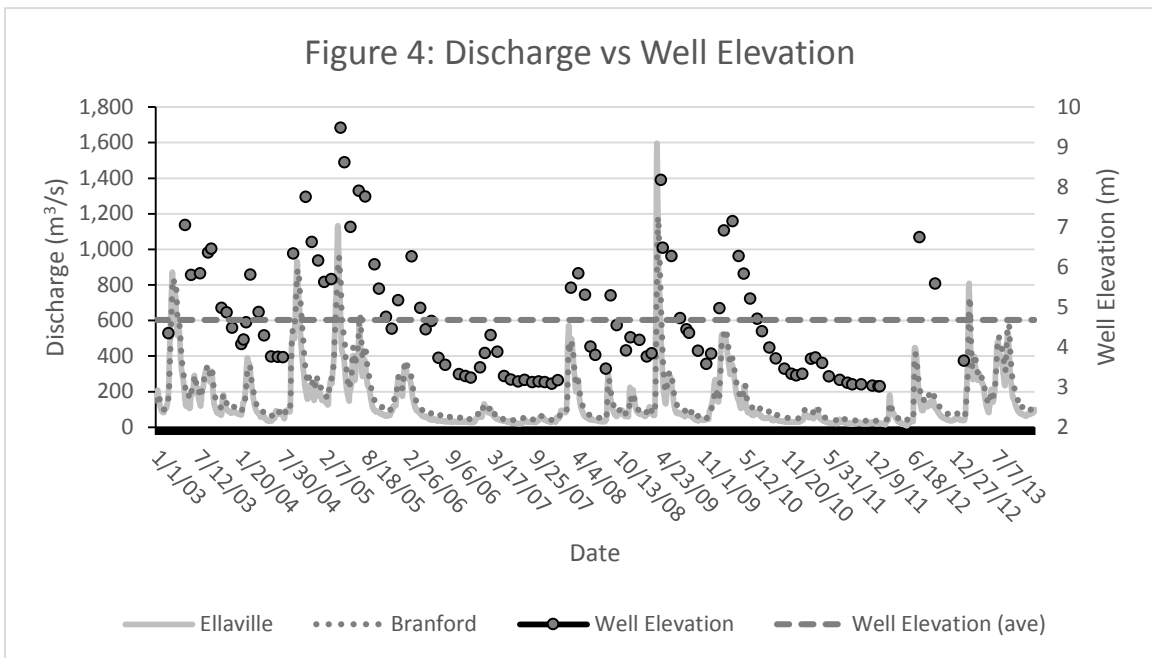


Figure 4: Comparing discharge from Ellaville and Branford gaging stations to measured well heights at Branford well. The well height average over the study period is the dashed line across the graph and reflects periods of wet vs dry conditions.

Water table elevation just prior to flood events ranged from a low of 3.17m (March 2008) to a high of 7m (June 2005), but no measurements of water table elevation were available from February to mid-September in 2013.

Flood peak attenuation and antecedent water table elevation in wells


The greatest flood peak attenuation almost always occurred in floods where antecedent groundwater heads were below average (Table 1). The water table elevations of the six attenuated floods, removing April 2005 and April 2009, ranged from 7-32% below average, while discharge downstream decreased from 1-16%.

Table 1: Listing of each flood with antecedent well elevations, discharge ratios, and antecedent stage heights, sorted by discharge ratio. The four shaded floods (Apr-05, Mar-08, Apr-09, and Feb-10) were considered discrepant, which is explored in the discussion.

Table 1. Discharge Ratios and Water Elevations				
Peak Discharge Ratio	Well Elevation (m)	Well Date	Peak Date	Antecedent Stage Height (m)
Branford/Ellaville	Branford	Branford		Branford
0.74	3.84	3/17/09	Apr-09	2.85
0.84	3.17	1/14/08	Mar-08	2.97
0.85	5.70	3/14/05	Apr-05	4.07
0.88	4.08	1/27/04	Feb-04	3.09
0.91	3.66	2/12/13	Mar-13	2.78
0.93			Jul-12	2.45
0.95	3.75	8/4/04	Oct-04	3.33
0.95			Mar-08	6.39
0.96	4.35	2/28/03	Mar-03	4.04
0.99	4.97	1/22/10	Feb-10	4.22
1.03			Apr-13	5.68
1.06	5.84	7/22/03	Aug-03	4.24
1.06			Jul-13	4.29
1.08	5.17	1/13/06	Feb-06	4.83
1.08			Feb-10	7.20
1.10			Jul-05	6.09
1.10			Mar-10	6.10
1.12	7.00	6/10/05	Jun-05	4.97
1.16			Sep-13	5.60
1.21			Aug-05	6.33

Less flood peak attenuation (or flood peak augmentation) occurred when antecedent groundwater heads were above average. The water table elevations of the three non-attenuated events ranged from 10-50% above average while discharge increased downstream between 6-12%.

Ratios of peak discharge at upstream and downstream gaging stations for each flood event are linearly and positively correlated with antecedent groundwater head ($R^2 = 0.47$) (Fig 5). The magnitude of flood peak attenuation increases as antecedent groundwater head decreases (Fig 5). The April 2005 and April 2009 flood events had peak discharge values that were much higher than the other floods ($1,133 \text{ m}^3/\text{s}$ and $1,597 \text{ m}^3/\text{s}$, respectively). Removing these events from our analysis improved the goodness of fit ($R^2 = 0.85$).

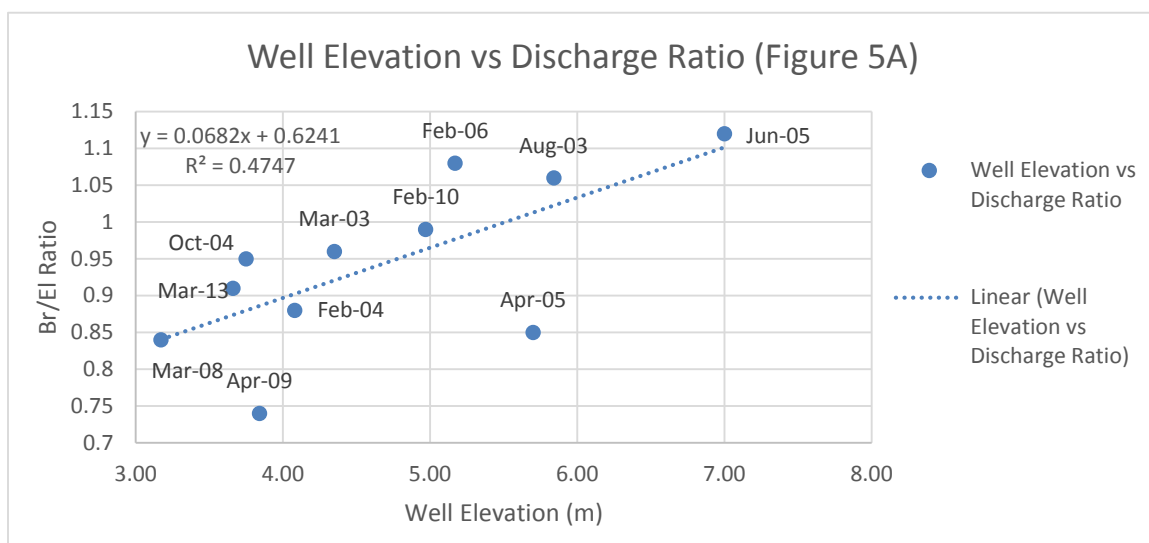

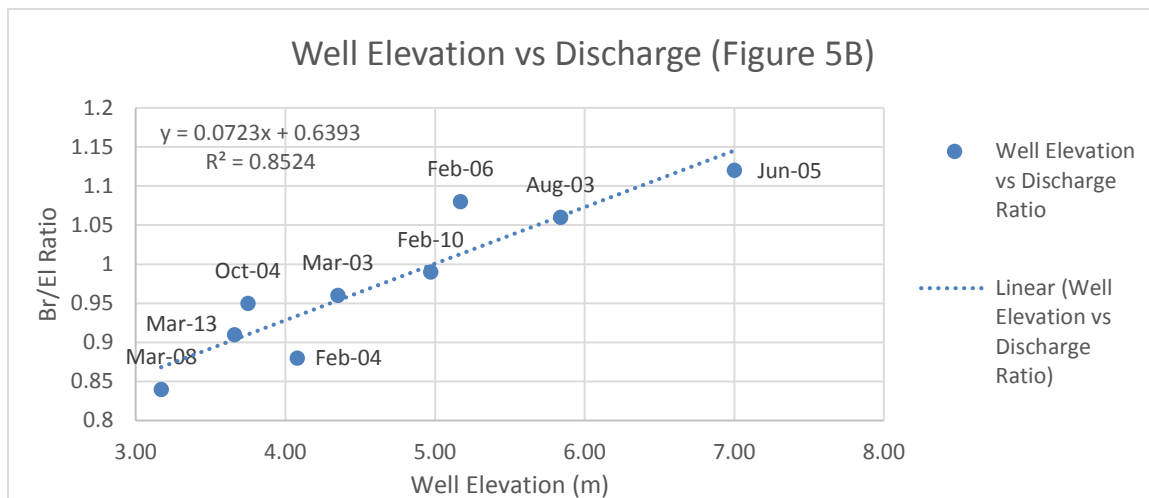
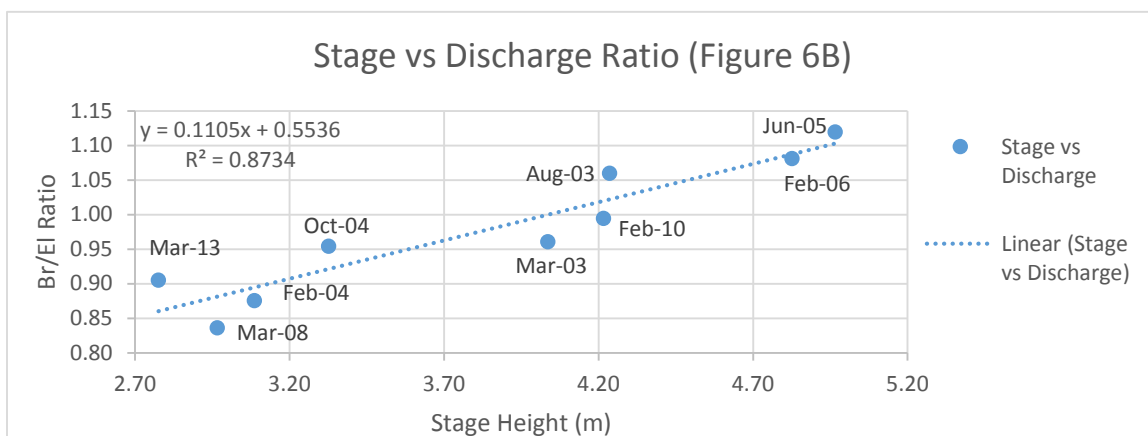
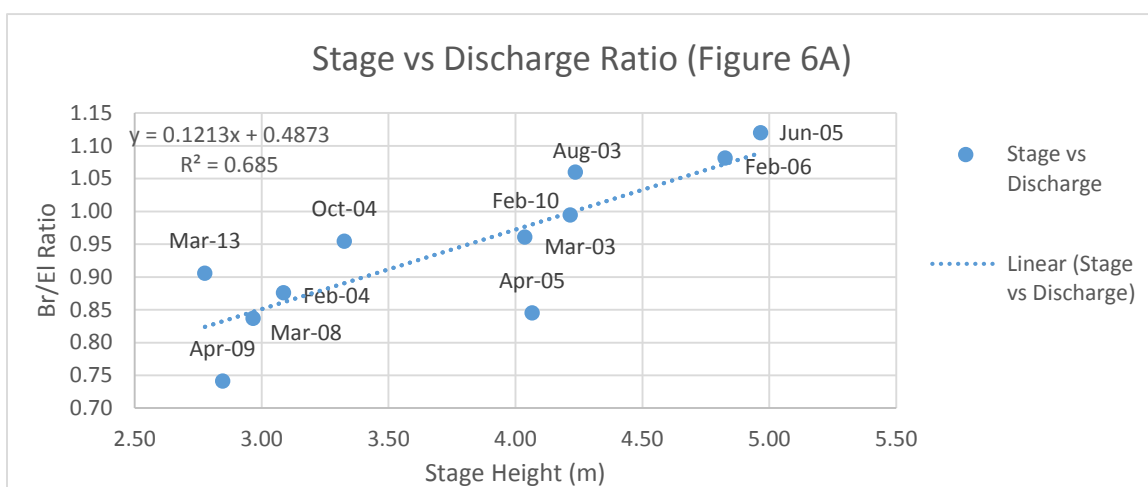


Figure 5: Well Elevations vs Discharge Ratios for the selected flood events. A) All eleven flood events along with a best fit line. B) The nine flood events after the April 2005 and April 2009 floods had been removed, with a much better fitting regression line.

Relationships between antecedent groundwater heads determined using river stage are similar to those determined from well data. Of the three floods that showed no attenuation, all of them had above-average antecedent stage height (11-41% above). In contrast, 5 of 8 attenuating floods had below average stage heights (25-44% below) and the other three attenuating floods antecedent stage heights only slightly above average, ranging from 4-11% above.

Ratios of peak discharge at upstream and downstream gaging stations for each flood event are also linearly and positively correlated with antecedent river stage ($R^2 = 0.68$) (Fig 6A). Again, goodness of fit was improved by removing the April 2005 and April 2009 flood events ($R^2=0.87$) (Fig 6B). Because antecedent river stage data was available for all twenty floods identified by the study, whereas groundwater head data

from wells was only available for eleven floods, we conducted a separate analysis using all twenty floods. There was again a linear, positive correlation, but the goodness of fit decreased ($R^2 = 0.54$) relative to Figure 6A (Fig 6C). The April 2005 and April 2009 floods were removed as in Figure 6B, and the secondary March 2008 and secondary February 2010 floods were removed due to a flood recurrence interval of only twelve days between a prior flood peak and the peak of the removed event, which will be explained in the discussion. Doing so improved the goodness of fit ($R^2 = 0.77$) (Fig 6D).



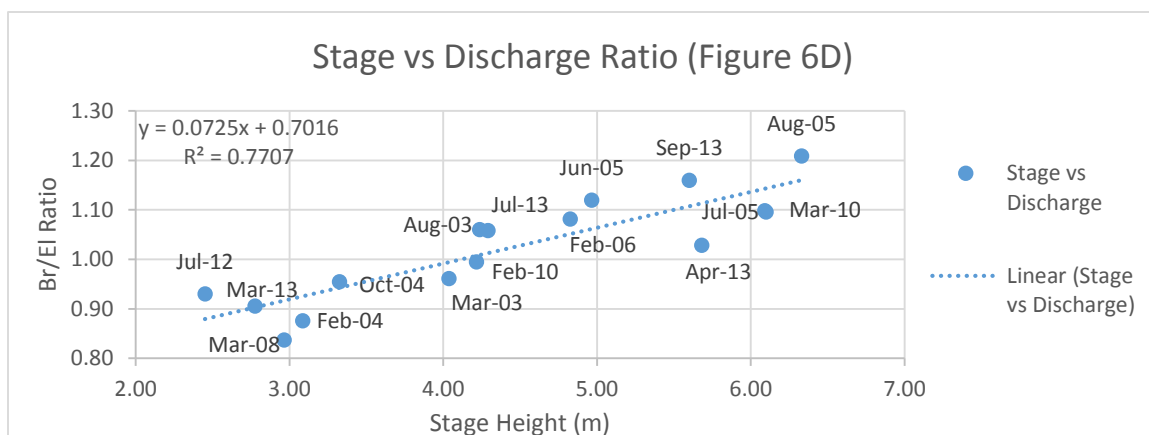
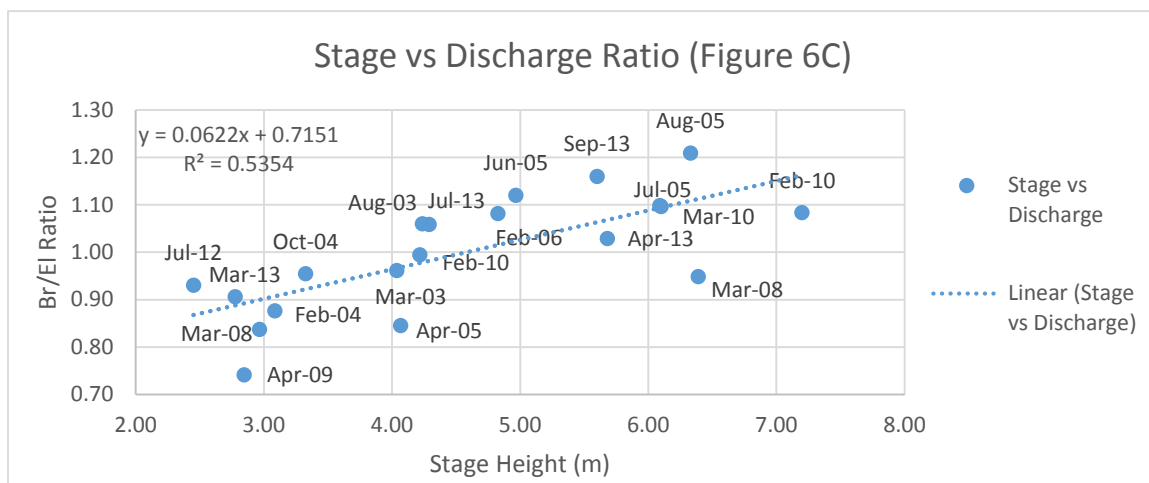


Figure 6: River stage vs Discharge ratios. A) Plot of all eleven featured flood events. B) Plot of the nine flood events, having removed the April 2005 and April 2009 floods. Note how much more linear the data are, showing a very strong positive linear relationship. C) Plot of all twenty flood events from the study period. D) Plot of all flood events with April 2005, April 2009, March 2008, and February 2010 removed.

By cross-referencing a database of historical NWS flood warnings with the flood peaks we identified in the study, we found five with issued warnings for Branford: March

2003, October 2004, April 2005, April 2009, and March 2013. All of these events reached flood stage. For the period from 2003-2009, the NWS released warnings with predicted stages for the next five days. Of those warnings, the March 2003, October 2004, and April 2005 warnings were all closely accurate, with predicted stage heights ranging from 0.11m lower to 0.26m higher than measured. The April 2009 flood, which showed extreme attenuation, had stage predictions ranging from 0.0 to 1.11m above the actual measurements. For the March 2013 flood, the NWS released warnings that predicted stage height for a single day, five days in advance. The three warnings released ranged from .78 to 1.89m above the measured heights.

Discussion

Our results suggest peak flood discharge in the Suwannee River downstream of the Cody Scarp is dependent on groundwater heads immediately before a flood. Furthermore, we found that when floods occur after prolonged drought periods that lower groundwater heads, transient aquifer storage can result in substantial flood peak attenuation in the Suwannee River Basin.

The relationship between antecedent groundwater heads and flood peak attenuation most likely reflects a combination of hydraulic gradient between the river and the aquifer during floods and the magnitude of storage that is available in the vadose zone. When groundwater heads are low before a flood, runoff from the upper basin during floods increases river stage more rapidly than local infiltration of rainfall can increase groundwater heads. Consequently, hydraulic gradients between the river and aquifer reverse during the flood event, leading to river water flowing into the aquifer via

conduits, where it is stored temporarily to reduce flood peaks. (Alberic 2004, Gulley et al 2013, Zhou 2007) For example, during the April 2005 flood, transient aquifer storage attenuated peak discharge by 15% between Ellaville and Branford.

In contrast, when groundwater heads are high, hydraulic gradients between the river and the groundwater are reduced and less flood water flows into the aquifer. For some low magnitude floods, river stage never increased above water table elevations, and consequently, groundwater inflow to the river during floods increased flood peaks. For example, during the February 2006 flood which had above-average antecedent well elevation, peak discharge increased by 8% between Ellaville and Branford.

In addition to antecedent groundwater heads, the steepness of the hydrograph and the magnitude of the flood also appear to have some influence on the degree of flood peak attenuation. Regarding the eleven floods with antecedent well and stage data, the eight attenuating floods had an average peak discharge of 682 m³/s at Ellaville whereas the three non-attenuating floods only had an average peak discharge of 361 m³/s. The stage height ratios (peak/antecedent) also differed, with the attenuating floods increasing stage by an average factor of 3.3 and the non-attenuating floods increasing by an average factor of 1.5. The larger floods increased stage height to the point where the hydraulic gradient switched directions, from groundwater flowing into the river to river water flowing into the aquifer. The non-attenuating floods had lesser stage increases which did not create significant reverse gradients.

The importance of hydraulic gradients between the river and the aquifer, and not just antecedent groundwater heads, is most apparent when comparing the April 2005 and April 2009 events. These events were the two largest floods in our record and appear as outliers when plotted with other floods (Fig 5A, 6A). Indeed, the large

magnitude of these two April floods may explain why they have different relationships with antecedent groundwater heads than smaller floods. The April 2009 flood had a peak discharge of 1,597 m³/s of discharge at Ellaville and the April 2005 had a peak discharge of 1,132 m³/s at Ellaville. During April 2009 flooding, groundwater heads were 57% below average and river stage was 82% below average. Discharge ratio during this flood was 0.74, corresponding to a 26% attenuation in peak discharge (413 m³/s) between Ellaville and Branford. While flood peak attenuation is generally predicted for floods that occur during lower antecedent groundwater heads, the April 2009 event showed far greater attenuation than other events that occurred with similar antecedent groundwater heads. This greater attenuation is due to the steeper hydraulic gradients between the river and the aquifer during these very large flood events. Indeed, steep increases in hydraulic gradients between the river and the aquifer allowed the April 2005 to be highly attenuated (ratio of upstream to downstream discharge was .85), even though the antecedent groundwater heads were above average, with water table elevation in the well 22% and river stage 8% greater than average.

When the two outlier April floods are removed in Figures 5B and 6B, the goodness of fit (R^2) becomes .85 for well elevation and .86 for river stage, meaning both data sets are nearly identical in terms of fit. However, when river stage is graphed for all twenty floods identified in the study (Fig 6C), the results initially suggest a weaker correlation, as the goodness of fit becomes (R^2) .54.

There were two months during the study period that experienced multiple flood peaks, in March 2008 and February 2010. In both cases, the time apart between flood peaks was only 12 days. Neither of these secondary floods had corresponding antecedent well data. The second flood in each case was removed from the stage vs

discharge ratio plot (6D), as we felt that the short timespan between flood peaks in these cases did not allow for conditions in the system to stabilize and allow for good data. By removing the above-mentioned April floods as well as these two floods, the goodness of fit improved to .77.

Flood Prediction

Most flood prediction models predict downstream flood magnitudes using only upstream discharge and rainfall. While this approach works well in many basins such as those with confined aquifers, it does not consider the potential impact of transient aquifer storage on flood magnitudes.

Five floods had NWS stage warnings released; each of these floods had discharges of over 700 m³/s at Branford. Three of the five (Mar 2003, Oct 2004, Apr 2005) had warnings that were very accurate, +/- 0.26m between predicted and measured stages. The two most recent floods (April 2009, March 2013) had more inaccurate predictions, with both failing to account for flood peak attenuation. Stage heights were predicted at over 1 meter higher than what occurred during the April 2009 flood, and 1.89 meters higher than measured stage for the March 2013 flood.

This analysis shows that flood predictions for this portion of the Suwannee River are inconsistent. For flood predictions to be the most useful, they need to be both accurate and timely. Predictions leading to alerts, evacuations, and prevention methods such as sandbag deployment can save lives and property if done correctly, but can

waste money and lower the population's confidence if the prediction is overly inaccurate. False alarms can be frustrating and costly, and increase the risk that people will ignore future warnings that may be more accurate (Schumann et al 2011).

Given the strong correlation between antecedent groundwater heads and flood peak attenuation in the Suwannee River, results suggest that models could be improved by incorporating antecedent groundwater head information. This additional variable would allow for greater prediction accuracy, as it more closely models the processes occurring during floods in the Suwannee.

Having a larger stage analysis of twenty events is useful because river stage data is more prevalent in many locations, with smaller data intervals. In systems with a strong correlation between groundwater and stage, the latter can be used for more effective flood modeling. Stage data is often collected by high resolution equipment and telemetered, while well data is commonly collected by hand and at spaced or irregular intervals. If groundwater head data were more consistently and frequently collected, both variables could be used more effectively in flood predictions.

One concern with using stage over a long period is that the shape of the river channel may change due to large flood events. During large floods, scouring of the river channel changes cross-sectional areas and discharge capacities, which can affect stage measurements. However, Mossa and Kowinsky 1997 found that the Suwannee's tough limestone bedrock strongly resisted scouring, with sediments flushed away were replaced within 1-2 months; therefore scour was not considered to be a major factor in altering discharges and stage heights.

Implications for aquifer processes

Understanding controls on transient aquifer storage of floodwaters is important for understanding karst ecohydrology in aquifers as well as potential pollution pathways. Conduits allow floodwaters to travel much further into aquifers during bank storage events than non-karst aquifers (Baffaut and Benson 2009, Personne et al 1998, Herman et al 2008, Katz et al 1997, Ha et al 2008). Consequently, pollutants that may be in rivers during floods are more likely to be introduced to aquifers in floods that occur when water tables are low, such as after droughts, than when water tables are high. Where pollutants are transferred from conduits to the groundwater matrix, they may remain inaccessible, locked into deeply transported sediments and pore spaces until another flooding event causes them to be flushed out of the system (Baffaut and Benson 2009, Herman et al 2008, Martin and Sreaton 2001).

Exchange of floodwaters and aquifers during floods can also be beneficial. In the Upper Suwannee River basin, there is an excess of nitrate (NO_3) in the groundwater due to heavy agricultural activities. This water infiltrates through sinkholes and fractures, or enters the groundwater through spring reversals during flood events. However, the spring reversals actually help remove the NO_3 by increasing chemical reactions among bacteria that digest it (Katz et al 1997). In addition, these reversals bring outside sediments, nutrients, oxygen, and dissolved organic carbon into cave and conduit ecosystems that they need to survive and could not otherwise exist without (Bonacci et al 2009).

Conclusions

This study determined that in a karst environment, a strong connection exists between antecedent groundwater heads and flood peak attenuation in the Lower Suwannee River. River stage, groundwater levels, and discharge ratios for an eleven year period were used to model the relationship between groundwater heads and attenuation. A strong, positive, linear relationship between antecedent groundwater heads, represented by stage and well elevation data, and the discharge ratio of Branford/Ellaville, downstream/upstream, occurs in this catchment. Antecedent groundwater heads control whether a flood will attenuate or not, while spring reversals and conduit systems provide a mechanism for river water to flow deep inside porous and permeable limestone aquifers, allowing for increased storage in the aquifer matrix. Understanding spring reversals and transient aquifer storage is paramount in understanding how and when pollutants and nutrients can enter karst aquifers.

Current flood prediction models do not take into account interactions between surface and groundwater, leading to predictions of varying accuracy for the basin, which can have negative social and economic impacts. By understanding how these interactions affect flood peak attenuation, they can be incorporated into future flood models to increase accuracy and public trust of forecasts and warnings.

References

- Alberic P. 2004. River backflooding into a karst resurgence (Loiret, France). *Journal of Hydrology* **286**: 194-202
- Baffaut C, Benson VW. 2009. Modeling Flow and Pollutant Transport in a Karst Watershed with SWAT. *American Society of Agricultural and Biological Engineers* **52**(2): 469-479
- Bailly-Comte V, Jourde H, Pistre S. 2009. Conceptualization and classification of groundwater-surface water hydrodynamic interactions in karst watersheds: case of the karst watershed of the Coulazou River (Southern France). *Journal of Hydrology* **376**: 456-462
- Bailly-Comte V, Jourde H, Roesch A, Pistre S, Batiot-Guilhe C. 2008. Time series analyses for Karst/River interactions assessment: case of the Coulazou river (southern France). *Journal of Hydrology* **349**: 98-114
- Bailly-Comte V, Martin Jonathan B, Sreaton EJ 2011. Time variant cross correlation to assess residence time of water and implication for hydraulics of a sink-rise karst system. *Water Resources Research* **47**
- Birkhead AL and James CS 2002. Muskingum river routing with dynamic bank storage. *Journal of Hydrology* **264**: 113-132
- Bonacci O, Pipan T, Culver DC. A framework for karst ecohydrology. *Environmental Geology* **56**: 891-900
- Burt TP, Bates PD, Stewart MD, Claxton AJ, Anderson MG, Price DA 2002. Water table fluctuations within the floodplain of the River Severn, England. *Journal of Hydrology* **262**: 1-20
- Changnon SA 2008. Assessment of Flood Losses in the United States. *Journal of Contemporary Water Research & Education* **138**: 38-44
- Chen Xi, Chen Xunhong 2003. Stream water infiltration, bank storage, and storage zone changes due to stream-stage fluctuations. *Journal of Hydrology* **280**: 246-264
- Chen Xi, Chen DY, Chen Xun-hong 2006. Simulation of baseflow accounting for the effect of bank storage and its implication in baseflow separation. *Journal of Hydrology* **327**: 539-549
- Coustau M, Vovier C, Borrell-Estupina V, Jourde H 2012. Flood modelling with a distributed event-based parsimonious rainfall-runoff model: case of the karstic Lez river catchment. *Natural Hazards and Earth System Sciences* **12**: 1119-1133
- Crandall CA, Katz BG, Hirten JJ. 1999. Hydrochemical evidence for mixing of river water and groundwater during high-flow conditions, lower Suwannee River basin, Florida, USA. *Hydrogeology Journal* **7**: 454-467
- Crane, J.J. 1986. An investigation of the geology, hydrogeology, and hydrochemistry of the lower Suwannee River Basin: Tallahassee, Florida Department of Natural Resources, Report of Investigations **96**. 205
- Ford DC, Williams P. 2007. *Karst Hydrogeology and Geomorphology*. John Wiley and Sons: Chichester.

- Forster S, Chatterjee C, Bronstert A 2008. Hydrodynamic simulation of the operational management of a proposed flood emergency storage area at the middle Elbe River. *River Research and Applications* **24**: 900-913
- Grubbs JW. 1998. Recharge Rates to the Upper Floridian aquifer in the Suwannee River Water Management District, Florida. USGS Water Resources Investigations Report 97-4283, 62
- Gulley J, Martin JB, Sreaton EJ, Moore PJ. 2011. River reversals into karst springs: a model for cave enlargement in eogenetic karst aquifers. *Geological Society of America Bulletin* **123**: 457-467
- Gulley JD, Martin JB, Spellman PD, Moore PJ, Sreaton EJ. 2013. Dissolution in a partially-confined carbonate platform: Effects of allogenic runoff, hydraulic damming of groundwater inputs, and surface-groundwater exchange at the basin scale. *Earth Surface Processes and Landforms* **38**: 1700-1713
- Gulley JD, Martin JB, Spellman P, Moore PJ, Sreaton EJ. 2014. Influence of partial confinement and Holocene river formation on groundwater flow and dissolution in the Florida carbonate platform. *Hydrological Processes* **28**: 705-717
- Ha K, Koh DC, Yum BW, Lee KK 2008. Estimation of river stage effect on groundwater level, discharge, and bank storage and its field application. *Geosciences Journal* **12**: 191-204
- Herman EK, Toran L, White WB. 2008. Threshold events in spring discharge: Evidence from sediment and continuous water level measurement. *Journal of Hydrology* **351**: 98-106
- Herman EK, Toran L, White WB 2009. Quantifying the place of karst aquifers in the groundwater to surface water continuum: A time series analysis study of storm behavior in Pennsylvania water resources. *Journal of Hydrology* **376**: 307-317
- Jourde H, Roesch A, Guinot V, Bailly-Comte V. 2007. Dynamics and contribution of karst groundwater to surface flow during a Mediterranean flood. *Environmental Geology* **51**: 725-730
- Katz, BG, DeHan RS, Hirten JJ, Catches JS. 1997. Interactions between ground water and surface water in the Suwannee River Basin, Florida. *Journal of the American Water Resources Association* **33**: 1237-1254
- Knebl MR, Yang ZL, Hutchison K, Maidment DR 2005. Regional scale flood modeling using NEXRAD rainfall, GIS, and HEC-HMS/RAS: a case study for the San Antonio River Basin Summer 2002 storm event. *Journal of Environmental Management* **75**: 325-336
- Lauber U, Kotyla P, Morche D, Goldschelder N 2014. Hydrogeology of an alpine rockfall aquifer system and its role in flood attenuation and maintaining baseflow. *Hydrology and Earth System Sciences* **11**: 6805-6841
- Martin JB, Dean RW 2001. Exchange of water between conduits and matrix in the Floridian aquifer. *Chemical Geology* **179(1-4)**: 145-165
- Martin JB, Sreaton EJ. 2001. Exchange of Matrix and Conduit Water with Examples from the Floridian Aquifer. In *Water-Resources Investigations Report*,

- Kuniansky EL (ed). U.S. Geological Survey Karst Interest Group Proceedings 01-4011: 38-44
- Mogil MH, Monro JC, Groper HS 1978. NWS's Flash Flood Warning and Disaster Preparedness Programs. *Bulletin of the American Meteorological Society* **59**: 690-699
 - Montaldo N, Mancini M, Rosso R 2004. Flood hydrograph attenuation induced by a reservoir system: analysis with a distributed rainfall-runoff model. *Hydrological Processes* **18**: 545-563
 - Mossa J, Konwinski J. 1998. Thalweg variability at bridges along a large karst river: the Suwannee River, Florida. *Engineering Geology* **49**: 15-30
 - Personne JC, Poty F, Vaute L, Drogue C. 1998. Survival, transport and dissemination of *Escherichia coli* and enterococci in a fissured environment. Study of a flood in a karstic aquifer. *Journal of Applied Microbiology* **84**: 431-438
 - Pittman JR, Hatzell HH, Oaksford ET. 1997. Spring Contributions to Water Quantity and Nitrate Loads in the Suwannee River during Base Flow in July 1995. U.S. Geological Survey Water-Resources Investigations Report 97-4152: 12
 - Planert M. 2007. Simulation of Regional Ground-Water Flow in the Suwannee River Basin, Northern Florida and Southern Georgia: USGS Scientific Investigations Report 2007-5031: 50
 - Schumann AH, Wang Y, Dietrich J 2011. Framing Uncertainties in Flood Forecasting with Ensembles. In *Flood Risk Assessment and Management*, Schumann AH (ed). 53-76
 - Scott TM. 1992. A Geological Overview of Florida. Florida Geologic Survey Open File Report No. 50. 78
 - Stewart MD, Bates PD, Anderson MG, Price DA, Burt TP 1999. Modelling floods in hydrologically complex lowland river reaches. *Journal of Hydrology* **223**: 85-106
 - Wett B, Jarosch H, Ingerle K 2002. Flood induced infiltration affecting a bank filtrate well at the River Enns, Austria. *Journal of Hydrology* **266**: 222-234
 - White WB. 2002. Karst hydrology: recent developments and open questions. *Engineering Geology* **65**(2-3): 85-105
 - Woltemade C, Potter K 1994. A watershed modeling analysis of fluvial geomorphologic influences on flood peak attenuation. *Water Resources Research* **30**: 1933-1942
 - Zanon F, Borga M, Zoccatelli D, Marchi L, Guame E, Bonnefait L, Delrieu G 2010. Hydrological analysis of a flash flood across a climatic and geologic gradient: the September 18, 2007 event in Western Slovenia. *Journal of Hydrology* **394**: 182-197
 - Zhou W. 2007. Drainage and flooding in karst terranes. *Environmental Geology* **51**: 963-973