



**Michigan
Technological
University**

Michigan Technological University
Digital Commons @ Michigan Tech

[Michigan Tech Patents](#)

Vice President for Research Office

1-6-2004

Snow groomer assembly

Philip J. Quenzi

Russell G. Alger

Michigan Technological University, rgalger@mtu.edu

Follow this and additional works at: <https://digitalcommons.mtu.edu/patents>

 Part of the [Automotive Engineering Commons](#), and the [Mechanical Engineering Commons](#)

Recommended Citation

Quenzi, Philip J. and Alger, Russell G., "Snow groomer assembly" (2004). *Michigan Tech Patents*. 94.
<https://digitalcommons.mtu.edu/patents/94>

Follow this and additional works at: <https://digitalcommons.mtu.edu/patents>

 Part of the [Automotive Engineering Commons](#), and the [Mechanical Engineering Commons](#)



US006671983B2

(12) **United States Patent**
Quenzi et al.

(10) **Patent No.:** **US 6,671,983 B2**
(45) **Date of Patent:** **Jan. 6, 2004**

- (54) **SNOW GROOMER ASSEMBLY**
- (75) Inventors: **Philip J. Quenzi**, Atlantic Mine, MI (US); **Russell G. Alger**, Hancock, MI (US)
- (73) Assignee: **Board of Control of Michigan Technological University**, Houghton, MI (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 232 days.

2,925,870 A	*	2/1960	Michelsen et al.	172/146
3,652,106 A		3/1972	Waterman	
3,794,122 A	*	2/1974	Rohrer	172/66
3,867,992 A	*	2/1975	Waterman	180/14.4
4,021,942 A	*	5/1977	Purdy	37/222
4,056,328 A	*	11/1977	Maxey	404/96
4,348,825 A		9/1982	Bachler	
4,437,245 A		3/1984	Nigmela	
4,523,398 A		6/1985	Scheibel et al.	
5,412,884 A	*	5/1995	Staples et al.	37/342
5,464,066 A	*	11/1995	Doucet	172/1
5,586,603 A		12/1996	Mattis	
5,611,291 A		3/1997	Pogue	

* cited by examiner

- (21) Appl. No.: **10/003,664**
- (22) Filed: **Oct. 23, 2001**
- (65) **Prior Publication Data**
US 2002/0035797 A1 Mar. 28, 2002

Primary Examiner—Thomas B. Will
Assistant Examiner—Kristine Florio
 (74) *Attorney, Agent, or Firm*—Michael Best & Friedrich LLP

Related U.S. Application Data


- (63) Continuation-in-part of application No. 09/134,265, filed on Aug. 14, 1998, now abandoned.
- (51) **Int. Cl.⁷** **E01H 4/02**
- (52) **U.S. Cl.** **37/222**
- (58) **Field of Search** 37/219, 220, 221, 37/222, 223, 224, 225, 465, 196; 172/21



(57) **ABSTRACT**


A snow groomer includes a movable platform, a prime mover mounted to the platform and a grooming drum rotatably driven by the prime mover for rotation in a direction opposite the traveling direction of the snow groomer. The grooming drum includes axially spaced apart and radially protruding ribs that extend circumferentially around the drum. The ribs include circumferentially spaced apart apertures and the apertures of each rib are aligned with the apertures of the other ribs. Elongated cutting teeth extend through the apertures of the ribs and have a cross-sectional area that is smaller than the apertures such that the cutting teeth are free to vibrate within the apertures as the drum rotates, thereby enhancing the pulverization of chunks of snow and ice.

- (56) **References Cited**
U.S. PATENT DOCUMENTS
- 1,111,628 A 10/1914 Wettervik
- 2,223,213 A 11/1940 Kersten
- 2,657,619 A 11/1953 Gilreath
- 2,786,283 A 3/1957 Bradley

24 Claims, 5 Drawing Sheets

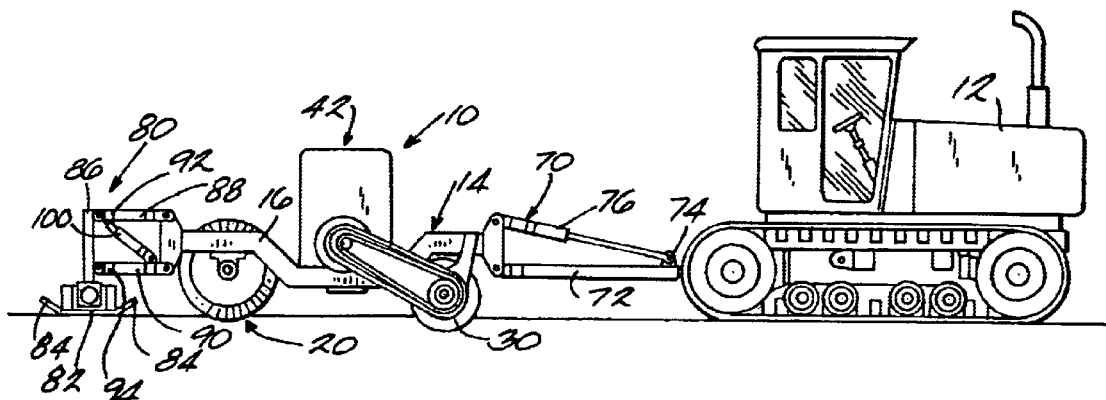

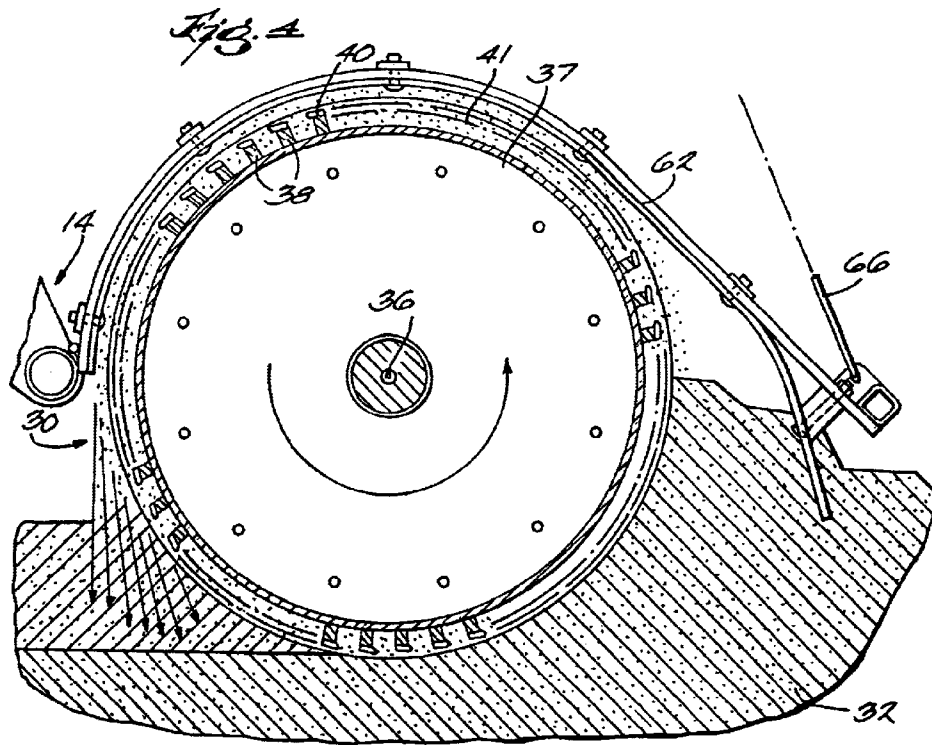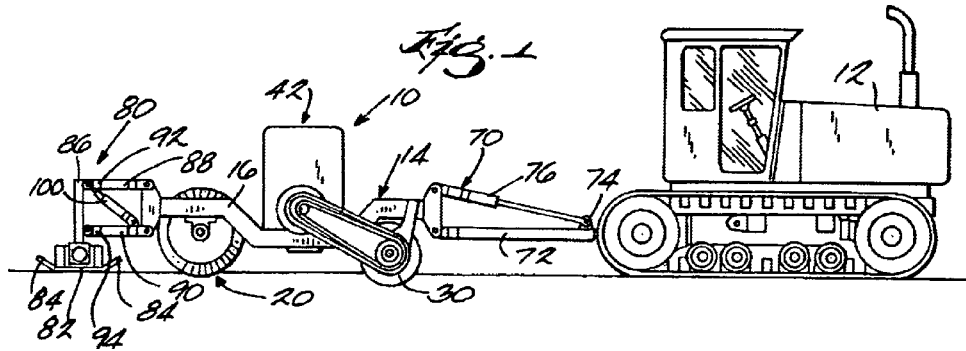

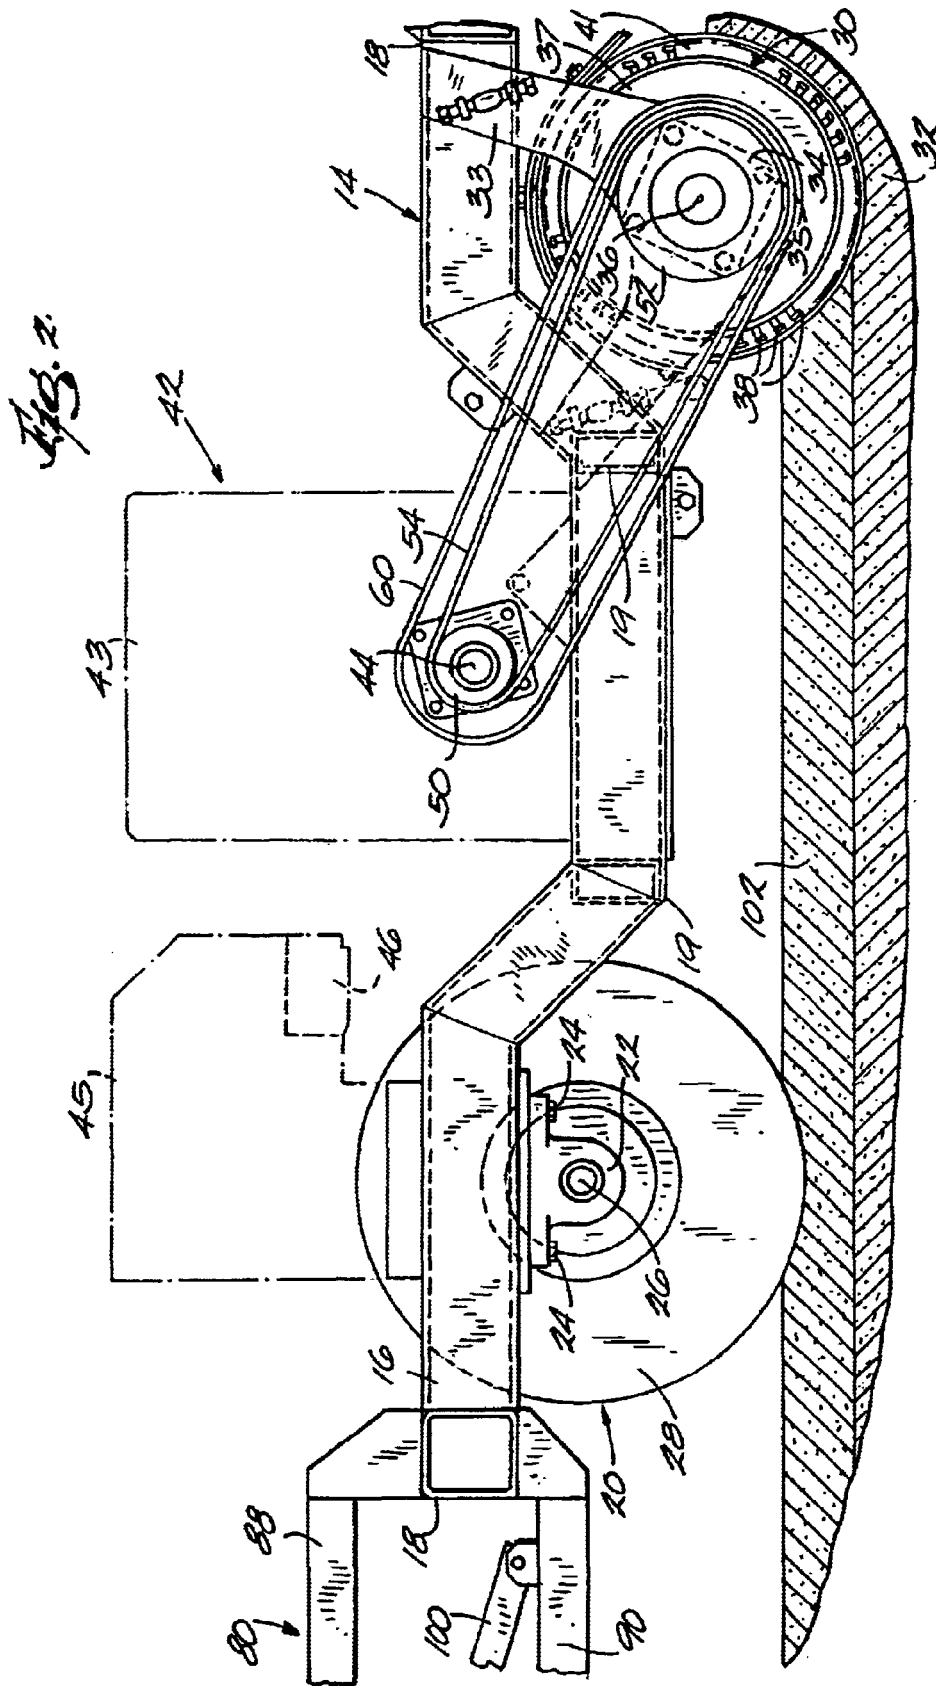

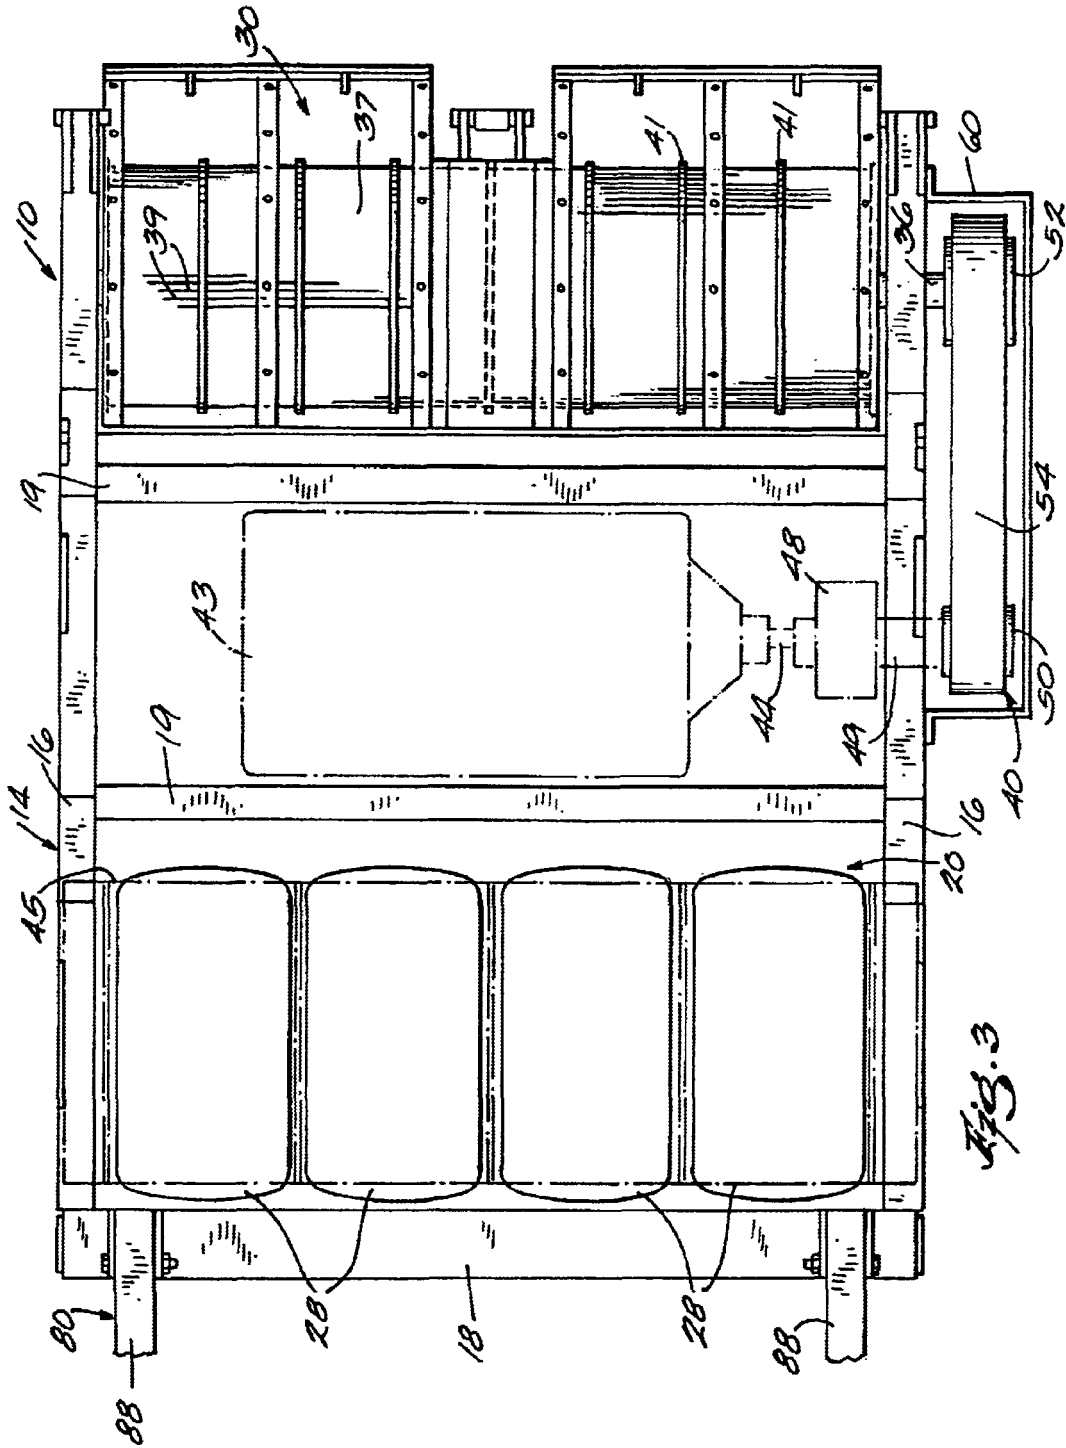


Fig. 3

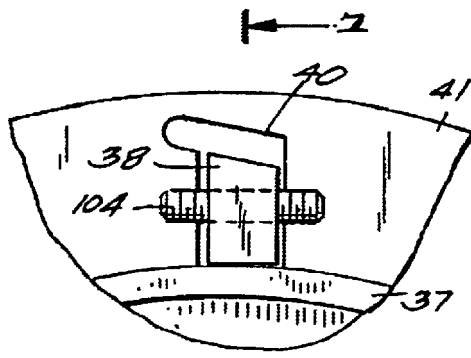


Fig. 6

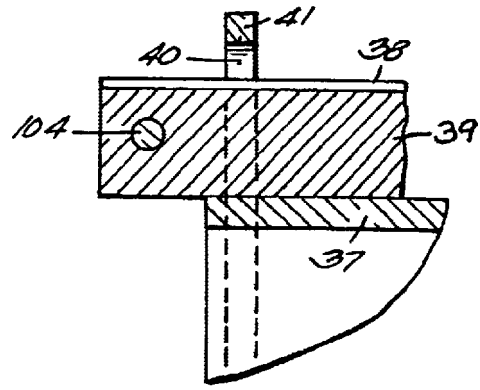


Fig. 7

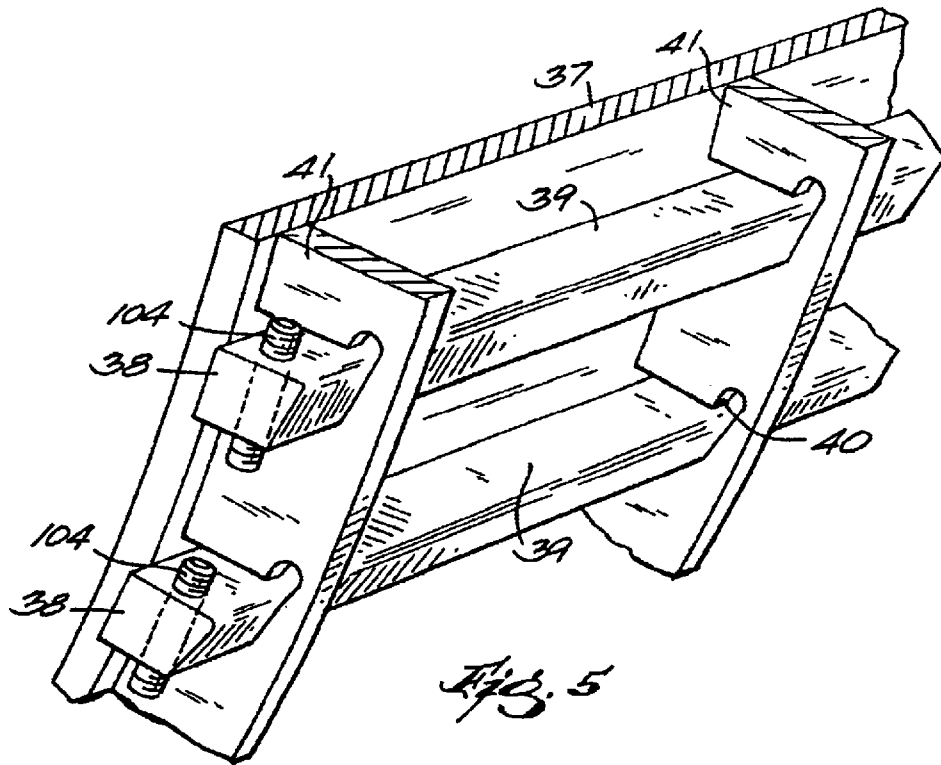


Fig. 5

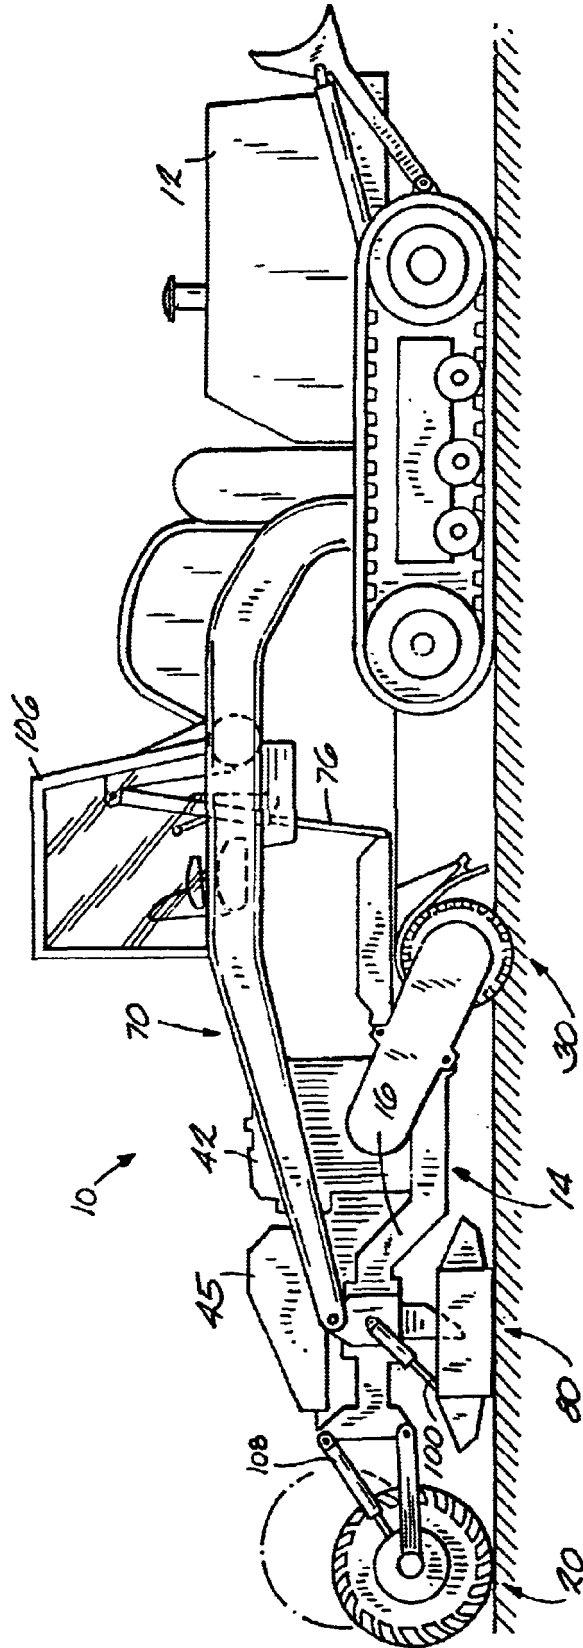


Fig. 8

SNOW GROOMER ASSEMBLY

RELATED APPLICATIONS

The present application is a continuation-in-part of U.S. patent application Ser. No. 09/134,265, filed Aug. 14, 1998 now abandoned.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to groomers for snow and, more particularly, to a snow groomer assembly for grooming snow.

2. Description of the Related Art

It is known to groom snowmobile trails by the use of drags pulled behind a tractor. These drags cut off the tops of the bumps or moguls and fill in the valleys. The resulting trail looks very smooth. However, the snow filling the valleys is made up of relatively large chunks with minimal compaction and therefore does not bond together to form a hard durable surface. The tops of the shaved off moguls are quite hard. As a result, as snowmobiles traverse the newly groomed trail, the loose snow in the valleys is compacted and displaced and the trail becomes bumpy in a short time.

It is also known to use a tiller to groom snow on a nordic ski trail and alpine ski slope. The tiller has a rotating cylinder that cuts up a surface of a snow pack on the trail or slope. Although the above tiller has worked well, it suffers from the disadvantage that the tiller works on the snow pack as a whole, thereby impacting only a minimal number of individual particles. Snow on heavily used alpine ski areas often turns into chunks of ice (called death cookies). It is desirable to turn those ice chunks back into snow without compaction to provide a good ski surface. Current equipment such as groomers or tillers will not do this. Thus, there is a need in the art to provide a snow groomer that acts on the individual particles of a snow pack, thereby changing the actual structure or make-up of the snow pack and to then densely compact the particles into a smooth surface.

SUMMARY OF THE INVENTION

It is, therefore, one object of the present invention to provide an improved snow groomer assembly for grooming snow on snowmobile trails and alpine ski hills.

It is another object of the present invention to provide a snow groomer assembly that acts on individual snow particles and changes the structure of a snow pack.

To achieve the foregoing objects, the present invention is a snow groomer assembly. The snow groomer assembly includes a rotor and a plurality of teeth on the rotor extending axially and spaced circumferentially about the rotor to condition a snow pack when contacted.

One advantage of the present invention is that an improved snow groomer assembly is provided. Another advantage of the present invention is that the snow groomer assembly provides increased durability and thus prolongs the smoothness of the trail or slope. Yet another advantage of the present invention is that the snow groomer assembly allows ice to be turned back into snow on alpine slopes and snowmobile trails. Still another advantage of the present invention is that the snow groomer assembly acts on individual snow particles or grains and actually changes the structure of the snow pack.

Other objects, features and advantages of the present invention will be readily appreciated as the same becomes

better understood after reading the subsequent description when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an elevational view of a snow groomer assembly, according to the present invention, illustrated in operational relationship with a vehicle.

FIG. 2 is an enlarged elevational view of the snow groomer assembly of FIG. 1.

FIG. 3 is a plan view of the snow groomer assembly of FIG. 1.

FIG. 4 is a fragmentary elevational view of a portion of the snow groomer assembly of FIG. 1.

FIG. 5 is an enlarged perspective view of a portion of the groomer drum assembly.

FIG. 6 is an enlarged side view of a portion of the drum assembly.

FIG. 7 is a section view taken along line 7—7 of FIG. 6.

FIG. 8 is an elevational view of an alternative embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIG. 1, one embodiment of a snow groomer assembly 10, according to the present invention, is illustrated in operational relationship with a vehicle 12. The vehicle 12 is of a type known as a snow tractor, which is conventional and known in the art. It should be appreciated that the vehicle 12 can either push or pull the snow groomer assembly 10 or the snow groomer assembly 10 could be self-propelled.

Referring to FIGS. 1 through 3, the snow groomer assembly 10 includes a frame assembly, generally indicated at 14. The frame assembly 14 includes a pair of side rails 16 extending longitudinally and spaced transversely. The frame assembly 14 also includes an end cross member 18 at both longitudinal ends of the side rails 16 and extending transversely therebetween. The frame assembly 14 includes a plurality of intermediate cross members 19 disposed longitudinally between the end cross members 18 and extending transversely between the side rails 16. The side rails and cross members 18 and 19 are generally rectangular tubular members secured together by suitable means such as welding.

The snow groomer assembly 10 also includes a wheel assembly, generally indicated at 20, operatively connected to the frame assembly 14 to allow the frame assembly 14 to be mobile such that it can be pushed or pulled by the vehicle 12. The wheel assembly 20 includes a bearing block 22 having a bearing therein on each side rail 16 near a rearward end thereof. The bearing block 22 is attached to an underside of the side rail 16 by suitable means such as fasteners 24. The wheel assembly 20 also includes an axle or rotatable shaft 26 extending transversely between the side rails 16 and extending into the bearings of the bearing blocks 22 for rotation relative to the frame assembly 14. The wheel assembly 20 includes at least one, preferably a plurality of wheels 28 connected to the axle 26 for rotation therewith. The wheels 28 are of the type having a wheel rim and tire. It should be appreciated that the bearing blocks 22, axle 26 and wheels 28 are conventional and known in the art. It should also be appreciated that tracks could be used instead of the wheels 28.

Referring to FIGS. 1 through 4, the snow groomer assembly 10 includes a rotor assembly, generally indicated at 30,

to condition or groom a snow pack **32** on a trail or slope. The rotor assembly **30** is disposed between the side rails **16** near a forward end thereof or opposite the end of the wheel assembly **20**. The rotor assembly **30** includes a support member **33** on the left side rail **16**. The support member **33** is generally V-shaped and extends downwardly from the left side rail **16**. The support member **33** is attached to the left side rail **16** by suitable means such as bolts in slotted holes to permit adjustment longitudinally and laterally of the left end of a rotor **37** to be described. A right side of the rotor **37** is supported by a belt case **60** to be described and is not adjustable. The rotor assembly **30** also includes a bearing block **34** having a bearing therein attached to left support member **33** and belt case **60** by suitable means such as fasteners **35**. The rotor assembly **30** includes a rotatable shaft **36** extending transversely between the side rails **16** and extending into the bearings of the bearing blocks **34** for rotation relative to the frame assembly **14**. It should be appreciated that the rotor assembly **30** is positioned vertically below the wheel assembly **20** a predetermined distance such as six inches for a six inch cut depth into the snow pack **32**. It should also be appreciated that this cut depth is variable by raising or lowering the front of frame assembly **14** by a lift arm **72** and a lift cylinder **76** to be described.

The rotor assembly **30** includes a rotor **37** disposed about the shaft **36**. The rotor **37** is a cylindrical tube or drum disposed about the shaft **36** and secured thereto by suitable means such as welding to allow rotation therewith. The rotor assembly **30** includes a plurality of teeth **38** disposed circumferentially about the rotor **37**. Preferably, the rotor **37** has approximately forty-eight (48) teeth **38** disposed circumferentially thereabout in a row and a plurality of rows spaced transversely along the rotor **37** to cut, reduce or condition the snow pack **32** when contacted. The teeth **38** are 0.5 inches in circumferential width and have a radial height of 0.75 inches with a bite per tooth of approximately 0.154 inches at 7 mph forward speed. The teeth **38** are formed by bars **39** extending axially and mounted to the rotor **37** by sliding the bars **39** through slots **40** in a plurality of, preferably nine, cutter retainer ribs that are formed by discs **41** extending radially and spaced axially along the rotor **37**. The discs **41** are secured to the rotor **37** by suitable means such as welding.

The snow groomer assembly **10** includes a drive assembly, generally indicated at **42**, for rotatably driving the rotor assembly **30**. The drive assembly **42** includes a prime mover **43** such as an internal combustion engine attached by suitable means such as bracing and fasteners (not shown) to the frame assembly **14**. The prime mover **43** has a rotatable shaft **44** extending transversely therefrom. The drive assembly **42** includes a fuel source **45** such as a diesel fuel tank and an electrical source **46** such as batteries attached by suitable means such as bracing and fasteners (not shown) to the frame assembly **14**. The fuel source **45** and electrical source **46** are connected by suitable means (not shown) to the prime mover **43**. It should be appreciated that the prime mover **43**, fuel source **45** and electrical source **46** are conventional and known in the art.

The drive assembly **42** also includes a torsional coupling **48** connecting the shaft **44** and a belt case input shaft **49**. An input drive sprocket **50** is keyed to the input shaft **49**. An output drive sprocket **52** is keyed to the rotor shaft **36**. The drive assembly **42** includes a belt **54** interconnecting the sprockets **50** and **52**. The drive assembly **42** rotates the rotor **37** at a predetermined speed such as V2 engine speed or 1100 rpm at rated engine speed. It should be appreciated that the prime mover **43** rotates the shaft **44**, torsional coupling

48, sprocket **50** and belt **54**, in turn, rotating the sprocket **52**, shaft **36**, and rotor **37** and teeth **38** of the rotor assembly **30**. It should also be appreciated that the drive assembly **42** may have a plurality of sprockets and belts to rotate the rotor assembly **30**.

Alternatively, the rotor **37** could be driven hydraulically. In this case, the prime mover **43** drives a hydraulic pump (or pumps) (not shown) which, in turn, are coupled by flexible hydraulic lines (not shown) to a hydraulic motor (or motors) (not shown) which drive the rotor **37**. This structure, although less efficient provides the ability to run the rotor **37** in both directions (clockwise and counter clockwise).

The snow groomer assembly **10** also includes a belt case **60** to enclose the sprockets **50** and **52** and belt **54**. The belt case **60** is attached to the frame assembly **14** by suitable means such as fasteners (not shown). The snow groomer assembly **10** further includes a cover or fender **62** spaced from the rotor assembly **30**. The cover **62** is generally arcuate in shape and extends transversely between the side rails **16**. The cover **62** is supported at the rear by pins **64** and at the front by chains or cables **66**.

The snow groomer assembly **10** also includes a hitch assembly, generally indicated at **70**, pivotally connected to the frame assembly **14** to allow the snow groomer assembly **10** to be towed behind the vehicle **12** and to raise and lower the frame assembly **14**. The hitch assembly **70** consists of an A-frame shaped lift arm **72** pivotally connected to the side rails **16** of the frame assembly **14** by suitable means. The hitch assembly **70** includes a support plate **74** secured to the other end of the lift arm **72** by suitable means such as welding. The hitch assembly **70** includes a hydraulic lift cylinder **76** pinned to the frame assembly **14** and the lift arm **72** for purposes of raising and lowering the frame assembly **14**.

The snow groomer assembly **10** includes a packing assembly, generally indicated at **80**, at a rearward end thereof for packing the conditioned snow. The packing assembly **80** includes a vibrator pan or plate **82** having upturned flanges **84** and connected to a post member **86**. The packing assembly **80** includes a pair of upper and lower support members **88** and **90** extending longitudinally and a pair of upper and lower cross members **92** and **94** extending transversely between the support members **88** and **90** and connected thereto by suitable means such as welding. The support members **88** and **90** and cross members **92** and **94** are tubular and generally rectangular in shape. The support members **88** and **90** are pivotally connected to the post member **80** and the frame assembly **14** by suitable means. The packing assembly **80** also includes two hydraulic cylinders **100** interconnecting the upper and lower support members **88** and **90** and pivotally connected thereto by suitable means to vary the down pressure of the plate **82** and to raise and lower the packing assembly **80**. It should be appreciated that the vibrator plate **82** acts as a skid plate and does the final compacting of the newly milled snow.

In operation, the snow groomer assembly **10** is connected to the vehicle **12** via the hitch assembly **70**. The prime mover **43** of the drive assembly **42** is started to rotate the rotor **37** of the rotor assembly **30**. The vehicle **12** pulls the snow groomer assembly **10** along a snow pack **32** at a predetermined speed such as seven to ten miles per hour as illustrated in FIG. 1. The drive assembly **42** generally counter-rotates the rotor **37** with respect to the traveling direction of the snow groomer **10** as illustrated by the arrow in FIG. 4 (up-milling). As the rotor **37** rotates, the teeth **38** bite into the snow pack **32** and snow is captured in cavities between the

teeth **38** and cover **62**. At the rear of the rotor **37** where the cover **62** stops, centrifugal force causes the finely milled snow to exit the rotor assembly **30** and forcefully impact the trail surface. The new finely milled snow is then compacted to a high density by the wheels **28** and vibrator pan **82**. This finely milled densely compacted snow **102** will consolidate into a very hard and durable snowmobile trail surface very quickly. For operation on alpine ski hills, the compaction would be reduced or eliminated resulting in the transmission of the ice chunks to fine snow ideal for skiing on.

FIGS. **5-7** better illustrate the bars **39** as they are supported within the slots **40** in the ribs or discs **41**. Each bar **39** includes a pin, bolt, or other retainer member **104** extending through each of its ends. The retainer members **104** are long enough to prevent the bar **39** from being slid axially out of the slots **40**. The retainer members **104** may alternatively be substantially anywhere along the lengths of the bars **39** to limit axial movement of the bars **39** in the slots **40**.

The bars **39** are configured to have cross-sectional areas and dimensions that are smaller than the slots **40** in which they are supported. This permits the bars **39** to rattle within the slots **40**. The rattling and resultant vibration of the bars **39** facilitates the reduction and pulverization of the hard-packed snow and ice into finer particles that are more suitable for the landscape (e.g. ski hills or snowmobile trails) over which the groomer **10** is traveling. The rattling and vibration of the bars **39** also prevents the build-up of snow and ice between the bars **39** and rotor **37**, as well as between individual bars **39**.

The illustrated construction includes bars **39** having lengths substantially equal to the longitudinal extent of the rotor **37**. The illustrated slots **40** on the discs **41** are aligned with the slots **40** of all other discs **41**. Alternatively, some slots **40** may be aligned with some, but not all slots **40** of the other discs **41**. In this regard, groups of aligned slots **40** may support shorter bars **39**, and the bars **39** may be staggered with respect to each other.

FIG. **8** illustrates an alternative embodiment of the invention. In this embodiment the hitch assembly **70** also supports an operator enclosure **106** and is secured to a more centrally located area of the vehicle **12**. The lift cylinder **76** is also reoriented to a more vertical position to raise and lower the rotor assembly **30**, thereby adjusting the cut depth of the snow groomer **10**. The positions of the packing assembly **80** and wheel assembly **20** have also been switched. An actuator **108** is employed to raise and lower the wheel assembly **20**. During snow grooming operations, the wheel assembly **20** is moved to a raised position and the snow groomer **10** is supported by packing assembly **80**. When an obstacle such as a road or other non-snow-covered surface is approached, the wheel assembly **20** is lowered, thereby raising the rotor assembly **30** and packing assembly **80** to a non-grooming position. When engaged with a snow-covered surface, the packing assembly **80** operates in the same manner as the previous embodiment. The remaining components including the frame assembly **14**, prime mover **42**, fuel source **45**, and rotor assembly **30** operate and interact in substantially the same manner as described for the previous embodiment.

The present invention has been described in an illustrative manner. It is to be understood that the terminology which has been used is intended to be in the nature of words of description rather than of limitation.

Many modifications and variations of the present invention are possible in light of the above teachings. Therefore, within the scope of the appended claims, the present invention may be practiced other than as specifically described.

What is claimed is:

1. A grooming drum adapted for use with a snow grooming device, said drum comprising:

an elongated cylinder including a central axis, said cylinder supportable by the snow grooming device for rotation about said central axis;

a plurality of axially spaced apart and radially protruding ribs extending circumferentially around said cylinder, said ribs including circumferentially spaced apart apertures, the apertures of each rib being substantially aligned with the apertures of at least one other rib; and
a plurality of elongated cutting teeth, each cutting tooth extending through aligned apertures of said ribs, said cutting teeth including a cross-sectional area, wherein said apertures are larger than said cross-sectional area to permit said cutting teeth to move with respect to said ribs as said drum rotates.

2. The grooming drum of claim **1**, wherein the snow grooming device is adapted to carry said drum in a direction of travel, and wherein said drum counter-rotates with respect to the direction of travel to agitate and groom snow.

3. The grooming drum of claim **1**, wherein said apertures of each rib are substantially axially aligned with the apertures of every other rib.

4. The grooming drum of claim **1**, wherein said elongated cutting teeth extend from one end of said drum to an opposite end of said drum along an axis that is substantially parallel to said central axis.

5. The grooming drum of claim **1**, wherein said cutting teeth include through bores in opposite distal ends, said drum further comprising pin members extending through said bores to retain said cutting teeth in said apertures.

6. The grooming drum of claim **1**, wherein said cutting teeth vibrate within said apertures as said drum rotates, said cutting teeth pulverizing compacted snow and ice into fine particles as said teeth vibrate.

7. The grooming drum of claim **1**, wherein during rotation of said drum, said elongated cutting teeth rattle within said apertures due to a clearance between said apertures and said cutting teeth owing to the apertures being larger than said cross-sectional area of said cutting teeth, and wherein said rattling causes compacted snow carried by said drum to be reduced to relatively fine particles.

8. The grooming drum of claim **1**, wherein said cutting teeth are slidable in a direction substantially parallel to said central axis.

9. A snow groomer for use on a snow-covered landscape, said snow groomer comprising:

a movable platform adapted to move in a forward direction;

a prime mover mounted to said platform;

a grooming drum rotatably mounted to said platform; and
a power transmission assembly operatively interconnecting said prime mover with said grooming drum,

wherein in response to operation of said prime mover, said drum counter-rotates with respect to the forward direction to agitate and groom snow on the snow-covered landscape.

10. The snow groomer of claim **9**, wherein said movable platform is towable by a self-propelled vehicle.

11. The snow groomer of claim **9**, wherein said prime mover includes a compression-ignition engine.

12. The snow groomer of claim **9**, wherein said grooming drum includes a plurality of axially spaced apart and radially protruding ribs extending circumferentially around said drum.

13. The snow groomer of claim 12, wherein said drum includes a plurality of elongated cutting teeth, each cutting tooth extending through apertures in said ribs.

14. The snow groomer of claim 13, wherein said cutting teeth include a cross-sectional area, and wherein said apertures are larger than said cross-sectional area to permit said cutting teeth to move with respect to said ribs as said grooming drum rotates.

15. The snow groomer of claim 9, further comprising a packing assembly, said packing assembly positioned rearwardly of said drum with respect to the forward direction and operable to pack the agitated and groomed snow.

16. The snow groomer of claim 9, further comprising a snow deflecting cover spaced from and partially surrounding said grooming drum to guide snow around said drum.

17. The snow groomer of claim 9, wherein said prime mover and said grooming drum operate independently of movement of said platform in the forward direction.

18. A snow groomer for use on a snow-covered landscape, said snow groomer comprising:

a movable platform adapted to move in a forward direction;

a prime mover mounted to said platform;

a grooming drum rotatably mounted to said platform, said grooming drum including a central axis, a plurality of axially spaced apart and radially protruding ribs extending circumferentially around said drum, said ribs including circumferentially spaced apart apertures, the apertures of each rib being substantially aligned with the apertures of at least one other rib, and a plurality of elongated cutting teeth, each cutting tooth extending through axially aligned apertures of said ribs, said cutting teeth including a cross-sectional area; and

a power transmission assembly operatively interconnecting said prime mover with said grooming drum,

wherein in response to operation of said prime mover, said drum counter-rotates with respect to the forward direction and wherein said apertures are larger than said cross-sectional area to permit said cutting teeth to move with respect to said ribs as said drum rotates to agitate and groom snow on the snow-covered landscape.

19. The snow groomer of claim 18, further comprising a packing assembly, said packing assembly positioned rearwardly of said drum with respect to the forward direction and operable to pack the agitated and groomed snow.

20. The snow groomer of claim 18, wherein said prime mover and said grooming drum operate independently of movement of said platform in the forward direction.

21. The snow groomer of claim 18, wherein said apertures of each rib are substantially axially aligned with the apertures of every other rib.

22. The snow groomer of claim 18, wherein said elongated cutting teeth extend from one end of said drum to an opposite end of said drum along an axis that is substantially parallel to said central axis.

23. The snow groomer of claim 18, wherein said cutting teeth rattle within said apertures during rotation of said drum to facilitate the agitation.

24. The snow groomer of claim 18, wherein said cutting teeth include a longitudinal extent and at least one stop member extending transverse to said longitudinal extent, said stop member being too large to pass through at least one of said apertures when said stop member is in said transverse orientation.

* * * * *