

**AUTOMATED PREDICTION OF NOISE FROM CONSTRUCTION SITE
USING STOCHASTIC APPROACH**

NUR'AIN BINTI IDRIS

UNIVERSITI TEKNOLOGI MALAYSIA

**AUTOMATED PREDICTION OF NOISE FROM CONSTRUCTION SITE
USING STOCHASTIC APPROACH**

NUR'AIN BINTI IDRIS

**A thesis submitted in fulfilment of the
requirements for the award of the degree of
Master of Engineering (Construction)**

**Faculty of Civil Engineering
Universiti Teknologi Malaysia**

DISEMBER 2012

*Especially for my beloved parent, Mr Idris Husin and Ms Kholijah
MdLazim, my husband, Hamidun Mohd Noh and my family.....*

ACKNOWLEDGEMENT

First of all, Alhamdulillah, I would like to deeply praise and thank to Almighty of Allah SWT for the blessing and blissfulness and giving me the opportunity to complete my master thesis successfully.

Also, I would like to express my most sincere appreciation to Dr Zaiton Haron for her encouragement and guidance in the completion of my research and thesis. I wish to thank her for her assistance all this while as my supervisor, who had offered me enormous support, professional advice and suggestion towards the success of this thesis.

In addition, I wish to express my sincere appreciation also extends to Dr Khairulzan Yahya, who had provided technical assistance in my thesis writing. Thank you for being so helpful and passionate for all this while.

In particular, I am truly grateful to my family members, especially my beloved parent and my lovely husband, who had provided the opportunity to attempt this thesis through their moral support and their sacrifices and understanding throughout the writing process of this thesis.

Last but not least, I would like to take this opportunity to thank to Ministry of Science and Technology, MOSTI for the Escience Fund Vot 79390 and GUP RMC Universiti Teknologi Malaysia.

ABSTRACT

The excessive of noise causes annoyance and suffering to the surrounding neighborhoods. A reliable method of noise prediction is needed to minimize this impact which can be utilized whilst the construction is still in the planning stage and tendering period. This will help the engineers to carry out the proper mitigation method. One such prediction model is stochastic modelling using Monte Carlo approach which has been identified to be able to predict the content of sound for a working day period and has been found to have a good agreement with deterministic method. However, this method is yet to be validated with measurement data and has not been presented in a way that user can utilize them with easy manner. This study investigates the accuracy of the model by comparing the result of the model with measurement of data from real construction sites. Also, this study develops the construction noise prediction tool by using Graphical User Interface, GUI which is useful for the user in noise management. In development of prediction tool, the model was designed to have two parts which are local model and global model that represent the small site and large site respectively. The model has taken into consideration of both the random movement of machines onsite and the random acoustic power of machines for samplings. The model results in the temporal distribution of noise level generated in a working period, including the equivalent noise level, L_{Aeq} and the standard deviation. The results were validated with the noise levels for a working day period measured from two different sites which represent a small construction site and a busy construction site. The prediction parameters obtained from measurements on site were applied in current prediction in BS5228 using deterministic approach, for further validation on L_{Aeq} . The accuracy of the developed construction noise prediction tool was carried out by means of t-test and mean absolute percentage error (MAPE). It was found that L_{Aeq} between measurements, stochastic approach and deterministic were not statistically significant at 0.05. MAPE of temporal distribution noise levels between measurement and modelling showed that the discrepancy was classified in range of 10-50 which was between good and acceptable condition classes. With these results, it showed that stochastic approach can be used as an alternative method of noise prediction to assist the environment engineers as early as in the planning stage in determination of noise arising that may affect the quality of life to the neighborhoods.

ABSTRAK

Bunyi bising yang melampau menyebabkan gangguan dan penderitaan terhadap masyarakat setempat. Kaedah yang boleh dipercayai dan boleh digunakan bagi meramal bunyi bising diperlukan bagi mengurangkan kesan ini ketika pembinaan masih berada dalam peringkat perancangan dan tempoh tawaran. Ini dapat membantu para jurutera melaksanakan kaedah pengurangan bunyi yang sewajarnya. Satu model ramalan stokastik menggunakan kaedah Monte Carlo telah dikenal pasti boleh meramal kandungan bunyi bagi dalam tempoh sehari bekerja dan telah dikenal pasti mempunyai hubungan yang baik dengan kaedah deterministik. Walaubagaimanapun, kaedah tersebut masih belum disahkan dengan cerapan data dan masih belum dipersembahkan dengan cara yang mudah dan dapat digunapakai oleh pengguna biasa. Kajian ini menyelidik ketepatan model dengan membandingkan keputusan yang diperolehi dari model dengan cerapan data dari tapak bina sebenar. Kajian ini juga membangunkan alat meramal bunyi dari pembinaan menggunakan *Graphical User Interface*, GUI, yang sangat berguna kepada pengguna dalam pengurusan bunyi. Dalam pembangunan alat ramalan tersebut, model telah direka untuk mempunyai dua bahagian iaitu *local model* dan *global model* yang mewakili tapak pembinaan yang bersaiz kecil dan besar. Model tersebut mengambil kira pergerakan rawak jentera di tapak bina dan kuasa akustik rawak bagi persampelan. Keputusan dari model dalam *Temporal distribution* bagi aras bunyi yang terhasil dalam tempoh bekerja termasuklah aras bunyi setara, L_{Aeq} dan sisihan piawai. Keputusan disahkan dengan aras bunyi bagi tempoh satu hari bekerja yang dicerap dari dua tapak berbeza yang mewakili tapak pembinaan yang kecil dan tapak pembinaan yang sibuk. Parameter ramalan yang diperolehi daripada pengukuran di tapak bina digunakan dalam ramalan semasa dalam BS5228 menggunakan pendekatan deterministik bagi pengesahan lanjutan terhadap L_{Aeq} . Ketepatan alat ramalan bunyi pembinaan yang dibangunkan telah diuji menggunakan ujian t dan peratus kesilapan purata mutlak (MAPE). Keputusan menunjukkan L_{Aeq} hasil dari cerapan, pendekatan stokastik dan deterministik adalah tidak signifikan pada 0.05. MAPE bagi *temporal distribution* aras bunyi antara cerapan dan permodelan menunjukkan perbezaan dikelaskan dalam julat 10 hingga 50 iaitu antara kelas bagus dan boleh diterima. Dengan keputusan ini, didapati bahawa pendekatan stokastik boleh digunakan sebagai kaedah ramalan bunyi alternatif untuk membantu jurutera alam sekitar seawal pada peringkat perancangan dalam menentukan peningkatan bunyi yang boleh memberi kesan kepada kualiti hidup masyarakat setempat.

TABLE OF CONTENTS

CHAPTER	TOPIC	PAGE
	TITLE	i
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENTS	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	xii
	LIST OF FIGURES	xiv
	LIST OF SYMBOL	xviii
	LIST OF ABBREVIATION	xix
1	INTRODUCTION	1
	1.1 Introduction	1
	1.2 Background of Study	2
	1.3 Problem Statement	4
	1.4 Aim and Objectives	4
	1.5 Research Scope	5
	1.6 Significance of Research	6
	1.7 Definition of Terms	6
	1.8 Brief Methodology	7

1.9	Organization of the Thesis	9
2	LITERATURE REVIEW	11
2.1	Introduction	11
2.2	The Characteristic of Construction Noise	12
2.2.1	Overview of Sound and Noise	13
2.2.2	Effect of Noise towards Communities and Workers	17
2.2.2.1	Effect of Construction Noise to the Community	17
2.2.2.2	Effects of Noise on Workers	18
2.3	The Measurement of Noise Emission Level from Construction Site	20
2.3.1	Sources of Noise from Construction Site	20
2.3.2	Measurement Procedures of Noise Immission Levels	22
2.3.3	Noise Permissible Limit by Department of Environment, Malaysia (DOE)	25
2.4	Noise Prediction Approach	27
2.4.1	Deterministic Prediction Method	28
2.4.2	Stochastic Prediction Approach	31
2.4.2.1	Monte Carlo Method	32
2.5	Discussion	40
2.6	Summary	43
3	METHODOLOGY	45
3.1	Introduction	45
3.2	Overview on Research Methodology	46
3.3	Development of Stochastic Modelling System	49
3.4	Onsite Measurements	56
3.4.1	Measurement Method of Noise	58

3.4.2	Measurement Method of Noise Emission Level from Construction Activities	61
3.4.2.1	Site 1	62
3.4.2.1	Site 2	64
3.4.3	Measurement Method of Noise Emission Level from Individual Machinery	66
3.5	Noise Prediction Method using Deterministic Approach, BS5228	67
3.6	Comparison using Statistical Analysis and MAPE Methods	68
3.7	Summary	70
4	ONSITE NOISE MEASUREMENT AND IT PREDICTION USING BS5228	71
4.1	Introduction	71
4.2	Noise Emission Level from Construction Site	72
4.2.1	Site 1	73
4.2.2	Site 2	80
4.3	Noise Emission Level Data for Individual Machines	87
4.4	Noise Prediction using Deterministic Approach	89
4.5	Discussion on Noise Measurement and the Predictions using BS5228	94
4.6	Summary	95
5	RESULT OF NOISE SIMULATION IN STOCHASTIC MODELLING BASED UPON MONTE CARLO APPROACH	97
5.1	Introduction	97
5.2	Monte Carlo Approach Noise Simulation from Construction Noise	98
5.3	Model Validation with the Real Onsite Measurement	101

5.3.1	Local Model Validity	101
5.3.2	Global Model Validity	108
5.3.2.1	Simulation Result of Local Models	111
5.3.2.2	Results in Global Model Based On the Combination of Local Model Results	118
5.4	Construction Noise Prediction Tool through Interface	120
5.5	Overview the Simulation Results from Local Model and Global Model through Interface	129
5.5.1	Random Position of Equipment during Simulations from Local Model	130
5.5.2	Distribution of Sound Pressure Level from Local Model	132
5.5.3	Histogram of Distributed Sound from Local Model	133
5.5.4	Cumulative Distribution Function, CDF from Local Model	134
5.5.5	Combination of Sound Pressure Level in Global Model	135
5.5.6	Histogram of Distributed Sound in Global Model	136
5.5.7	Cumulative Distribution Function, CDF from Global Model	137
5.5.8	Summary from Construction Noise Prediction Tool	138
5.6	Discussion on Simulations Results	139
5.7	Summary	142
6	COMPARISON AND VALIDATION BETWEEN THE NOISE OBTAINED FROM MEASUREMENT, SIMULATIONS AND BS5228	143
6.1	Introduction	143
6.2	Comparison between Onsite Measurement and Simulations	144
6.2.1	Multiple Comparison in Site 1 (Ayer Hitam)	146

6.2.1.1	Comparison in term of L_{Aeq} using Statistical Analysis	147
6.2.1.2	Comparison in term of CDF using Statistical Analysis and MAPE	150
6.2.1.3	Comparison with the permissible limits by DOE (2004)	153
6.2.2	Multiple Comparison in Site 2 (Nusajaya)	154
6.2.2.1	Statistical Analysis Comparison in term of L_{Aeq}	157
6.2.2.2	Comparison of CDF using Statistical Analysis and MAPE	159
6.2.2.3	Comparison with the DOE (2004) permissible limits	162
6.3	Discussion	163
6.4	Summary	164
7	CONCLUSIONS AND RECOMMENDATIONS	165
7.1	Introduction	165
7.2	Conclusion Based on Objectives	165
7.3	Recommendations	168
	REFERENCES	169

LIST OF TABLES

TABLE NO	TITLE	PAGE
2.1	Noise perception	15
2.2	Permissible limit of equivalent noise level by DOE (2004)	26
2.3	Maximum Permissible Sound Levels (percentile, L_N and L_{max}) of Construction, Maintenance and Demolition work by receiving land use (DOE, 2004)	27
2.4	Probability distribution of machines working in different mode of operation (Gilchrist <i>et al.</i> , 2003)	34
3.1	Classified types based on examined MAPE	69
4.1	Division of sub-sites with activities description	72
4.2	The data of noise emission level measured	74
4.3	The frequency of occurrence from measured data	77
4.4	The data of noise emission level measured from site 2	81
4.5	The frequency of occurrence from measured data of site 2	84
4.6	The acoustic characteristic of machineries obtained from site measurement	88
4.7	The computation of equivalent noise level for site 1 based on BS5228	92
4.8	The computation of equivalent noise level of site 2 in deterministic manner	93
5.1	Summary of acquired data from measurement for a local model	102

5.2	Summary of required data from local models for simulations of global model	110
5.3	The number of machines with the used local model	125
6.1	Comparisons between onsite measurement and simulations results	147
6.2	MAPE of simulations and measurement in site1	152
6.3	Comparisons with the DOE limits (2004)	153
6.4	Comparisons between onsite measurement and simulations results in site 2	156
6.5	MAPE of simulations modelling and measured	161
6.6	The DOE limits (2004) comparisons	162

LIST OF FIGURES

FIGURE NO	TITLE	PAGE
1.1	Framework of the research	8
2.1	Range of sound pressure levels in decibels	14
2.2	3 dB rules for identical noise sources	16
2.3	Measurement of daily equivalent levels of noise for each worker	19
2.4	Peak levels measured for each worker	20
2.5	Average spectrums of the analyzed stages	22
2.6	Measurement locations recommended by SAE	23
2.7	Six locations measurement proposed by the ISO 6393 test procedures	24
2.8	Flowchart for Sound Power Level Method, BS5228	30
2.9	Location of stochastic source on site for Monte Carlo method	36
2.10	PDF and CDF obtained for single equipment operating full power	37
2.11	Computation of PDF and CDF for single equipment	38
2.12	Flow chart for Monte Carlo method simulation for multiple sources	39
3.1	Flow of research methodology	48
3.2	Framework of stochastic modelling system	50
3.3	Principles of modelling system	51
3.4	A sub-site area of operation for Monte Carlo method	52
3.5	Sampling of stochastic variables (x_1 , x_2 , and x_3) into deterministic equation ($f(x)$)	53

3.6	Local modelling system	54
3.7	Flow chart for Monte Carlo method simulation for multiple sources	55
3.8	The steps regarding measurement and prediction using BS5228	57
3.9	Sound level meter	59
3.10	Sound level meter calibration	59
3.11	Sound level meter interface	60
3.12	Button on sound level meter	60
3.13	Six major position of noise measurement	61
3.14	Distometer	62
3.15	The schematic diagram of site 1	63
3.16	Real onsite measurement of site 1 with one local model	63
3.17	The schematic diagram of site 2	65
3.18	On site noise immission level measurement at site 2	65
3.19	Measurement of individual noise emission level	66
3.20	Schematic diagram of sound level meter position during noise emission level measurement	67
4.1	The distribution of sound pressure level from onsite measurement	75
4.2	The distribution of noise level during working period with L_{Aeq}	76
4.3	The histogram of sound pressure level during measurement	78
4.4	PDF and CDF from on site measurement	79
4.5	The distribution of sound pressure level during onsite measurements	82
4.6	The distribution of sound pressure level during working hours	83
4.7	Histogram of sound pressure level during measurement	85
4.8	PDF and CDF of noise measurement at site 2	86
4.9	The machineries working in site 1	89

4.10	The machineries involved in noise emission level from construction site 2	89
4.11	The schematic diagram of construction site 1 with the distance from the receiver	90
4.12	The schematic diagram of construction site 2 with the distance from the receiver	90
4.13	Adjustment to sound power level based on percentage of on time	91
5.1	Part of coding in MATLAB	100
5.2	The schematic diagram of local model	102
5.3	The random position of machineries in local model	103
5.4	Color bar with the action of noise levels	104
5.5	Distribution of sound pressure level in local model	105
5.6	Histogram of sound pressure levels	106
5.7	CDF produced for local model	107
5.8	Division of global model into local models	109
5.9	The random position of machineries in each local model	112
5.10	The fluctuation of sound pressure levels in local models	114
5.11	The histogram of sound pressure levels distribution in local models	115
5.12	The PDF and CDF graph acquired in local models	117
5.13	Distribution of sound pressure level in global model	118
5.14	Histogram of sound pressure level in global model	119
5.15	Result of PDF and CDF in global model	120
5.16	First interface of noise prediction tool	122
5.17	The part that required user to select the option given	123
5.18	The explanation about local model and the required data	124
5.19	The second interface of Construction Noise Prediction Tool	125
5.20	The input data required	126
5.21	Warning box for the irrational values of	127

	probabilistic	
5.22	The output result	128
5.23	The interface of conclusion part	129
5.24	Input data before start the simulation	130
5.25	Random position in local model 1	131
5.26	Distribution of sound pressure level in local model	132
5.27	Histogram of sound pressure level generated in local model	133
5.28	Graph of CDF and PDF from local model	134
5.29	Combination of sound pressure levels in global model	136
5.30	Histogram of sound pressure level in global model	137
5.31	CDF and PDF obtained in global model	138
5.32	Summary and conclusion	139
6.1	CDF and PDF graphs comparison	145
6.2	The region control by CDF graphs	146
6.3	Comparison using box plot analysis	149
6.4	Comparison of means values of measurement and simulations with BS5228	150
6.5	Comparison of CDF using paired-samples t test	151
6.6	CDF and PDF graphs comparison in site 2	155
6.7	CDF graphs comparison with region control	155
6.8	Box plot comparison	157
6.9	T test analysis of mean values, LAeq in site 2	158
6.10	Paired sample t test analysis of CDF values in site 2	160

LIST OF SYMBOLS

L_p	=	Sound pressure level
L_w	=	Sound power level
L_{Aeq}	=	Equivalent continuous sound level
L_{Aeq10m}	=	Sound level equivalent at 10 meter
L_{Aeq30s}	=	Sound level equivalent for 30 seconds
L_{max}	=	Maximum sound level
LN	=	Percentile Levels
L_{10}	=	Percentile levels with values exceeding 10% of elapsed time
L_{50}	=	Percentile levels with values exceeding 50% of elapsed time
L_{90}	=	Percentile levels with values exceeding 90% of elapsed time

LIST OF ABBREVIATION

DOE	=	Department of Environment
WHO	=	World Health Organization
SAE	=	Automotive Engineers Society
dB(A)	=	Decibel
SPL	=	Sound pressure level
CDF	=	Cumulative Distribution Function
PDF	=	Probability Distribution Function
MAPE	=	Mean Absolute Percentage Error
GUI	=	Graphical Interface User
CNPT	=	Construction Noise Prediction Tool

CHAPTER 1

INTRODUCTION

1.1 Introduction

Construction noise is a major contributor as physical contaminant in noise pollution after traffic noise in the society nowadays. Noise arising from construction activities is unwanted and undesirable not only to the workers but also to the community which effects on physical, psychic and social deterioration (Fernández *et al.*, 2009). Annoyance on people is one of the most effects of noise (Large and Ludlow, 1975; Ng, 2000) and several reports in the mass media have also highlighted how people have been annoyed. In some developed countries, complaints regarding traffic noise are not as much as the complaints from construction noise (Berglund *et al.*, 1999). In Malaysia, the number of public complaints regarding construction noise has increased from year 2007 to year 2008 that is 44 percent to 56 percent respectively (Noh *et al.*, 2009). The number of complaints might be increasing year by year if no action were undertaken. In 1996, DOE annual report proclaimed that a high percentage of urban dwellers are exposed to noise over 65 decibels. However, the only way to avoid health damage is to prevent the excessive noise exposure (Sensogut, 2007).

Thus, the prediction of noise level is concerned as early as in the planning stage through EIA report for approval of new development so that the annoyance can be reduced (Carpenter, 1997 and Carpenter *et.al*, 1997). Moreover, the noise is also concerned during tendering period and construction phase for not exceeding the limits specified by the authority. Therefore the appropriate method of noise prediction is required in order to give an accurate prediction of noise emission from construction activities. The trustworthiness of noise prediction might reduce the effects of noise including annoyance that can minimize the public's complaint and no disruption on construction progress so that the project is not halted due to a few complaints.

1.2 Background of Study

The excessive noise arising from construction operations gives negative effects that might cause afflict to the workers and people living in the vicinity, which can lead to the public animosity or civilian's ire. One aspect of noise generated from construction sites is that in reality the noise level is non constant, fluctuates and vary with time (Ivanov *et al.*, 2005; Gannoruwa and Ruwanpura, 2007; Haron and Yahya, 2008). The fluctuations of noise level are typically due to the nature of the construction activities, the types and the status of machinery being used and others. For example, many machinery will work in different phase where the machine might be in off condition, idling or fully power operated. The movement of machineries also influence the noise level experienced at the receiver (Haron and Yahya, 2008 and 2009) of which the noise levels is increased when the machinery as the noise source is near to the receiver and vice versa (Khouski *et al.*, 2004). However, the current noise prediction method assumes these factors as gross simplification and laborious to apply if analysts want to examine the effect of various parameters due nature of prediction is deterministic.

In addition, the current deterministic noise prediction using BS5228 results only in single index which is equivalent noise level, L_{Aeq} without any information regarding confidence levels. A single L_{Aeq} prediction may mean that quality of the sound, which has a particular effect on people, may be ignored. Carpenter *et al.* (1997) claimed that prediction of L_{Aeq} in this way is inaccurate and annoyance to the community is not being addressed appropriately. He also suggests that prediction could be a model that is able to provide statistical distribution and as the result, stochastic model has been introduced. Other researchers also reported that the environment quality could be depending on the information in temporal distribution, also in addition to the L_{Aeq} value (Raimbault and Dubois, 2005; Yang and Kang, 2005; Wong, 2004). The noise prediction using stochastic approach was first developed by Waddington and Lewis (2000) and later by Gilchrist *et al.* (2003). However, both Waddington and Lewis (2000) and Gilchrist *et al.* (2003) do not present the results in a way that makes effective use of the stochastic modeling which provides statistical distribution such as Cumulative Distribution Function, CDF. Then, Haron and Oldham (2004), Haron and Yahya (2009) and Haron *et al.* (2009) have furthered the Waddington and Lewis model using the Monte Carlo approach and probability approach with CDF output. As a result, both Monte Carlo and probability approach were found to be in a good agreement with deterministic approach in terms of L_{Aeq} . Beside L_{Aeq} value, a time history of noise levels arising from construction site or CDF for working day period also provides statistical information for L_{10} , L_{50} , L_{90} , L_{max} and L_{min} . L_{10} , L_{50} , and L_{90} are percentile levels with values exceeding 10%, 50% and 90% of the elapsed time respectively, and L_{max} and L_{min} stand for the maximum and minimum sound levels.

1.3 Problem Statement

Recently, researchers have shown an increased interest in noise prediction especially using stochastic approach (Waddington and Lewis, 2000; Gilchrist *et al.*, 2003; Haron and Oldham, 2004; Gannoruwa and Ruwanpura, 2007; Haron and Yahya, 2009; and Haron *et al.*, 2009). Stochastic model using Monte Carlo method have been used in noise prediction due to the variation of number of machines involved, different acoustical characteristic such as sound power, different mode of operations, for example idle, off mode or fully powered, and the movement of machinery which are not having fixed location during real construction process. Haron and Yahya (2009) and Haron *et al.*, (2009), have reported that the mean value of equivalent continuous noise level obtained from stochastic modelling has good agreement with BS5228. However, this is yet to be verified with data from measurement. The automated computation or system should enable user which the user utilized easily is also yet to be developed.

1.4 Aim and Objectives

The aim of this study is to evaluate and validate the stochastic modelling system for the purpose of noise prediction from construction site. The comparison between result obtained from modelling and that of onsite measurement were carried out in order to verify the result acquired from the modelling based upon stochastic approach and ascertain whether it can be used as the construction noise prediction tools or vice versa.

The specific objectives of this research are as follows:

1. To develop a construction noise prediction tools based on existing stochastic modeling which produce the temporal distribution of noise levels for a working period, CDF for noise management.
2. To measure the noise levels generated from the actual construction site during working period as the real system.
3. To compare the results obtained from measurements, stochastic modelling and deterministic model in BS5228.

1.5 Research Scope

The scope of the research is restricted to the real onsite measurements whereas the measurements of noise emission levels arising from construction site are focused on substructure stages of construction and the measurements are carried out in the state of Johor. In addition, the results are obtained from real measurement, simulation modelling using stochastic approach and deterministic in BS5228 procedure in terms of L_{Aeq} only. The stochastic modelling in form of interface is designed in Graphical User Interface, GUI which is user friendly and is limited to maximum of four local models.

1.6 Significance of Research

The research is important and significant from both the theoretical and practical perspectives. The rationale and motivation for this research are :

- The prediction of noise exposure at the planning stages and during tendering process could be carried out using stochastic modeling which provide the temporal of distribution for a working day period and standard deviation in addition to the L_{Aeq} .
- The comparison and verifying of noise prediction from simulation model with the real system which is the real measurements and using deterministic approach in BS5228, will be strong evidence that simulation could be used as noise prediction and also to reduce the annoyance on people which facilitate the mitigation planning. It will be very useful to the environmental engineer.

1.7 Definition of Terms

- Sound power level: The total sound energy per unit time given out by an item of plant under particular conditions. Thus, it is an intrinsic characteristic of the source (DOE, 2004).
- Sound pressure level: Sound pressure level is the sound energy received at a specific location, at a given distance from a sound source and given conditions such as screening, etc. The units are dB(A) (DOE, 2004).

- L_{Aeq} : 'A' weighted equivalent sound level, a constant sound level which has the same sound energy as an actual varying sound over a given period. The unit used is 'A' weighted decibels (DOE, 2004).
- dB: Decibel, a measure of sound power or sound pressure (DOE, 2004).
- dB(A): 'A' weighted decibel to allow for sensitivities of the human ear at different frequencies (DOE, 2004).

1.8 Brief Methodology

This study was implemented in three main stages as demonstrated in Figure 1.1 below. Phase 1 of the research focused on the development of stochastic modelling using Monte Carlo method with applied the random of locations and acoustic power and also take into consideration of screening of each machinery. The model was divided into two parts which were local and global model and designed in GUI, Matlab software. Then the onsite measurements were conducted from real construction site and analyzed the noise level. The inputs that represent the real system that measured from construction site were applied in the modelling system as to evaluate and validate the noise prediction and lastly the statistical analysis were carried out to compare the results obtained and verify whether the modelling could be used as noise prediction tool or vice versa.

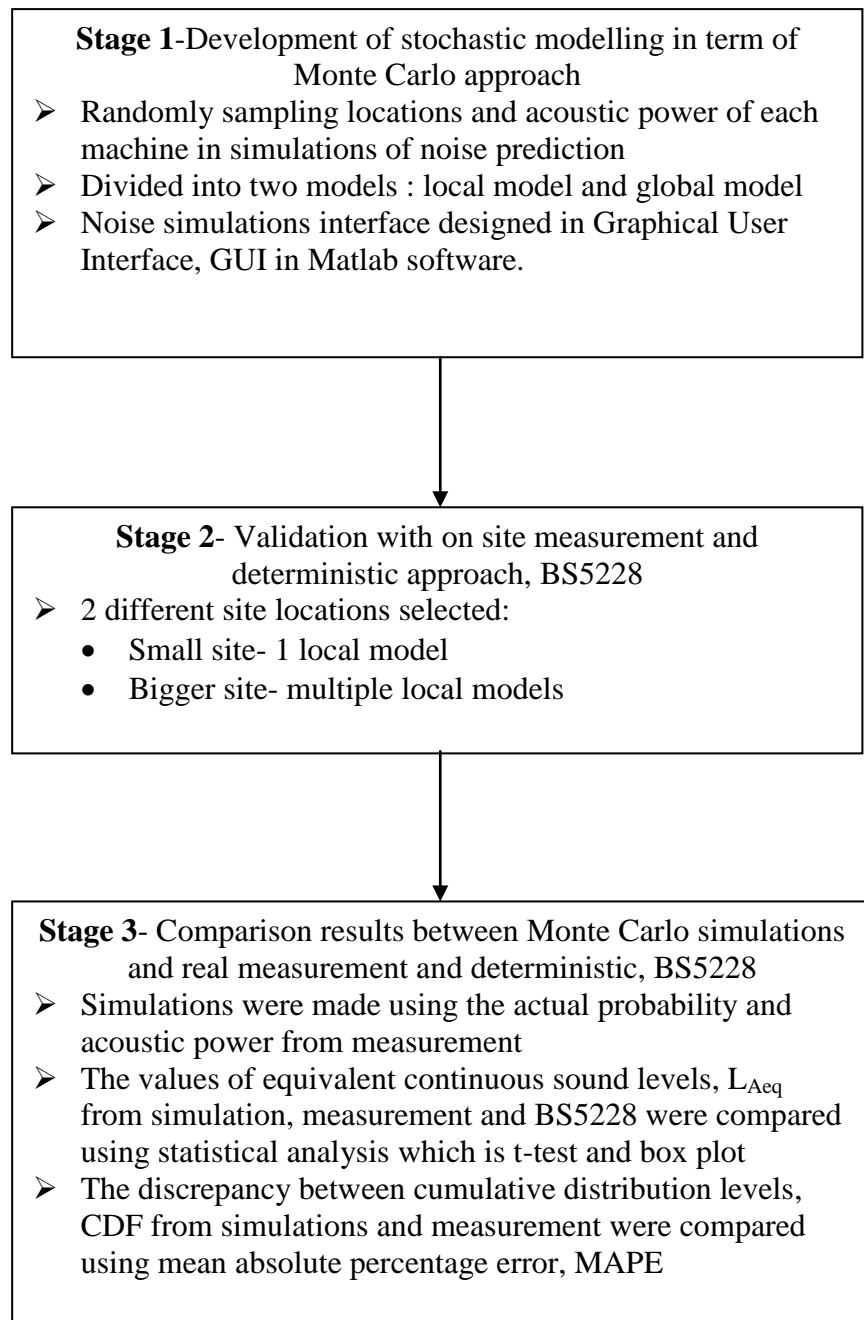


Figure 1.1: Framework of the research

1.9 Organization of the Thesis

The approach in this study is based on a number of stages which are reflected in the titles of the chapters of the thesis. The introductory chapter summarizes the problems related with the excessive noise from construction site and the effects on workers and neighborhoods. The limitations of current noise prediction using deterministic approach as it only provides the value of L_{Aeq} without any confidence levels of noise and leads to a particular sound level that might affect people is ignored.

In chapter 2, the overview of construction noise characteristic, differentiation between sound and noise, effects of noise towards workers and the communities, the measurement of noise emission levels, permissible noise emission levels and the current available noise prediction method that have been employed in this research are reviewed and analyzed.

Chapter 3 describes the methodology to conduct the research regarding the development of stochastic modelling and measurements of noise emission levels from construction site. The chapter also includes the methods of analysis of the statistical techniques that are performed to evaluate the noise emission levels and the noise prediction using stochastic and also deterministic.

In chapter 4, the analysis of results from the onsite measurement is presented. Instead of L_{Aeq} , the results also included the cumulative distribution function, CDF which provides the important percentile level such as L_{10} , L_{50} , L_{90} and L_{max} . The prediction using deterministic in BS5228 procedure are conducted using the condition as onsite measurement and are compared together in terms of L_{Aeq} only.

Then, the prediction of noise using stochastic modelling is presented in Chapter 5. In this chapter, the input data are based on the real system as measured such as noise emission level for a machine, distance and working probability. The modelling is designed in the form of interface and the example of noise prediction using the modelling tool is also included in this chapter.

In chapter 6, the comparisons of results obtained from measurement, stochastic simulation and deterministic are conducted. The statistical analysis is used to compare the results and determine whether the prediction using stochastic modelling is valid to be used or vice versa. Finally, the summary and conclusions derived from this study are presented in Chapter 7 together with recommendations for future research.

REFERENCES

Ballesteros, M.J., Quintana, S., Fernandez, M.D., Ballesteros, J.A., and Rodriguez, L., (2008) Acoustic analysis of the framework and walls stage in the construction of housing block, *Acoustics 08 Paris*.

Ballesteros, M.J., Fernandez, M.D., Quintana, S., Ballesteros, J.A., & Gonz, I. (2010) Noise emission evolution on construction sites, measurement for controlling and assessing its impact on the people and on the environment. *Building and Environment*, 45, 711–717.

Berglund, B., Lindvall, T. & Schwela, D.H. (1999), *Guidelines for Community Noise*, World Health Organisation, Geneva.

Brüel & Kjær, (2000), *Environmental Noise*, Copyright © 2000, 2001 Sound & Vibration Measurement A/S.

BS 5228, Part 1: 2009, (2009), *Noise and vibration control on construction and open sites*, British Standard Institution.

BS ISO 6393:2008, (2008), *Determination of sound power level – Stationary test condition*. British Standard Institution.

Budney, E., Chłosta, M., Meyer, H.J., & Skibniewski, M.J. (2009). *Construction Machinery*, Springer Handbook of Mechanical Engineering, Part B, pp. 1149–1266.

Carpenter, F. (1997), Construction noise prediction at the planning stage of new developments, *Building Acoustics*, 3(4), p. 239-249.

Carpenter, F., Gibbs, B.M., and Lewis, J. (1997), BS 5228: The prediction of noise from construction sites, *Proceeding of Institute of Acoustics*.

Chang, Y.F., Lin, C.J., Chyan, J.M., Chen, I.M. and Chen, J.E. (2007), Multiple regression models for the lower heating value of municipal solid waste in Taiwan, *Journal of Environmental Management*, 85(4): 891–899.

Department of Environment (2004), *The planning guidelines for environmental noise limits and control*, Malaysia.

Everton, S., (2006), *Sound advice: Control of noise at work in music and entertainment*, HSE Books.

Fang, J.-H., Zhou, Y.-Q., Hu, X.-D., & Wang, L. (2009) Measurement and analysis of exhaust noise from muffler on an excavator. *International Journal of Precision Engineering and Manufacturing*, 10 (5), 59–66.

Fernandez M. D., Recuero M. and Blas J. M. (2009), Definition of a labelling code for the noise emitted by machines, *Applied Acoustic* 69, p.141-146.

Fernandez M.D., Recuero M., and Blas J.M. (2008), Definition of a labelling code for the noise emitted by a machines, *Original Research Article Applied Acoustic*, Vol 69 (2), p.141-146.

Fernandez M.D., Quintana, S., Chavarria, N., and Ballesteros, J.A. (2009), Noise exposure of workers of the construction sector, *Applied Acoustic* 70 (2009) 753-760

Gannoruwa, A., and Ruwanpura, J.Y., (2007), Construction noise prediction and barrier optimization using special purpose simulation, *Proceedings of the 2007 Winter Simulation Conference*.

Gilchrist, A., Allouche, E.N., and Cowan, D. (2003), Prediction and mitigation of construction noise in an urban environment, *Canadian Journal of Civil Engineering*, 30, p. 659-672.

Hamoda, M.F., (2008), Modeling of construction noise for environmental impact assessment, *Journal of Construction For Developing Countries*, Vol 13 No 1, 2008.

Haron, Z., and Oldham, D. J. (2004), Stochastic Modelling in Environmental and Building Acoustics, *Journal of Recent Research Development, Sound and Vibration*, p. 213-234.

Haron, Z. and Oldham, D.J. (2005a), The Application of Stochastic Modelling to the Prediction of Noise from Open Sites Activities, *Proceeding Managing noise and uncertainties, Le Mans*.

Haron, Z. and Oldham, D.J. (2005b), Stochastic modelling for prediction noise from construction site, *Autumn Conference, Proceeding of Institute of Acoustic, Oxford*.

Haron, Z. (2007), *The prediction of noise from construction sites using stochastic models*, Faculty of Civil Engineering, Universiti Teknologi Malaysia.

Haron, Z. and Yahya, K. (2008), Monte Carlo analysis as a tool to incorporate variation on noise sources in prediction of noise from construction site, *International Journal of Construction for Developing Countries*, Vol 13(2).

Haron, Z. and Shafii, A.M., (2008), Predicting of Noise from Construction Site: Deterministic vs Stochastic Models - A Review, *International Conference on Science and Technology: Applications in Industry and Education*.

Haron, Z. and Yahya, K. (2009a), Monte Carlo Analysis for Prediction of Noise from a Construction Site, *International Journal of Construction For Developing Countries*, Vol 14(1).

Haron, Z., Yahya, K. and Mohamad, M.I. (2009b), Probability Approach For Prediction of Construction Site Noise, *Journal of Asian Architecture and Building Engineering*, Vol 2(2).

Haron, Z, Idris, N., Jahya, Z., Yahya, K., Mustaffar, M. (2012), Automated prediction of noise from construction sites, *Proceeding of APSEC-ICCER 2012*.

Idris, N., Haron, Z., Noh, H.M., Construction Noise Prediction using Stochastic Model, *Proceeding of ENCON 2010, Engineering Conference on Advancement in Mechanical and Manufacturing for Sustainable Environment*.

Ivanov, N., Tyurina, N., Elkin, Y., Minina, N., (2005), Noise barriers for community noise reduction, *Twelfth International Congress on Sound and Vibration, ICSV12*.

Koushki P.A., Kartam N. And Al-Mutairi N.(2004), Workers perception and awareness of noise pollution at construction sites in Kuwait, *Kuwait J.Sci. Eng*, 21(2), p.p 127-136.

Large, J.B., and Ludlow, J.E. (1975), Community reaction to construction noise, *Proceeding of the Inter-noise, Sendai*.

Maria, A.,(1997), Introduction to Modeling and Simulation, *Proceeding of the 1997 Winter Simulation Conference*.

Minina N., Butorina M., Ivanov N., Tyurina N., (2008), Effect of construction noise on acoustical pollution of city environment, *Int. Congress on Sound and Vibration*, p.p 813-820.

Neitzel R. (1998), *An assessment of occupational noise exposures in four construction trades*, Ph.D.Thesis, University of Washington.

Ng, C.F. (2000), Effects of building construction noise on residents: A quasi-experiment, *Journal of Environmental Psychology. The Journal of the Acoustical Society of America*, 20, p. 719-729.

Noh, H.M., Haron, Z., Yahya, K., (2009), Development of noise emission database from construction site equipments for construction noise prediction, *Asia Pacific Structural and Construction Conference, APSEC 2009*.

Sensogut, C. (2007), Occupational noise in mines and its control – A case study, *Polish J. of Environ. Stud.* Vol. 16, No. 6, p.p 939-942.

Spessert, B.M. & Kochanowski , H.A. (2010) *Diesel engine noise emission*. In: Mollenhauer, K. & Tschoeke, H. (eds.) *Handbook of diesel engines, Part 4*. Springer Verlag, Berlin, Heidelberg. pp. 487–504.

Staiano M. A. (2000), Experience Predicting Construction-Site Noise, *Transportation Research Record*, Washington DC, 2000.

Thalheimer, E. (2000). Construction noise control program and mitigation strategy at the Central Artery/Tunnel Project. *Noise Control Engineering Journal*, 48 (5), 157–165.

Thalheimer, E., and C. Shamoon. 2007. New York City's new and improved construction noise regulation. *Proceedings of NOISE-CON 07. The 2007 National Conference on Noise Control Engineering*, Reno, Nevada, October 22–24.

Ullah, M.,Schmidt, H., Cho, K.-H., and Wolkenhauer, O., (2006), Deterministic modelling and stochastic simulation of biochemical pathways using MATLAB, *IEE Proc-Syst. Biol.*, Vol. 153, No 2, March 2006.

Vardhan H., Karmakar N.C. and Rao Y.V. (2005), Assessment of heavy earth moving machinery noise vis-a-vis routine maintenance, *Noise Control Eng. J.* 54 (2), 64-78.

Waddington, D.C., Lewis, J. Oldham, D.J and Gibbs, B.M (2000) Acoustic emission from construction equipments, *Building Acoustics*, 2000, p. 201-215.

Wentang, R. & Attenborough, K. (1989) The prediction of noise from construction sites. *In Proceedings of the Institute of Acoustics. St Albans, UK.*