

Technical University of Denmark



Is barley malt safe as a food ingredient?

Duedahl-Olesen, Lene; Olesen, P. A.

Publication date:
2016

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Duedahl-Olesen, L., & Olesen, P. A. (2016). Is barley malt safe as a food ingredient?. Poster session presented at The 1st food chemistry conference, Amsterdam, .

DTU Library

Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Is barley malt safe as a food ingredient?

Duedahl-Olesen, L. (lduo@food.dtu.dk) and Olesen, P.A.

Introduction

Today's increased focus on sustainability requires increased focus on the safety of the products in use. Barley malt is used for beer and whisky production and the spent grain by-products from brewing makes up to 85% of brewers' total by-products. Spent grain has previously been used mainly for animal feed and recently the high nutritive value has made it feasible as bread flour supplement [1] and therefore human food.

Process contamination such as the genotoxic acrylamide formed due to Maillard reactions between reducing sugars and amino acids at raised temperature could appear during drying of the malt. Previously, acrylamide has been detected among others in potato products, coffee and bread [2].

The use of smoked barley malt for enhanced flavours for certain beer and whisky types may increase the content of carcinogenic process contaminants in the by-products. Carcinogenic polycyclic aromatic hydrocarbons (PAH) are such process contaminants previously identified in e.g. smoked fish [3]. Germinated barley is smoke treated and for many whisky malts dried over peat-fuelled furnaces for flavour addition, probably with increased health risks for spent grain consumers as a result. To evaluate our concern we studied different barley malt types.

Table 1. Analysed malt types divided into processing techniques with obtained values for content of fat (%), dry matter (%), sum of PAH 4 ($\mu\text{g}/\text{kg}$) and Acrylamide ($\mu\text{g}/\text{kg}$). N.d. not detected, - not relevant.

Process	Malt	Fat (%)	Dry matter (%)	PAH 4 ($\mu\text{g}/\text{kg}$)	Acrylamide ($\mu\text{g}/\text{kg}$)
	Raw barley malt	1.5	90.7	n.d.	n.d.
Dried	Barley malt 1	2.4	95.9	n.d.	< 5.0
	Barley malt 2	2.0	93.5	n.d.	< 5.0
	Wey	2.3	96.1	n.d.	16
	Caramunch	2.8	94.1	n.d.	126
	Carafa O	3.4	96.4	n.d.	86
	Munch black	4.5	94.9	n.d.	33
Smoked	Barley malt 2 (Smouldering beech)	2.3	93.3	0.12	10
	Wey (Smouldering beech)	2.4	95.7	0.12	6.2
	Peated (Peat smoked)	1.8	94.8	15.0	25
	Whisky light (Peat smoked)	1.6	94.7	24.2	29
	Whisky (Peat smoked)	2.2	96.2	68.8	63
Recovery	Added standards	-	-	81.6 %	100.1 %

Results and Discussion

For PAH we focused on four marker PAH (PAH 4), namely the sum of benz[a]anthracene, chrysene, benzo[b]fluoranthene and benzo[a]pyrene proposed by the Scientific Contamination panel at EU in 2008 [4]. Dried malt did not contain detectable levels of PAH 4, whereas smoked malt levels were found to depend on the smoke source used (table 1). Highest PAH 4 levels were found in peat smoked malts. For European citizens the daily intake of PAH 4 is approx. 1200 ng/day for all foods [4] corresponding to the dietary intake of 20 g peat smoked whisky malt per day.

Highest acrylamide levels were as expected found in a medium roasted malt (Caramunch) with second highest levels in chocolate based malt (table 1). Average acrylamide levels were 40 $\mu\text{g}/\text{kg}$, slightly lower than the Swedish reported levels for bread [2]. Full substitution of flour with spent grain is therefore expected to increase the total dietary intake of acrylamide with approx. 10%.

Use of spent grains for beer snacks, is due to heat addition expected to increase the acrylamide level, whereas the PAH 4 level is expected to be unchanged. Analysis of the actual by-products is relevant for further risk assessment of the products.

Conclusions

- Peat smoked malt should have limited use in human food products due to their content of PAH 4
- Acrylamide dietary intake levels will increase due to use of malt in bread flour
- For further risk evaluation controlled smoke experiments and analysis of the actual spent grain by-product should be performed

References

1. A. Dabija, et al. (2005). Spent grains qualitative estimation – by products of beer industry. *Scientific Researches. Agroalimentary Processes and Technologies*, Volume XI, No. 2, 267-270
2. K. Svensson, L. Abrahamsson, W. Becker, A. Glynn, K-E Hellnäs, Y Lind, J Rosén (2003). Dietary intake of acrylamide in Sweden. *Food and Chemical Toxicology* 41: 1581-1586.
3. L. Duedahl-Olesen, J.H. Christensen, A. Højgård, K. Granby & M. Timm-Heinrich (2010). Influence of smoking parameters on the concentration of polycyclic aromatic hydrocarbons (PAHs) in Danish smoked fish, *Food Additives & Contaminants: Part A*, 27:1294-1305.
4. EU (2008). Polycyclic aromatic hydrocarbons in food. Scientific opinion of the panel on contaminants in the food chain. *The EFSA journal* 724: 1-114
5. K. Granby, NJ Nielsen, RV Hedegaard, T Christensen, M Kann, LH Skibsted (2008) Acrylamide-asparagine relationship in baked/toasted wheat and rye breads. *Food Addit Contam Part A* 25:921-929

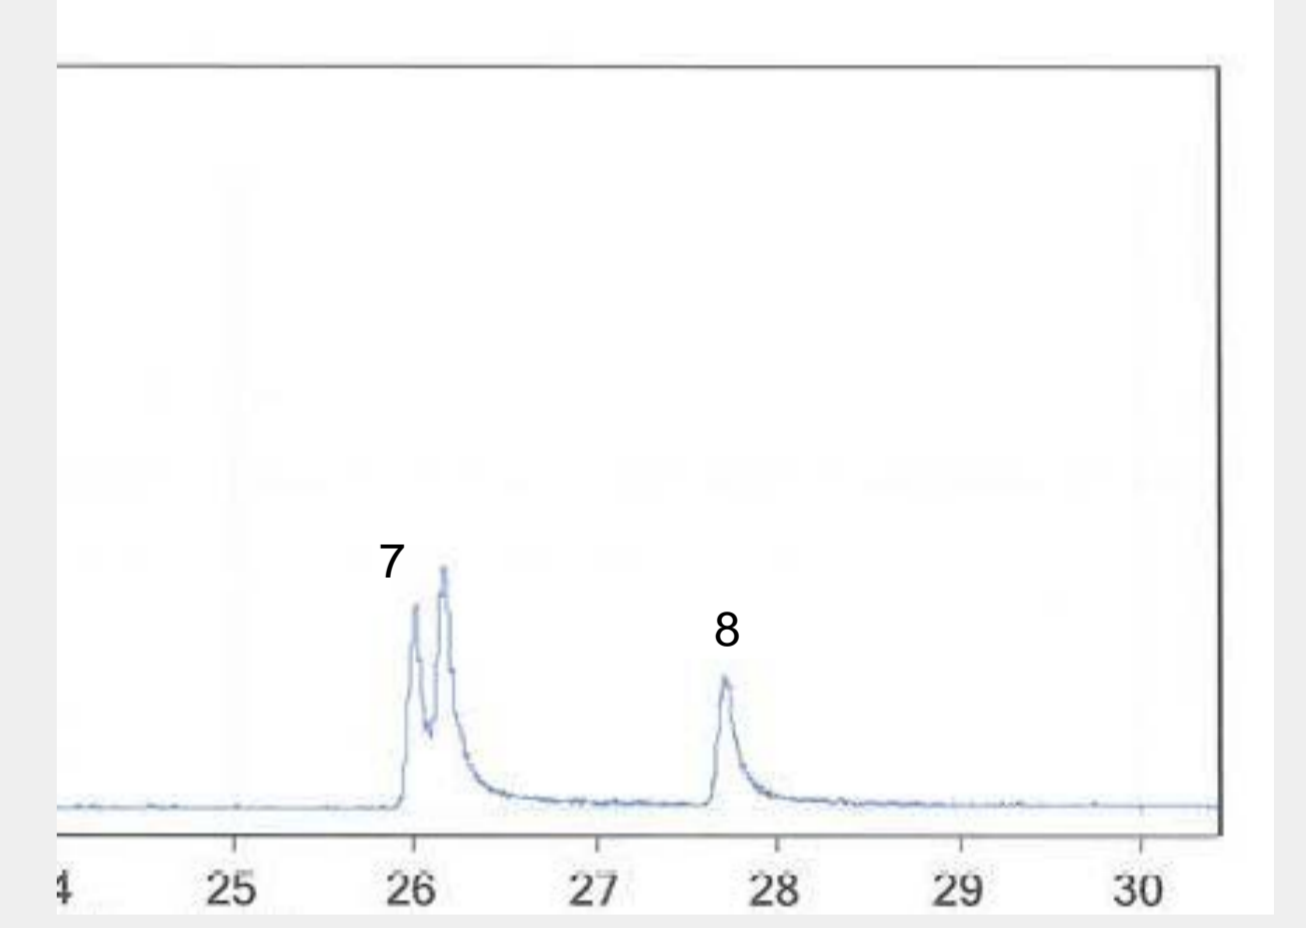
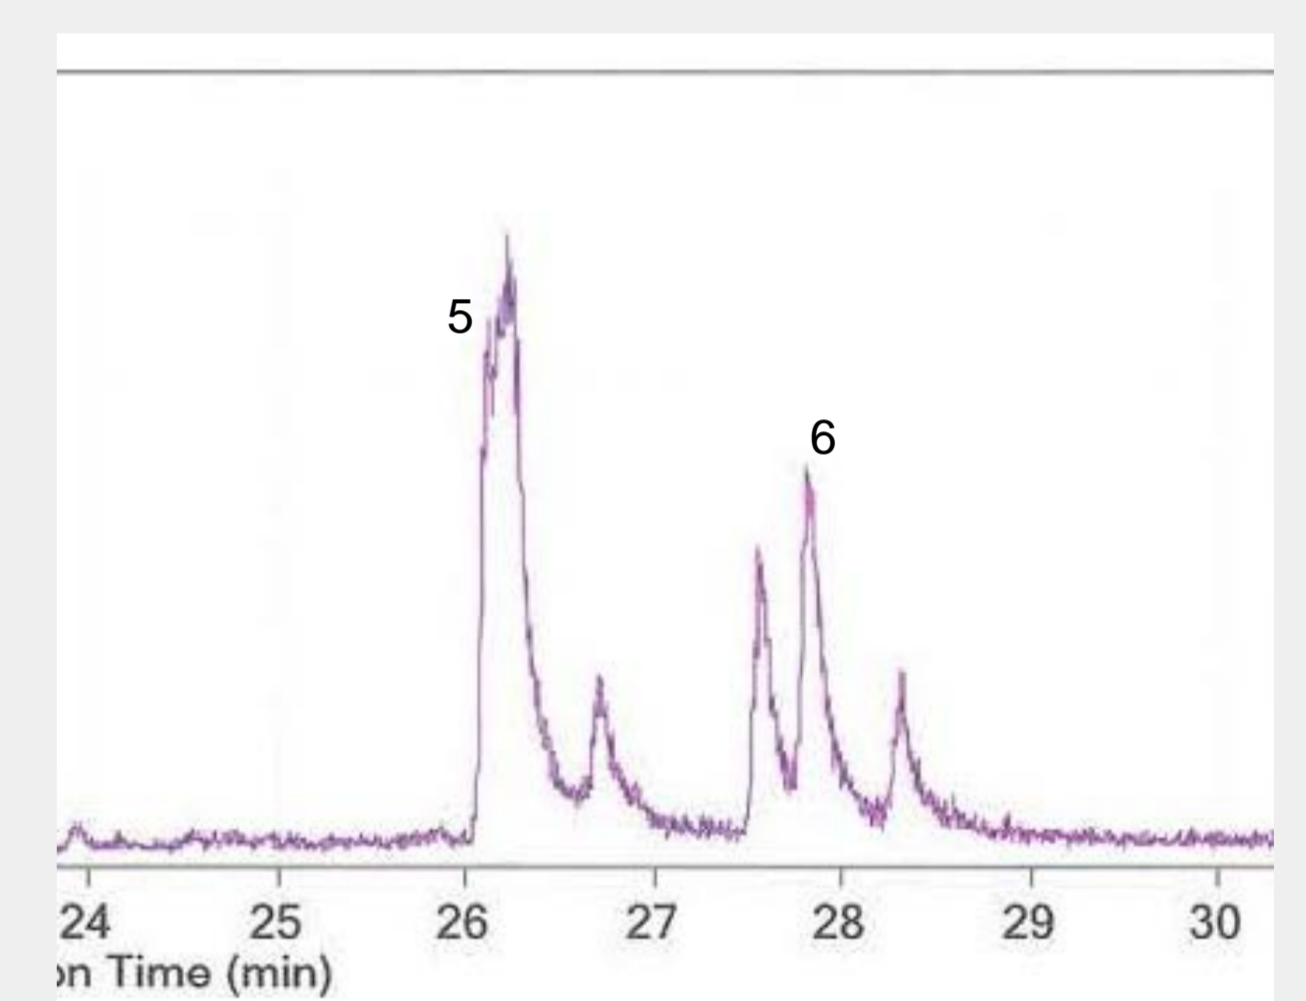
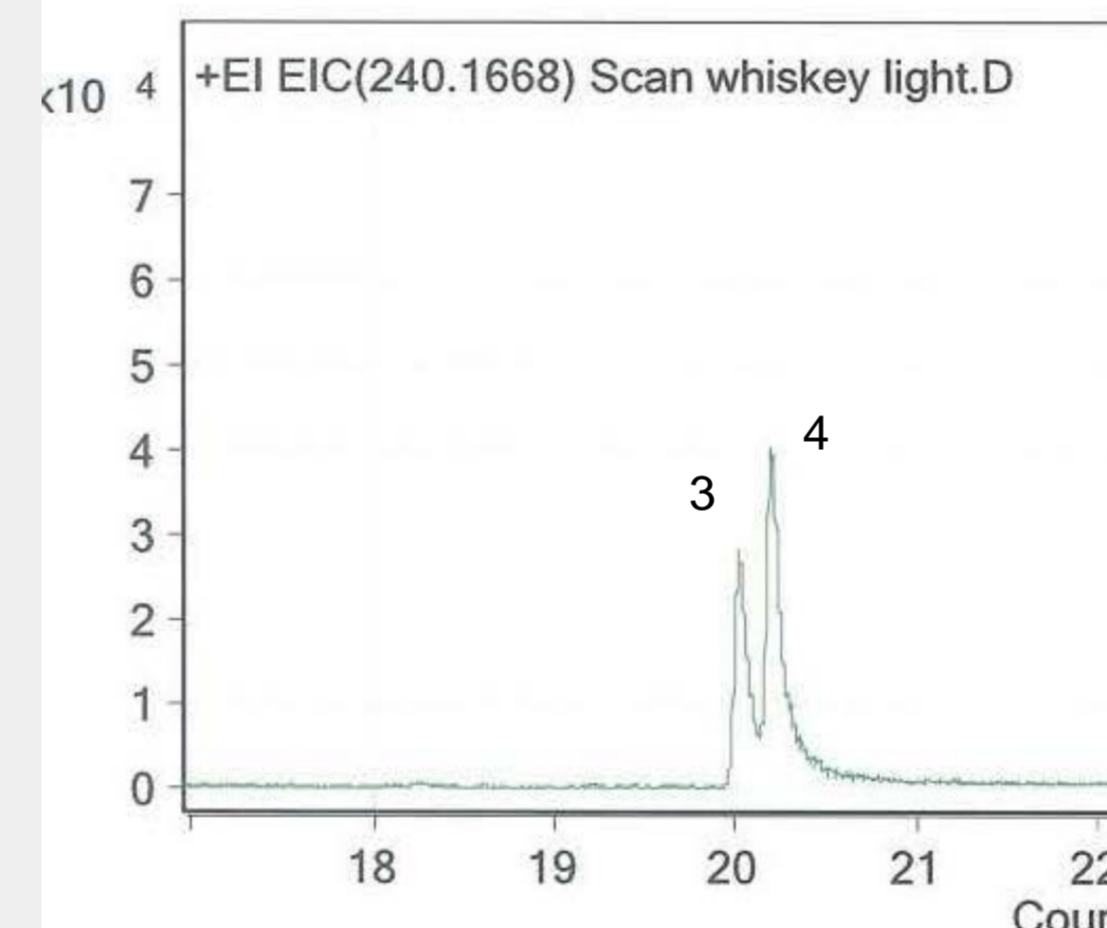
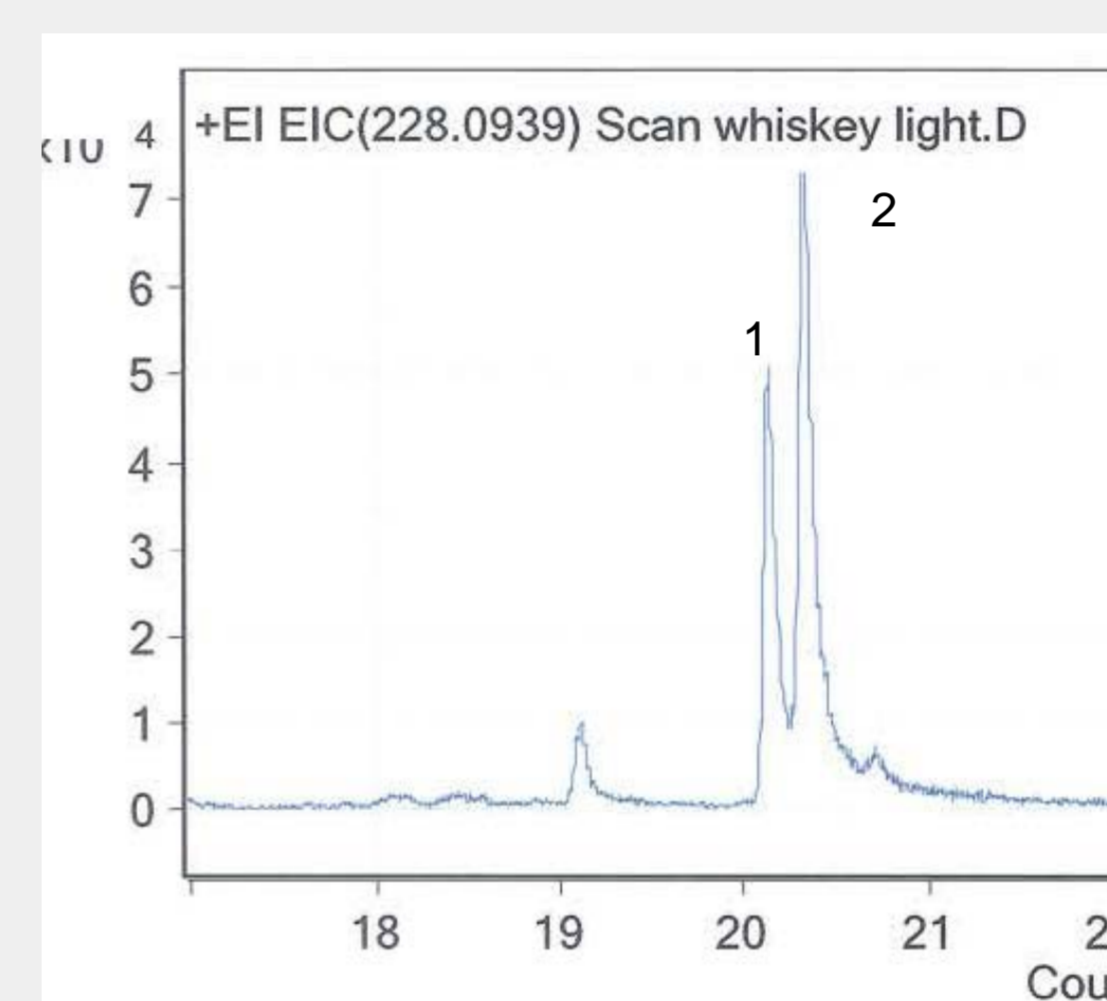


Figure 1. Samples of malt: Munch black (1), Caramunch (2), Wey (3), Whisky (4) and Raw Barley (5).

Materials and methods

For PAH 4 analysis 5 g homogenised malt sample (grinded samples of malt from figure 1) were mixed with 10 g polyacrylic acid and 10 g Ottawa sand (dried at 450 °C) and added to a 66ml stainless steel cell together with isotopic internal standards [3]. Samples were extracted by PLE using acetone:hexane (1:1, v:v) with 2 cycles at 100°C [3]. Clean-up by first GPC (Bio-beads S-X3) followed by Silica based SPE (500mg) [3] was followed by GC separation by 2 times 15m DB-5MS with Q-TOF MS detection. Chromatograms are found in figure 2 and 3.

For acrylamide, 3 g homogenised samples were extracted with Milli-Q water on ultra thurax followed by SPE (multimode) clean-up. Acrylamide were separated by LC on a Hypercarb column with tandem mass spectrometric detection (MRM mode) [5].

Gravimetric fat determination of PLE extracted malts dried at 70°C and gravimetric dry matter determination of malt samples at 102°C were done.