



300 Gb/s IM/DD based SDM-WDM-PON with laserless ONUs

Bao, Fangdi; Morioka, Toshio; Oxenløwe, Leif Katsuo; Hu, Hao

Published in:
Optics Express

Link to article, DOI:
[10.1364/OE.26.007949](https://doi.org/10.1364/OE.26.007949)

Publication date:
2018

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Bao, F., Morioka, T., Oxenløwe, L. K., & Hu, H. (2018). 300 Gb/s IM/DD based SDM-WDM-PON with laserless ONUs. *Optics Express*, 26(7), 7949-7954. DOI: 10.1364/OE.26.007949

DTU Library

Technical Information Center of Denmark

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



300 Gb/s IM/DD based SDM-WDM-PON with laserless ONUs

FANGDI BAO,^{1,2} TOSHIO MORIOKA,¹ LEIF K. OXENLØWE,¹ AND HAO HU^{1,*}

¹*DTU Fotonik, Technical University of Denmark, Ørstedts Plads, Building 343, DK-2800 Kgs. Lyngby, Denmark*

²*National Key Laboratory of Science and Technology on Tunable Laser, Harbin Institute of Technology, Harbin, Heilongjiang 150001, China*

**huhao@fotonik.dtu.dk*

Abstract: A low-cost, high-speed SDM-WDM-PON architecture is proposed by using a multi-core fiber (MCF) and intensity modulation/directly detection (IM/DD). One of the MCF cores is used for sending laser sources from optical line terminal (OLT) to optical network unit (ONU), thus facilitating laserless and colorless ONUs, and providing ease of network management and maintenance. In addition, the wavelengths of the ONUs are controlled on the OLT side, which also enables flexible optical networks. Thanks to the low inter-core crosstalk of a MCF, downstream (DS) and upstream (US) signals are transmitted independently in different cores of the MCF, not only increasing the aggregated capacity but also avoiding the Rayleigh backscattering noise. Finally, a proof-of-principle experiment is performed by using a 7-core fiber, achieving 300 /120 Gb/s aggregated capacity for DS and US (3 × cores, 4 × wavelengths, 25/10 Gb/s per wavelength), respectively.

© 2018 Optical Society of America under the terms of the [OSA Open Access Publishing Agreement](#)

OCIS codes: (060.2330) Fiber optics communications; (060.4510) Optical communications; (060.4230) Multiplexing.

References and links

1. L. G. Kazovsky, W. Shaw, D. Gutierrez, N. Cheng, and S. Wong, "Next-generation optical access networks," *J. Lightwave Technol.* **25**(11), 3428–3442 (2007).
2. R. Asif, "Advanced and flexible multi-carrier receiver architecture for high-count multi-core fiber based space division multiplexed applications," *Sci. Rep.* **6**(1), 27465 (2016).
3. D. Nesses, "NG-PON2 technology and standards," *J. Lightwave Technol.* **33**(5), 1136–1143 (2015).
4. D. T. van Veen and V. E. Houtsmma, "Symmetrical 25-Gb/s TDM-PON with 31.5-dB Optical Power Budget Using Only Off-the-Shelf 10-Gb/s Optical Components," *J. Lightwave Technol.* **34**(7), 1636–1642 (2016).
5. Y. Luo, X. Zhou, F. Effenberger, X. Yan, G. Peng, Y. Qian, and Y. Ma, "Time- and wavelength-division multiplexed passive optical network (TWDM-PON) for next-generation PON stage 2 (NG-PON2)," *J. Lightwave Technol.* **31**(4), 587–593 (2013).
6. P. Iannone, A. Gnauck, M. Straub, J. Hehmann, and L. Jentsch, "High-Split Intelligent TWDM PON Enabled by Distributed Raman Amplification," in *Proceedings of the European Conference and Exhibition on Optical Communications (ECOC, 2016)*, paper Th.3.C.6.
7. N. Cvijetic, D. Qian, and J. Hu, "100 Gb/s optical access based on optical orthogonal frequency-division multiplexing," *IEEE Commun. Mag.* **48**(7), 70–77 (2010).
8. J. K. Hmood, S. W. Harun, S. D. Emami, A. Khodaei, K. A. Noordin, H. Ahmad, and H. M. Shalaby, "Performance analysis of an all-optical OFDM system in presence of non-linear phase noise," *Opt. Express* **23**(4), 3886–3900 (2015).
9. R. Hu, Q. Yang, M. Luo, X. Xiao, X. Xiao, H. Li, and W. Shieh, "A cost-effective 2.5 Gb/s/λ; Bi-directional coherent UDWDM-PON with computationally-efficient DSP," in *Proceedings of the European Conference and Exhibition on Optical Communications (ECOC, 2014)*, paper Th.2.6.4.
10. D. Lavery, R. Maher, D. S. Millar, B. C. Thomsen, P. Bayvel, and S. J. Savory, "Digital Coherent Receivers for Long-Reach Optical Access Networks," *J. Lightwave Technol.* **31**(4), 609–620 (2013).
11. A. Shahpari, R. M. Ferreira, R. S. Luis, Z. Vujicic, F. P. Guiomar, J. D. Reis, and A. L. Teixeira, "Coherent Access: A Review," *J. Lightwave Technol.* **35**(4), 1050–1058 (2017).
12. B. Li, Z. Feng, M. Tang, Z. Xu, S. Fu, Q. Wu, L. Deng, W. Tong, S. Liu, and P. P. Shum, "Experimental demonstration of large capacity WSDM optical access network with multicore fibers and advanced modulation formats," *Opt. Express* **23**(9), 10997–11006 (2015).
13. B. Zhu, T. F. Taunay, M. F. Yan, J. M. Fini, M. Fishteyn, E. M. Monberg, and F. V. Dimarcello, "Seven-core multicore fiber transmissions for passive optical network," *Opt. Express* **18**(11), 11117–11122 (2010).

14. R. Asif, H. Hu, P. Mitchell, J. Macdonald, F. Da Ros, N. Psaila, F. Ye, L. K. Oxenlowe, and T. Morioka, "Experimental demonstration of 6-mode division multiplexed NG-PON2: Cost effective 40 Gbit/s/spatial-mode access based on 3D laser inscribed photonic lanterns," in *Proceedings of the European Conference and Exhibition on Optical Communications (ECOC) 2015*, paper Tu.1.5.1.
15. C. Xia, N. Chand, A. M. Velázquez-Benítez, Z. Yang, X. Liu, J. E. Antonio-Lopez, H. Wen, B. Zhu, N. Zhao, F. Effenberg, R. Amezcua-Correa, and G. Li, "Time-division-multiplexed few-mode passive optical network," *Opt. Express* **23**(2), 1151–1158 (2015).
16. F. Ren, J. Li, Z. Wu, T. Hu, J. Yu, Q. Mo, Y. He, Z. Chen, and Z. Li, "Three-mode mode-division-multiplexing passive optical network over 12-km low mode-crosstalk FMF using all-fiber mode MUX/DEMUX," *Opt. Commun.* **383**, 525–530 (2017).
17. H. Hu, R. Asif, F. Ye, S. Gross, M. Withford, T. Morioka, and L. K. Oxenlowe, "Bidirectional 120 Gbps SDM-WDM-PON with Colourless ONU using 10 Gbps Optical Components without DSP," in *Optical Fiber Communication Conference (Optical Society of America, 2016)*, paper M3C.1.
18. A. Shahpari, R. S. Luís, V. Ribeiro, J. D. Reis, R. Ferreira, J. M. D. Mendinueta, Z. Vujicic, B. J. Puttnam, M. Lima, N. Wada, and A. Teixeira, "Spectrally efficient enhanced-performance bidirectional coherent PON With laserless 10 Gb/s ONU [Invited]," *J. Opt. Commun. Netw.* **7**(3), A403–A413 (2015).
19. A. Agmon, M. Nazarathy, D. M. Marom, S. Ben-Ezra, A. Tolmachev, R. Killey, P. Bayvel, L. Meder, M. Hübner, W. Meredith, G. Vickers, P. C. Schindler, R. Schmogrow, D. Hillerkuss, W. Freude, C. Koos, and J. Leuthold, "OFDM/WDM PON With Laserless, Colorless 1 Gb/s ONUs Based on Si-PIC and Slow IC," *J. Opt. Commun. Netw.* **6**(3), 225–237 (2014).
20. S. Jain, T. Mizuno, Y. Jung, Q. Kang, J. Hayes, M. Petrovich, G. Bai, and H. Ono, "32-core inline multicore fiber amplifier for dense space division multiplexed transmission system," in *Proceedings of the European Conference and Exhibition on Optical Communication (ECOC, 2016)*, paper Th.3.A.1.
21. B. Zhu, T. F. Taunay, M. Fishteyn, X. Liu, S. Chandrasekhar, M. F. Yan, J. M. Fini, E. M. Monberg, and F. V. Dimarcello, "112-Tb/s space-division multiplexed DWDM transmission with 14-b/s/Hz aggregate spectral efficiency over a 76.8-km seven-core fiber," *Opt. Express* **19**(17), 16665–16671 (2011).
22. Deliverable D2, 3 "Report on Development of First Generation MCF and PBGF Fibres" <http://www.fp7-cosign.eu/deliverables/>

1. Introduction

With the advent of a variety of broad-band internet services such as cloud computing, high-definition (HD)/4K TV, business IP traffic and social networking, there has been an exponential increase of bandwidth demand in access networks [1,2]. Researchers are investigating on high-speed passive optical networks (PONs), and standards of PONs have been updated by both Full Service Access Network (FSAN) and IEEE in recent years [3, 4]. Various kinds of PON technologies have been demonstrated for increasing the bandwidth of access networks. Time-division multiplexing PON (TDM-PON) is initially proposed and has been extensively deployed worldwide, but it has a limited number of end users and transmission reach due to the low power budget. By using wavelength-division multiplexing (WDM), a hybrid WDM-TDM-PON has been demonstrated, which can stack multiple TDM-PONs [5,6]. In addition, many other techniques have also been proposed for a PON system, such as orthogonal frequency division multiplexing (OFDM), ultra-dense WDM and coherent detection [7–11]. In order to further increase the capacity of a PON system, space-division multiplexing (SDM) has been introduced to utilize multiple spatial channels for data transmission through a single fiber [12–17]. On the other hand, optical network unit (ONU) remains highly cost-sensitive in the whole access network, since it directly serves end users who need to pay installation and maintenance cost [18, 19], and a cost-effective ONU is of high importance in the access networks.

In this paper, we propose a cost-effective, high-speed SDM-WDM-PON scheme using intensity modulation and direct detection (IM/DD) with a low-crosstalk multi-core fiber (MCF) without any digital signal processing (DSP). A 7-core fiber is used for the proof-of-concept demonstration, where three outer cores are used for upstream (US) and the other three outer cores are used for downstream (DS). The inner core in the center is used to transmit light source originated from optical line terminal (OLT) to ONU, thus achieving laserless and colorless ONUs. Finally, an aggregated capacity of 300 Gb/s for DS and 120 Gb/s for US are achieved in the SDM-WDM-PON, which may be a good candidate for future broad-band access networks and mobile backhauls such as 5G mobile networks.

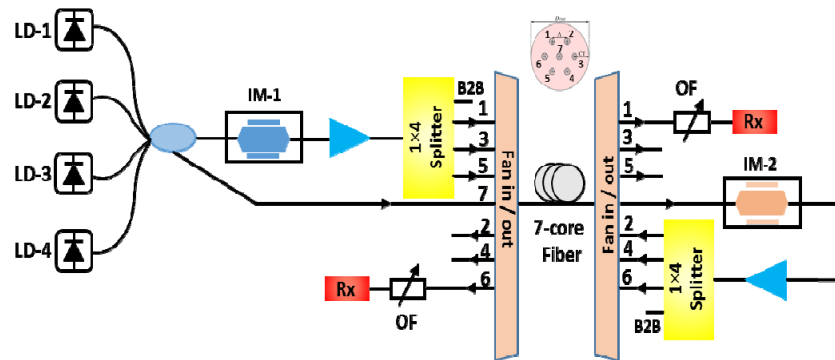


Fig. 2. Experimental setup for SDM-WDM-PON system. (IM: intensity modulator, B2B: back to back.)

and then launched into three outer cores (core 1, core 3 and core 5) of the 7-core fiber through the fan-in device. After the 7-core fiber transmission, the signals are SDM demultiplexed by the fan-out device and launched into three individual SMFs. The DS signals are filtered by an optical filter (OF) and finally detected by a receiver. The receiver consists of a tunable attenuator, an optical pre-amplifier and a 25 Gb/s photo-detector. The parameters of the 7-core fiber used in the experiment are as follows: the diameter and pitch of the core are $9\ \mu\text{m}$, $46.8\ \mu\text{m}$ respectively, and the cladding diameter is $186.5\ \mu\text{m}$. For each core at $1550\ \text{nm}$, the dispersion and dispersion slope are around $16.5\ \text{ps/km-nm}$ and $0.06\ \text{ps/km-nm}^2$, respectively [21]. The inter-core crosstalk has been measured by launching the light in the central core and measuring the optical power for each of the 6 outer cores. The range of the crosstalk values for 6 outer cores is in between -40 and $-50\ \text{dB}$. The core-averaged inter-core crosstalk is $\sim 45\ \text{dB}$ over 2-km at $1550\ \text{nm}$ [21]. Fan-in/ Fan-out devices based on a fiber are designed to match the core spacing and mode field of the 7-core fiber [22]. The measured insertion losses of the fan-in/fan-out are 1.45 dB, 2.25 dB, 2.5 dB, 3.05 dB, 1.7 dB, 2.85 dB and 2.3 dB, respectively, for core 1 to core 7. Note that by using free-space device, the fan-in/fan-out loss can be reduced to be $\sim 1\ \text{dB}$. Therefore, the combining loss is significantly reduced compared to the existing TDM- PONs that combine signals from the ONUs using couplers. Although the MCF in the experiment has a limited length of 2 km, it's expected to achieve much longer transmission distance using the proposed scheme, since the MCF exhibits very low inter-core crosstalk. The main limitation for long-distance transmission is the dispersion. Since the dispersion of the MCF is similar as that of a standard single mode fiber (SSMF), the expected transmission distance and the solutions are also similar as that of the SSMF, such as using dispersion compensation or using more advanced modulation formats.

The other part of the WDM source is launched into the inner core (core 7) of the 7-core fiber through the fan-in device. After the 7-core fiber transmission, the WDM source is OOK modulated by an intensity modulator with 10 Gb/s PRBS of $2^{31}-1$, amplified by an EDFA, combined by a coupler and finally sent back to the OLT through the other three outer cores (core 2, core 4, core 6) of the 7-core fiber as US signals. The spectra of both DS and US signals after transmission are shown in Fig. 3. On the OLT side, the US signals are filtered by OFs, and detected by a receiver.

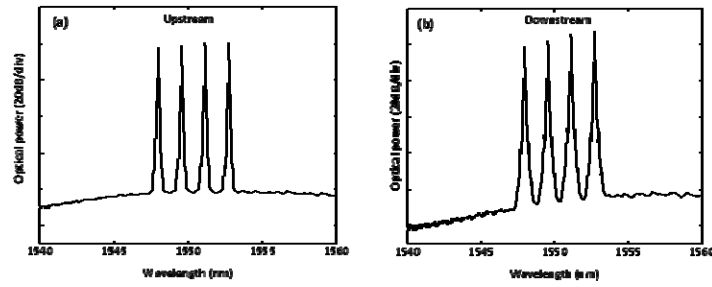


Fig. 3. Optical spectra after transmission for (a) US signals, (b) DS signals.

4. Experimental results

We first evaluate the DS transmission performance with 25 Gb/s signals per wavelength per core, as shown in Fig. 4. We can see that after the 2-km 7-core fiber transmission, the BER performance is almost same as the back-to-back (B2B) case and error-free performance ($\text{BER} < 10^{-9}$) is achieved with a receiver sensitivity of around -33 dBm for all the signals of four wavelengths in three cores, indicating similar performances for all these channels. When the launched power is increased to 2 dBm per wavelength per core, no obvious BER degradation has been observed. Therefore, the power budget of ~ 32 dB is achieved taking into account ~ 3 dB maximum insertion loss of the fan-in/fan-out device.

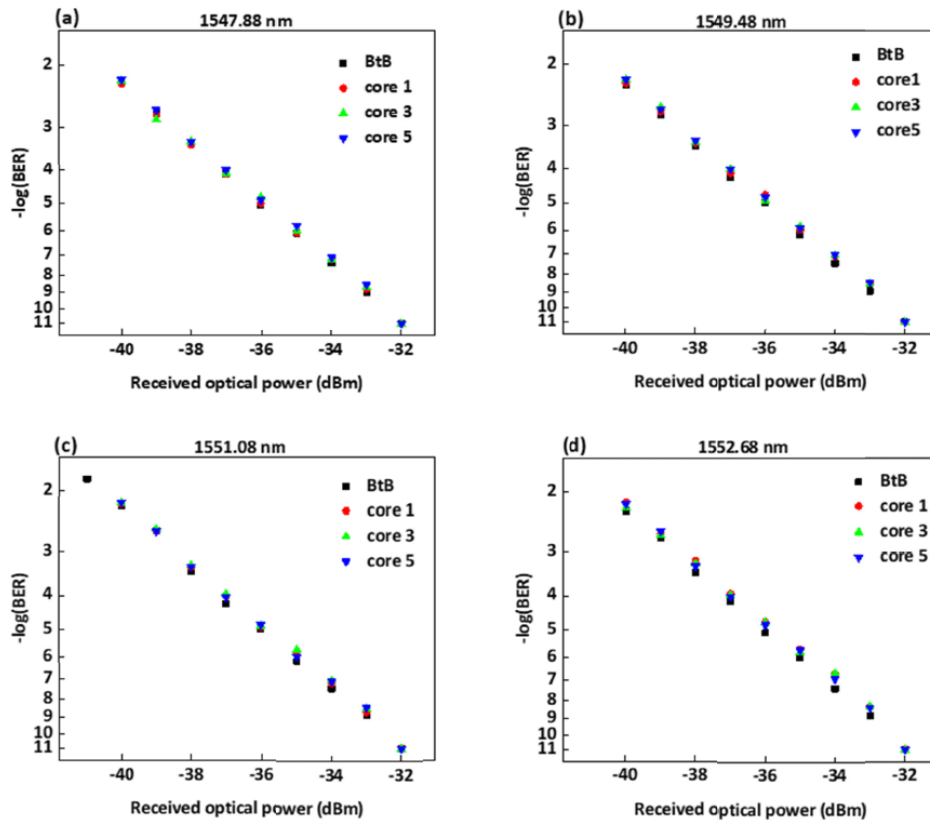


Fig. 4. Measured BER of the DS signals in 3 different cores (core 1, core 3, core 5) at the wavelength of (a) 1547.88 nm, (b) 1549.48 nm, (c) 1551.08 nm, (d) 1552.68 nm.

Having confirmed that the performance for different wavelengths is almost same, only one wavelength at 1552.68 nm is measured for the 10 Gb/s US signals in order to evaluate the uplink transmission performance. Similar to the DS transmission, the BERs are measured after the 7-core fiber transmission and the results are plotted in Fig. 5. After the 2-km 7-core fiber transmission, the BER performance is almost same as the B2B case, which also confirms the good transmission performance for the US signals.

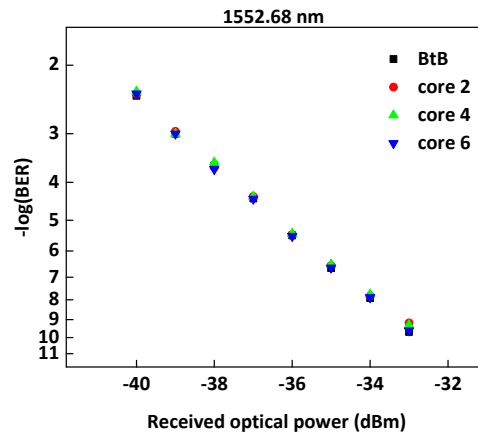


Fig. 5. Measured BER of the US signal in 3 different cores (core 2, core 4, core 6) at the wavelength of 1552.68 nm.

5. Conclusion

An SDM-WDM-PON scheme has been proposed and experimentally verified using a 7-core fiber and IM/DD without DSP. The DS and US signals are distributed in different outer cores of the 7-core fiber, resulting in bidirectional operation. The laser sources originated from OLT are transmitted to ONU through the inner core of the 7-core fiber, thus achieving a laserless and colorless ONU and facilitating cost reduction and ease of wavelength management. Transmission capacity of 300/120 Gb/s for DS/US (4 wavelengths, 3 cores, 25/10 Gb/s per wavelength) has been successfully achieved, which could be a promising candidate for future large-capacity access networks.

Funding

Danish National Research Foundation (DNRF) for supporting Centre of Excellence SPOC (Centre for Silicon Photonics for Optical Communications), ref DNRF123 and Innovations Fonden for supporting the Strategic Research (e-space project, #0603-00514B).

Acknowledgments

The authors would like to thank OFS for providing the 7-core fiber with fan-in/fan-out devices.