

Masters Program in **Geospatial Technologies**



LANDSLIDE SUSCEPTIBILITY ASSESSMENT IN KARANGANYAR REGENCY - INDONESIA

Comparison of Knowledge-Based and Data-Driven Models

FAUS TINUS HANDI FERYANDI

Dissertation submitted in partial fulfilment of the requirements
for the Degree of *Master of Science in Geospatial Technologies*

LANDSLIDE SUSCEPTIBILITY ASSESSMENT IN KARANGANYAR REGENCY - INDONESIA

Comparison of Knowledge-Based and Data-Driven Models

Dissertation

Supervised by

Dr. rer.nat. Albert Remke

52⁰ North GmbH

Institute for Geoinformatics (IFGI)

Westfälische Wilhelms-Universität

Münster - Germany

Co-supervised by

Prof. Dr. Jorge Mateu

Department of Mathematics

Universitat Jaume I

Castellon - Spain

Pedro da Costa Brito Cabral, Ph.D

Instituto Superior de Estatística e Gestão de Informação

Universidade Nova de Lisboa

Lisbon – Portugal

February, 2011

ACKNOWLEDGEMENTS

I would like to thank sincerely to my supervisor Dr. Albert Remke, my co-supervisor Prof. Dr. Jorge Mateu and Pedro Cabral, Ph.D for their supporting guidance, valuable comments and suggestions during the thesis period.

To all lecturers from UJI Spain, ISEGI-UNL Portugal and IFGI-WWU Germany, who taught me in the first two semesters, brought new concepts and introduced me to a great academic atmosphere: let me extend high gratitude.

All friends in the program, it was nice to meet, share knowledge, discuss, help and get help back during “our survival” period. Achieve the best in your life, guys.

To all my colleagues in Indonesia, especially in Directorate of Base Mapping, National Land Agency Republic of Indonesia: Thank you for supporting.

Prayer and endlessly love from my family, and my wife Naries. How could I say completely how they are really meant to me?

Finally, thanks Jesus. I know You never stop blessing me.

--

If you are not a truly genius, do not conduct a research because of your ego, but because it is relevant, applicable and useful to society. No matter how simple it is.

AUTHOR'S DECLARATION

I hereby declare that this thesis is my original work and that I have not received any external assistance and only the sources cited were used. This thesis has never been submitted for any other degree program, and is submitted exclusively to the Universities participating in the Erasmus Mundus Master program in Geospatial Technologies.

Münster, 15 February 2011

Faus Tinus Handi Feryandi

ABSTRACT

Disaster management requires spatial information as a backbone of preparedness and mitigation process. In that context, an assessment of landslide susceptibility becomes essential in an area that is prone to landslide due to its geographical condition. The Tawangmangu, Jenawi and Ngargoyoso Subdistric in Karanganyar Regency is the one of such areas, and is the area most frequently hit by landslides in the Central Java Province of Indonesia.

In this study, three different methods were applied to examine landslide susceptibility in that area: heuristic, statistical logistic regression and Artificial Neural Network (ANN). Heuristic method is a knowledge-based approach whereas the latter two are categorized as data-driven methods due to the involvement of landslide inventory in their analysis. Eight site-specific available and commonly used landslide influencing factors (slope, aspect, topographical shape, curvature, lithology, land use, distance to road and distance to river) were preprocessed in a GIS environment and then analyzed using statistical and GIS tools to understand the relationship and significance of each to landslide occurrence, and to generate landslide susceptibility maps. ILWIS, Idrisi and ArcGIS software were used to prepare the dataset and visualize the model while PASW was employed to run prediction models (logistic regression for statistical method and multi-layer perceptron for ANN). The study employed degree of fit and Receiving Operating Characteristic (ROC) to assess the models performance.

The region was mapped into five landslide susceptibility classes: very low, low, moderate, high and very high class. The results also showed that lithology, land use and topographical are the three most influential factors (i.e., significant in controlling the landslide to take place). According to degree of fit analysis applied to all models, ANN performed better than the other models when predicting landslide susceptibility of the study area. Meanwhile, according to ROC analysis applied to data-driven methods, ANN shows better performance (AUC 0,988) than statistical logistic regression (AUC 0,959).

CONTENTS

| | |
|--|------|
| ACKNOWLEDGEMENTS..... | ii |
| ABSTRACT..... | iv |
| CONTENTS..... | v |
| LIST OF FIGURES..... | vii |
| LIST OF TABLES..... | viii |
| LIST OF ACRONYMS..... | ix |
| CHAPTER 1 INTRODUCTION | 1 |
| 1.1. Background and motivation..... | 1 |
| 1.2. Objectives..... | 4 |
| 1.3. Research questions | 4 |
| 1.4. Study area | 5 |
| 1.5. Structure of thesis..... | 5 |
| CHAPTER 2 DATA | 7 |
| 2.1. Landslide inventory..... | 7 |
| 2.2. Influencing factors | 9 |
| 2.2.1. Slope | 12 |
| 2.2.2. Aspect | 14 |
| 2.2.3. Topographical shape | 14 |
| 2.2.4. Curvature | 14 |
| 2.2.5. Lithology | 16 |
| 2.2.6. Land use..... | 17 |
| 2.2.7. Distance to road | 18 |
| 2.2.8. Distance to river | 18 |
| CHAPTER 3 METHODOLOGY | 20 |
| 3.1. Knowledge-based: heuristic method | 20 |
| 3.1.1. Scoring | 20 |
| 3.1.2. Weighting process using SMCE ILWIS | 22 |
| 3.1.3. Heuristic modeling..... | 23 |
| 3.2. Data-driven: statistical method | 25 |
| 3.2.1. Landslide density calculation..... | 25 |
| 3.2.2. Weight of evidence assessment | 26 |
| 3.2.3. Logistic regression modeling | 27 |
| 3.3. Data-driven: artificial neural network..... | 29 |
| 3.4. Performance analysis | 32 |
| CHAPTER 4 RESULTS AND DISCUSSION | 34 |
| 4.1. Heuristic model | 34 |
| 4.2. Statistical model..... | 37 |

| | | |
|---|---|----|
| 4.2.1. | Landslide density | 37 |
| 4.2.2. | Weight of evidence..... | 37 |
| 4.2.3. | Normality test result..... | 40 |
| 4.2.4. | Correlation..... | 41 |
| 4.2.5. | Logistic regression model | 43 |
| 4.3. | Artificial Neural Network model | 47 |
| 4.4. | Comparison | 52 |
| 4.4.1. | Results comparison | 53 |
| 4.4.2. | Methods comparison in landslide susceptibility assessment | 55 |
| 4.5. | Success-performance of the models..... | 57 |
| 4.6. | Additional discussion | 59 |
| CHAPTER 5 CONCLUSIONS AND RECOMMENDATIONS..... | | 62 |
| REFERENCES | | 64 |
| ANNEX 1. List of landslide events 2002 – 2010 in the study area | | 69 |
| ANNEX 2. Q-Q plot of variables | | 71 |
| ANNEX 3. Logistic regression prediction results..... | | 73 |
| ANNEX 4. LSI using pseudo-probabilities..... | | 77 |
| ANNEX 5. ANN used in this study | | 78 |
| ANNEX 6. Landslide susceptibility maps | | 80 |

LIST OF FIGURES

| | |
|--|----|
| Figure 1. A landslide event in Legoksari Village, Tawangmangu, December 27 th , 2010..... | 1 |
| Figure 2. Overview of the study area: (a) the scaled STRM 30m appearance of study area; (b) the unscaled map of Indonesia (source: Forensic Services, 2010) ... | 5 |
| Figure 3. Morphology of the study area (source: Kristijono et al., 2008) | 5 |
| Figure 4. Distribution of the landslide occurrences in the study area at different elevation..... | 7 |
| Figure 5. Landslide types (USGS, 2004) | 8 |
| Figure 6. Categorization of (a) Slope and (b) Aspect | 13 |
| Figure 7. Categorization of (a) Topographical shape and (b) Curvature | 15 |
| Figure 8. Categorization of (a) Lithology and (b) Land use | 17 |
| Figure 9. Categorization of (a) Distance to road and (b) Distance to river..... | 19 |
| Figure 10. Pairwise comparison tool in ILWIS | 22 |
| Figure 11. Diagram of heuristic method | 24 |
| Figure 12. Diagram of statistical method | 29 |
| Figure 13. Neural network schema in landslide susceptibility assessment | 30 |
| Figure 14. Diagram of artificial neural network..... | 31 |
| Figure 15. Pair wise comparison in ILWIS (a) Criteria tree with input (spatial factors) and resulted weight; (b) Weighting process result containing the inconsistency value | 34 |
| Figure 16. (a) Landslide susceptibility index of heuristic model (LSI _h), and (b) Histogram of the map | 35 |
| Figure 17. Landslide susceptibility map of heuristic method (LSM _h)..... | 36 |
| Figure 18. (a) Landslide susceptibility index of statistical model (LSI _s), and (b) Histogram of the map | 46 |
| Figure 19. LSM based on statistical method | 47 |
| Figure 20. (a) Landslide susceptibility index of ANN model (LSI _{ANN}), and (b) Histogram of the map | 51 |
| Figure 21. LSM based on ANN method | 52 |
| Figure 22. Comparison of each class from three methods..... | 53 |
| Figure 23. Variables comparison between Heuristic and ANN method..... | 54 |
| Figure 24. Degree of fit result | 58 |
| Figure 25. ROC curve plot of logistic regression | 58 |
| Figure 26. ROC curve plot of ANN..... | 59 |

LIST OF TABLES

| | |
|---|----|
| Table 1. Influencing factors in the study | 10 |
| Table 2. Tabulation of slope and aspect class in the study area | 13 |
| Table 3. Tabulation of topographical shape and curvature class in the study area.. | 15 |
| Table 4. Tabulation of lithology and land use class in the study area | 18 |
| Table 5. Tabulation of distance to road and distance to river class | 19 |
| Table 6. Score for each class | 21 |
| Table 7. Scale of importance | 23 |
| Table 8. Area of LSMh class | 36 |
| Table 9. Density and WoE tabulation | 38 |
| Table 10. Descriptive analysis of the predictor variables (using original values) | 41 |
| Table 11. Result of bivariate pearson analysis | 42 |
| Table 12. Collinearity analysis..... | 43 |
| Table 13. Model summary of datasets | 44 |
| Table 14. Result of backwise LR..... | 45 |
| Table 15. Area of LSMs class | 47 |
| Table 16. ANN setting | 48 |
| Table 17. Network information | 49 |
| Table 18. Results of ANN process (a) Model summary; (b) Predictor importance ... | 50 |
| Table 19. Area of LSM _{ANN} class | 52 |
| Table 20. Importance ranking of variables | 54 |
| Table 21. Comparison of each method..... | 57 |
| Table 22. ROC AUC of logistic regression..... | 58 |
| Table 23. ROC AUC of ANN | 59 |

LIST OF ACRONYMS

| | |
|--------------|--|
| ANN | Artificial Neural Network |
| ASCII | American Standard Code for Information Interchange |
| AUC | Area under Curve |
| Bakosurtanal | National Coordinating Agency for Surveys and Mapping |
| DEM | Digital Elevation Model |
| GIS | Geographic Information System |
| ILWIS | Integrated Water and Land Information System |
| LR | Logistic Regression |
| LSI | Landslide Susceptibility Index |
| LSM | Landslide Susceptibility Map |
| MLP | Multi-layer Perceptron |
| PASW | Predictive Analytics Software |
| ROC | Receiver Operating Characteristics |
| RS | Remote Sensing |
| SMCE | Spatial Multi Criteria Evaluation |
| SRTM | Shuttle Radar Topography Mission |

CHAPTER 1 INTRODUCTION

1.1. Background and motivation

According to [Crozier and Glade \(2005\)](#), hazards are defined as processes and situation, which have potential to bring about damages, losses or other adverse effects to valued attribute of humankind. Hazards may cause losses of life or injuries, property damages, social and economic disruptions or environmental damages. One of the common natural hazards is landslide that is defined as "the movement of a mass of rock, debris, or earth down a slope" ([Cruden, 1991](#)). The movement happens because of natural occurrences, human activities or a combination of both that causes slope's instability.

As located in the equatorial area, which brings more than six months rainy season, diverse soil lithology characteristic and land cover, as well as diverse topographical relief, some parts in Indonesia could easily experience landslides. The statistical data from Indonesian National Agency for Disaster Management (BNPB) shows that in 2008, about 11% of the total disaster events in Indonesia were landslides that caused lots of damages ([BNPB, 2008](#)).

[Hadmoko et al. \(2010\)](#) stated that during 1990–2005 there were 1.508 landslide occurrences that hit Java Island, the most mountainous and densest island in Indonesia. Those events damaged 8.682 houses, 3.017 hectares of agriculture areas, and 9.939 meters road. Economic losses were



Figure 1. A landslide event in Legoksari Village, Tawangmangu, December 27th, 2010. (Sources: [Kristijono et al., 2008](#))

estimated around 18.040.450 euro. One of the most severe landslide occurrences was the one that hit 14 subdistricts in Karanganyar Regency, Central Java, in December 27th, 2007, caused 64 death tolls and damaged hundred houses and public facilities ([PVMBG, 2007](#)). [Figure 1](#) shows one location of those events. The last landslide occurred on 22nd of July 2010 in Selomoro Village, Jenawi Subdistrict,

which damaged a bridge, killed one person and wounded six people ([Era Baru, 2010](#)).

Regarding the aforementioned facts above, it is really important to reduce the risk of landslide event by doing preparedness, mitigation and risk planning in the region where historically known as the vulnerable area such as Karanganyar Regency. Those activities need landslide susceptibility assessment.

According to [Fell et al. \(2008\)](#), landslide susceptibility assessment is a quantitative or qualitative assessment of landslide spatial distribution that exists or potentially may occur in an area. This activity involves an analysis of environmental variables or factors that contribute to the events to take place, triggering factors that activate, and also a zoning process of susceptible area based on certain classifications. In short words, susceptibility is a function of landslide and its causative factors. Practically, in recent years landslide susceptibility assessment and mapping make use of statistical and geospatial tools e.g., Geographical Information System (GIS), Remote Sensing (RS), Global Positioning System (GPS) for handling spatial data in order to make better assessment ([Van Westen et al., 2008](#)).

There are many methods to assess landslide susceptibility. [Ayalev et al. \(2005\)](#) differentiate landslide susceptibility methods into three big groups: semi-qualitative, quantitative and hybrid. Examples of semi-qualitative methods are Simple Ranking and Rating and Analytical Hierarchy Process (AHP). Quantitative methods group could be divided into Process-based, Statistical (bivariate statistical analysis and multivariate statistical analysis: discriminant and logistic regression), and Training and Membership-based (Artificial Neural Network and Fuzzy). The last group, hybrid method, is a combination of the previous two groups e.g., the combination of bivariate statistical analysis and AHP.

The semi qualitative method is also known as heuristic method. According to [Caniani et al. \(2008\)](#), this method is categorized as knowledge-based assessment because it is leaning its semi-qualitative analysis based on literatures, expert opinions or previous researches to assess influencing factors. The factors are classified, integrated and weighted based on their importance using a decision rules mechanism ([Lei and Jing-feng, 2006](#)). One underlying assumption embedded to this approach is that the relationship between landslide susceptibility and the influencing factors has been recognized already. Although its limitation concerned the subjectivity, in areas where do not have a reliable landslide events record, this approach is useful. There were researchers who worked on this method e.g., [Ruff and Czurda \(2008\)](#), [Abella and Van Westen \(2008\)](#), [Hadmoko et al. \(2010\)](#), [Wati \(2010\)](#), and [Wahono \(2010\)](#), just to mention a few of many.

Accord with its name, quantitative methods applies more quantitative assessment. Commonly, quantitative methods use landslide inventory (i.e., records of landslide) in the analysis. This inclusion makes these methods are called data-driven methods. Two widely used methods are statistical method and artificial neural network (ANN).

Statistical methods lean their analysis based on numerical expressions of the relationship between influencing factors and landslides statistically. In bivariate analysis, it could be achieved by calculating landslide occurrence frequency or density. In multivariate analyses, for example in logistic regression, the correlation of all factors and the recorded landslide events is further elaborated by finding the coefficient and significance of each factors simultaneously. In this approach, the weights from density analysis could be treated as the value of predictor variables in logistic regression analysis (Lei and Jing-feng, 2006; Ayalew and Yamagishi, 2005). Dai et al. (2001), Borsevski (2001), Lee (2005), Muhiyudin et al. (2004), Pradhan (2010) are other several researches that used such analysis.

ANN is a relatively new approach in landslide susceptibility analysis (Lei and Jing-feng, 2006). One of its modules is multi-layer perceptron (MLP). This approach concerns towards interconnectivity among layers by creating hidden and output layers. It learns from experience via samples of past landslides; then performs forecast of events (Gomez and Kavzoglu, 2005). Nowadays, statistical programs (e.g., PASW, abbreviation of Predictive Analytics Software) also provide this kind of module and could give an importance value of each variable. This method was used by Caniani et al. (2008), Pradhan and Lee (2010), Chauhan et al. (2010), Nefeslioglu et al. (2008), and Melchiorre et al. (2008).

Fundamental concepts about landslide assessment are “the past and present are the keys to the future” (Carrara et al., 1991; Hadmoko et al., 2010), the main conditions that cause landslide can be identified, and the degree of susceptibility can be estimated (Chacon et al., 2006). Therefore, it is assumed that in some areas, which have landslides record in the past, the possibility of the events to take place again is bigger if the influencing or environmental factors (slope, curvature, geology and so forth) there are still similar or do not change significantly (Van Westen et al., 2006). In that context, data-driven methods, which include landslides inventory in their analyses, are really useful as prediction approach for landslide assessment.

In Karanganyar Regency, implementation of data-driven methods using landslide inventory to assess landslide susceptibility, so far, not yet ever be applied. Though in the field work the occurrences were collected, Wati (2010) just produced landslide susceptibility map by using heuristic method (i.e., no involvement of landslide

occurrences) because the main focus of her research was land capability assessment. Wati's study area was only confined to one sub district, Tawangmangu. Therefore, it is worthwhile to implement statistical logistic regression and ANN, as addition to heuristic method, in a comparative study.

These three methods—without disregarding to other methods—can represent three main variants of conceptual landslide susceptibility assessment. Although statistical method and ANN are the same quantitative method, these two methods have different approach to predict: the first is based on statistical relationship, whereas the latter is based on computational learning process in a network. By doing comparison of the processes and resulted models from these three methods, the drawbacks and eminences of every method will be assessed. Moreover, this study is expected not only to produce spatial information (i.e., the landslide susceptibility maps for land use planning) but also to investigate every model performance in the study area and show which can perform better.

1.2. Objectives

Based on the research background, the general objective of this research is to assess landslide susceptibility in the Tawangmangu, Ngargoyoso and Jenawi Subdistrict in Karanganyar Regency at medium scale using three different methods: heuristic, statistical and ANN. The objective could be specified as follows:

1. To generate landslide susceptibility model in order to know landslide susceptible areas distribution;
2. To analyze the factors/variables that influence landslides to take place;
3. To investigate the performance of the models based on success-analysis degree of fit and the cutoff-independent performance criteria's Receiving Operating Characteristic (ROC) curve;
4. To compare the methods descriptively based on their own characteristics and analyze the advantages and disadvantages of each.

1.3. Research questions

To approach the objectives several research questions were proposed:

1. What are the factors used to build model?
2. How to assign weight for each factor?
3. What are the most influencing factors?
4. Which parts are susceptible in the study area?
5. How do degree of fit and ROC curve show model performance?
6. How do the methods interact with the datasets?

1.4. Study area

The study area is located in three subdistricts of Karanganyar Regency: Tawangmangu, Ngargoyoso and Jenawi in Central Java Province, Indonesia (Figure 2). It covers 174,13 km², within latitudes 70°30'40"S to 70°35'16"S and longitudes 111°07'15"E to 111°11'41"E. Based on historical records of landslide, those sub districts are the most often hit by landslide among 17 subdistricts inside Karanganyar Regency.

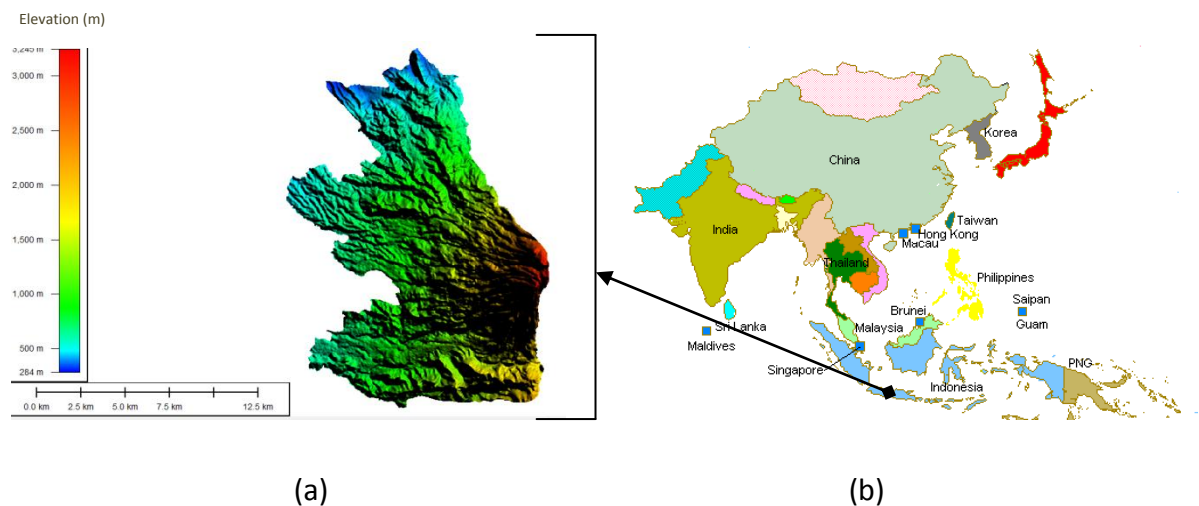


Figure 2. Overview of the study area: (a) the scaled STRM 30m appearance of study area; (b) the unscaled map of Indonesia (source: [Forensic Services, 2010](#))

The location is nearby Mount Lawu (3.265m above sea level), so some parts are hilly and mountainous—with the lowest altitude is 284m and the highest is 3.245m—the topographical situation that was presumed susceptible toward landslide occurrence (Figure 3). According to [PVBMB \(2007\)](#), there happens a large conversion from forest into agriculture areas, roads and settlements during the past 10 years. This activity affected soil capability to absorb rainfall, which potentially cause the movement of rock or debris down a slope.



Figure 3. Morphology of the study area (source: [Kristijono et al., 2008](#))

1.5. Structure of thesis

The structure of thesis encompasses five chapters. Chapter 1 (Introduction) outlines the background, motivation, objectives, and study area. The second chapter (Data) is dedicated to explore landslide occurrences and the influencing factors of landslides. This chapter also works through their preparation and preprocessing to create ready-to-use datasets. Chapter 3 (Methodology) evaluates three employed methods and stages. In this chapter, the weighting process and importance of each factor are analyzed. Chapter 4 (Result and Discussion) presents the results and discusses the models and their performance. Finally, the fifth chapter (Conclusions and Recommendations) summarizes the work and limitation. It also gives necessary avenues for future study.

CHAPTER 2 DATA

This chapter describes the datasets and their preparation for use in the methods that follow.

2.1. Landslide inventory

Landslide inventory is a dataset about landslide occurrences in any certain area. It gives insight into landslide phenomena locations, date, type, volume and damages (Van Westen et al., 2008). Landslides are normally appeared as area or point forms. If there is an aerial photo or high resolution satellite imagery with respect to the occurrence time frame, landslides could be formed as areas because delineation process could be done. However, such materials are not available for the area of interest. It makes the presentation of landslide events is only in points, but next, for technical matter, becoming the buffered areas. In this study, landslides are spreading over 74 locations in three subdistricts (Figure 4).

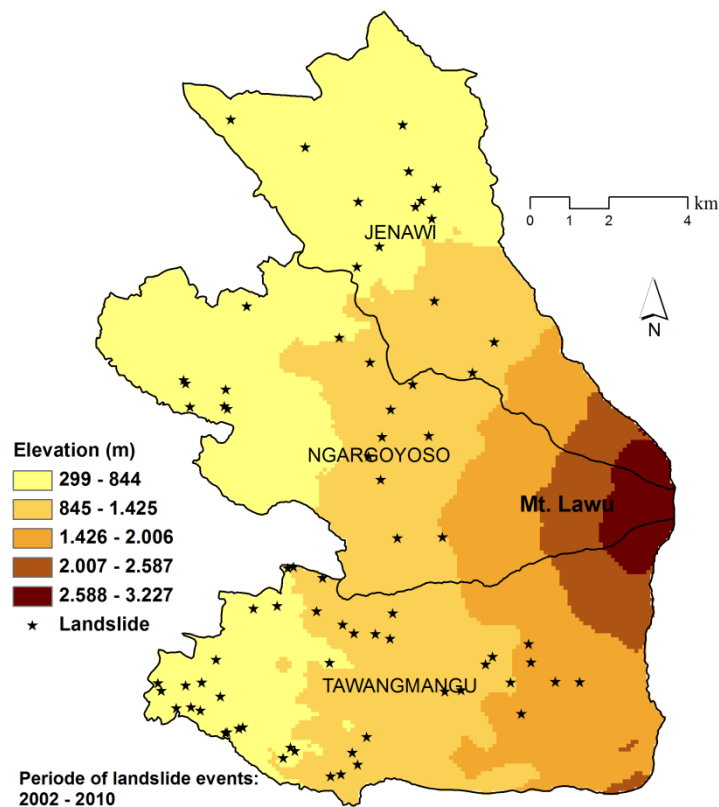


Figure 4. Distribution of the landslide occurrences in the study area at different elevation

Jenawi Subdistric has 14 occurrences (18,92%); Ngargoyoso has 18 occurrences (24,32%); Tawangmangu has 42 occurrences (56,76%). These occurrences are compilation from various sources: the field record from Wati (2010), reports from

PVMBG (2007) and local newspapers. The occurrences were the events that happened during a period from 2002 till 2010 (Annex 1).

There are several types of landslides: slide, topple, fall, spread, flow and complex (Highland and Bobrowsky, 2008). Slide occurs on surfaces of rupture from intense shear strain; its movement does not initially occur simultaneously. Topple occurs in forward rotations at a point or axis below the center of the displaced mass. It easily happens in the very steep slope. Fall happens in a material detachment along the surface on which little or no shear displacement has occurred. The occurrence is called flow if the movement is continuous. Flows often happen after slide happened. Spread is a subsidence of the fractured mass of cohesive material into softer underlying material. A landslide could be in complex type if it is a combination of the previous landslides. Landslide types are shown in Figure 5.

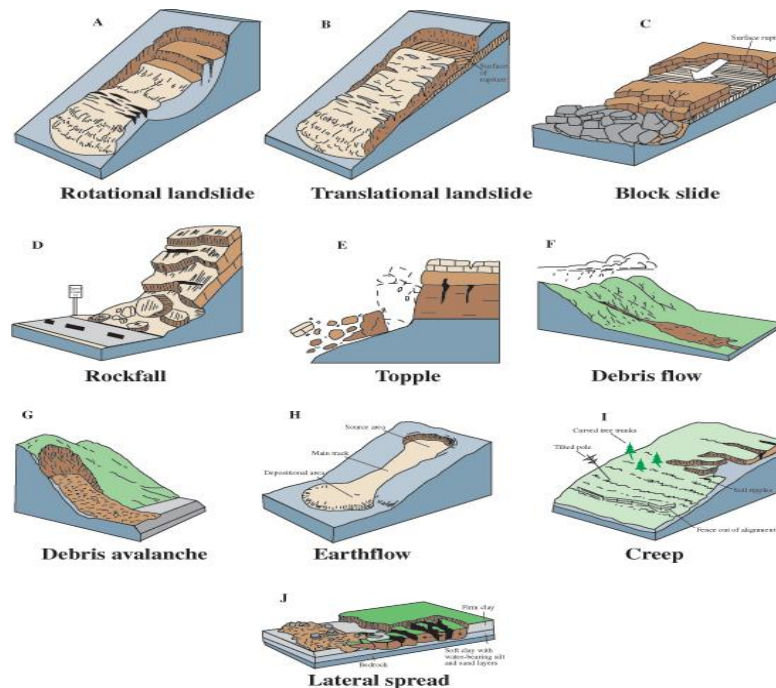


Figure 5. Landslide types (USGS, 2004)

The landslide inventory does not have landslides type differentiation. It makes this study considers that characteristics of each type in the analysis are similar. As result, there is no differentiation of events in model building process. According to Chacon et al. (2006), in regional scale assessment it is still acceptable as the required accuracy is not high, and the map is generally not aimed as an accurate predictive medium.

2.2. Influencing factors

Influencing factors (also called variables) are the causes of slope proneness in any certain area, which influence landslide to take place. According to [Ayalew et al. \(2005\)](#), in a GIS-based analysis, to choose influencing factors or variables one has to be sure that the selected factors are operational (have a certain degree of affinity with landslides), complete (fairly represented all over the study area), non-uniform (varies spatially), and measurable (have measurement level).

Practically, [Soeters and Van Westen \(1996\)](#) observed that there are five dataset groups that are commonly used to assess landslide susceptibility:

- Geomorphology, for instances geomorphological sub unit, land form
- Topography or morphology, for instances digital terrain model and its derivation (slope, aspect, curvature)
- Geology or engineering geology, for instances lithology, material of sequences
- Land use
- Hydrology, for instances proximity to drainage, catchment areas, temperature, evaporation, rainfall

Another classification, as proposed by [Cruden and Varnes \(1996\)](#), considered landslide influencing factors into four big groups:

- Geological factors such as weak material, sensitive material, sheared material, jointed or fissured material, aversely oriented structural discontinuity, weathered material;
- Morphological factors such as slope, angle, uplift (tectonic or volcanic), erosion (fluvial, glacial, wave), rebound;
- Physical factors such as intense rainfall, rapid snow melt, earthquakes, rapid draw down floods and tidal, volcanic eruptions;
- Human-induced factors such as excavation of slope, land use, land use/cover change (e.g., deforestation), loading, irrigation, mining.

[Cruden and Varnes \(1996\)](#) also regrouped factors into preparatory and triggering factors. Preparatory factors are usual causal factors as mentioned before. If the causes happen as the events that initiate landslides, they are called triggering factors. Heavy or prolonged rainfall, seismic activities such as volcano eruption and earthquake could be categorized as triggering factors. Normally landslides can have many causes but can only have one trigger.

The usage of factors can vary according to the specific conditions of an area ([Jimenez-Peralvez, 2009](#)). The area in this study is mountainous (not flat), so the

availability of topography and morphology factors is important. Land use in the area is also heterogeneous, and there are many small rivers all over the area. As consequence, the factors related to human-induced and hydrology should be included.

Though not all related factors could be partaken because of unavailability matter, this study still employs some relevant factors that are scientifically important and universally used (Table 1):

- Slope, aspect, and curvature as the factors of topographical group;
- Topographical shape (land form) as a factor of geomorphologic group;
- Land use and distance to road as the factors of human-induced group;
- Lithology as a factor of geology group;
- Distance to river as a factor of hydrology group.

Table 1. Influencing factors in the study

| No | Group | Factors | Source |
|----|----------------|---------------------|--|
| 1 | Topographic | Slope | DEM extracted from the height information of Topographic Map at the scale of 1:25.000 (25K). Source: National Coordinating Agency for Surveys and Mapping (Bakosurtanal) |
| 2 | | Aspect | DEM extracted from the height information of Topographic Map 25K. Source: Bakosurtanal |
| 3 | | Curvature | SRTM 30m |
| 4 | Geomorphologic | Topographical shape | SRTM 30m |
| 5 | Geology | Lithology | Geology Map 100K Source: Indonesian Geological Research and Development Center |
| 6 | Human-induced | Land use | Land use layer from Topographic Map 25K Source: Bakosurtanal |
| 7 | | Distance to road | Road layer from Topographic Map 25K Source: Bakosurtanal |
| 8 | Hydrology | Distance to river | River layer from Topographic Map 25K Source: Bakosurtanal |

Slope is one of the most important factors and should be available. Almost all researches use this factor. Slope stability (or failure) is considered as the main cause that drives landslides. Because slope is derived from elevation, this study does not include elevation as its variable.

Lithology, same as slope, is the most universal determinant factor in most stability studies. By having lithology, general geologic conditions could be assessed as each class in a lithology map reflects unique material characteristics. Although lithology has the lowest scale (100K: the biggest available scale of Indonesian Geological Map in the study area) that could affect the discriminatory power, it is better to keep using it. The study area is located nearby Mount Lawu and much influenced by Lawu Land System. This situation makes the area has unique lithology condition.

Land use and distance to road are the most commonly used human-induced factors. Both are often used to assess susceptibility in the areas that have a lot of settlements. By having them in the analysis, this study also calculates the factual influence of human activities.

There are some other relevant factors such as soil type and distance to fault. As mentioned before, unfortunately there are no proper datasets regarding these factors available in the study area. Another missing factor is rainfall, a factor that is related with precipitation and often triggers landslides to occur. It is an important variable because, as shown in the landslide records database ([Annex 1](#)), landslides occurred more frequent in the rainy season from September to March, after heavy or prolonged rainfall. Without rainfall data, to involve the precipitation influence, this study still can use aspect as an indirect rainfall indicator. But, still the absence of rainfall makes this study cannot involve triggering factors to determine susceptibility, a condition that is also shown by other researches such as [Wati \(2010\)](#), [Hadmoko et al. \(2010\)](#), [Wahono \(2010\)](#), [Ayalew and Yamagishi \(2005\)](#), [Gomez and Kavzoglu \(2005\)](#).

In spatial modeling, it is generally true that the more factor the better model. Every single contribution of potential factors could be calculated to build the model. Nevertheless, the quantity is not always the case. Statistically, there are other conditions such as correlation and significance among factors that influence the quality. According to [Soeters and Westen \(1996\)](#), it may also not really necessary to include all causal variables because in nature landslides are actually caused only by several certain factors that being dominant in the area of interest. According to [Kristijono et al. \(2008\)](#), which assessed the December 2007's landslide events in Tawangmangu Subdistrict, land use and geology presumably behaved as the main factors.

During the period of occurrence, the influencing factors are considered constant or under the same condition throughout the study area and through time (i.e., not

dependent on time). Because of no temporal engagement, this study is a non-temporal assessment.

The factors have two forms: discrete (nominal) and continuous. Lithology, land use and topographical shape are discrete variables whereas slope, aspect, curvature, distance to road and distance to river are continuous variables. As the way it is, heuristic method categorizes all factors into classes. Meanwhile, in data-driven methods, discrete variables are still categorized into classes but to maintain continuity, there is no categorization applied toward continuous variables ([Van Den Eeckhaut et al., 2006](#); [Lei and Jing-feng, 2007](#)).

The following subsections describe preprocessing stages. Although the factors are multi scale and multi format, the final form of each factor is uniform: raster grid 30m following SRTM's grid size, WGS84 datum, and UTM 49S map projection. By using 30m grid, this study wants to keep the usage of high resolution "power" (as given by slope, curvature, topographical shape, aspect and land use) instead of reducing the grid size to approach lower resolution measure, which only belongs to lithology.

2.2.1. Slope

Slope is an angle between a location in the surface and the horizon. It could be expressed in degree or percentage at which 45° is equal with 100%. [Dai et al. \(2001\)](#) stated that slope or slope gradient is an essential influencing factor because foreknown that slope failure (instability) becomes the main reason of mass movement. Slope controls driving force (shear stress) and resisting force (shear strength) in an area. [Wati \(2010\)](#) mentioned that the higher the slope, the higher the shear stress, and so, the higher the chance of failure. It means landslides tend to occur more frequent on steeper slopes ([Gomez and Kavzoglu, 2005](#)).

Slope is derived from the raster interpolated/DEM extracted from the height information of 25K topographic map contour (12,5m interval and 4m accuracy). According to [Land Info \(2010\)](#), a DEM generated from 24K topographical map would have 1/3 arc second spatial resolution. It is better than STRM 30m that has 1 arc second spatial resolution.

Then, that raster grid file was converted into slope by assigning percentage as divider. The result indicates that the lower the slope value, the flatter the terrain; the higher the slope value, the steeper the terrain. Afterwards, in heuristic method, slope was reclassified into several categories using a classification schema from Research Center for Disaster, [PSBA-UGM \(2001\)](#). The classification categorizes slopes into five classes according to the gradients that represent terrain

morphology: gently sloping (0–8%), undulating (>8–15%), moderately steep (>30–45%), steep (>30–45%) and very steep (>45%). Figure 6a illustrates the result. Table 2 shows that almost half of the area is occupied by steep and very steep slope, which preliminary indicates big chance for landslide to occur. For statistical and ANN, the continuous values from slope is going to be used in the process.

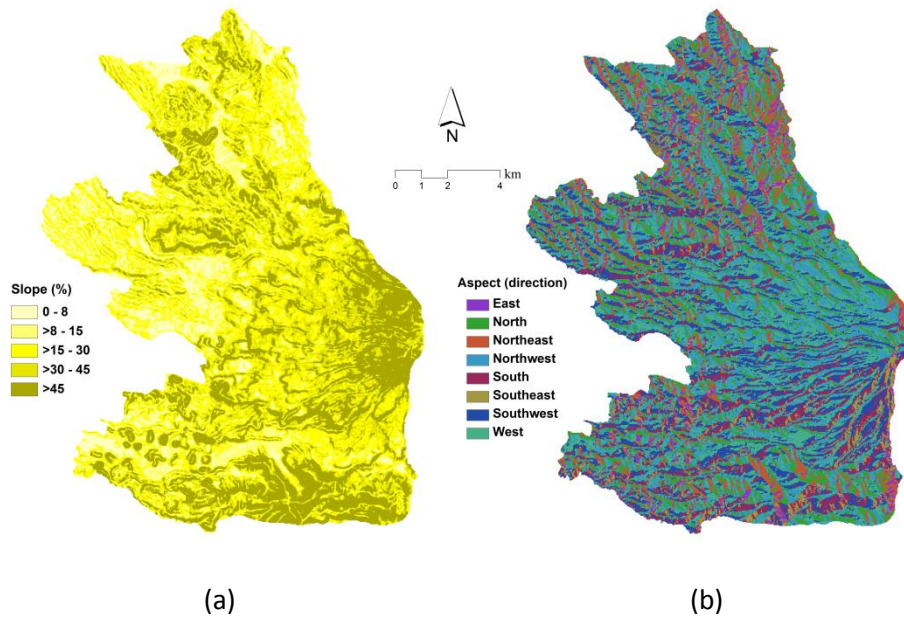


Figure 6. Categorization of (a) Slope and (b) Aspect

Table 2. Tabulation of slope and aspect class in the study area

| Factor | Class | Class name | Hectares | % |
|--------|--------|------------------|----------|-------|
| Slope | 0-8 | Gently sloping | 4606,01 | 26,38 |
| | >8-15 | Undulating | 1244,97 | 7,13 |
| | >15-30 | Moderately steep | 3172,97 | 18,17 |
| | >30-45 | Steep | 2188,81 | 12,54 |
| | >45 | Very steep | 6247,36 | 35,78 |
| Aspect | 1 | East | 703,55 | 4,04 |
| | 2 | North | 2619,98 | 15,05 |
| | 3 | Northeast | 1696,20 | 9,74 |
| | 4 | Northwest | 3370,96 | 19,36 |
| | 5 | South | 1786,00 | 10,26 |
| | 6 | Southeast | 744,85 | 4,28 |
| | 7 | Southwest | 3157,36 | 18,13 |
| | 8 | West | 3334,22 | 19,15 |

2.2.2. Aspect

Aspect is expressed as horizontal direction to which a mountain or hill slope faces. Usually it is expressed clockwise, from 0° to 360° . Aspect can influence a region's local climate (microclimate) due to the sun's ray incident to the faces. For instance, as the sun's rays are in the west at the hottest time of day in the afternoon, in most cases a west-facing slope will be warmer than a sheltered east-facing slope. Because of that, aspect affects structural, soil and organic (e.g., vegetation distribution) of slope faces. Aspect also indirectly indicates a precipitation effect from rainfall as if rainfall has a pronounced directional component by influence of a prevailing wind, the amount of rainfall falling on a slope may vary depending on its aspect (Wieczorek et al., 1997). Hence, some faces become more stable than others. In short, it could be said that aspect has indirect influence on landsliding, related to other factors such as soil moisturizer, weathering and rainfall.

ArcGIS with its spatial analysis tool was applied to derive aspect. The aspect image shows eight categories excluding flat that are going to be used in heuristic method. Figure 6b and Table 2 shows the result. As so with slope, for statistical and ANN, no classification implemented so the original value from aspect is going to be used in the process.

2.2.3. Topographical shape

It has already known that land form influences landslide occurrence. Hadmoko et al. (2010), reported that denudational and structural hill were more susceptible than plain/flat area (e.g., alluvial plain or flood plain). Another research, from Caniani et al. (2008), noted that hardly landslide happened in peak, flat and pit. Contrariwise, landslides were more often to occur in hillside.

The topographical shape is actually a specific surface land form, which is created automatically only in IDRISI software. The material, an ASCII file from SRTM 30m, was then converted into IDRISI raster format. The software classified the shape into 11 topographic features based on polynomial surface fitting of each 3x3 pixel area (Eastman, 2006). Figure 7a shows the result. Table 3 tabulates each class area.

2.2.4. Curvature

Curvature is the shape of surface. This study considers that negative curvatures value represent concave, around zero ($-0.1 - 0.1$) curvatures value represent flat and positive curvatures value represent convex surface (Pradhan and Lee, 2010). Concave and convex surfaces of the earth are more influential in boosting landslide to occur. SRTM 30m is used to create aspect. It has to be converted into ASCII in

order to be processed. Then, after getting SRTM in raster grid, using spatial analysis facilities, curvature was created. The software uses fourth-order polynomial to calculate the area of 3x3 window. Figure 7b shows curvature categorization for heuristic method. Table 3 tabulates each class area. Data-driven methods use the original continuous value.

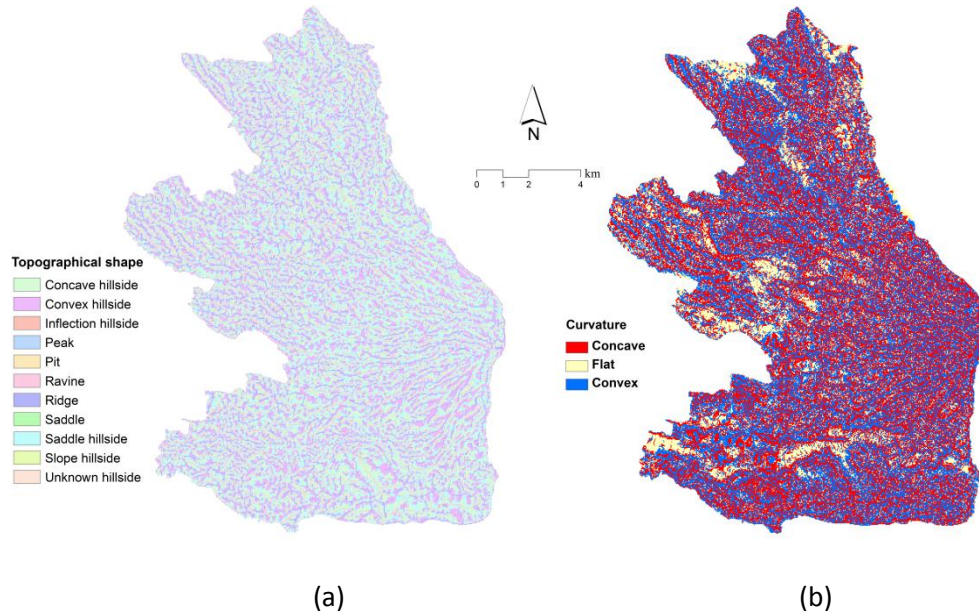


Figure 7. Categorization of (a) Topographical shape and (b) Curvature

Table 3. Tabulation of topographical shape and curvature class in the study area

| Factor | Class | Class name | Hectares | % |
|------------|-------|---------------------|----------|-------|
| Topo shape | 1 | Concave hillside | 4028,59 | 23,14 |
| | 2 | Convex hillside | 4355,88 | 25,01 |
| | 3 | Inflection hillside | 261,46 | 1,50 |
| | 4 | Peak | 0,59 | 0,003 |
| | 5 | Pit | 0,09 | 0,001 |
| | 6 | Ravine | 1772,55 | 10,18 |
| | 7 | Ridge | 1794,09 | 10,30 |
| | 8 | Saddle | 0,74 | 0,004 |
| | 9 | Saddle hillside | 4975,82 | 28,57 |
| | 10 | Slope hillside | 0,09 | 0,001 |
| | 11 | Unknown hillside | 223,40 | 1,28 |
| Curvature | 1 | Concave | 7379,80 | 42,38 |
| | 2 | Flat | 2769,82 | 15,91 |
| | 3 | Convex | 7263,68 | 41,71 |

2.2.5. Lithology

Lithology is a group of parent materials. In the study area, according to the geology map there are eight lithology classes (Table 4). These classes show the local geologic formations around Old and New Lawu Volcano, formed by volcanic activities in Pleistocene and Holocene period (Wati, 2010). Each geological unit has own lithological characteristic. Each lithology has different materials. Its relation with landslides is located on the slippery degree of the materials toward erosion. For instance, hard and massive rocks are already known generally resistant to erosion (Anbalagan and Singh, 2001). It means the more massive the material the more potent its resistance.

Below the classification of those formations (Wati, 2010):

- a. Lawu Lahar (Qlaa). This formation consists of andecite, basalt and minor fumice. Most of those minerals merge with volcanic sand. In the study area, Lawu Lahar formation spreads out in volcanic foot slope areas; it also forms several low hills.
- b. Condrodimuko Lava (Qvcl). This formation is formed by andesitic lava from Condrodimuko Crater. It spreads out to southwest from the peak.
- c. Lawu Volcanic Rock (Qvl). This formation is mostly composed by volcanic tuff and breccia inserted by andesitic lava. It is the largest formation in the area and extends out westward from the peak.
- d. Jabolarangan Lava (Qvjl). This formation encompasses andesitic lava with andesine, quartz, feldspar and minor hornblende from Mount Jabolarangan (the peak of Old Lawu Volcano).
- e. Sidoramping Lava (Qvsl). It contains dark grey andesitic lava from four old small mountains around Old Lawu (Mount Sidoramping, Mount Puncakdalang, Mount Kukusan and Mount Ngampiyungan). It is located in the southern part.
- f. Jabolarangan Breccia (Qvjb). It is formed by volcanic breccia intercalated by andesitic lava, mostly located in slope 30-50%.
- g. Wonosari Formation (Tmwl). This formation consists of reef limestone and calcarenite inserted by conglomeratic limestone and marl. It formed several cone-shaped low hills.
- h. Andecite (Tma). This formation is actually an intrusion rock with particular textures (porphyritic, subhedral, and has 0,5 – 1 meter in size). Tma contains mostly andesine, and then orthoclase, small portion of quartz and plagioclase microlite, as well as 30% volcanic glass.

Because the data is ready-to-use data, it is only needed to be converted into raster grid. [Figure 8a](#) depicts the formations.

2.2.6. Land use

Land use could indirectly affect slope stability. Vegetation cover, for example, influences hydrological processes because of the hydraulic conductivity effect ([Van Westen et al., 2008](#)). Vegetable garden or sparse vegetation in steep slope could increase the susceptibility because such vegetation root could not bind the soil if rain fall down. As result, soil erosion could easily happen. Building construction nearby hill, which involved cut and fill activities, could enlarge pressure causing slope instability. According to the existing land use map, land use types are classified into 11 classes ([Table 4](#)).

Land use distribution in the study area principally depends on topographic condition. Lower part is intensively occupied for settlement area and agricultural activities (vegetable garden, paddy field, or mixed garden). But, in some undulating and hilly slope area, small village and agricultural activities are also found. Upper parts of Mount Lawu are dominated by dense protected forest. Bush and shrub are distributed everywhere mostly in between forest and agricultural field or settlement. The land use map then converted into raster grid format. [Figure 8b](#) shows the result.

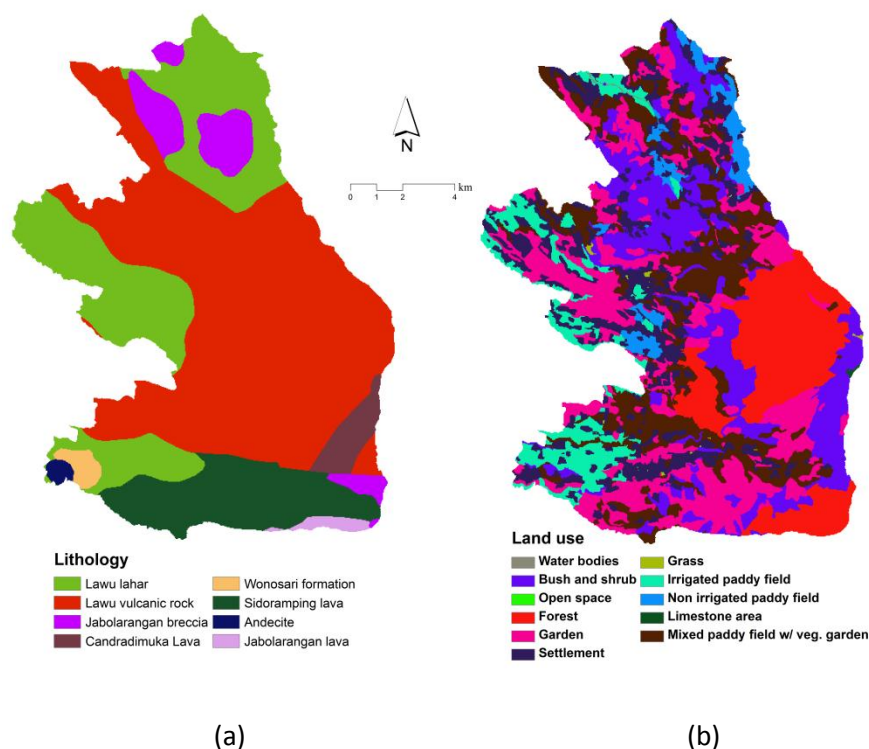


Figure 8. Categorization of (a) Lithology and (b) Land use

Table 4. Tabulation of lithology and land use class in the study area

| Factor | Class | Class name | Hectares | % |
|-----------|-------|----------------------------------|----------|-------|
| Lithology | 1 | Andecite | 77,84 | 0,45 |
| | 2 | Candradimuka Lava | 422,81 | 2,43 |
| | 3 | Jobolarangan Breccia | 1039,68 | 5,97 |
| | 4 | Jobolarangan Lava | 132,68 | 0,76 |
| | 5 | Lawu Lahar | 4537,24 | 26,06 |
| | 6 | Lawu volcanic rock | 9013,74 | 51,76 |
| | 7 | Sidoramping lava | 2026,20 | 11,64 |
| | 8 | Wonosari Formation | 163,13 | 0,94 |
| Land use | 1 | Water bodies | 10,27 | 0,06 |
| | 2 | Bush and Shrub | 3175,05 | 18,23 |
| | 3 | Open space | 1,41 | 0,01 |
| | 4 | Forest | 2701,27 | 15,51 |
| | 5 | Garden | 3903,75 | 22,42 |
| | 6 | Settlement | 2603,20 | 14,95 |
| | 7 | Grass | 23,41 | 0,13 |
| | 8 | Irrigation paddy field | 1229,43 | 7,06 |
| | 9 | Non Irrigation paddy field | 572,90 | 3,29 |
| | 10 | Limestone Area | 10,15 | 0,06 |
| | 11 | Mixed paddy field w/ veg. garden | 3182,46 | 18,28 |

2.2.7. Distance to road

Road constructions in hilly or mountainous area are sites on anthropologically induced instability (Ayalew and Yamagishi, 2005). Road segments—according to hydrological perspective—may act as the barrier, sink or corridor of water flow that affect slope stability. Due to this reason, easy to find that landslides occurred above roads or nearby roads. The study area has more road networks in the western part rather than the eastern part where Mount Lawu exists.

To classify road network proximity, buffer analysis was applied. This study uses multiplied distance. The first 100 meters is assigned as the first class, the next 200 meters as the second class and so forth (Figure 9a). For accommodating data driven methods, distance analysis was used to assign values continuously. Table 5 shows distance to road classes' tabulation.

2.2.8. Distance to river

Rivers or streams drainage may induce river bank failure because of slope undercutting and stream erosion. There are a lot of small rivers in the study area. Two of them are the River Suwaluh and River Gembong that flow into the River

Bengawan Solo, the longest river in Java Island. With constant of distance 50 meters, multiple buffer analysis was applied to categorize this factor into classes (Figure 9b). For the purpose of data-driven methods, distance analysis was applied to create continuous values. Table 5 shows distance to river classes' tabulation.

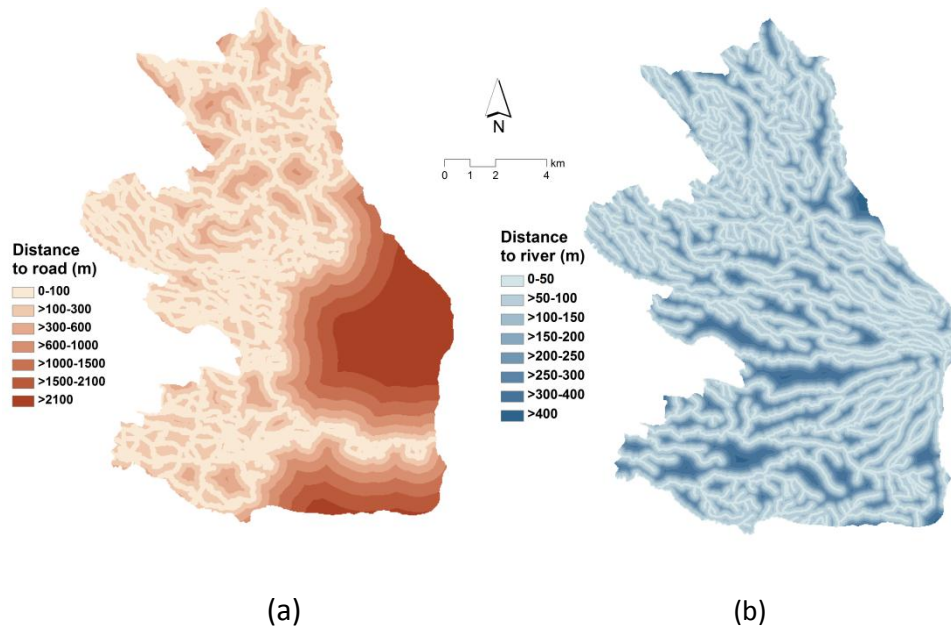


Figure 9. Categorization of (a) Distance to road and (b) Distance to river

Table 5. Tabulation of distance to road and distance to river class

| Dist. to road | Class | Buffer distance (m) | Hectares | % |
|---------------|-------|---------------------|----------|-------|
| | 1 | 0-100 | 6605,16 | 37,93 |
| | 2 | >100-300 | 4767,16 | 27,38 |
| | 3 | >300-600 | 2113,24 | 12,14 |
| | 4 | >600-1000 | 1308,12 | 7,51 |
| | 5 | >1000-1500 | 1342,37 | 7,71 |
| | 6 | >1500-2100 | 1068,83 | 6,14 |
| | 7 | >2100 | 208,42 | 1,20 |
| Dist.to river | 1 | 0-50 | 4400,50 | 25,27 |
| | 2 | >50-100 | 7071,46 | 40,61 |
| | 3 | >100-150 | 2184,28 | 12,54 |
| | 4 | >150-200 | 1448,22 | 8,32 |
| | 5 | >200-250 | 935,26 | 5,37 |
| | 6 | >250-300 | 913,68 | 5,25 |
| | 7 | >300-400 | 422,65 | 2,43 |
| | 8 | >400 | 37,26 | 0,21 |

CHAPTER 3 METHODOLOGY

This chapter elaborates the methods used to conduct the analyses and build the landslide susceptibility models.

3.1. Knowledge-based: heuristic method

To assess landslide susceptibility using heuristic method there are two common approaches: direct and indirect method. The first method applies direct assessment to interpret susceptibility in the field on the basis of detailed maps (geomorphological maps, for instance). The latter does not assess directly in the field, but via data integration techniques in any particular software. This study uses indirect heuristic method.

As discussed in Chapter 1, heuristic approach is a semi-qualitative method. Besides uses knowledge properties (expert opinions, previous research results or literature recommendations), it also uses index-based procedures such as simple ranking and rating or analytical hierarchy process (AHP) in assigning weight and creating model. Concerning this, scoring and weighting process are crucial to build a model in heuristic approach.

3.1.1. Scoring

A scoring assessment is assigned to score every class. One class will have one score. Although there are many ways to rank each class, for most of the factors, this study uses scoring system from 1 to 5. Score 1 represents the lowest value and 5 represents the highest value (Table 6). Low values reflect low contribution.

Slope is scored based on its gradient classification. As discussed in Chapter 2, the higher slope the bigger landslide tendency to occur. As result, the lowest class gradient (0-8%) gains the lowest score and the highest class gradient (>45%) gains the highest score. Aspect in this study is scored based on the general characteristic in the equatorial area that the western or northern part of slope is commonly drier than others. Eight aspect classes are then categorized into five scored classes.

Curvature only has three classes. This study uses two values, 1 and 5, to score the classes because concave and convex surface are considered having the same influential condition toward landslides occurrence. Therefore, score 1 is assigned for the flat areas whereas score 5 for the concave and convex areas. In assigning topographical shape score, the surface land form such as flat and peak gain the lowest grade because landslides occur very sparsely on that area (Caniani et al., 2008). As contrary, according to the same research, the areas having most frequent

landslides are saddle hillside, convex hillside and concave hillside. Eleven classes of topographical shape are then categorized into five scored classes.

Table 6. Score for each class

| Influencing factor | Class | Score |
|--------------------|--|-------|
| Slope | 0 – 8% (gently sloping) | 1 |
| | >8 – 15% (undulating) | 2 |
| | >15 – 30% (moderately steep) | 3 |
| | 30% - 45% (steep) | 4 |
| | >45% (very steep) | 5 |
| Aspect | North (N), West (W), Northwest (NW) | 1 |
| | Northeast (NE) | 2 |
| | East (E), Southwest (SW) | 3 |
| | Southeast (SE) | 4 |
| | South (S) | 5 |
| Curvature | Concave | 5 |
| | Flat | 1 |
| | Convex | 5 |
| Topo. shape | Peak (Pk), Pit (Pt) | 1 |
| | Saddle (S), slope hillside (Sl Hs), unknown hillside (U Hs) | 2 |
| | Inflection hillside (I Hs) | 3 |
| | Ravine (Rv), Ridge (Rg) | 4 |
| | Concave hillside (Cv HS), convex hillside (Cx Hs), saddle hillside (S Hs) | 5 |
| Lithology | Andecite (Tma) | 1 |
| | Candradimuka Lava (Qvcl), Sidoramping Lava (Qvsl), Jabolarangan Lava (QvjI), Wonosari formation (Twml) | 2 |
| | Jobolarangan Breccia (Qvjb) | 3 |
| | Lawu volcanic rock (Qvl) | 4 |
| | Lawu Lahar (Qlla) | 5 |
| Land use | Water bodies (WB), Limestone area (LA) | 1 |
| | Bush and Shrub (BS), Open space (OS), Grass (Gr) | 2 |
| | Irrigated paddy field (IPF), Non Irrigated paddy field (NIPF) | 3 |
| | Garden (Gd) | 4 |
| | Settlement (S), Mixed paddy field with vegetable garden (MFP) | 5 |
| Dist. to road | >1000 m | 1 |
| | >600 – 1000 m | 2 |
| | >300 – 600 m | 3 |
| | >100 – 300 m | 4 |
| | 0 – 100 m | 5 |
| Dist. to river | >200 m | 1 |
| | >150 – 200 m | 2 |
| | >100 – 150 m | 3 |
| | >50 – 100 m | 4 |
| | 0 – 50 m | 5 |

A key concept to assign scores to lithology factor is resistance toward erosion. The resistance is determined by massiveness, or in the other side, brittleness. In this case, according to [Wati \(2010\)](#), andecite as massive rocks gain the lowest score. Jabolarangan breccias are more brittle than lava formations (Jabolarangan Lava,

Sidoramping Lava, Candradimuka Lava) and Wonosari formation, due to the high amount of sand fragment. Lawu Lahar and Lawu volcanic rock that has volcanic sandstone (Kristijono et al., 2008) is more susceptible to landslide so both get high score.

Regarding land use, water bodies (lake), limestone area, and forest gain the lowest score; because lake area is normally flat, limestone area contains massive rocks, and forest has dense vegetation that could prevent erosion (Hadmoko et al., 2010). Garden is more susceptible than grass because of the lower pressure of grass. Relevant with the previous discussion in Subsection 2.2.5, settlement and mixed paddy field with vegetable garden (dryland agriculture) have the highest score.

As showed by Jadda et al. (2009), Ayalew and Yamagishi (2005), the scores for distance to road and distance to river are determined based on the proximity without considering road types. The possibility for landslides to occur becomes bigger nearby the feature. It causes the closer the buffer area to the feature, the higher the score.

3.1.2. Weighting process using SMCE ILWIS

Another important part in heuristic method is weighting process. Hadmoko et al. (2010), directly assigned weight for every contributing factor based on a checklist and give them a rank. To assign weight, this study does not use that method but uses Spatial Multi Criteria Evaluation (SMCE). SMCE is a module in ILWIS software that facilitates users in doing multi criteria evaluation in a spatial way. All datasets in advance must be converted into ILWIS raster format and surely have the same georeferences (coordinates, borders, and number of pixels).

The first step to apply SMCE is creating a criteria tree. The criteria tree consists of root (main goal or final map) and leafs (criteria or

influencing factors map). The factors cannot be straight off usable in weighting process unless had been standardized. The

standardization has aims in order to make the factors comparable. This study uses maximum standardization by dividing them by the maximum value. Afterwards, to assign weight the software provides three tools: direct, pair-wise and rank ordering

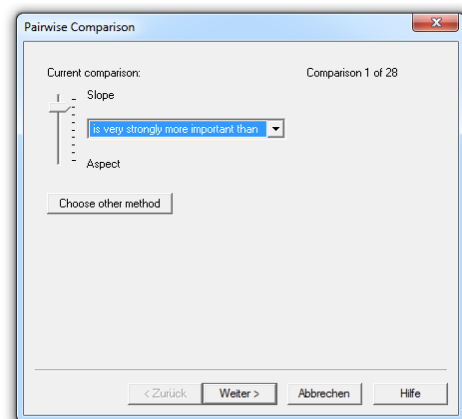


Figure 10. Pair-wise comparison tool in ILWIS

comparison. This study uses pair wise method that originally comes from analytical hierarchy process (AHP), a decision support method proposed by Saaty (1980).

Pair-wise method calculates the magnitude (importance) based on an appraisal to every unique pair of two factors qualitatively (Figure 10). To locate the factors according to a scale of importance (Table 7), this study refers to the previous researches that had used the same influencing factors and had given the significance value to each factor, for instance Hadmoko et al., 2010; Wati, 2010; Muhiyuddin et al., 2004; Ruff and Czurda, 2009. Slope, for example, was given higher weight than others; so this study adopts that result by placing slope more important than others.

Table 7. Scale of importance

| Intensity | Definition |
|-----------|--------------------------------------|
| 1 | Is extremely more important than |
| 2 | Is very strongly more important than |
| 3 | Is strongly more important than |
| 4 | Is moderately more important than |
| 5 | Is equally important as |
| 6 | Is moderately less important than |
| 7 | Is strongly less important than |
| 8 | Is very strongly less important than |
| 9 | Is extremely less important than |

However, still subjective opinion is needed to adjust exactly in which scale the degree of importance of one factor must be located comparatively with others, because there are nine detail options. There are 28 comparisons and to keep the quality, the software provides consistency value. The comparison process is considered having inconsistency if the value is bigger than 0.1. Weight for all factors is the final result. The bigger the weight value the bigger the contribution. The cumulative weight for all factors is equal with 1.

3.1.3. Heuristic modeling

A map from heuristic method is mathematically presented as:

$$LSI_h = (W_1 * X_1) + (W_2 * X_2) + \dots + (W_n * X_n) \quad (\text{Eq.1})$$

Where:

LSI_h = Landslide susceptibility index map from heuristic method

$W_{1...n}$ = Weight of influencing factor

$X_{1...n}$ = Predictor variable/influencing factor

ArcGIS raster calculator was used to generate the landslide susceptibility index (LSI) map by giving weights to each factor and calculating the model using Eq. 1. Afterward, LSI was classified into five susceptibility classes, i.e., very low, low, moderate, high and very high, to acquire land susceptibility map (LSM). Figure 11 illustrates the work flow.

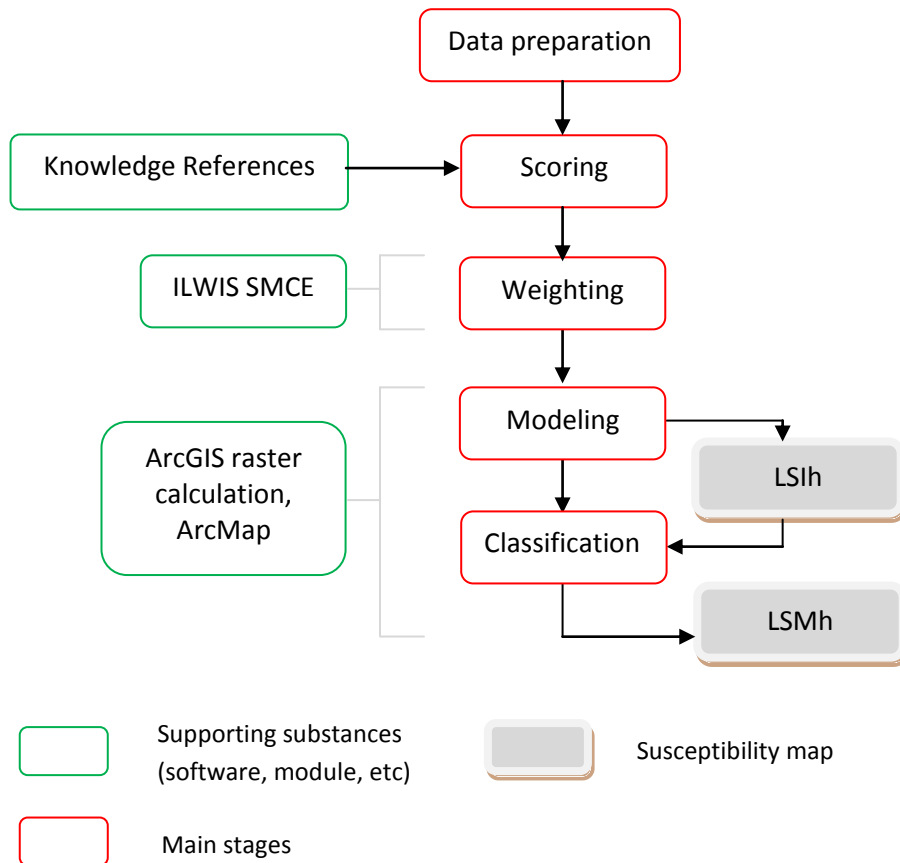


Figure 11. Diagram of heuristic method

To classify data, there are several methods. Four most common are natural breaks, equal interval, quantile, and standard deviation. By looking into data histogram, the most appropriate method can be decided. According to Ayalew and Yamagishi (2005), standard deviation method, which uses mean and standard deviation to break the class, is reliable to classify datasets that have normal distribution. Using this method, contrast of values above and below the mean is readily seen. Natural breaks (Jenks) is preferable if dataset does not show normal distribution, since this method can optimally assign data to classes such that the variances within all classes are minimized, and the variances among classes are maximized; so it can identify real classes inside the data. Equal interval method, which emphasizes the same interval size, is good to compare time series data, but it does not show real data characteristic. Quantile method that uses the same number to assign each

class member is also good for time series data, but it tends to place widely different value in the same class so the classification does not show real data characteristic either.

3.2. Data-driven: statistical method

Statistical method in landslide susceptibility is actually about a quantitative analysis based on statistical analysis of factors and occurrences. Inside this concept, the relationship among influencing factors and between them and landslide occurrences is important to assess.

This study applies some processes to employ statistical method. First, it applies two bivariate assessments: pixel-based landslide density and weight of evidence (WoE). Generally, both aim to understand landslides distribution in every class of influencing factors. But, as landslide density gives the conditional probability that is going to be used as values for discrete variables, WoE gives weights that could be used to assess the relationship between landslide and a particular class ([Barbieri and Cambuli, 2009](#)).

Second, to have clearer understanding about datasets, this study conducts some explanatory analyses: descriptive analysis and Q-Q plots, bivariate pearson correlations and collinearity analysis. Q-Q plots is aimed to assess normality test graphically. The bivariate pearson correlation and collinearity show the correlation between predictor variables. Finally, this study applies binary logistic regression to build statistical model. The next following sections describe the processes.

3.2.1. Landslide density calculation

Landslide density analysis plays an important role in landslide studies because it shows clear representation about occurrences in a certain factor class. The representation roughly reflects the indication of which class that more sensitive than others. Before assessing density, it is necessary to create landslide inventory in the polygon format. Each point was buffered 50 meters with respect to the shortest used distance in distance to river factor. The process does not affect the quality because all points have the same treatment. Afterwards, using cross facilities in ILWIS, landslide inventory was overlaid with the factors to get information about which pixels inside the class are landslide pixels. This process needs separation for landslide pixel and non-landslide pixels by giving attribute 0 for non-landslide and 1 for landslide pixels. After gaining the crossed table, the table needs to be modified to make it easy to read.

Landslide density can simply be defined as number of landslide pixels divided by the total number of pixels. To calculate landslide density within each class, the following formula is used (Lei and Jing-feng, 2006; Ayalew and Yamagishi, 2005):

$$Density = \frac{(Lpix_i / Tpix_i)}{\sum_{i=1}^n (Lpix_i / Tpix_i)} \quad (Eq. 2)$$

Where:

$Lpix_i$ = landslide pixel number of i class in a certain factor

$Tpix_i$ = total pixel number of i class in a certain factor

3.2.2. Weight of evidence assessment

Weight of Evidence (WoE) method is first introduced by Bonham-Carter (1994) to assess mineral potential mapping. Nowadays, WoE is also implemented to assess landslide susceptibility (Lee et al., 2002; Neuhaser and Terhorst, 2007). This study uses this method to assess the correlation between a class and landslide occurrence. The idea of this method is originated from Bayesian probability using landslides presence and absence in a class. This method gives positive and negative weight of evidence ($W_i +$ and $W_i -$) assigned to each class in each factor. $W_i +$ is used to indicate the importance of presence, whereas $W_i -$ is used to indicate the importance of absence. By subtracting $W_i +$ with $W_i -$, contrast (C) is gained as a basis to assess the spatial association between each factor class and landslides. Below the formulas to calculate weights (Barbieri and Cambuli, 2009).

$$W_i + = \ln \frac{Lpix_i / TLpix}{NLpix_i / TNLpix} \quad (Eq. 3)$$

$$W_i - = \ln \frac{Lpix_{others} / TLpix}{NLpix_{others} / TNLpix} \quad (Eq. 4)$$

Where:

$W_i +$ = Positive weight

$W_i -$ = Negative weight

$Lpix_i$ = Number of landslide pixel in i class

$TLpix$ = Total number of landslide pixel (according to each factor)

$NLpix_i$ = Number of non-landslide pixel in i class

$TNLpix$ = Total number of non-landslide pixel (according to each factor)

$Lpix_{others}$ = Number of landslide pixel in the other classes

$NLpix_{others}$ = Number of non-landslide pixel in the other classes

3.2.3. Logistic regression modeling

Logistic regression is a generalized linear statistical model that predicts the probability using a binary response (0 and 1 or true and false) and multicovariates ([Hosmer and Lemeshow, 2000](#)). The probability is fitted into a sigmoid logistic curve. Regarding to landslide susceptibility assessment, logistic regression aim is to find the best fitting model to describe relationship between the landslide (as a response variable) presence (1) and the absence (0) and influencing factors (as predictor variables). As all influencing factors are used in one-time analysis, this method is categorized as multivariate analysis.

Statistical logistic regression is applicable in landslide susceptibility assessment as the usage of binary response is fit with landslide situation (occurred and not occurred). It also could manage both continuous and discrete variable, so the subjective discretization of continuous variables could be avoided.

In logistic regression the relationship among predictor variables and response variable can be expressed as below:

$$\text{Pr}(\text{event}) = 1/(1+e^{-z}) \quad (\text{Eq. 5})$$

Where:

Pr (event) = the estimated probability of landslide occurrence (varies from 0 to 1: nearby 0 reflects low and near 1 reflects high probability).
 e^{-z} = exponential function, where e is a number (approximately 2.718281828)
and z = the linear combination expressed as:

$$z = B_0 + B_1X_1 + B_2X_2 + \dots + B_nX_n \quad (\text{Eq. 6})$$

Where B_0 is the intercept; B_1, B_2, \dots, B_n are the coefficient (or weight) for each predictor variable indicating its contribution; X_1, X_2, \dots, X_n are the predictor variables.

Each class of discrete predictor variables then is given value from its density. This process can solve the problem about how to assign numeric value for discrete variables that are originally nominal data. According to [Lei and Jing-feng \(2006\)](#) and [Carrara \(1983\)](#), this process is beneficial as it allows the consideration about the so-called “previous knowledge” of landslide susceptibility.

In the prediction process, training dataset size of response variable is important because it determines the resulted model. One of the recommendations is to use the equal number size of landslide and non-landslide pixel ([Dai and Lee, 2002](#);

[Ayalew and Yamagishi, 2006](#)). This study picks the response variables in two ways. First, takes all landslide pixels but randomly selects the non-landslide pixels. Second, still takes all landslide pixels but selects non landslide pixel smoothly to the whole area, also in equal proportion between landslide and non-landslide pixels. Each withdrawal was done three times to get the best result. This approach gives opportunity to choose the best datasets based on model summary and overall percentage correct.

Logistic regression analysis is conducted in PASW software. Landslide inventory and all influencing factors must be converted from grid raster format into ASCII file (.txt). It is also necessary to do cleaning process, because the ASCII files from conversion still have original header information and a blank area value (-9999) that should be omitted. At the same time, the file must be restructured to order variable values in one single column.

Basically, there are three forms of logistic regression module: enter, forward inclusion and backward elimination. In the first module, all predictor variables are directly calculated in one step whereas in the second, all predictor variables are initially excluded and then some are included in the next steps until the requirements are achieved ([García-Rodríguez, et al., 2008](#)). This study uses the latter type: backward elimination (Backward Likelihood Ratio) approach to run logistic regression analysis. In this approach, the software predicts the probability using all predictor variables at the initial iteration, and then after several steps the final result shows the remaining variables that fulfill the significance requirement (maximum likelihood-ratio). It becomes an advantage: there are elimination and selection during the process, so the analysis can give the variables that are statistically important to build the model.

The result also gives intercept and the coefficient for each predictor. Using those values, [Eq. 5](#) and [6](#) were calculated using raster calculator ArcGIS to build the landslide susceptibility index map. Similar with the heuristic method, the index map was classified into classes by considering the distribution. [Figure 12](#) illustrates the work flow.

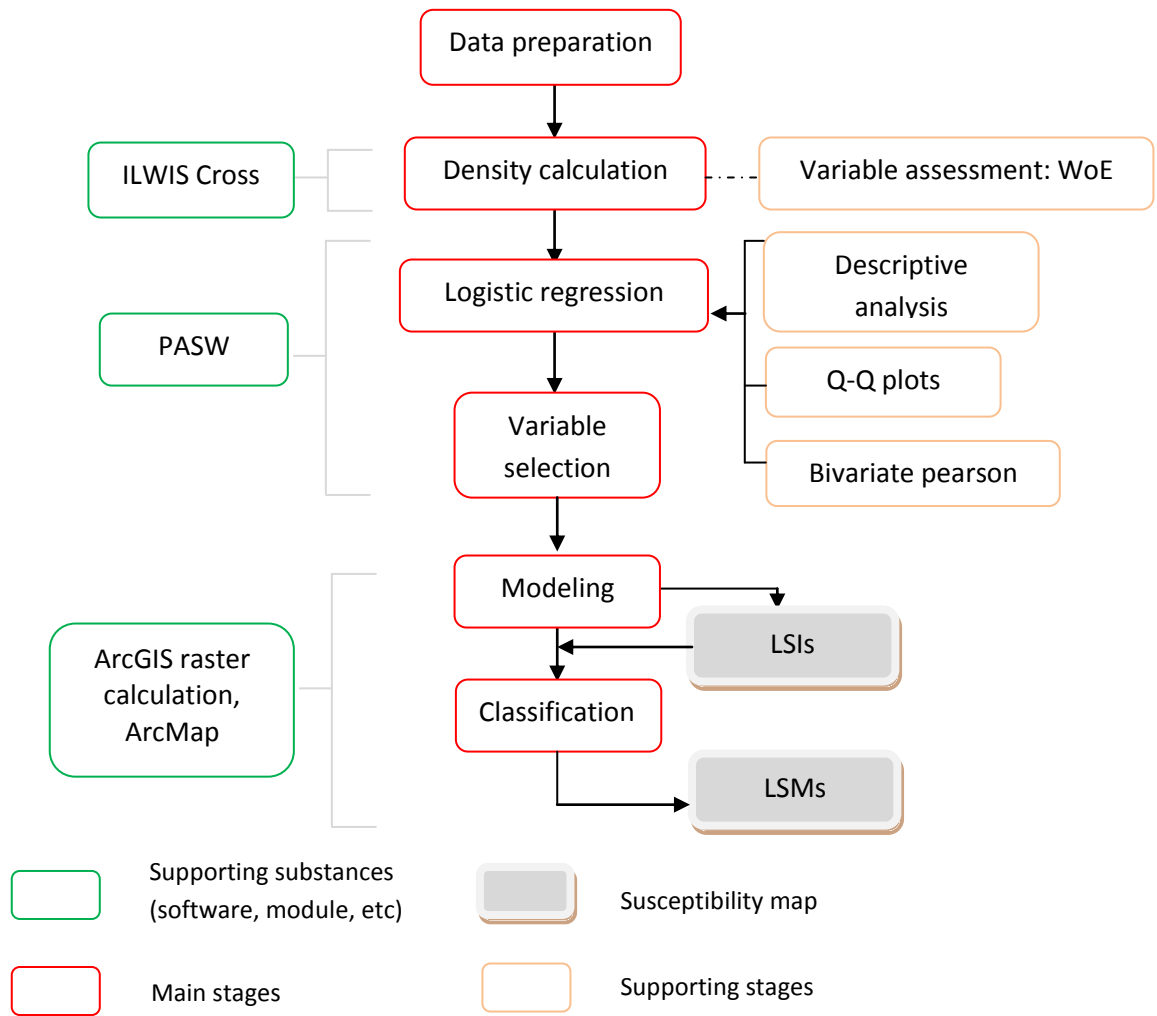


Figure 12. Diagram of statistical method

3.3. Data-driven: artificial neural network

Artificial neural network is a computational model that attempts to mimic biological neural networks or human brain mechanism in making prediction (Gomez and Kavzoglu, 2005). ANN is an adaptive model. It can learn or update the system internal representation as responses to the stimuli in iteration processes, so that the performance of a specific task is improved. Its learning process is function of learning algorithm that can define how network synaptic weights (interneuron connection strengths) are adjusted between successive training cycles. The network is outlined as layers and interconnection (Figure 13).

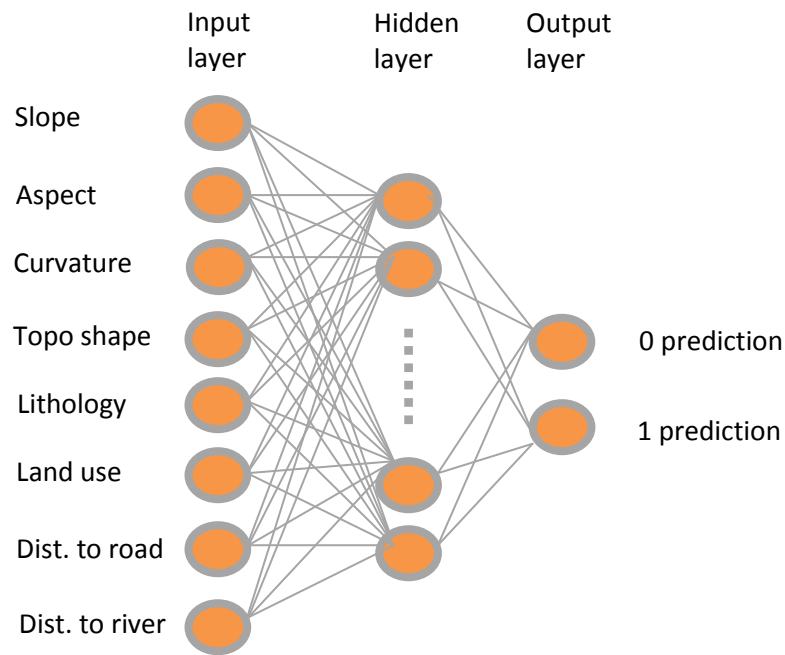


Figure 13. Neural network schema in landslide susceptibility assessment

The input layer contains the predictors (influencing factors). The hidden layer contains unobservable nodes, or units whose values are some functions of the predictor given by the process. The output layer contains responses. Each output unit is some function of the hidden units. In neural network procedures, the form of the function depends in part upon the network type and in part upon user-controllable specifications ([SPSS Technical Support, 2010](#)).

There are two common ANN architecture or topology viz. feed-forward and recurrent neural network ([Rios, 2010](#)). In feed-forward architecture, connections in a network flow forward from input layers to output layers without any feedback loops whereas there are loops in a recurrent neural network. This study uses feed-forward Multi-layer Perceptron (MLP).

MLP consists of multiple layers of nodes. One layer is connected to the next. MLP utilizes a supervised learning technique. As explained by [Rios \(2010\)](#), it means the network is trained by providing it with input and matching output patterns. The pattern can be created by an external teacher, or provided by the system/software (self-supervised). The technique itself is called back-propagation as an abbreviation of backwards propagation of error. In this propagation, the iteration has two basic movements ([Gomez and Kavzoglu, 2005](#)): forward movement that will present the input pattern and backward error correction movement that will deliver back the error from the output toward input via intermediate layers in order to adjust the synaptic weight and reduce the error. It means the process tries to find the model that has minimum error, or the error has achieved the acceptable level between the

desired and actual output values. This level can be set by iteration times or threshold value.

Regarding landslide susceptibility assessment, multi-layer perceptron (MLP) is more appropriate than single layer perceptron because of the existence of intermediate (or hidden) layers in between input layers and output layers. Hidden layers can accommodate non-linearity so the model can solve the nonlinear classification.

Basically, there are two phases in artificial neural network: training and testing phase (Pradhan and Lee, 2010). Before running MLP on those two phases, there are some parameters that must be set up in order to complete the model architecture. Those parameters are composition of training set and testing set, number of hidden layers, activation function, type of training, initial learning rate, momentum, stopping rules and iteration times. The training set is used in the training phase to train the network and produce internal weight. The testing set is a set used to track prediction error during training in order to prevent overtraining (SPSS Technical Support, 2010). The testing set is not the same with the training sets, and the software can choose them differently. A testing phase is also called a classification phase.

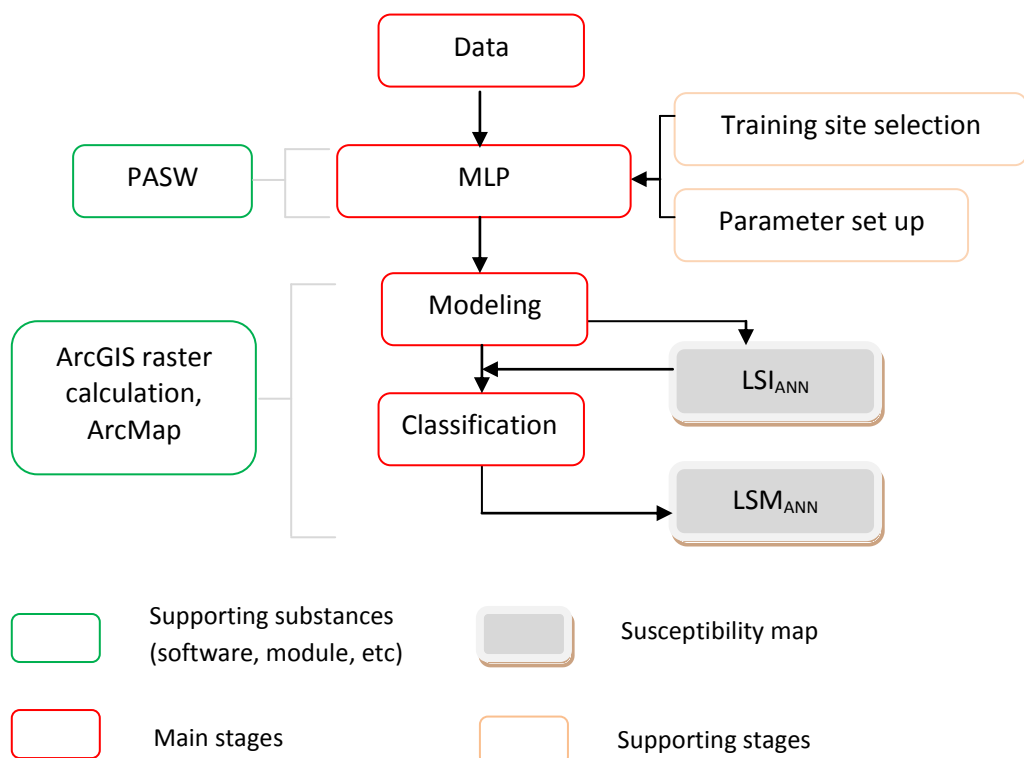


Figure 14. Diagram of artificial neural network

To conduct MLP analysis, this study applies PASW. Besides giving a classification table for each categorical response variable, ANN process also gives pseudo-probabilities values for each dependent variable category, and the importance of predictor variables (SPSS, 2009). Lee et al. (2003) used the pseudo-probabilities, whereas Pradhan and Lee (2010), Chauchan et al. (2008) used the importance to develop landslide susceptibility index. This study employs both and then selects one that could give better result.

LSI map was created in ArcGIS. Then, the ANN LSI map was classified using the same procedure with heuristic and statistical methods. Figure 14 illustrates the work flow.

3.4. Performance analysis

The next step after gaining landslide susceptibility models is to evaluate their performance by measuring prediction accuracy, which is achieved by analyzing the agreement between the results and the observed data/landslide occurrences (Fratinni et al., 2010).

There are two basic concepts to assess models performance: using success analysis and predictive analysis. As mentioned by Van Den Eeckhaut et al. (2010), success analysis uses the same landslide occurrences (often called as calibration set) with the ones used to build the model. It makes this analysis is occasionally called as calibration analysis. Another one, predictive power analysis, uses the different landslide occurrence dataset (often called as validation set) with the one that is used to build models. Because of that, in some literatures, it is called validation analysis. This study only implements success-performance analysis because the number of landslide occurrence is small and cannot be divided into two different sets, i.e. calibration and validation set.

However, there is a special case for heuristic method. This method does not involve landslide occurrence dataset in its analysis. It makes a condition that the performance test using landslide occurrence dataset in this method could be categorized as a validation analysis too.

This study applies degree of fit for all methods and goes deeper by conducting Receiving Operating Characteristic (ROC) analysis for data-driven methods. Degree of fit analysis compares or crosses landside inventory with LSM (Fernandez et al., 2003; Jimenez-Peralvarez et al., 2009) by following the Eq. 2. In some sense, degree of fit is similar with density analysis but it is applied toward each class of susceptibility map and is not toward each class of influencing factor. Degree of fit analyses was conducted by means of ILWIS. Regarding this, the LSM must be exported into ASCII file (.asc) in order to be read.

ROC analysis is one of the most common approaches used to assess landslide susceptibility model performance, such as explored by [Frattini et al. \(2010\)](#), [Jadda et al. \(2009\)](#), [Van den Eeckhaut et al. \(2006\)](#), [Mancini et al. \(2010\)](#). The technique evaluates the performance of classification schemes in which there is dependent variable with two categories by which subjects are classified (based on a cutoff value). Because of that, this technique is appropriate to be applied for statistical logistic regression and ANN, the methods that using binary response in their classification. ROC analysis gives area under curve (AUC) that can be used as a metric to assess the overall quality of a model ([Frattini et al., 2010](#)). Larger AUC indicates better performance. Graphically, it is showed by the curve closer to the upper-left corner.

ROC analysis was applied by means of PASW. In statistical logistic regression, landslide inventory dataset (as state variable) is “compared” with the predicted probability (as test variable, a derivative result from logistic regression analysis). For ANN, the software calculates ROC curve using pseudo-probabilities values that are derived from the prediction process. These values are based on the combined training and testing samples used to build the model.

ROC analysis can give an explanatory power of a model using two operating characteristics in the contingency test of binary classifier: TPR and FPR ([Fawcett, 2004](#)). TPR (True Positive Rate) or sensitivity shows the correct classifying positive instances among all positive cases. FPR (False Positive Rate), on the other hand, defines how many incorrect positive results occur among all negative cases available during the test. FPR is calculated based on the specificity, a measure of negative proportion that are correctly identified ($FPR = 1 - \text{specificity}$). Hence, ROC curve is a graphical plot of sensitivity and $(1 - \text{specificity})$.

CHAPTER 4 RESULTS AND DISCUSSION

This chapter presents and discusses the results from the methods described in the previous chapter.

4.1. Heuristic model

The weighting judgment process in pair-wise comparison gives a weight for every influencing factor (Figure 15b). From the calculation, the final criteria tree (with weight in 2 digits) was created as shown in Figure 15a. Bigger weights indicates that the pertinent factor gives bigger influence toward the model. Slope has the biggest contribution (0,326), followed by lithology and land use with value 0,242 and 0,130, respectively. On the other side, the lowest contribution is given by aspect (0,028), followed by curvature (0,041) and distance to river (0,045). No negative weights in heuristic method. The inconsistency value is 0,062194: smaller than 0,1. It means, according to SMCE validation, the choosing process is consistent. No improper stage while positioning the factor based on its importance to another.

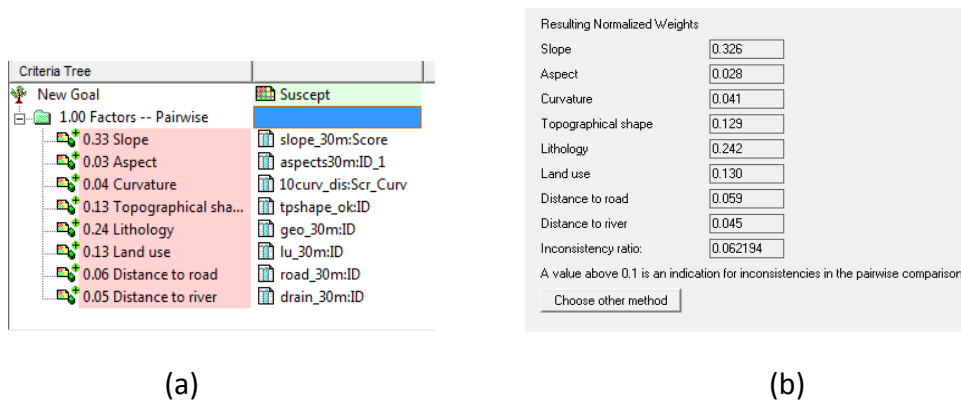


Figure 15. Pair wise comparison in ILWIS (a) Criteria tree with input (spatial factors) and resulted weight; (b) Weighting process result containing the inconsistency value

Those values could be interpreted as an indication of possibility. If there is an area close to the river or road, but situated at gently slope, the possibility for landslide to occur is lower than another area where is distant to the road but has steep slope.

Following Eq. 1, LSI is calculated and mathematically modeled as below and presented in Figure 16a.

$$LSI_h = 0,326slo + 0,028asp + 0,041curv + 0,129tpshp + 0,242lit + 0,130lu + 0,059d.road + 0,045d.river$$

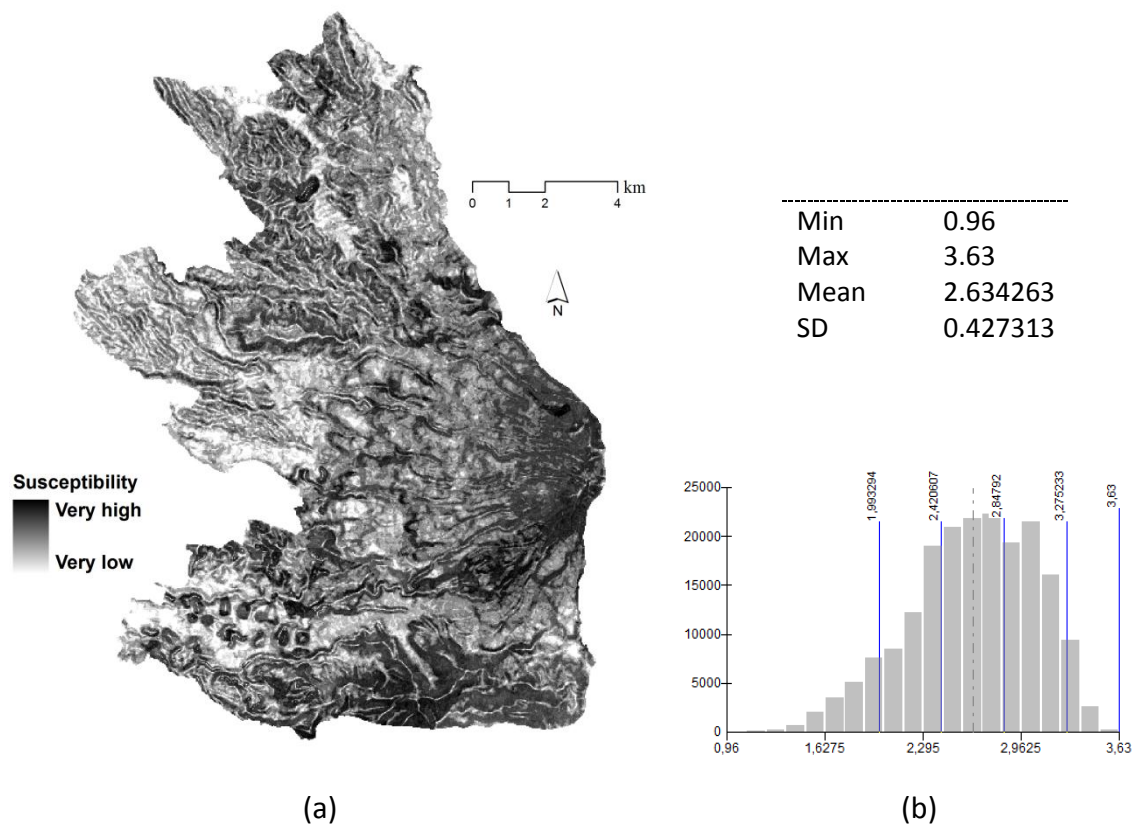


Figure 16. (a) Landslide susceptibility index of heuristic model (LSIh), and (b) Histogram of the map

The index map has the highest value 3,63 showing the highest susceptibility and the lowest is 0,96 showing the lowest susceptibility. As shown in [Figure 16b](#), the histogram depicts near normal distribution indicated by near bell-shaped curve, which means values near the mean (dashes line type) occur more often. This condition, as discussed earlier in the Chapter 3, gives consequences for the usage of standard deviation as better option method to classify. As result, there are five classes that are divided based on the mean of each class. [Figure 17](#) depicts the final landslide susceptibility map from heuristic method.

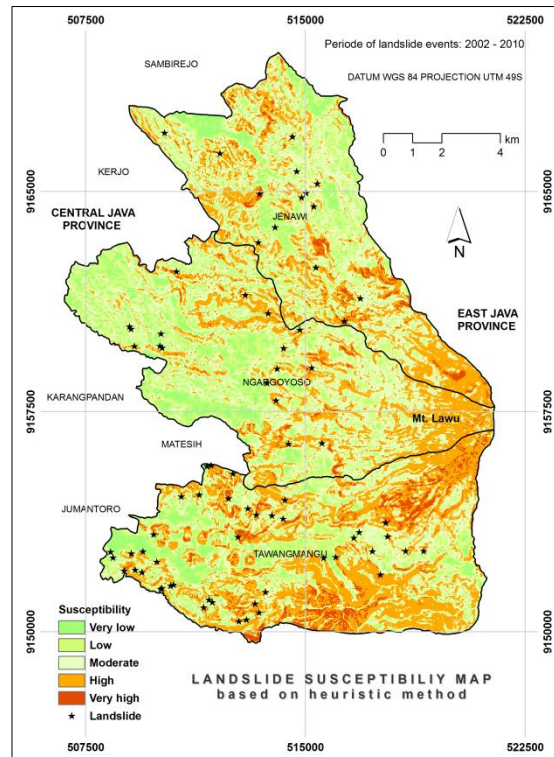


Figure 17. Landslide susceptibility map of heuristic method (LSMh)

Range values for each susceptibility class is 0,96 – 1,99 (very low), 2 – 2,24 (low), 2,43 – 2,85 (moderate), 2,86 – 3,27 (high), and 3,28 – 3,63 (very high).

Table 8. Area of LSMh class

| No | Class | Hectares | Km ² | % |
|----|-----------|----------|-----------------|-------|
| 1 | Very low | 1466,98 | 14,67 | 8,45 |
| 2 | Low | 3596,77 | 35,97 | 20,73 |
| 3 | Moderate | 6357,07 | 63,57 | 36,64 |
| 4 | High | 5264,02 | 52,64 | 30,34 |
| 5 | Very high | 666,53 | 6,67 | 3,84 |

Table 8 resumes that the largest susceptibility area is moderate class, followed by high, low, very low and very high respectively. Most areas under high class consist of steep slope e.g., the area nearby Mount Lawu in the eastern part. Very high classes are located in very steep slope areas, gardens and mixed paddy fields with vegetable gardens, and Lawu Lahar formation. High class areas are also mostly located in steep and very steep slope, but with lower scored factor class such as forest. Moderately class as the majority is distributed smoothly. Low and very susceptibility classes are mostly located in the gently slopes, andecites, forests and paddy fields.

4.2. Statistical model

The analyses in statistical method give density and contrast (C), explanation about normality, correlation and significance of influencing factors, and probability calculation.

4.2.1. Landslide density

Landslide density that locates the existing occurrences into each class can reveal the relation between each class and landslide: which class having many events (i.e., the densest class or denser class) and which class having no events. Landslide density can indicate which area or class that is historically sensitive to earth failure. However, in this study, the density is not considered as the weight. It means the density is not applied directly to gain each factor contribution in modeling process, as had been done by other researches ([Wahono, 2010](#); [Van Westen, 1993](#); [Memarian et al. 2006](#)). As discussed earlier in Chapter 3, landslide density values are used as values for discrete variables while doing logistic regression and ANN analysis.

As shown in [Table 9](#), the landslides spread across classes. In slope factor for example, most events occurred in steep class (>30 – 45%) and least in undulating class (>8 – 15%). Density of aspect is almost equal for each class. In this factor, north becomes the densest class and southeast is the least dense. Inflection hillside class is becoming the densest class (28,47%) in topographical shape. Meanwhile, for curvature, concave and convex class acquire 71,61% of occurrences. The densest class in lithology, land use, distance to road, distance to river is Wonosari formation, irrigated paddy field, 0-100 meter buffer distance class and class >100-150 meter, respectively. There are some classes that do not have landslide occurrences such as pit (Pt) in topographical shape, limestone area (LA) in land use factor, and > 1000 meter classes in distance to road factor.

4.2.2. Weight of evidence

The density just shows up the relationship between landslide occurrences and any classes positively because it just calculates the presence, whereas WoE assessment steps further by also considering the absence. While Pearson analysis is done mainly aimed to statistically assess dependency between two predictor variables based on covariance, WoE is aimed to assess the association based on the evidences (occurrences). So, in this assessment, statistical description such as covariance and standard deviation is not put into attention.

Table 9. Density and WoE tabulation

| Name | Density | Lpix _i | Lpix _{others} | TLpix | NLpix _i | NLpix _{others} | TNLpix | W+ | W- | C |
|------------------|---------|-------------------|------------------------|-------|--------------------|-------------------------|--------|----------|----------|----------|
| Slope (%) | | | | | | | | | | |
| 0-8 | 0,1822 | 49 | 183 | 232 | 45973 | 144160 | 190133 | -0,1352 | 0,0395 | -0,1748 |
| >8-15 | 0,0611 | 5 | 227 | 232 | 14006 | 176127 | 190133 | -1,2291 | 0,0547 | -1,2838 |
| >15-30 | 0,2397 | 49 | 183 | 232 | 34939 | 155194 | 190133 | 0,1392 | -0,0342 | 0,1734 |
| >30-45 | 0,3161 | 47 | 185 | 232 | 25401 | 164732 | 190133 | 0,4163 | -0,0830 | 0,4993 |
| >45 | 0,2008 | 82 | 150 | 232 | 69814 | 120319 | 190133 | -0,0381 | 0,0215 | -0,0596 |
| Aspect | | | | | | | | | | |
| E | 0,1122 | 8 | 230 | 238 | 7633 | 185198 | 192831 | -0,1635 | 0,0062 | -0,1697 |
| N | 0,1921 | 52 | 186 | 238 | 28960 | 163871 | 192831 | 0,3749 | -0,0838 | 0,4587 |
| NE | 0,1018 | 18 | 220 | 238 | 18932 | 173899 | 192831 | -0,2609 | 0,0247 | -0,2856 |
| NW | 0,1087 | 38 | 200 | 238 | 37443 | 155388 | 192831 | -0,1957 | 0,0419 | -0,2376 |
| S | 0,1339 | 24 | 214 | 238 | 19184 | 173647 | 192831 | 0,0135 | -0,0015 | 0,0150 |
| SE | 0,0770 | 6 | 232 | 238 | 8341 | 184490 | 192831 | -0,5399 | 0,0187 | -0,5586 |
| SW | 0,1582 | 51 | 187 | 238 | 34510 | 158321 | 192831 | 0,1801 | -0,0440 | 0,2241 |
| W | 0,1160 | 41 | 197 | 238 | 37828 | 155003 | 192831 | -0,1299 | 0,0293 | -0,1592 |
| Tp shape | | | | | | | | | | |
| Cv Hs | 0,1639 | 62 | 176 | 238 | 44733 | 148355 | 193088 | 0,1173 | -0,0382 | 0,1555 |
| Cx Hs | 0,0979 | 40 | 198 | 238 | 48327 | 144761 | 193088 | -0,3982 | 0,1041 | -0,5023 |
| I Hs | 0,2847 | 7 | 231 | 238 | 2908 | 190180 | 193088 | 0,6693 | -0,0147 | 0,6840 |
| Pk | 0,0000 | 0 | 238 | 238 | 6 | 193082 | 193088 | INFINITY | 0,000031 | INFINITY |
| Pt | 0,0000 | 0 | 238 | 238 | 1 | 193087 | 193088 | INFINITY | 0,000005 | INFINITY |
| Rv | 0,1323 | 22 | 216 | 238 | 19667 | 173421 | 193088 | -0,0970 | 0,0104 | -0,1075 |
| Rg | 0,1432 | 24 | 214 | 238 | 19818 | 173270 | 193088 | -0,0177 | 0,0020 | -0,0197 |
| S | 0,0000 | 0 | 238 | 238 | 8 | 193080 | 193088 | INFINITY | 0,000041 | INFINITY |
| S Hs | 0,1780 | 83 | 155 | 238 | 55162 | 137926 | 193088 | 0,1994 | -0,0924 | 0,2919 |
| Sl Hs | 0,0000 | 0 | 238 | 238 | 1 | 193087 | 193088 | INFINITY | 0,000005 | INFINITY |
| U Hs | 0,0000 | 0 | 238 | 238 | 2457 | 190631 | 193088 | INFINITY | 0,0128 | INFINITY |
| Curvature | | | | | | | | | | |
| Cv | 0,3260 | 114 | 124 | 238 | 81417 | 110194 | 191611 | 0,1198 | -0,0988 | 0,2186 |
| Fl | 0,2838 | 33 | 205 | 238 | 32407 | 159204 | 191611 | -0,1987 | 0,0360 | -0,2347 |
| Cx | 0,3901 | 91 | 147 | 238 | 77787 | 113824 | 191611 | -0,0599 | 0,0390 | -0,0989 |
| Lithology | | | | | | | | | | |
| Qlla | 0,0485 | 66 | 202 | 268 | 55198 | 138007 | 193205 | -0,1485 | 0,0537 | -0,2022 |
| Qvl | 0,0401 | 99 | 169 | 268 | 100007 | 93198 | 193205 | -0,3374 | 0,2679 | -0,6053 |
| Qvjlb | 0,0181 | 3 | 265 | 268 | 6715 | 186490 | 193205 | -1,1330 | 0,0241 | -1,1571 |
| Qvcl | 0,0347 | 4 | 264 | 268 | 4677 | 188528 | 193205 | -0,4836 | 0,0095 | -0,4931 |
| Tmwl | 0,4059 | 18 | 250 | 268 | 1781 | 191424 | 193205 | 1,9860 | -0,0603 | 2,0462 |
| Qvsl | 0,1278 | 71 | 197 | 268 | 22471 | 170734 | 193205 | 0,8232 | -0,1841 | 1,0074 |
| Tma | 0,3249 | 7 | 261 | 268 | 867 | 192338 | 193205 | 1,7614 | -0,0220 | 1,7834 |
| Qvjil | 0,0000 | 0 | 268 | 268 | 1489 | 191716 | 193205 | INFINITY | 0,0077 | INFINITY |

Table 9 (continued)

| | | | | | | | | | | |
|--------------------------|--------|-----|-----|-----|-------|--------|--------|----------|---------|----------|
| Land use | | | | | | | | | | |
| WB | 0,0000 | 0 | 237 | 237 | 111 | 192294 | 192405 | INFINITY | 0,0006 | INFINITY |
| BS | 0,0845 | 22 | 215 | 237 | 34067 | 158338 | 192405 | -0,6457 | 0,0974 | -0,7432 |
| OS | 0,0000 | 0 | 237 | 237 | 195 | 192210 | 192405 | INFINITY | 0,0010 | INFINITY |
| F | 0,0000 | 0 | 237 | 237 | 29992 | 162413 | 192405 | INFINITY | 0,1695 | INFINITY |
| Gd | 0,1558 | 52 | 185 | 237 | 43645 | 148760 | 192405 | -0,0333 | 0,0096 | -0,0429 |
| S | 0,3110 | 64 | 173 | 237 | 26876 | 165529 | 192405 | 0,6592 | -0,1643 | 0,8235 |
| Gs | 0,0000 | 0 | 237 | 237 | 693 | 191712 | 192405 | INFINITY | 0,0036 | INFINITY |
| IPF | 0,5004 | 16 | 221 | 237 | 13983 | 178422 | 192405 | -0,0737 | 0,0056 | -0,0793 |
| NIPF | 0,0000 | 0 | 237 | 237 | 6467 | 185938 | 192405 | INFINITY | 0,0342 | INFINITY |
| LA | 0,0000 | 0 | 237 | 237 | 119 | 192286 | 192405 | INFINITY | 0,0006 | INFINITY |
| MPF | 0,2990 | 83 | 154 | 237 | 36257 | 156148 | 192405 | 0,6198 | -0,2223 | 0,8421 |
| Dist to road (m) | | | | | | | | | | |
| 0-100 | 0,4484 | 160 | 78 | 238 | 72447 | 117477 | 189924 | 0,5667 | -0,6352 | 1,2019 |
| >100-300 | 0,1809 | 46 | 192 | 238 | 51688 | 138236 | 189924 | -0,3422 | 0,1029 | -0,4451 |
| >300-600 | 0,1196 | 14 | 224 | 238 | 23805 | 166119 | 189924 | -0,7565 | 0,0733 | -0,8298 |
| >600-1000 | 0,2510 | 18 | 220 | 238 | 14574 | 175350 | 189924 | -0,0145 | 0,0012 | -0,0157 |
| >100-1500 | 0,0000 | 0 | 238 | 238 | 15009 | 174915 | 189924 | INFINITY | 0,0823 | INFINITY |
| >1500-2100 | 0,0000 | 0 | 238 | 238 | 12227 | 177697 | 189924 | INFINITY | 0,0665 | INFINITY |
| >2100 | 0,0000 | 0 | 238 | 238 | 174 | 189750 | 189924 | INFINITY | 0,0009 | INFINITY |
| Dist to river (m) | | | | | | | | | | |
| 0-50 | 0,1910 | 48 | 152 | 200 | 47457 | 131924 | 179381 | -0,0974 | 0,0328 | -0,1303 |
| >50-100 | 0,2762 | 96 | 104 | 200 | 65586 | 113795 | 179381 | 0,2722 | -0,1988 | 0,4710 |
| >100-150 | 0,2840 | 39 | 161 | 200 | 25917 | 153464 | 179381 | 0,2999 | -0,0609 | 0,3607 |
| >150-200 | 0,1591 | 12 | 188 | 200 | 14246 | 165135 | 179381 | -0,2804 | 0,0209 | -0,3012 |
| >200-250 | 0,0897 | 5 | 195 | 200 | 10528 | 168853 | 179381 | -0,8534 | 0,0352 | -0,8886 |
| >250-300 | 0,0000 | 0 | 200 | 200 | 10432 | 168949 | 179381 | INFINITY | 0,0599 | INFINITY |
| >300-400 | 0,0000 | 0 | 200 | 200 | 5047 | 174334 | 179381 | INFINITY | 0,0285 | INFINITY |
| >400 | 0,0000 | 0 | 200 | 200 | 168 | 179213 | 179381 | INFINITY | 0,0009 | INFINITY |

Note: Apprehension about L_{pix_i} and other abbreviations can be seen in [Subsection 3.2.2](#).

Table 9 shows the calculation results from Eq. 3 and 4. The W^+ (positive weights), which explain importance of presence, can have a positive or negative value. A positive value means the presence of a class is favorable for the landslide occurrence. The larger W^+ is, the higher the positive correlation is. On the other way, if the W^+ gives negative value it means the class is not favorable.

The W^- , negative weights that deal with absence, also has positive and negative value. Positive W^- means the absence of the factor is favorable for the occurrence, whereas negative W^- means the absence for the class is unfavorable. Another

important issue is about the nearness to 0. If a class has value around 0, that class could be considered has no or less relation with the occurrences. In contrary, if a class has big value, that class it is more related with the occurrences.

[Bonham-Carter \(1994\)](#) also noted that subtraction of W^+ with W^- would give Contrast (C), a measure of correlation. This notation shows spatial association between a class and landslide occurrence. Positive contrast draws positive association (positively correlated) and negative contrast draws negative association (negatively correlated). If $W^+ = W^- = 0$ means there is no correlation between the class and occurrence ([Neuhauser and Terhorst, 2007](#)). In a positive correlation, it is assumed if the area of the class increase, number of landslide occurrences also increase. Otherwise, in negative correlation, if the area increases, number of occurrences decrease. If there is no occurrence in a class ($L_{pix_i} = 0$), then it causes W^+ becomes undefined/infinity, for example for water bodies class in land use factor or classes with buffer more than 2.100m in distance to road factor. In the case of C analysis, that value gives no indication of correlation.

In slope, moderately and steep class have positive correlation with landslide, but gently slope, undulating and very steep class have negative correlation. Settlement area has positive correlation with landslides, which could be interpreted that the increasing number of settlement area can influence landslides to occur more often. All classes with positive C are the crucial causative classes and are likewise possible indicators for future landslides. On the other side, WoE analysis also shows that locally in this study, there some classes that are uncorrelated to landslide occurrences.

To deepen the discussion, it is also relevant to assess the relative importance of a factor i.e., positive C of a factor (not a class). Hence, the sum of all positive weight values (no matter from W^+ or W^-) is subtracted with the sum of all negative weight values ([Neuhauser and Terhorst, 2007](#)). As result, slope has $C = 2,1909$; aspect 2,6855; topographic shape 1,7737; curvature 0,5522; lithology 7,3024; land use 2,5760; distance to road 2,6422; and distance to river has $C = 2,2412$. These values conclude that based on WoE assessment, lithology is the most influencing factor, followed by aspect, distance to road, land use, distance to river, slope, topographic shape and the least is curvature.

4.2.3. Normality test result

The straightforward assessment of skewness (measures of symmetry) and kurtosis (measures of flatness of the distribution) from all predictor variables shows a situation that the datasets are generally not following the ideal traditional condition of normal distribution at which skewness is 0 and kurtosis is 3 ([Table 10](#)). A Q-Q plot

(quantile-quantile plot) was done to show a more convenient assessment graphically. This plotting compares a quantile of dataset from normal target. If skewness is > 0 (positive skew) the tail of the histogram extends to the right; the mass of the distribution is concentrated on the left of the figure. Lithology factor shows this situation, for example; and the Q-Q drives the point eminently. On the other way, as shown by land use variable, the skewness is < 0 (negative skew), means the tail tends to the left and the mass of the distribution is concentrated on the left. [Annex 2](#) explains this deeper.

Table 10. Descriptive analysis of the predictor variables (using original values)

| Predictor | N | Minimum | Maximum | Mean | Std. Deviation | Skewness | | Kurtosis | |
|---------------|--------|-----------|------------|-------------|----------------|----------|------|----------|------|
| | | | | | | Stat | S.E | Stat | S.E. |
| Slope | 177596 | ,0410404 | 287,742300 | 35,2014288 | 24,791978496 | 1,910 | ,006 | 7,641 | ,012 |
| Aspect | 177596 | ,0009087 | 359,995800 | 224,3941658 | 100,51940587 | -,862 | ,006 | -,309 | ,012 |
| Curvature | 177596 | -20,85386 | 15,7820400 | ,0055026773 | 1,0059974917 | -1,032 | ,006 | 26,226 | ,012 |
| Toposhape | 172153 | ,00000 | ,63920 | ,2557415 | ,21363775 | 1,167 | ,006 | -,476 | ,012 |
| Lithology | 172153 | ,00000 | ,405921 | ,06115611 | ,051386602 | 4,151 | ,006 | 22,390 | ,012 |
| Landuse | 172153 | ,00000 | ,500414 | ,18298872 | ,143569028 | ,485 | ,006 | -,552 | ,012 |
| Dist to road | 177634 | ,00000 | 4890,00000 | 676,3035062 | 994,58549180 | 1,860 | ,006 | 2,768 | ,012 |
| Dist to river | 170958 | ,00000 | 948,68330 | 126,7420920 | 109,38623615 | 1,423 | ,006 | 2,754 | ,012 |

4.2.4. Correlation

This study uses bivariate pearson correlation to check interdependence among the predictor variables. Generally, independence intuitively means that the occurrence of one event makes it neither more nor less probable than the other occurrences. The departure is shown by degree of correlation, and in Pearson analysis, it is called Pearson coefficient/correlation (Pearson product-moment correlation coefficient). The coefficient shows a linear relationship.

The analysis works by dividing the covariance of two variables by the product of their standard deviation. This study uses 2-tailed probabilities in the significance test because the direction of association is not known in advance. If the value approaches 0, there is less of relationship (closer to uncorrelated or closer to be independent). Value 1 shows a perfect positive correlation; and -1 shows a perfect negative correlation. It means the value between -1 and 1 indicates the degree of correlation. The closer the value to either -1 or 1, the stronger the correlation is. If the significance level (p-value) is relatively large (more than the given limit, usually

0,05) then correlation is not significant or it shows the independency between the two variables.

Table 11. Result of bivariate pearson analysis

| | | Slope | Aspect | Curva- ture | Topo- shape | Litho- logy | Land use | Dist toroad | Dist toriver |
|-----------------|---------------------|---------|---------|----------------|----------------|----------------|-------------|----------------|-----------------|
| Slope | Pearson Correlation | 1 | -,058* | ,002 | ,003 | ,072** | -,223** | ,338** | ,005 |
| | Sig. (2-tailed) | | ,000 | ,407 | ,248 | ,000 | ,000 | ,000 | ,081 |
| | N | 177596 | 177596 | 177596 | 122540 | 122540 | 122540 | 177140 | 121615 |
| Aspect | Pearson Correlation | -,058** | 1 | -,006* | ,003 | -,101** | -,038** | ,114** | ,008** |
| | Sig. (2-tailed) | ,000 | | ,017 | ,353 | ,000 | ,000 | ,000 | ,007 |
| | N | 177596 | 177596 | 177596 | 122540 | 122540 | 122540 | 177140 | 121615 |
| Curva ture | Pearson Correlation | ,002 | -,006* | 1 | -,005 | ,003 | -,009** | ,006* | ,001 |
| | Sig. (2-tailed) | ,407 | ,017 | | ,065 | ,311 | ,001 | ,011 | ,721 |
| | N | 177596 | 177596 | 177596 | 122540 | 122540 | 122540 | 177140 | 121615 |
| Topo shape | Pearson Correlation | ,003 | ,003 | -,005 | 1 | ,010** | -,009** | -,003 | ,010** |
| | Sig. (2-tailed) | ,248 | ,353 | ,065 | | ,000 | ,000 | ,334 | ,000 |
| | N | 122540 | 122540 | 122540 | 172153 | 172153 | 172153 | 122483 | 164963 |
| Litho logy | Pearson Correlation | ,072** | -,101** | ,003 | ,010** | 1 | ,081** | -,165** | ,020** |
| | Sig. (2-tailed) | ,000 | ,000 | ,311 | ,000 | | ,000 | ,000 | ,000 |
| | N | 122540 | 122540 | 122540 | 172153 | 172153 | 172153 | 122483 | 164963 |
| Land use | Pearson Correlation | -,223** | -,038** | -,009** | -,009** | ,081** | 1 | -,451** | ,068** |
| | Sig. (2-tailed) | ,000 | ,000 | ,001 | ,000 | ,000 | | ,000 | ,000 |
| | N | 122540 | 122540 | 122540 | 172153 | 172153 | 172153 | 122483 | 164963 |
| Dist toroad | Pearson Correlation | ,338** | ,114** | ,006* | -,003 | -,165** | -,451** | 1 | -,027** |
| | Sig. (2-tailed) | ,000 | ,000 | ,011 | ,334 | ,000 | ,000 | | ,000 |
| | N | 177140 | 177140 | 177140 | 122483 | 122483 | 122483 | 177634 | 121476 |
| Dist Toriver | Pearson Correlation | ,005 | ,008** | ,001 | ,010** | ,020** | ,068** | -,027** | 1 |
| | Sig. (2-tailed) | ,081 | ,007 | ,721 | ,000 | ,000 | ,000 | ,000 | |
| | N | 121615 | 121615 | 121615 | 164963 | 164963 | 164963 | 121476 | 170958 |

** . Correlation is significant at the 0.01 level (2-tailed).

* . Correlation is significant at the 0.05 level (2-tailed).

Table 11 shows statistically that some pair of predictor variables are dependent and the correlation is significant, for example between slope and land use, aspect and lithology, lithology and distance to road and others that are signed. On the other side, there are also pairs that show insignificant relations (means independent) such as slope and curvature, aspect and topographical shape, topographical shape and distance to road, and the others that do not have signs.

The existing significance correlation or highly correlated condition (having multicollinearity) makes difficulties to identify the unique contribution of each variable in predicting the dependent variable because the highly correlated variables are predicting the same variance in the dependent variable. Because of that, the steps taken to handle this problem might be removing one of the highly correlated variables, creating “composite” of those variables, or leaving as is by

considering that in the regression the most important is the overall result of combined predictors, not the unique effect of each predictor. The highly correlation is indicated by value above 0,75 or 0,80.

In addition to bivariate pearson, this study also conducts collinearity test by assessing tolerance and VIF (Variance Inflation Factor, the reciprocal of tolerance). Multicollinearity exists when tolerance is below 0,1 and VIF is greater than 10 or an average much greater than 1. In the same sense, tolerance close to 1 shows little multicollinearity, whereas close to 0 suggests that multicollinearity may be a threat (Williams, 2009b).

Table 12. Collinearity analysis

| Predictor variable | Collinearity statistics | |
|--------------------|-------------------------|-------|
| | Tolerance | VIF |
| Slope | ,868 | 1,152 |
| Aspect | ,965 | 1,036 |
| Curvature | 1,000 | 1,000 |
| Toposhape | ,999 | 1,001 |
| Lithology | ,911 | 1,098 |
| Landuse | ,763 | 1,311 |
| Disttoroad | ,676 | 1,478 |
| Disttoriver | ,998 | 1,002 |

Table 11 shows that the highest pearson correlation is 0,451 which belongs to the relationship between land use and distance to road. The highly correlation is proved also by the tolerance value of those two (0,763 and 0,676 as the two lowest) in Table 12. The values there are still below the highly correlation threshold, which indicates no threat of multicollinearity from the usage of all predictor variables. Therefore, in this study multicolliearity is not an issue.

4.2.5. Logistic regression model

From the normality test that had been done before (Subsection 4.2.3), the datasets shows non-normal distribution. As the theory mentions that normal datasets will behave better and show better properties, the original values of continuous variables was transformed by using formula: $(\text{data}) - \text{mean}(\text{data}) / \text{standard deviation}(\text{data})$.

As discussed before in Chapter 3, this study tests two dataset samples and chooses one as the best model for logistic regression. There are 448 cases (224 landslide pixels and 224 non-landslide pixels). Below the test summary and the complete results can be seen in Annex 3 (for dataset 2).

Table 13. Model summary of datasets

| Model summary | | | | |
|---------------|-------------------|----------------------|---------------------|----------------------------|
| Dataset | -2 Log likelihood | Cox & Snell R Square | Negelkerke R Square | Overall percentage correct |
| 1 | 303,042 | 0,508 | 0,678 | 83,7 |
| 2 | 235,256 | 0,577 | 0,770 | 90,4 |

Dataset 1 = non landslide pixel is randomly selected by software

Dataset 2 = non landslide pixel is smoothly distributed

In [Table 13](#), the deviance (-2 Log Likelihood) measures how poor the model predicts the decisions: the smaller the statistic the better the model fits the data ([William, 2009a](#)). R square is the square of correlation between the model's predicted values and the actual values. The value ranges from 0 to 1. The bigger the value resulted, the greater the magnitude of correlation, regardless of whether the correlation is positive or negative ([UCLA Academic Technology Services, 2008](#)). The magnitude of correlation shows how good the prediction model created.

The overall percentage correct is an overall success rate, calculated based on the sensitivity of prediction (the correct prediction of event did occur) and the specificity of prediction (the correct prediction of event did not occur). This gives the percent of cases for which the dependent variables was correctly predicted (how good the agreement between observed and predicted). The higher the percentage exists, the better the prediction runs. Based on those criteria, dataset 2 is opted

[Table 14](#) shows logistic regression process results. Constant or intercept is the value of z when the value of all predictor variables is zero. B value (coefficient of the constant) is the indicator of contribution embedded to each predictor variable that is going to be used in linear combination (z in [Eq. 6](#)). The coefficient could have negative, zero or positive value. A positive regression coefficient explains that the predictor variable increases the probability, while a negative regression coefficient asserts that the variable decreases the probability. A large value, which does not matter positive or negative, shows that the factor strongly influences the probability. Cases for this are lithology, land use and topographical shape. A near-zero coefficient indicates that the causal factor has little influence on the probability.

Table 14. Result of backwise LR

| | | B | S.E. | Wald | df | Sig. | Exp(B) |
|--------|-------------|----------|-------------|-------------|-----------|-------------|---------------|
| Step 1 | Aspect | -,274 | ,174 | 2,473 | 1 | ,116 | ,761 |
| | Slope | -,566 | ,232 | 5,970 | 1 | ,015 | ,568 |
| | Disttoroad | ,197 | ,228 | ,748 | 1 | ,387 | 1,218 |
| | Disttoriver | -,398 | ,185 | 4,620 | 1 | ,032 | ,672 |
| | Lithology | 13,754 | 3,533 | 15,156 | 1 | ,000 | 940665,829 |
| | Landuse | 3,562 | 1,589 | 5,023 | 1 | ,025 | 35,220 |
| | Curvature | 2,697 | ,363 | 55,158 | 1 | ,000 | 14,835 |
| | Toposhape | -3,251 | ,790 | 16,944 | 1 | ,000 | ,039 |
| | Constant | ,151 | ,568 | ,070 | 1 | ,791 | 1,163 |
| Step 2 | Aspect | -,246 | ,170 | 2,096 | 1 | ,148 | ,782 |
| | Slope | -,510 | ,220 | 5,365 | 1 | ,021 | ,600 |
| | Disttoriver | -,384 | ,183 | 4,404 | 1 | ,036 | ,681 |
| | Lithology | 12,745 | 3,218 | 15,686 | 1 | ,000 | 342754,390 |
| | Landuse | 3,068 | 1,473 | 4,337 | 1 | ,037 | 21,491 |
| | Curvature | 2,665 | ,363 | 53,984 | 1 | ,000 | 14,372 |
| | Toposhape | -3,189 | ,785 | 16,487 | 1 | ,000 | ,041 |
| | Constant | ,294 | ,541 | ,295 | 1 | ,587 | 1,342 |
| Step 3 | Slope | -,503 | ,218 | 5,308 | 1 | ,021 | ,605 |
| | Disttoriver | -,393 | ,183 | 4,634 | 1 | ,031 | ,675 |
| | Lithology | 13,487 | 3,168 | 18,118 | 1 | ,000 | 719695,188 |
| | Landuse | 3,355 | 1,460 | 5,281 | 1 | ,022 | 28,642 |
| | Curvature | 2,620 | ,359 | 53,211 | 1 | ,000 | 13,731 |
| | Toposhape | -3,220 | ,784 | 16,868 | 1 | ,000 | ,040 |
| | Constant | ,201 | ,536 | ,140 | 1 | ,708 | 1,222 |

S.E. = Standard errors associated with the coefficients

df = This column lists the degrees of freedom for each of the tests of the coefficients

Exp(B) = The odds ratios for the predictors

Wald and Sig. = The Wald chi-square value and 2-tailed p-value

At the moment, there were three steps in the backwise LR method. In first two steps, there was elimination process for variables that have significance (sig.) higher than 0,05 limit (critical p-value). In the step 2, distance to road was eliminated and in the step 3, aspect was eliminated. Therefore, at the end of the process, there are six selected predictor variables that give significant influence to the model. Those are slope, curvature, topographical shape, lithology, land use, and distance to river. Based on their significance values, slope, land use, and distance to river have low significance. However, the calculation still includes these variables to build model.

This selection leads the usage of only six factors in statistical logistic regression model. Based on the coefficient from step 3, z (Eq. 6) was calculated as follow:

$$z = 0,201 + 0,503slo + 2,620curv - 3,220tpshp + 13,487lit + 3,355lu - 0,393d.river$$

Then, p was calculated using Eq.5 and the LSIs is shown in Figure 18a:

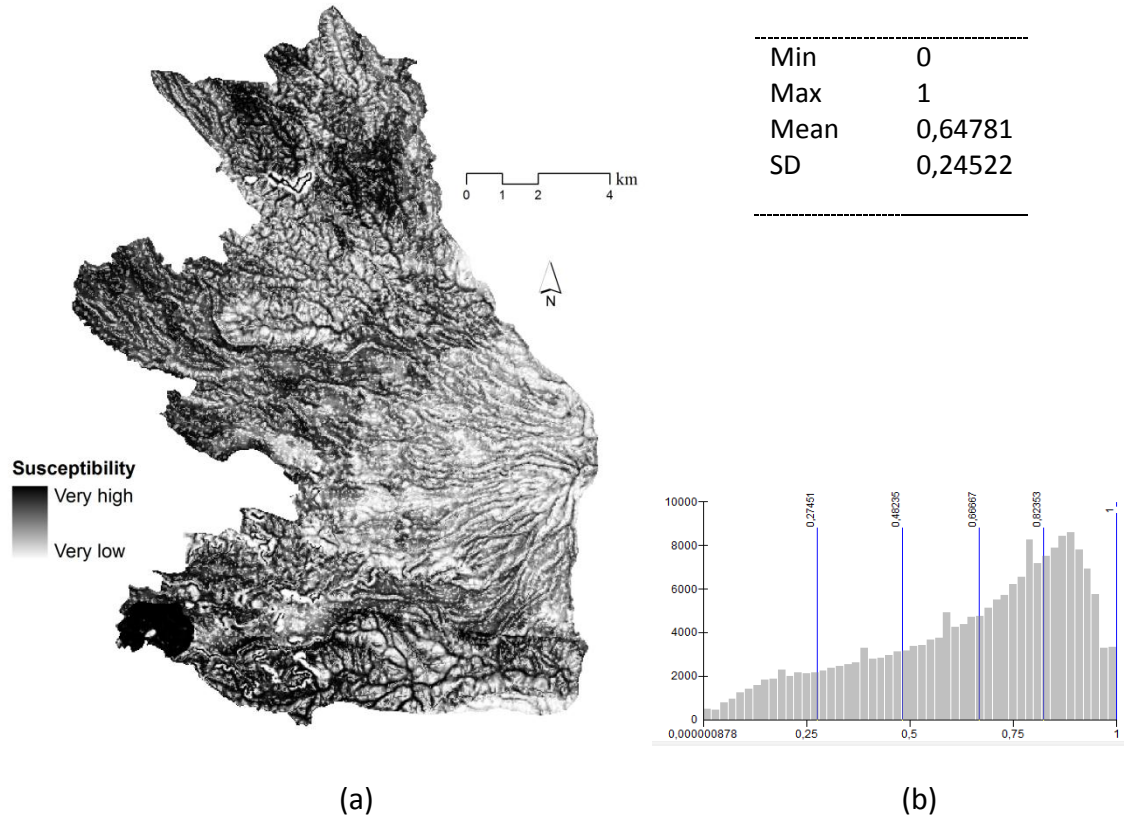


Figure 18. (a) Landslide susceptibility index of statistical model (LSIs), and (b) Histogram of the map

The LSIs histogram (Figure 18b) shows that the dataset is not normally distributed so this study uses natural breaks (Jenks) method to classify into five classes. The LSMs is shown in Figure 19. Range value for each susceptibility class is 0 - 0,27451 (very low), 0,27452 - 0,48235 (low), 0,48236 - 0,66667 (moderate), 0,66668 - 0,82353 (high), and 0,82354 - 1 (very high).

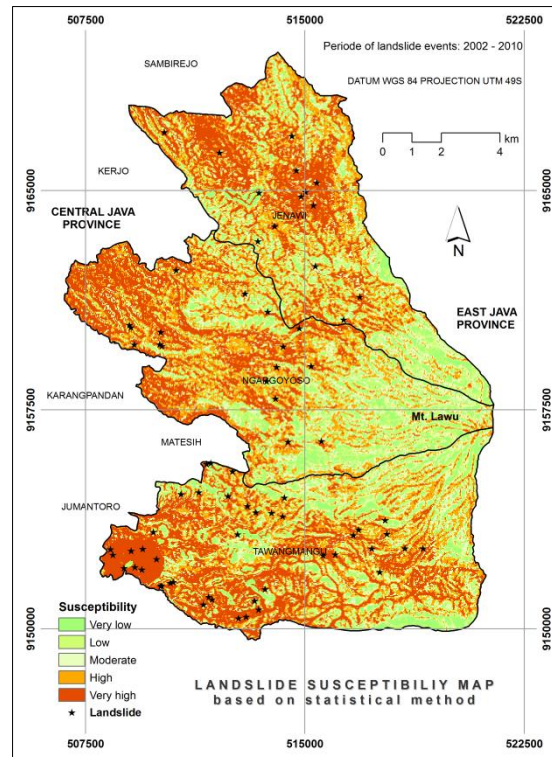


Figure 19. LSM based on statistical method

Table 15. Area of LSMs class

| No | Class | Hectares | Km ² | % |
|----|-----------|----------|-----------------|-------|
| 1 | Very low | 1853,55 | 18,53 | 10,68 |
| 2 | Low | 2489,67 | 14,89 | 14,35 |
| 3 | Moderate | 3273,39 | 32,73 | 18,87 |
| 4 | High | 4374,41 | 43,74 | 25,21 |
| 5 | Very high | 5360,36 | 53,60 | 30,89 |

According to the result (Table 15), very high susceptibility area occupies 30,89% and becomes the largest area. With high class (25,21%), both covers more than half of the whole area. Very low class becomes the smallest area with 18,53 km² (10,68%). It is clear, as shown in Figure 19, that areas where landslides did not take place, such as in nearby Mount Lawu, the susceptibility is low or very low. Most susceptible areas are mainly located in the western and northern part following the recorded landslides distribution.

4.3. Artificial Neural Network model

ANN uses the same sample dataset with the one that had been chosen in logistic regression. The original and normalized dataset (by formula $(data) - \text{mean}(data) / \text{standard deviation}(data)$) were tested in advance. As result, the normalized

dataset give better outcome (based on percent correct prediction), so it was chosen in the process.

Prior setting up of parameter must be determined while running ANN. To get optimum result, which is indicated by correct classification value, the setting process was done three times by changing the partition and the order of predictor variables. In its training process, ANN is sensitive to variable order because every different order gives different pattern of initial synaptic values, which can affect the whole process. [Table 16](#) shows the neural network setting in this study.

Table 16. ANN setting

| | |
|-----------------------------------|---|
| Partition | 50% training (6) 33,3% test (4) 16,67 holdout (2) |
| Type of training | Batch |
| Optimization Algorithm | Scaled conjugate gradient |
| Training: | |
| - Initial Lambda | 0,00000005 |
| - Initial Sigma | 0,00005 |
| - Interval center | 0 |
| - Interval offset | +0,5 |
| Stopping rules: | |
| - Max training epoch | Automatically |
| - Max training time | 15 minutes |
| - Min rel. change in train error | 0,0001 |
| Data to use computing pred. error | Automatically |

ANN could divide samples into training, testing and holdout partition. A network will generally be most efficient if testing samples are smaller than training samples. Because of that, this study implements the partition architecture as shown by [Table 16](#). The third dataset, holdout partition, is an independent dataset. It gives the “honest” estimate of predictive ability, as holdout data is not used to build the model in the previous steps. Small percentage of holdout incorrect prediction indicates that the network provides better result.

This study applies batch training module when employing information from all records in the training dataset. The module updates the synaptic weights after passing all training data record. It is preferred because it directly minimizes the total error and can update the weights many times until the stopping rule is met. For the usage of big dataset, batch training method is not really appropriate because of time consuming process. However, this study only uses small dataset, so batch

method is more useful rather than online (use one record at a time) or mini-batch (use group record at a time). The online method is useful for large dataset whereas mini-batch is for “medium-size” dataset. ANN PASW names discrete variables as factors and continuous variables as covariates (Table 17).

Table 17. Network information

| | | | |
|-----------------|--|---|--------------------|
| Input Layer | Factors | 1 | Lithology |
| | | 2 | Landuse |
| | | 3 | Toposhape |
| | Covariates | 1 | Slope |
| | | 2 | Aspect |
| | | 3 | Curvature |
| | | 4 | Disttoroad |
| | | 5 | Disttoriver |
| | Number of Units ^a | | 24 |
| | Rescaling Method for Covariates | | Normalized |
| Hidden Layer(s) | Number of Hidden Layers | | 1 |
| | Number of Units in Hidden Layer 1 ^a | | 5 |
| | Activation Function | | Hyperbolic tangent |
| Output Layer | Dependent Variables | 1 | Landslide |
| | Number of Units | | 2 |
| | Activation Function | | Softmax |
| | Error Function | | Sum of Squares |

a. Excluding the bias unit

While using pseudo-probability values in determining landslide susceptibility, the whole area or the whole pixels should be fed into the network using the same architecture (i.e., repeat running the model again). The acquired pseudo-probability values are two values, for example (0,002; 0,998) for each pixel. The first values represent no-landslide pseudo-probability and the second values represent landslide pseudo-probability. The first values were subtracted from the second to gain susceptibility values. Those values then were converted into raster grid to build map. However, the result is poor (Annex 4). The susceptibility index map seems “insensible” because it only gives two values (near 1 = very high class and near 0 = very low class). Because this network uses all pixels, probably the usage of so-unbalanced numbers of landslide and non-landslide pixels has big impact in the ANN modeling.

Considering the situation above, this study then uses the network that employs sample dataset (equal number of landslide and non-landslide case) and its variable importance to build landslide index. As shown in Table 18a (and then, in Figure 21), according to this network, the model shows more sensible result. The hold out samples incorrect prediction is 7,6%, which means the total correct prediction is 92,4%. Holdout accuracy for non-landslide pixels is 97%, whereas for landslide pixels is 89,1% (Annex 5). Table 18b displays values that show the importance/contribution of every predictor variable.

Table 18. Results of ANN process (a) Model summary; (b) Predictor importance

| (a) | | | (b) | | |
|-------------------------------|-------------------------------|--|-------------|------------|-----------------------|
| Train- ing | Sum of Squares Error | 15,228 | Predictor | Importance | Normalized Importance |
| | Percent Incorrect Predictions | 1,4% | | | |
| | Stopping Rule Used | 1 consecutive step(s) with no decrease in error ^a | | | |
| | Training Time | 00:00:00,326 | | | |
| Testing | Sum of Squares Error | 20,517 | Slope | ,102 | 34,5% |
| | Percent Incorrect Predictions | 5,5% | Aspect | ,049 | 16,7% |
| | | | Curvature | ,296 | 100,0% |
| Hold out | Percent Incorrect Predictions | 7,6% | Disttoroad | ,045 | 15,2% |
| | | | Disttoriver | ,040 | 13,6% |
| Dependent Variable: Landslide | | | | | |

a. Error computations are based on the testing sample.

In GIS modeling, the interval of predictor variables was determined by their five classes' natural break and given sequential value from 1 to 5. This approach has an advantage in the term that the process did not subjectively discretize the variable (still in the concept "data-driven"). Because ANN does not have specific formula to predict real probability that can connect directly to a GIS environment such so in logistic regression (i.e., Eq.5), the model is created based on a linear equation modeling/overlay model in GIS (summing up all weighted layers).

To model the formula in correct way, the values of distance to river and distance to road variables need to be inversed. It is due to a situation that landslides potential occurrences are not following the increasing distance measure but the decreasing proximity measure. Hence, the closest class was given value 5, the next was 4, and so forth. This process is crucial to be done. Otherwise, the result will be misleading.

From the analysis, could be seen that curvature is the most important variable with importance value 0,296; then followed by topographical shape (0,185), lithology (0,163), and so forth (Table 18b). Following Eq. 1, ANN model could be mathematically presented as below and the index map is shown in Figure 20a:

$$LSI_{ANN} = 0,102slo + 0,049asp + 0,296curv + 0,185tpshp + 0,163lit + 0,120lu + 0,045d.road + 0,040d.river$$

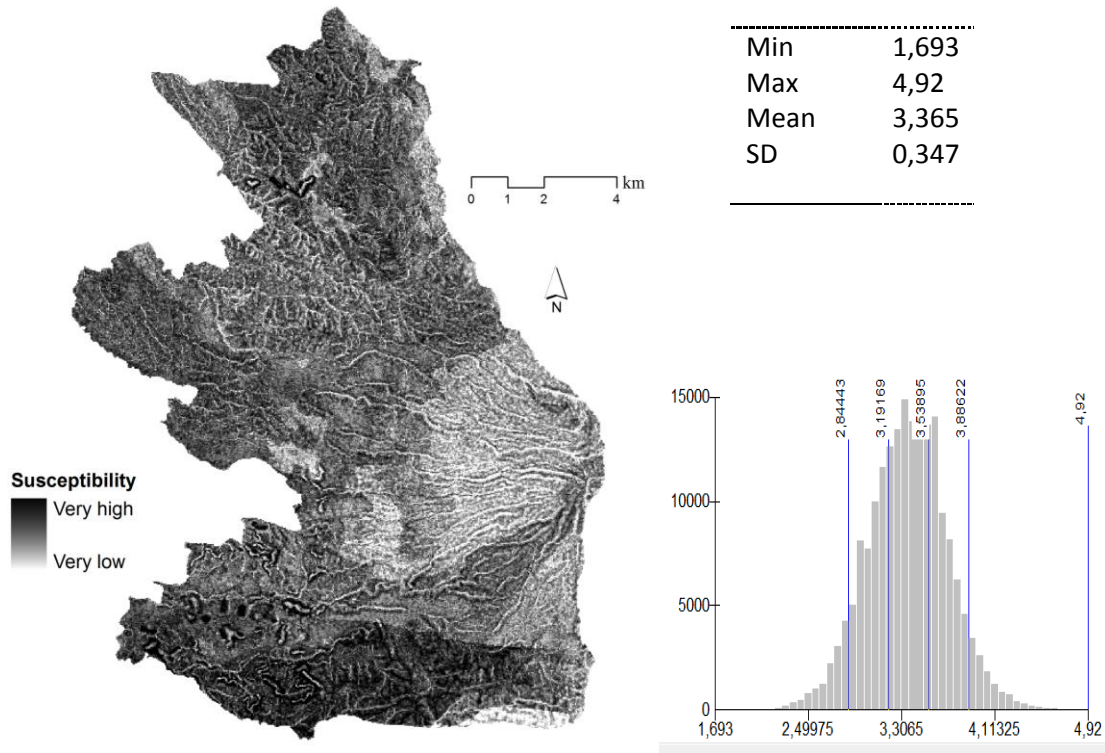


Figure 20. (a) Landslide susceptibility index of ANN model (LSI_{ANN}), and (b) Histogram of the map

LSI_{ANN} histogram in Figure 20b displays that the dataset is normally distributed so this study uses standard deviation method to classify the map into five classes. The LSM_{ANN} can be seen in Figure 21. According to ANN (Table 19), very high susceptibility areas occupy 6,08% of the area and become the smallest class. Together with high class (24,16%) that becomes the second largest area, both cover around 30,24%. The largest area 69,08 km² (7,88%) is moderate class. Very low class is the second smallest class, occupies 6,67% of the area. Most susceptible areas are mainly located in the southern part following the landslides distribution.

The result also shows that lithology formation density is influential. As can be seen in Figure 21, some high and very high classes (in the southern part) are located in

Sidoramping Lava and andecite formation. From the density analysis, already known that andecite is the densest class and Sidoramping Lava is the third densest class.

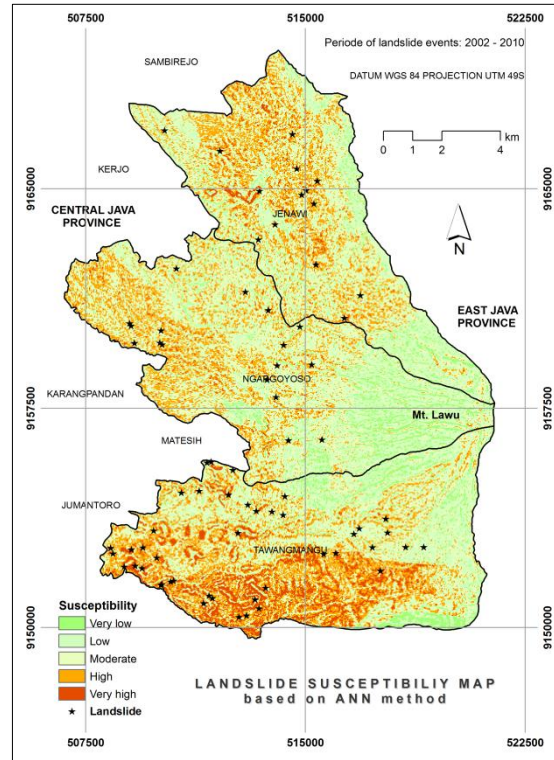


Figure 21. LSM based on ANN method

Table 19. Area of LSM_{ANN} class

| No | Class | Hectares | Km ² | % |
|----|-----------|----------|-----------------|-------|
| 1 | Very low | 1156,49 | 11,56 | 6,67 |
| 2 | Low | 4039,79 | 40,39 | 23,28 |
| 3 | Moderate | 6908,06 | 69,08 | 39,81 |
| 4 | High | 4191,31 | 41,91 | 24,16 |
| 5 | Very high | 1055,72 | 10,55 | 6,08 |

4.4. Comparison

After getting result for all used methods, it is apparent that these three methods give different result quantitatively. One reason for this is due to the difference of contribution of each variable. Therefore, it is good to compare the results, the contribution of variables, as well as the characteristic of each method that inevitably casts on the difference.

4.4.1. Results comparison

Based on Table 8, Table 15, and Table 19 about LSM result tabulation, a column chart was created and shown in Figure 22.

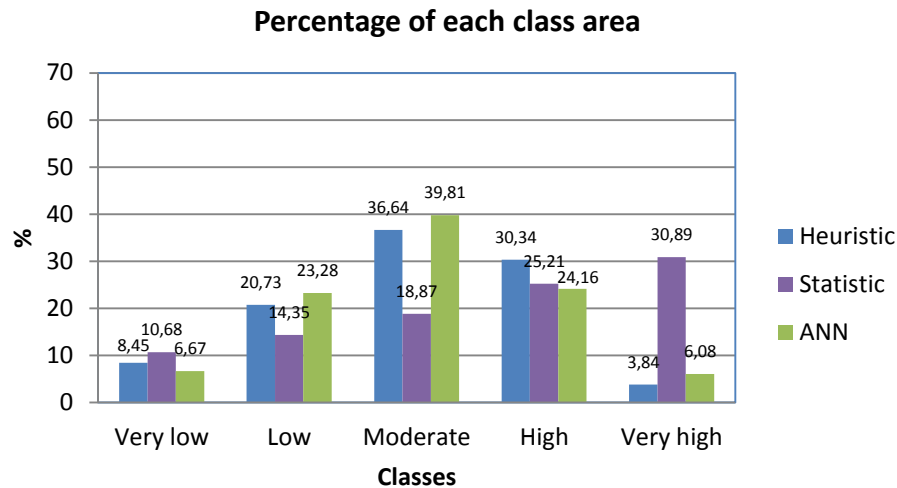


Figure 22. Comparison of each class from three methods

The figure shows the results difference, for example, the largest area in very low class comes from statistical logistic regression; in high class the largest area comes from heuristic method. However, it does not demonstrate superiority. Although the statistical logistic regression has the largest area for high and very high class ($25,24 + 30,89 = 56,13\%$), that outcome does not automatically state that the method is the best in prediction. The percentage just explains that the process has found out that 56,13% of the study area is high and very high susceptible according to heuristic method.

Some visual findings could be discussed about the effect of landslide inventory usage. It seems clear that in data-driven method results (Figure 19 and Figure 21), landslide occurrences give significant effect: the less the landslides in any certain areas the less susceptible such areas to be. For example, in the area near Mount Lawu's peak where almost no landslide took place, the susceptibility class is largely low or very low. It is different to the outcome from heuristic method (Figure 17). Since there is no involvement of landslide occurrence, no clear indication about landslide record influence in the map. Different from the other two, according to heuristic method, the area near Mount Lawu in fact belongs to high and very high susceptibility class. That outcome is logical because such area has steep and very steep slope gradient, and specifically for heuristic method slope becomes the most influential factor. A visualization from landslide susceptibility maps in single frame,

which is using the SRTM 30m aspect and elevation as background, could be seen in [Annex 6](#).

The variable importance also could be compared. However, in statistical logistic regression, because the modeling equation is different and not like the other methods that have all contribution values equal with 1, its importance could not be compared quantitative-graphically with the others. The importance only could be compared by ranking sequentially.

Table 20. Importance ranking of variables

| Ranking based on importance of contribution | Heuristic | ANN | Statistical logistic regression |
|---|-------------------|-------------------|---------------------------------|
| 1 | Slope | Curvature | Lithology |
| 2 | Lithology | Topo shape | Land use |
| 3 | Land use | Lithology | Topo shape |
| 4 | Topo shape | Land use | Curvature |
| 5 | Distance to road | Slope | Slope |
| 6 | Distance to river | Aspect | Distance to river |
| 7 | Curvature | Distance to road | Aspect** |
| 8 | Aspect | Distance to river | Distance to road* |

*Omitted in the first step

**Omitted in the second step

[Table 20](#) resumes that variables ranking in each method is not the same. According to heuristic method, statistical logistic regression, and ANN, respectively the most significance variable is slope, lithology and curvature. These dominant factors give the highest effect to the model. In heuristic method for example, as seen in [Figure 23](#) and [Figure 17](#), slope influence is clearly appearing. The area having high slope gradient such as the one nearby the mountain, mostly belong into high or very high susceptibility class.

Contribution value of predictor variables

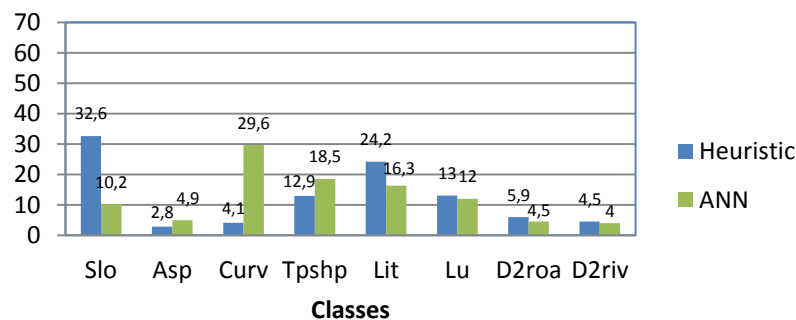


Figure 23. Variables comparison between Heuristic and ANN method

Although each method gives different importance order, there is a trend of importance. As instance, lithology and topographical shape always exist in the top positions whereas aspect and distance to river always being in the bottom. To assess them completely but without looking at the original value, a simple weighting process was done by giving them sequential values: 8 for the 1st rank and 1 for the lowest rank (8th), and then summing the same variables up. The variable having highest value is considered as the most influential variable while the variable having small value as the less influential variable. As result, lithology becomes the most influential, followed by land use and topographical shape (both have the same score), slope, curvature, distance to road, distance to river, and aspect, respectively. Furthermore, by looking back to the result from WoE analysis that also specifically examines the influence using landslide inventory (see [Subsection 4.2.2](#)), this study also finds out that lithology is being the most influential factor.

4.4.2. Methods comparison in landslide susceptibility assessment

Heuristic method limitation is situated on its subjectivity. It is certainly known that heuristic method contains subjectively approach when applying techniques to score and rank. Because of that, results from many researchers could be different one another, depend on their references, expertise and knowledge. It brings a consequence that in order to get finer result, a clear understanding of causal factors' natural behavior and additional module (e.g., the decision support analysis) is necessary. Another thing, for an intensive heuristic research, an advisable reference is the one that bears similar geo-environmental condition with the area of interest. Otherwise, the information about causal factors could be bias in part.

Concerning data availability, heuristic method has benefit in flexibility because it still could be applied even if there are no landslide records in the area of interest. If an area has representative landslide records, the better option is using statistical and artificial method as these methods are more quantitative than heuristic method.

In landslide susceptibility assessment, because landslide inventory map as a response variable is showing dichotomic phenomena (landslide and non-landslide), logistic regression is appropriate. Statistical logistic regression has additional but convincing eminence concerning variable assessments: sturdy methods to assess the variables' behavior (e.g., normality, collinearity), a clearance process of variable selections, and its capacity to select the variables based on significance. It makes this method more robust than heuristic method in one side, but also less flexible on the other side because it needs a rigorous statistical basis to run the analyses. In case this statistical basis assessment is not fulfilled, the results could be not

optimum. That sense makes an understanding, to get better results from statistical logistic regression, a statistically proper data treatment is important.

Statistical logistic regression and ANN can handle discrete and continuous data or both at the same time without any problem. In that case, heuristic method can only deal with discrete data, so continuous variables should be discretized into categories.

ANN is flexible in term that it can determine the form of relationship between predictor variables and response variables during the learning process. If a linear relationship is appropriate, the result should closely approximate that of the linear regression model. If a non-linear relationship is more appropriate, the network will automatically approximate the “correct” model structure ([SPSS Technical Support, 2010](#)). However, because of that flexibility, ANN also has trade-off about model interpretability. Its synaptic weights and error propagation, as well as how it determines the relationship between landslide influencing factors and landslide occurrences are not easily interpretable. Thus, in this context, it would be more reliable to use statistical model if the interpretability is necessary to explain. If one just wants to obtain optimum model more quickly, ANN is reliable.

In this study, ANN employs the variable importance derived from the network, in a linear equation model when creating landslide susceptibility map. It makes the process behaves more closely to heuristic model rather than to logistic regression that has its own equation (sigmoid) for calculating probability. In some sense, it could be considered that the process is not generally following the ANN prediction schema that, following its activation function, could produces end result as 0 to 1 values. Nevertheless, in other sense, it is sensible because it uses “the influence value” of every variable in building the model, and specific in this study, as another approach it could improve the performance.

All methods could be implemented to all scale. However, according to [Dai et al. \(2002\)](#), there is a particular scale range that susceptibility mapping process using data-driven methods could be more advantageous. The range is 1:10.000 – 1:50.000. On that scale, it is possible to map out the occurrences of past landslides in detail and to collect sufficient information from supporting materials and activities such as from high resolution imagery and field surveys. To make the description more compact, [Table 21](#) lists some equality and distinction.

Table 21. Comparison of each method

| No | Characteristics | Heuristic | Statistical logistic regression | ANN |
|----|-----------------------------------|---|---|---|
| 1 | Analysis | Expert-driven | Data-driven | Data-driven |
| 2 | Weighting | Could be qualitative or semi-qualitative, trial and error | Quantitative | Quantitative |
| 3 | Scale | Applied in all scale, the detail depends on the smallest mapping unit | Applied in all scale. But more advantageous in 10.000 – 50.000 mapping scales (Dai et al. 2002) | Applied in all scale. But more advantageous in 10.000 – 50.000 mapping scales (Dai et al. 2002) |
| 4 | Landslide occurrences involvement | Does not require landslide occurrences record in modeling | Need landslide occurrences record as response variable | Need landslide occurrences record as response variable |
| 5 | Data treatment | Discretization of continuous variable into classes | Could handle continuous and discrete | Could handle continuous and discrete |
| 6 | Modeling (equation) | GIS model | Statistical model | GIS model (in PASW) |
| 7 | Coverage | Applied to all area coverage | Applied to all area coverage | Applied to all area coverage |
| 8 | Factor selection | Not applicable | Applicable, based on significance | Applicable (but, PASW does not provide the module) |
| 9 | Factor correlation | Not assessed | Assessed | Not assessed |
| 10 | Easiness | Easy to understand the process, but need expertise in scoring and weighting process to make the analysis reasonable | All process and contribution of each factor are reasonable and could be followed | Difficult to follow the internal process within the hidden layers (black-box nature) |
| 11 | Normality issue | Not really matter for traditional GIS. SMCE Ilwis applies normalization | Influential | Influential |
| 12 | Probability issue | Not applied | Applied completely | Could be applied as pseudo-probability |

4.5. Success-performance

As discussed earlier in [Section 3.4](#), this study uses degree of fit and ROC analysis to assess model performance. According to its characteristic, degree of fit is a spatial-based analysis (analyzing based on spatial matching between the resulted map and landslide events) while ROC is called a probability/statistical-based analysis (analyzing based on statistical classification).

Degree of fit analysis explains model performance by assessing relative error: the summation value of low and very low susceptibility class; and assessing relative success rate: the summation value of high and very high susceptibility class. The

smaller relative error and the higher relative success rate, the higher the quality of the susceptibility map.

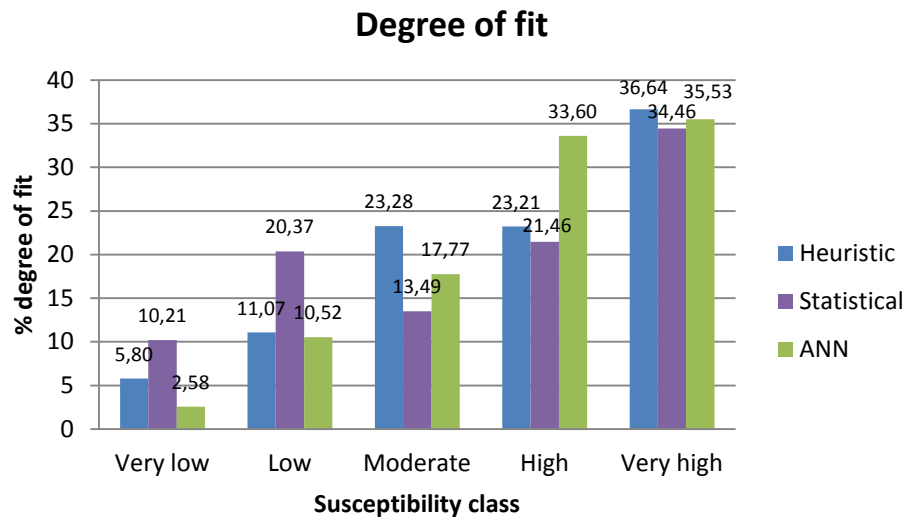


Figure 24. Degree of fit result

Figure 24 indicates that the relative error for heuristic, statistical and ANN is 16,87%; 30,58%; and 13,10%. The relative success rate is 59,86%; 55,92% and 69,13% respectively for heuristic, statistical and ANN. These values shows that, based on degree of fit, ANN performs better as it gives the lowest relative error and the highest relative success rate.

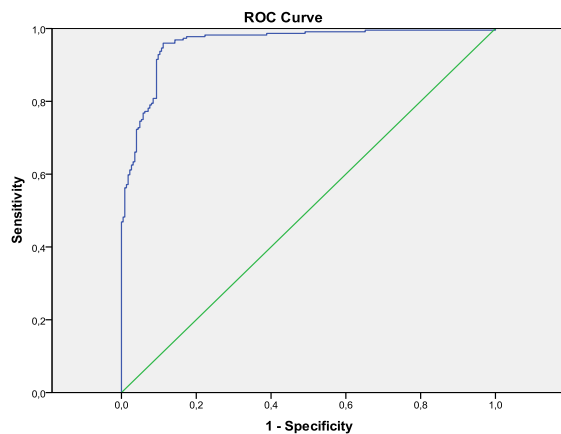


Figure 25. ROC curve plot of logistic regression

Table 22. ROC AUC of logistic regression

| Area Under the Curve | | | | |
|--|-------------------------|------------------------------|------------------------------------|-------------|
| Test Result Variable(s): Predicted probability | | | | |
| Area | Std. Error ^a | Asymptotic Sig. ^b | Asymptotic 95% Confidence Interval | |
| | | | Lower Bound | Upper Bound |
| ,959 | ,009 | ,000 | ,941 | ,976 |

a. Under the nonparametric assumption

b. Null hypothesis: true area = 0.5

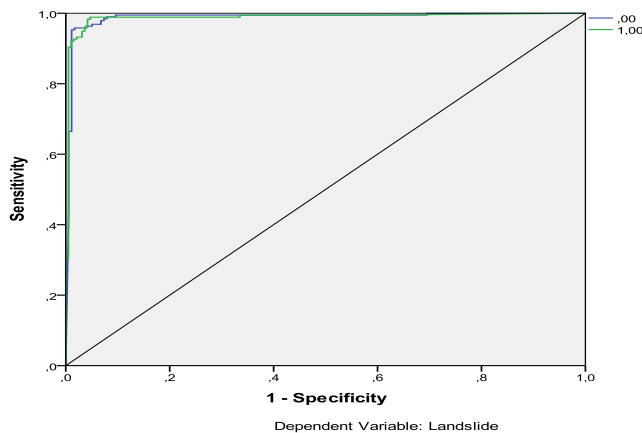


Figure 26. ROC curve plot of ANN

Table 23. ROC AUC of ANN

| Area Under the Curve | | |
|----------------------|------|------|
| | | Area |
| Landslide | ,00 | ,988 |
| | 1,00 | ,988 |

As discussed earlier in [Section 3.4.](#), and then shown in [Figure 25](#) and [Figure 26](#), to acquire ROC curve, the sensitivity is plotted against “1 – specificity”. Area under curve can serve as global accuracy statistic of a model. Its value can range from 0,5 to 1. Value 0,5 shows random prediction, represented by the diagonal straight line and value 1 shows a perfect prediction. The closer the value to 1 the better the model. The AUC results ([Table 22](#) and [Table 23](#)) demonstrate that ANN model performs better than statistical logistic regression model. Its line is closer to upper-left corner and its AUC value is higher (0,988) than logistic regression (0,959). This value can be interpreted that ANN model has 98,8% all possible pairs of cases are assigned correctly, whereas logistic regression has 95,9%.

ROC analysis strengthens the earlier findings from degree of fit. From the result given by degree of fit and ROC analysis, this study shows that the ANN Multi-layer Perceptron model performs better than the other methods.

4.6. Additional discussion

After gaining the results, although previously there is discussion in the end of every result, it is going to be good to have critical and specific discussion about some substances.

In data-driven methods, the condition of landslide inventory affects the results. [Figure 4](#) visualizes landslide events distribution in the study area. The figure depicts that in the area near Mount Lawu’s peak (the western part), no data available about landslide occurrences. The area is located on high elevation part. A critical question could be promoted regarding this: are there really no landslides or the landslides are simply not recorded? This is important because if the latter becomes the case,

the results could have a systematical error. In the field, the area is covered by dense forest. Naturally, very scarce landslides take place over dense forest. On the other side, the area is a remote area; no human access (i.e., roads or settlements) there. If landslides occur, probable nobody could record them. Therefore, this study could only assume that possibly there are events but because they are small, infrequently and inaccessible, there are no written record on them. It could be one source of the uncertainty in this study.

The next thing that must be noticed is about the sample size. By having only 74 events under the area 174,13 km², this study could be categorized as rare-event landslide susceptibility assessment. Rare-event data makes a situation that binary dependent variables dozens to thousands of times fewer 1s than 0s. As noted by [Van den Eeckhaut et al. \(2006\)](#), when modeling the events probably a factual result could not be reached, because of overestimation for example.

This rare-event case makes this study cannot conduct predictive-power analysis on data-driven methods in assessing model performance. Hence, the assessment of model performance is not really optimal. As consequence, the sense “better model” cannot be globally generalized and should be framed inside the concept of how well or successful the models describe the phenomena (i.e., the available landslide events) that happened locally in the study area and at the corresponding time. In other circumstances (e.g., different area of interest, different landslide event time frame) which model gives better performance probably different.

Regarding causal factors, [Fell et al. \(2008\)](#) mentioned that at least there were two aspects that might be affecting the results: the usage of factors that in nature change in time but for practical matter had been assumed stabile, and dataset detail level. This study just takes a look for static land use, although in fact a dynamic condition (i.e., land use change) is more influential.

Dataset detail level (i.e., scale or resolution) can affect results, in case of discriminatory power. So, especially in a GIS-based spatial modeling circumstance, datasets having same detail degree are more favorable. That issue is devised in this study. Only lithology has lower scale than others. Spatially, lithology will have bigger mapping unit than others. In some sense, related with spatial-matching analysis (e.g., density and WoE), probable that situation affects the analysis result.

Another thing that could be discussed is about normalization process. Since the datasets come from different unit of measurement, normalization becomes an important part in this study. Besides as an effort to make data closer to normal so they can behave better in the modeling, this process also makes all data more comparable. Although it has been recognized that logistic regression and ANN can

compromise with normality issue, this study has proven that it is a matter in getting better model performance, especially to logistic regression that more sensitive to datasets behavior. For example, in degree of fit analysis using the original datasets, logistic regression model gives poor result: relative error 44,42% and relative success 32,71%. Then, the normalization was applied. Although the result shows there are several factors remain not normal, the normalization effort takes effect because some datasets are closer to normal than before. As result, the relative error decreases to 30,58% and relative success increases to 55,92%. But, still this method is less competitive than the others because its statistical basis causes a less flexibility requirement of normality than the others (i.e., it demands normal data to perform better).

Based on what have been discussed before, although many efforts have been conducted to improve the quality (e.g., AHP implementation, multicollinearity test to avoid overfitting, normalization, three times withdrawal of equal-number binary response samples, and withdrawal of more training cases in multi-layer perceptron) it seems clear that the datasets are naturally embedded with uncertainty and characteristics that make the results could have imperfect part. This study does not deal much with the uncertainty of the datasets and analyses—or its solution, but for further study, this matter could be an important consideration.

CHAPTER 5 CONCLUSIONS AND RECOMMENDATIONS

Landslide susceptibility assessment and susceptibility zoning actually are just one part of disaster management. As a preventive medium to minimize landslides risk in the threatened area, these processes could be continued by other steps such as landslide risk mapping (which involve the life loss and property loss assessment) and its integration with land use planning and regional development. The susceptibility assessment in the Tawangmangu, Jenawi and Ngargoyoso Subdistrict in Karanganyar Regency using knowledge-based heuristic method and data-driven methods (statistical logistic regression and ANN) conclude some points as below:

1. The methods are applicable. The objectives of this study, which are formulated by a set of research questions, are fulfilled. Using eight influencing factors (slope, aspect, curvature, topographical shape, lithology, land use, distance to road and distance to river), each method applies specific way to assign weight and build the model. Heuristic method uses SMCE analysis, statistical logistic regression uses Backward LR, and ANN uses MLP back-propagation approach. As result, the most influencing factor in heuristic method, statistical logistic regression, and ANN is slope, lithology, and curvature, respectively. Totally, the most influential factor is lithology.
2. The study area was mapped into five landslide susceptibility classes: very low, low, moderate, high and very high class. According to heuristic method, the largest area is moderate (36,64%), followed by high (30,34%), low (20,73%), very low (8,45%) and very high class (3,84%). Logistic regression displays that the largest area is very high class (30,89%), followed by high (25,21%), moderate (18,87%), low (14,35%) and very low class (10,68%). ANN exhibits that moderate class (39,81%) became the largest area, followed by high (24,16%), low (23,28%), very low (6,67%) and very high class (6,08%).
3. Degree of fit analysis showed that ANN performs better than the other methods. The second is heuristic and the third is statistical logistic regression. According to ROC analysis, which is applied to data-driven methods, ANN (AUC 0,988) shows better performance than statistical logistic regression model (AUC 0,959).
4. Each method has its own characteristics, eminences and limitations. In short, heuristic method has more flexibility concerning free requirement of landslide inventory dataset, but also has limitation in its subjectivity. Data-driven methods are more robust in their analyses, but at the same time require more preliminary treatments for the variables. Some considerations could be implemented to improve the quality, such as proper references

basis and involvement of more quantitative weighting mechanism specific for heuristic method, correlation assessment, normalization, well-defined neural network setting, and proper selection of cases sample.

5. The models and their contribution value cannot be extrapolated or used to other regions because the methods use site-specific information to make prediction (zoning).

This study contains some limitations and drawbacks, which generally regard to data availability and uncertainty. Hence, continuing what have been discussed in [Section 4.6](#), for further research below are some recommendations.

1. The involvement of more and time series of causal and triggering factors. Recognized that triggering factor (e.g., rainfall) is important; as noticed that landslide frequency becomes bigger in the rainy season (October-March). This factor may function not only as a complement for hydrological group but also as a way to add some temporal analyses. More factors, such as soil and its characteristic (type, depth, textures, and permeability) and fault proximity, would be beneficial because by having more comprehensive factors, the study could reckon all possible contribution from the factors.
2. It is recommended to have bigger number of landslides. Besides help avoiding uncertainty, more cases can deliver validation set to fulfill the need to assess not only model's success but also predictive-performance for data-driven models.
3. High resolution satellite imageries (SPOT 5, Quickbird, IKONOS, and so forth) from the corresponding years could be used in the further study as supporting materials to acquire the polygon form of landslide events. Landslides in original polygon feature are better than they are in point feature as polygon form could depict the real affected area.
4. Landslides have various types in nature; each type has its specific characteristics, material, and movement style (e.g., avalanches and flows advance at high speed and cover a wider area, while creep is so local and slow in speed). As consequence, the most representative models are the ones that assess every type individually. Hence, it is recommended to have various landslide types in landslide inventory map.
5. One common characteristic of individual grid-based analysis and small mapping unit is class dispersion. The same susceptibility classes are not always flocking together in the same area, so for further application such as land use planning, a generalization is indispensable and suggested. The generalization can be processed by following the most dominant class according to the desirable mapping scale.

REFERENCES

- Abella EAC, Van Westen CJ (2008) Qualitative landslide susceptibility assessment by multicriteria analysis: a case study from San Antonio del Sur, Guantanamo Cuba. *Geomorphology* 94: 453 – 466
- Anbalagan R, Singh B (2001) Landslide hazard and risk mapping in the Himalayan. In Tianchi L, Chalise SR, Upreti BN (eds). *Landslide Hazard and Mitigation in the Hidu-kush Himalayas*, ICIMOD, Nepal.
- Ayalew L, Yamagishi H (2005) The application of GIS-based logistic regression for landslide susceptibility mapping in the Kakuda-Yahiko Mountains, Central Japan. *Geomorphology* 65 (1-2): 15-31
- Ayalew L, Yamagishi H, Marui H, Kanno T (2005) Landslides in Sado Island of Japan: Part II. GIS-based susceptibility mapping with comparisons of results from two methods and verifications. *Engineering Geology* 81: 432 – 445.
- Barbieri G, Cambuli P (2009) The weight of evidence statistical method in landslide susceptibility mapping of the Rio Pardu Valley (Sardinia, Italy). *Proceedings in 18th World IMACS/MODSIM Congress, Australia 13 – 17 July 2009*. URL: <http://www.mssanz.org.au/modsim09/G3/barbieri.pdf>, accessed on September 9th, 2010
- Bonham-Carter GF (1994) *Geographic Information System for Geoscientist: modeling with GIS*. Pergamon, Ottawa
- Borsevski PV (2001) Statistical modeling of landslide hazard using GIS. *Proceedings of the Seventh Federal Interagency Sedimentation Conference*, March 2001, Nevada
- BNPB - National Agency for Disaster Tackling and Refugee (2008) *Disaster Statistic 2008*. URL: http://www.bnpb.go.id/website/index.php?option=com_content&task=view&id=2101, accessed on August 23rd, 2010.
- Caniani D, Pascale S, Sdao F, Sole A (2008) Neural networks and landslide susceptibility: a case study of the urban area of Potenza. *Natural Hazards* 45(1): 55–72
- Carrara A (1983) Uncertainty in Evaluating Landslide Hazard and Risk. In Nemec et al. (eds) *Prediction and Perception of Natural Hazard*, 101-109. Kluwer Academic Publishers, Netherlands
- Carrara A, Cardinali M, Detti R, Guzzetti F (1991) GIS techniques and statistical model in evaluating landslide hazard: earth surface process. *Landform* 16 (5): 427 – 445
- Chauhan S, Sharma M, Arora MK, Gupta NK (2010) Landslide susceptibility zonation through rating derived from Artificial Neural Network. *International Journal of Applied Earth Observation and Geoinformation* 12 (5): 340 – 350
- Chacon J, Irigaray C, Fernandez T, Hamdouni RE (2006) Engineering geology map: landslides and geographical information system. *Bulletin for Engineering Geology and Environment* 65: 341 – 411

- Chung CF, Fabbri AG (2003) Validation of spatial prediction models for landslide hazard mapping. *Natural Hazards* 30: 451 – 472.
- Crozier MJ, Glade T (2005) Landslide hazard and risk: issues, concepts and approach. In Glade T, Anderson M, Crozier M (Eds) *Landslide hazard and risk*, Wiley, Chichester 1 – 40.
- Cruden, DM (1991) A Simple Definition of a Landslide. *Bulletin of the International Association of Engineering Geology* 43 (1): 27-29
- Cruden DM, Varnes DJ (1996) Landslide types and processes. In Turner AK, Shuster RL (Eds) *Landslides: Investigation and Mitigation*. Trans Res Board, Spec Rep 247: 36-75
- Dai FC, Lee CF, Li J, Xu ZW (2001), Assessment of landslide susceptibility on the natural terrain of Lantau Island, Hong Kong, *Environmental Geology* 40: 381 – 391
- Dai FC and Lee CF (2002) Landslide characteristics and slope instability modeling using GIS. *Geomorphology* 42(3-4): 213-228
- Dai FC, Lee CF, Ngai YY (2002) Landslide risk assessment and management: an overview. *Engineering Geology* 64: 65-87
- Eastman (2006). *IDRISI Andes, guide to GIS and image processing, user's guide* (ver. 15). Clark University Press, Massachusetts
- Era Baru (2010) Bridge construction workers dead due to slide.
URL: <http://erabaru.net/nasional/50-jakarta/15686-saat-kerjabakti-tewas-tertimbun-tanah-longsor>, accessed on September 1st, 2010 (in Indonesian)
- Fawcett T (2004) ROC Graphs: Notes and Practical Considerations for Researchers.
URL: http://home.comcast.net/~tom.fawcett/public_html/papers/ROC101.pdf, accessed on January 3rd, 2011
- Frattini P, Crosta G, Carrara A (2010) Techniques for evaluating the performance of landslide susceptibility model. *Engineering Geology* 111: 62 – 72
- Fell R, Corominas J, Bonnard C, Cascini L, Leroi E, Savage WZ (2008) Guidelines for landslide susceptibility, hazard and risk zoning for land use planning. *Engineering Geology* 102: 85 – 98
- Fernandez T, Irigaray C, EL Hamdouni R, Chacon J (2003) Methodology for landslide susceptibility mapping by means of a GIS. Application to the Contraviesa Area (Granada, Spain). *Natural Hazards* 30: 297 – 308
- Forensic Services (2010) The Map of Forensic Based Service in Southeast Asia. URL: of <http://www.forensic.cc/>, accessed on December 20th, 2010
- Garcia-Rodriguez MJ, Malpica JA, Benito B, Diaz M (2008) Susceptibility assessment of earthquake-triggered landslides in El Salvador using logistic regression. *Geomorphology* 95: 172 -191
- Gomez H, Kavzoglu T (2005) Assessment of shallow landslide susceptibility using artificial neural networks in Jabonosa River Basin, Venezuela. *Engineering Geology* 78: 11 – 27
- Hadmoko DS, Lavigne F, Sartohadi J, Hadi P, Winaryo (2010) Landslide Hazard and risk assessment and their application in risk management and landuse planning in eastern flank of Menoreh Mountains, Yogyakarta Province, Indonesia. *Natural Hazards* 54(3): 623 – 642

- Hosmer DW and Lemeshow S (2000) Applied Logistic Regression 2nd edition. Wiley, London
- Highland LM and Bobrowsky P (2008) The landslide handbook—A guide to understanding landslides: Reston, Virginia, U.S. Geological Survey Circular 1325, 129 p
- Jadda M, Shafri HZM, Mansor SB, Sharifikia M, Pirasteh S (2009) Landslide susceptibility evaluation and factor effect analysis using probabilistic-frequency ratio model. *European Journal of Scientific Research* 33(4): 654 – 668
- Jimenez-Peralvez JD, Irigaray C, Hamdouni RE, Chacon J (2009) Building model for automatic landslide-susceptibility analysis, mapping and validation in ArcGIS. *Natural Hazards* 50: 571 – 590
- Kristijono A, Tejakusuma IG, Nurjaman D, Prawiradisastira S, Setiabudi A, Wantoso EW, Suryanto (2008) Rapid Assessment Report of Landslide Disaster in Mogol Sub-Village, Legoksari Village, Tawangmangu Sub District, Karanganyar Regency Central Java Province. URL: <http://sirrma.bppt.go.id/home/rapid-assessment/longsor-karanganyar>, accessed on September 29th, 2010 (in Indonesian)
- Land Info (2010) Digital Elevation Model. URL: http://www.landinfo.com/products_dems.htm, accessed on December 1st, 2010
- Lee S, Ryu JH, Min KD, Won JS (2003) Landslide susceptibility analysis using GIS and Artificial Neural Network. *Earth Surface Processes and Landforms* 28: 1361-1376
- Lee S, Choi J, Min, K (2002) Landslide susceptibility analysis and verification using the Bayesian probability model. *Environmental Geology* 43(1-2): 120 – 131
- Lei Z, Jing-feng H (2006) GIS-based logistic regression methods for landslide susceptibility mapping in regional scale. *Journal of Zhejiang University SCIENCE A* 7 (12): 2007 – 2017
- Mancini F, Ceppi C, Ritrovato G (2010) GIS and statistical analysis for landslide susceptibility mapping in the Dunia area, Italy. *Natural Hazard Earth System Science* 10: 1851 - 1864
- Memarian H, Tajbakhsh M, Safdari A, Akhondi E (2006) Statistical Landslide Risk Zonation on the Shourijeh Formation in GIS Framework. URL: <http://www.ngdir.ir/Papers/PapersDetail.asp?PID=9948>, accessed October 14th, 2010
- Melchiorre C, Matteucci M, Azzoni A, Zanchi A (2008) Artificial neural networks and cluster analysis in landslide susceptibility zonation. *Geomorphology* 94: 379 – 400
- Muhyiuddin WM, Ibrahim W, Rainis R (2004) Modeling landslide using GIS and RS: a case study of upper stream of Langat River Basin, Malaysia. *Malaysian Journal of Environmental Management* 5: 113 – 122
- Nandi A, Shakoor A (2009) A GIS-based landslide susceptibility evaluation using bivariate and multivariate statistical analysis. *Engineering Geology* 110: 11 – 20
- Nefeslioglu HA, Gokceoglu C, Sonmez H (2008) An assessment on the use of logistic regression and artificial neural networks with different sampling

- strategies for the preparation of landslide susceptibility maps. *Engineering Geology* 97: 171 – 191
- Neuhäuser B, Terhorst B (2007) Landslide susceptibility assessment using “weights-of-evidence” applied to a study area at the Jurassic escarpment (SW-Germany). *Geology* 86: 12-24
- Pradhan B (2010) Remote sensing and GIS-based landslide hazard analysis and cross-validation using multivariate logistic regression model on three test areas in Malaysia. *Advances in Space Research* 45: 1244–1256
- Pradhan B, Lee S (2010) Regional landslide susceptibility analysis using back-propagation neural network model at Cameron Highland, Malaysia. *Landslides* 7(1): 13-30
- PSBA-UGM (2001) Landslide Disaster Information System for Kulonprogo Regency. Togyakarta, Bappeda Kabupaten Kulonprogo, p.67 (in Indonesian, unpublished)
- PVMBG - Centre of Volcanology and Geological Disaster Mitigation (2007) Brief Report of Landslide in Karanganyar Regency, Central Java. URL: http://portal.vsi.esdm.go.id/joomla/index.php?option=com_content&task=view&id=302&Itemid=2, accessed on June 30th, 2010 (in Indonesian)
- Rios D (2010) Neural networks: A requirement for intelligent systems. URL: <http://www.learnartificialneuralnetworks.com/#Intro>, accessed December 24th, 2010
- Ruff M, Czurda K (2008) Landslide susceptibility analysis with a heuristic approach in Eastern Alps (Vorarlberg, Austria). *Geomorphology* 94: 314 – 324
- Saaty TL (1980) *The Analytical Hierarchy Process*. McGraw Hill, New York
- Soeters R, Van Westen CJ (1996) Slope stability recognition, analysis, and zonation application of geographical information system to landslide hazard zonation. In: Turner AK, Schuster RL (Eds) *Landslides: investigation and mitigation*. Sp.-Rep.247, Transportation Research Board, National Research Council. National Academy Press, Washington DC: 129 – 177
- SPSS Technical Support (2010) PASW® Neural Networks 18.
- SPSS (2009) PASW® Neural Networks 18 – Specification: New Tools for Building Predictive Models. URL: <http://www.spss.com/media/collateral/statistics/neural-networks.pdf>, accessed on December 29th, 2010
- UCLA Academic Technology Services (2008) FAQ: What are pseudo R-squareds?. URL: http://www.ats.ucla.edu/stat/mult_pkg/faq/general/Pseudo_RSquareds.htm, accessed October 19th, 2010
- USGS - United States Geological Survey (2004) Landslide Type and Processes. URL: <http://pubs.usgs.gov/fs/2004/3072/fs-2004-3072.html>, accessed on September 28th, 2010
- Van Den Eeckhaut M, Vanwalleghem T, Poesen J, Govers G (2006) Prediction of landslide susceptibility using rare events logistic regression: a case study in the Flemish Ardennes (Belgium). *Geomorphology* 76: 392–410
- Van Den Eeckhaut M, Hervás J, Montanarella J (2010) Validation of landslide inventory, susceptibility and hazard maps for risk management.

- URL: http://globesec.jrc.ec.europa.eu/workshops/valgeo-2010/presentations/session-2/VanDenEeckhaut_al_v4.pdf, accessed on December 22nd, 2010
- Van Westen CJ (1993) Remote sensing and geographic information systems for geological hazard mitigation. *ITC Journal* 4: 393-399
- Van Westen CJ, Castellanos E, Kuriakose SL (2008) Spatial data for landslide susceptibility, hazard, and vulnerability assessment: an overview. *Engineering Geology* 102: 112 – 131
- Van Westen CJ, van Asch TWJ, Soeters R (2006) Landslide hazard and risk zonation – why is it still so difficult? *Bulletin for Engineering Geology and Environment* 65(2): 167 – 184
- Wahono BFD (2010) Application of statistical and heuristic methods for landslide susceptibility assessment: a case study in Wadas Lintang Sub District, Wonosobo Regency Central Java, Indonesia. M.Sc Thesis. ITC Uni Twente Netherlands and GMU Yogyakarta Indonesia
- Wati SE (2010) Integrating landslide susceptibility into land capability assessment for spatial planning: a case study in Tawangmangu Sub District, Karanganyar Regency, Indonesia. M.Sc Thesis. ITC Univ. Twente Netherlands and GMU Yogyakarta
- Wieczorek GF, Mandrone G and DeCola L (1997) The influence of hillslope shape on debris-flow initiation. In: C.L. Chen, Editor, *Debris-flow hazards mitigation: mechanics, prediction, and assessment*, American Society of Civil Engineers, New York (1997), pp. 21–31
- William R (2009a) Logistic Regression, Part III: Hypothesis Testing, Comparisons to OLS. URL: <http://www.nd.edu/~rwilliam/stats2/l83.pdf>, accessed October 19th, 2010
- William R (2009b) Multicollinearity. URL: <http://www.nd.edu/~rwilliam/stats2/l11.pdf>, accessed November 18th, 2010
- Yilmaz I (2010) The effect of the sampling strategies on the landslide susceptibility mapping by conditional probability and artificial neural network. *Earth and Environmental Science* 60(3): 505 - 519
- Zucca A, Sharifi AM, Fabbri AG (2008) Application of spatial multi-criteria analysis to site selection for a local park: a case study in the Bergamo Province, Italy. *Journal of Environmental Management* 88: 752 – 769





ANNEX 1. List of landslide events 2002 – 2010 in the study area

| No | Subdistrict | Village | Time | Effects |
|----|--------------|--------------|---------------------------------|--|
| 1 | Tawang mangu | Tawang mangu | Dec 26, 2007 | 37 died and 17 damaged houses |
| 2 | | Ledoksari | Dec 26, 2007 | Twelve damaged houses |
| 3 | | Tengklik | Dec 26, 2007 | Damaged agricultural land |
| 4 | | Tengklik | Feb, 2009 | 33 damaged houses and damaged road |
| 5 | | Sepanjang | Dec 26, 2007 | Four damaged houses |
| 6 | | Sepanjang | Dec 26, 2007 | Seven damaged house and damaged road |
| 7 | | Sepanjang | March 17, 2009 | Damaged house |
| 8 | | Sepanjang | Feb27, 2009 | Damaged road |
| 9 | | Sepanjang | Dec 2006 | Damaged land (shrub and bush) |
| 10 | | Sepanjang | Nov 18, 2009 | Damaged agricultural land (mixed garden) |
| 11 | | Sepanjang | Nov 15, 2009 | Damaged road |
| 12 | | Sepanjang | 2008 (no info about exact date) | Damaged agricultural land |
| 13 | | Sepanjang | 2007 (no info about exact date) | Damaged agricultural land |
| 14 | | Plumbon | Feb, 2007 | Damaged building |
| 15 | | Plumbon | Feb, 2007 | Damaged road retaining wall |
| 16 | | Plumbon | Dec, 2007 | Three damaged houses |
| 17 | | Plumbon | Dec, 2008 | Damaged land (shrub and bush) |
| 18 | | Plumbon | Jan, 2009 | Damaged land (shrub and bush) |
| 19 | | Karanglo | March, 2008 | Damaged road |
| 20 | | Kalisoro | August 12, 2009 | Damaged agricultural land |
| 21 | | Kalisoro | June 2009 | Damaged land (pine plantation) |
| 22 | | Bandardawung | March, 2009 | Damaged agricultural land (mixed garden) |
| 23 | | Bandardawung | 2009 (no info about exact date) | Damaged road |
| 24 | | Bandardawung | 2008 (no info about exact date) | Damaged agricultural land (mixed garden) |
| 25 | | Bandardawung | 2009 (no info about exact date) | Damaged road |
| 26 | | Bandardawung | 2009 (no info about exact date) | Damaged agricultural land (mixed garden) |
| 27 | | Bandardawung | 2009 (no info about exact date) | Damaged agricultural land (mixed garden) |
| 28 | | Bandardawung | 2009 (no info about exact date) | Damaged agricultural land (mixed garden) |
| 29 | | Bandardawung | 2009 (no info about exact date) | Damaged agricultural land (mixed garden) |
| 30 | | Gondosuli | Dec 4, 2005 | Damaged land (shrub and bush) |
| 31 | | Nglebak | 2006 (no info about exact date) | Damaged road |

Annex 1 (continued)


| | | | | |
|----|------------|--------------|---------------------------------|---------------------------------------|
| 32 | | Tengklik | Nov 15, 2009 | Damaged agricultural land |
| 33 | | Tengklik | 2006 (no info about exact date) | Damaged mixed vegetable garden |
| 34 | | Bandardawung | 2006 (no info about exact date) | Damaged land (shrub and bush) |
| 35 | | Tawangmangu | Oct 2007 | Damaged land (shrub and bush) |
| 36 | | Tawangmangu | 2006 (no info about exact date) | Damaged land (shrub and bush) |
| 37 | | Sepanjang | Nov 19, 2009 | Damaged houses, land (shrub and bush) |
| 38 | | Tengklik | May 27, 2008 | Damaged road |
| 39 | | Tengklik | Nov 15, 2009 | Damaged houses |
| 40 | | Blumbang | Jan 21, 2010 | Damaged houses |
| 41 | | Blumbang | June 15, 2010 | 4 died, damaged bridge and road |
| 42 | | Blumbang | Jan 18, 2005 | Damaged houses |
| 43 | Ngargoyoso | Nglegok | Dec 12, 2002 | Damaged houses, land (shrub and bush) |
| 44 | | Nglegok | Dec 26, 2007 | Damaged houses, land (shrub and bush) |
| 45 | | Berjo | Mar 28, 2008 | Damaged houses, land (shrub and bush) |
| 46 | | Nglegok | Jan 23, 2009 | Damaged houses, land (shrub and bush) |
| 47 | | Nglegok | Jan 23, 2009 | Damaged mixed vegetable garden |
| 48 | | Nglegok | Jan 30, 2009 | 6 died, damaged 2 houses. |
| 49 | | Gondosuli | Nov 21, 2005 | Damaged land (shrub and bush) |
| 50 | | Berjo | Mar 5, 2007 | Damaged houses |
| 51 | | Ngargoyoso | Jan 6, 2010 | 1 died, damaged house |
| 52 | | Ngargoyoso | Feb 19, 2010 | Damaged houses |
| 53 | | Kemuning | Jan 21, 2010 | Damaged 3 houses |
| 54 | | Kemuning | Jan 21, 2010 | Damaged houses, land |
| 55 | | Nglegok | Jan 30, 2009 | Damaged houses, land (shrub and bush) |
| 56 | | Kemuning | Feb 19, 2010 | Damaged houses |
| 57 | | Kemuning | Feb 19, 2010 | Damaged houses land (shrub and bush) |
| 58 | | Ngargoyoso | Feb 19, 2010 | Damaged land (shrub and bush) |
| 59 | | Girimulyo | Feb 19, 2010 | Damaged land (shrub and bush) |
| 62 | | Girimulyo | Feb 19, 2010 | Damaged houses |
| 61 | Jenawi | Balong | Jan 12, 2009 | Damaged houses |
| 62 | | Balong | Jan 12, 2009 | Damaged houses |
| 63 | | Balong | May 22, 2009 | Damaged houses, land (shrub and bush) |
| 64 | | Trengguli | Jan 3, 2008 | Damaged houses, land (shrub and bush) |
| 65 | | Seloromo | Dec 27, 2007 | Damaged 51 houses |
| 66 | | Balong | May 22, 2009 | Damaged houses, land (shrub and bush) |
| 67 | | Balong | May 22, 2009 | Damaged houses, land (shrub and bush) |
| 68 | | Sidomukti | Jan 21, 2010 | Damaged houses, land (shrub and bush) |
| 69 | | Trengguli | Feb 21, 2010 | Damaged houses, land (shrub and bush) |
| 70 | | Jenawi | Feb 21, 2010 | Damaged houses, land (shrub and bush) |
| 71 | | Lempong | Feb 4, 2010 | Damaged houses |
| 72 | | Seloromo | July 22, 2010 | 1 died, 6 wounded, damaged bridge |
| 73 | | Argamanis | Nov 15, 2009 | Damaged houses, land (shrub and bush) |
| 74 | | Gumeng | Nov 15, 2009 | Damaged houses, land (shrub and bush) |

ANNEX 2. Q-Q plot of variables
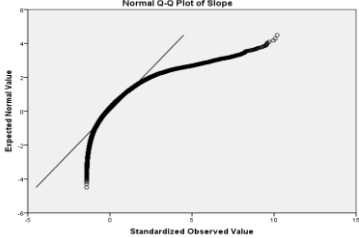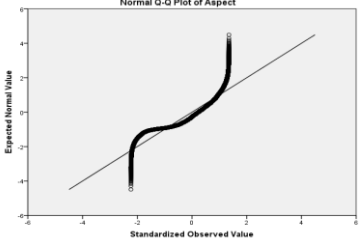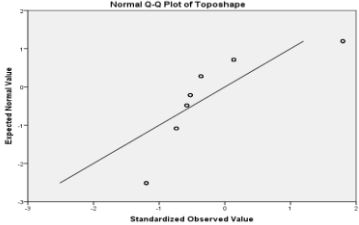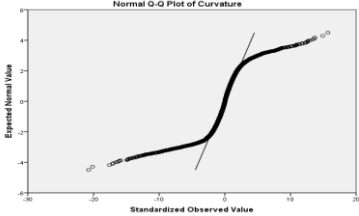
| Plot | Explanation |
|--|---|
| <p>Slope</p>  <p>The plot shows a curve that starts below the diagonal line and then arches above it, indicating positive skewness. The x-axis is labeled 'Standardized Observed Value' and the y-axis is labeled 'Expected Normal Value'.</p> | <p><i>Positive skew (1,910)</i></p> <p>The right tail is longer; the mass of the distribution is concentrated on the left of the figure.</p> |
| <p>Aspect</p>  <p>The plot shows a curve that starts above the diagonal line and then arches below it, indicating negative skewness. The x-axis is labeled 'Standardized Observed Value' and the y-axis is labeled 'Expected Normal Value'.</p> | <p>Left end of pattern is below the line; right end of pattern is above the line. Short tails at both ends of the data distribution.</p> <p><i>Negative skew (-,862):</i> The left tail is longer; the mass of the distribution is concentrated on the right of the figure.</p> |
| <p>Topographical shape</p>  <p>The plot shows a curve that starts below the diagonal line, arches above it, and then returns below it, indicating a skewed distribution. The x-axis is labeled 'Standardized Observed Value' and the y-axis is labeled 'Expected Normal Value'.</p> | <p>Starting below the target line (or to the right), arching across it and then back to finish below (or to the right of) the line again.</p> <p>Skewed to the right/positive skew (1,167): The right tail is longer; the mass of the distribution is concentrated on the left of the figure.</p> |
| <p>Curvature</p>  <p>The plot shows a curve that starts above the diagonal line and then arches below it, indicating negative skewness. The x-axis is labeled 'Standardized Observed Value' and the y-axis is labeled 'Expected Normal Value'.</p> | <p><i>Negative skew (-1,032)</i></p> <p>Left end of pattern is above the line; right end of pattern is below the line. Short tails at both ends of the data distribution but the left tail is longer; the mass of the distribution is concentrated on the right of the figure.</p> |

Annex 2 (continued)


Lithology

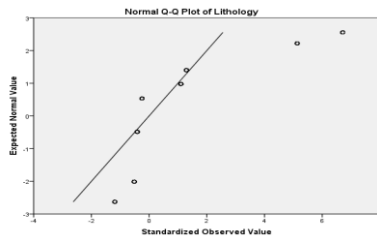

Skewed to the right/positive skew (4,151):


The result is a Q-Q plot that resembles the left hand top of an arch, starting below the target line (or to the right if you prefer), arching across it and then back to finish below (or to the right of) the line again (i.e., it has a long right hand tail).

Land use

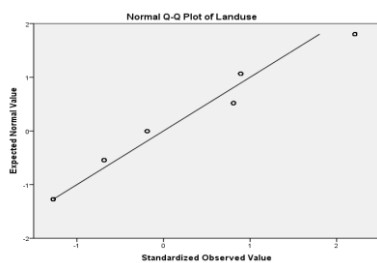


Positive skew (0,485) : The right tail is longer; the mass of the distribution is concentrated on the left of the figure.

Distance to road

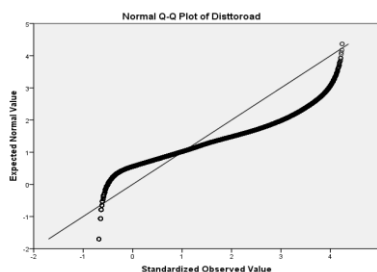

Positive skew (1,860): The mass of the distribution is concentrated on the left of the figure.

Distance to river

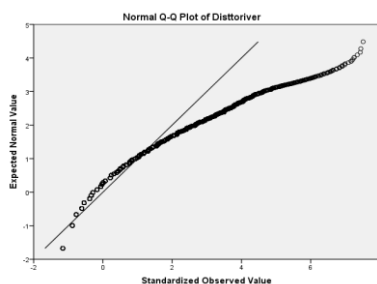

Positive skew (1,423) : The right tail is longer; the mass of the distribution is concentrated on the left of the figure.

ANNEX 3. Logistic regression prediction results

| Notes | | |
|-------------------------------|-----------------------|--|
| Output Created | | 04-Jan-2011 19:03:40 |
| Comments | | |
| Input | Data | D:_THESIS\DATA\Variables\continuous\cont_as |
| | Active Dataset | ci\dataset3_egal_ori_normalized.sav |
| | Filter | <none> |
| | Weight | <none> |
| | Split File | <none> |
| | N of Rows in Working | 448 |
| | Data File | |
| Missing Value Handling | Definition of Missing | User-defined missing values are treated as missing |
| Syntax | | LOGISTIC REGRESSION VARIABLES Landslide /METHOD=BSTEP(LR) Aspect Slope Disttoroad Disttoriver Lithology Landuse Curvature Toposhape /SAVE=PRED /CRITERIA=PIN(0.05) POUT(0.10) ITERATE(20) CUT(0.5). |
| Resources | Processor Time | 00:00:00,047 |
| | Elapsed Time | 00:00:00,100 |
| Variables Created or Modified | PRE_2 | Predicted probability |

[DataSet2] D:_THESIS\DATA\Variables\continuous\cont_ascii\dataset2_egal_ori_normalized.sav

Case Processing Summary

| Unweighted Cases ^a | | N | Percent |
|-------------------------------|----------------------|-----|---------|
| Selected Cases | Included in Analysis | 448 | 100,0 |
| | Missing Cases | 0 | ,0 |
| | Total | 448 | 100,0 |
| Unselected Cases | | 0 | ,0 |
| Total | | 448 | 100,0 |

a. If weight is in effect, see classification table for the total number of cases.

Dependent Variable Encoding

| Original Value | Internal Value |
|----------------|----------------|
| dimens ,00 | 0 |
| ion0 1,00 | 1 |

Block 0: Beginning Block

Classification Table^{a,b}

| Observed | | | Predicted | | |
|--------------------|-----------|------|-----------|------|--------------------|
| | | | Landslide | | Percentage Correct |
| | | | ,00 | 1,00 | |
| Step 0 | Landslide | ,00 | 0 | 224 | ,0 |
| | | 1,00 | 0 | 224 | 100,0 |
| Overall Percentage | | | | | 50,0 |

a. Constant is included in the model.

b. The cut value is ,500

Variables in the Equation

| | B | S.E. | Wald | df | Sig. | Exp(B) |
|-----------------|------|------|------|----|-------|--------|
| Step 0 Constant | ,000 | ,094 | ,000 | 1 | 1,000 | 1,000 |

Variables not in the Equation

| | Score | df | Sig. |
|-------------------------|---------|----|------|
| Step 0 Variables Aspect | 4,388 | 1 | ,036 |
| Slope | 53,534 | 1 | ,000 |
| Disttoroad | 50,245 | 1 | ,000 |
| Disttoriver | 5,853 | 1 | ,016 |
| Lithology | 28,953 | 1 | ,000 |
| Landuse | 59,740 | 1 | ,000 |
| Curvature | 210,688 | 1 | ,000 |
| Toposhape | 193,652 | 1 | ,000 |
| Overall Statistics | 269,870 | 8 | ,000 |

Block 1: Method = Backward Stepwise (Likelihood Ratio)

Omnibus Tests of Model Coefficients

| | Chi-square | df | Sig. |
|--------------------------|------------|----|------|
| Step 1 Step | 388,608 | 8 | ,000 |
| Block | 388,608 | 8 | ,000 |
| Model | 388,608 | 8 | ,000 |
| Step 2 ^a Step | -,732 | 1 | ,392 |
| Block | 387,876 | 7 | ,000 |
| Model | 387,876 | 7 | ,000 |
| Step 3 ^a Step | -2,072 | 1 | ,150 |
| Block | 385,804 | 6 | ,000 |
| Model | 385,804 | 6 | ,000 |

a. A negative Chi-squares value indicates that the Chi-squares value has decreased from the previous step.

Model Summary

| Step | -2 Log likelihood | Cox & Snell R Square | Nagelkerke R Square |
|------|----------------------|----------------------|---------------------|
| 1 | 232,452 ^a | ,580 | ,773 |
| 2 | 233,184 ^a | ,579 | ,772 |
| 3 | 235,256 ^a | ,577 | ,770 |

a. Estimation terminated at iteration number 7 because parameter estimates changed by less than ,001.

Classification Table^a

| Observed | | | Predicted | | |
|----------|--------------------|------|-----------|------|--------------------|
| | | | Landslide | | Percentage Correct |
| | | | ,00 | 1,00 | |
| Step 1 | Landslide | ,00 | 203 | 21 | 90,6 |
| | | 1,00 | 25 | 199 | 88,8 |
| | Overall Percentage | | | | 89,7 |
| Step 2 | Landslide | ,00 | 203 | 21 | 90,6 |
| | | 1,00 | 24 | 200 | 89,3 |
| | Overall Percentage | | | | 90,0 |
| Step 3 | Landslide | ,00 | 203 | 21 | 90,6 |
| | | 1,00 | 22 | 202 | 90,2 |
| | Overall Percentage | | | | 90,4 |

a. The cut value is ,500

Variables in the Equation

| | | B | S.E. | Wald | df | Sig. | Exp(B) |
|---------------------|---------------------|--------|-------|--------|-------|------|------------|
| Step 1 ^a | Aspect | -,274 | ,174 | 2,473 | 1 | ,116 | ,761 |
| | Slope | -,566 | ,232 | 5,970 | 1 | ,015 | ,568 |
| | Disttoroad | ,197 | ,228 | ,748 | 1 | ,387 | 1,218 |
| | Disttoriver | -,398 | ,185 | 4,620 | 1 | ,032 | ,672 |
| | Lithology | 13,754 | 3,533 | 15,156 | 1 | ,000 | 940665,829 |
| | Landuse | 3,562 | 1,589 | 5,023 | 1 | ,025 | 35,220 |
| | Curvature | 2,697 | ,363 | 55,158 | 1 | ,000 | 14,835 |
| | Toposhape | -3,251 | ,790 | 16,944 | 1 | ,000 | ,039 |
| | Constant | ,151 | ,568 | ,070 | 1 | ,791 | 1,163 |
| Step 2 ^a | Aspect | -,246 | ,170 | 2,096 | 1 | ,148 | ,782 |
| | Slope | -,510 | ,220 | 5,365 | 1 | ,021 | ,600 |
| | Disttoriver | -,384 | ,183 | 4,404 | 1 | ,036 | ,681 |
| | Lithology | 12,745 | 3,218 | 15,686 | 1 | ,000 | 342754,390 |
| | Landuse | 3,068 | 1,473 | 4,337 | 1 | ,037 | 21,491 |
| | Curvature | 2,665 | ,363 | 53,984 | 1 | ,000 | 14,372 |
| | Toposhape | -3,189 | ,785 | 16,487 | 1 | ,000 | ,041 |
| | Constant | ,294 | ,541 | ,295 | 1 | ,587 | 1,342 |
| | Step 3 ^a | Slope | -,503 | ,218 | 5,308 | 1 | ,021 |
| Disttoriver | | -,393 | ,183 | 4,634 | 1 | ,031 | ,675 |
| Lithology | | 13,487 | 3,168 | 18,118 | 1 | ,000 | 719695,188 |
| Landuse | | 3,355 | 1,460 | 5,281 | 1 | ,022 | 28,642 |
| Curvature | | 2,620 | ,359 | 53,211 | 1 | ,000 | 13,731 |
| Toposhape | | -3,220 | ,784 | 16,868 | 1 | ,000 | ,040 |
| Constant | | ,201 | ,536 | ,140 | 1 | ,708 | 1,222 |

a. Variable(s) entered on step 1: Aspect, Slope, Disttoroad, Disttoriver, Lithology, Landuse, Curvature, Toposhape.


| Model if Term Removed | | | | | |
|-----------------------|-------------|----------------------|-----------------------------|----|--------------------|
| Variable | | Model Log Likelihood | Change in -2 Log Likelihood | df | Sig. of the Change |
| Step 1 | Aspect | -117,456 | 2,459 | 1 | ,117 |
| | Slope | -119,472 | 6,491 | 1 | ,011 |
| | Disttoroad | -116,592 | ,732 | 1 | ,392 |
| | Disttoriver | -118,648 | 4,844 | 1 | ,028 |
| | Lithology | -126,778 | 21,104 | 1 | ,000 |
| | Landuse | -118,775 | 5,098 | 1 | ,024 |
| | Curvature | -167,149 | 101,845 | 1 | ,000 |
| | Toposhape | -124,220 | 15,988 | 1 | ,000 |
| Step 2 | Aspect | -117,628 | 2,072 | 1 | ,150 |
| | Slope | -119,488 | 5,792 | 1 | ,016 |
| | Disttoriver | -118,893 | 4,602 | 1 | ,032 |
| | Lithology | -127,032 | 20,880 | 1 | ,000 |
| | Landuse | -118,777 | 4,369 | 1 | ,037 |
| | Curvature | -167,626 | 102,069 | 1 | ,000 |
| | Toposhape | -124,362 | 15,541 | 1 | ,000 |
| Step 3 | Slope | -120,466 | 5,676 | 1 | ,017 |
| | Disttoriver | -120,048 | 4,841 | 1 | ,028 |
| | Lithology | -129,756 | 24,257 | 1 | ,000 |
| | Landuse | -120,294 | 5,332 | 1 | ,021 |
| | Curvature | -167,719 | 100,182 | 1 | ,000 |
| | Toposhape | -125,549 | 15,843 | 1 | ,000 |

| Variables not in the Equation | | | | Score | df | Sig. |
|-------------------------------|--------------------|------------|--|-------|----|------|
| Step 2 ^a | Variables | Disttoroad | | ,750 | 1 | ,386 |
| | Overall Statistics | | | ,750 | 1 | ,386 |
| Step 3 ^b | Variables | Aspect | | 2,114 | 1 | ,146 |
| | | Disttoroad | | ,350 | 1 | ,554 |
| | Overall Statistics | | | 2,838 | 2 | ,242 |


a. Variable(s) removed on step 2: Disttoroad.

b. Variable(s) removed on step 3: Aspect.

ANNEX 4. LSI using pseudo-probabilities

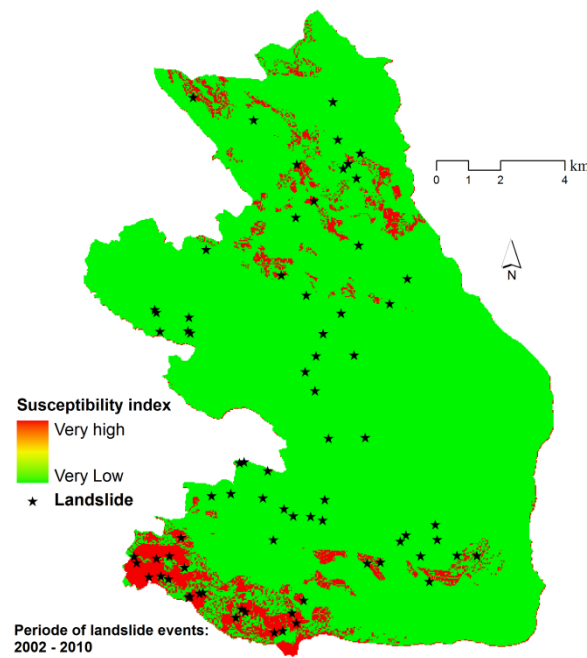

ANN model performance from ROC AUC analysis:

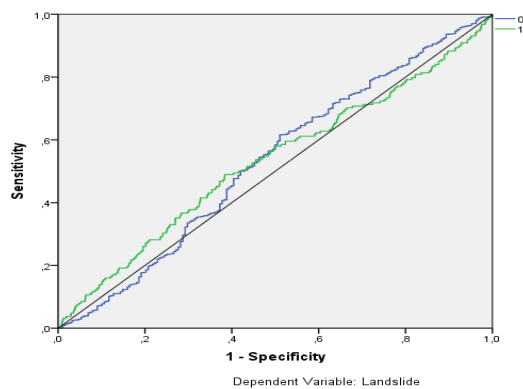

| Area Under the Curve | | |
|----------------------|---|------|
| | | Area |
| Landslide | 0 | ,531 |
| | 1 | ,531 |

ANNEX 5. ANN used in this study

*Multilayer Perceptron Network.

MLP Landslide (MLEVEL=N) BY Lithology Landuse Toposhape WITH Slope Aspect Curvature
Disttoroad Disttoriver
/RESCALE COVARIATE=NORMALIZED
/PARTITION TRAINING=6 TESTING=4 HOLDOUT=2
/ARCHITECTURE AUTOMATIC=YES (MINUNITS=1 MAXUNITS=50)
/CRITERIA TRAINING=BATCH OPTIMIZATION=SCALEDCONJUGATE
LAMBDAINITIAL=0.0000005 SIGMAINITIAL=0.00005 INTERVALCENTER=0 INTERVALOFFSET=0.5
MEMSIZE=1000
/PRINT CPS NETWORKINFO SUMMARY CLASSIFICATION IMPORTANCE
/PLOT NETWORK
/STOPPINGRULES ERRORSTEPS= 1 (DATA=AUTO) TRAININGTIMER=ON (MAXTIME=15)
MAXEPOCHS=AUTO ERRORCHANGE=1.0E-4 ERRORRATIO=0.0010
/MISSING USERMISSING=EXCLUDE .

Multilayer Perceptron

| Notes | | |
|------------------------|--------------------------------|---|
| Output Created | | 18-Nov-2010 16:20:35 |
| Comments | | |
| Input | Data | D:_THESIS\DATA\Variables\continuous\cont_ascii\dataset3_equal_ori_normalized.sav |
| | Active Dataset | DataSet1 |
| | Filter | <none> |
| | Weight | <none> |
| | Split File | <none> |
| | N of Rows in Working Data File | 448 |
| Missing Value Handling | Definition of Missing | User- and system-missing values are treated as missing. |
| | Cases Used | Statistics are based on cases with valid data for all variables used by the procedure. |
| Weight Handling | | not applicable |
| Syntax | | MLP Landslide (MLEVEL=N) BY Lithology Landuse Toposhape WITH Slope Aspect Curvature Disttoroad Disttoriver /RESCALE COVARIATE=NORMALIZED /PARTITION TRAINING=6 TESTING=4 HOLDOUT=2 /ARCHITECTURE AUTOMATIC=YES (MINUNITS=1 MAXUNITS=50) /CRITERIA TRAINING=BATCH OPTIMIZATION=SCALEDCONJUGATE LAMBDAINITIAL=0.0000005 SIGMAINITIAL=0.00005 INTERVALCENTER=0 INTERVALOFFSET=0.5 MEMSIZE=1000 /PRINT CPS NETWORKINFO SUMMARY CLASSIFICATION IMPORTANCE /PLOT NETWORK /STOPPINGRULES ERRORSTEPS= 1 (DATA=AUTO) TRAININGTIMER=ON (MAXTIME=15) MAXEPOCHS=AUTO ERRORCHANGE=1.0E-4 ERRORRATIO=0.0010 /MISSING USERMISSING=EXCLUDE . |
| Resources | Processor Time | 00:00:00,889 |
| | Elapsed Time | 00:00:00,902 |

[DataSet1] D:_THESIS\DATA\Variables\continuous\cont_ascii\dataset3_egal_ori_normalized.sav

Model Summary

| | | |
|----------|-------------------------------|--|
| Training | Cross Entropy Error | 15,228 |
| | Percent Incorrect Predictions | 1,4% |
| | Stopping Rule Used | 1 consecutive step(s) with no decrease in error ^a |
| | Training Time | 00:00:00,326 |
| Testing | Cross Entropy Error | 20,517 |
| | Percent Incorrect Predictions | 5,5% |
| Holdout | Percent Incorrect Predictions | 7,6% |

Dependent Variable: Landslide

a. Error computations are based on the testing sample.

Network Information

| | | | |
|-----------------|--|--------------------|------------|
| Input Layer | Factors | 1 | Lithology |
| | | 2 | |
| | | 3 | |
| | | 4 | |
| | | 5 | |
| | Covariates | 1 | |
| | | 2 | |
| | | 3 | |
| | | 4 | |
| | | 5 | |
| Hidden Layer(s) | Number of Units ^a | 24 | Normalized |
| | Rescaling Method for Covariates | | |
| | Number of Hidden Layers | 1 | |
| | Number of Units in Hidden Layer 1 ^a | 5 | |
| | Activation Function | Hyperbolic tangent | |
| Output Layer | Dependent Variables | 1 | Landslide |
| | Number of Units | 2 | |
| | Activation Function | Softmax | |
| | Error Function | Sum of Square | |

a. Excluding the bias unit

Classification


| Sample | Observed | Predicted | | |
|----------|-----------------|-----------|-------|-----------------|
| | | ,00 | 1,00 | Percent Correct |
| Training | ,00 | 110 | 2 | 98,2% |
| | 1,00 | 1 | 109 | 99,1% |
| | Overall Percent | 50,0% | 50,0% | 98,6% |
| Testing | ,00 | 74 | 5 | 93,7% |
| | 1,00 | 3 | 64 | 95,5% |
| | Overall Percent | 52,7% | 47,3% | 94,5% |
| Holdout | ,00 | 32 | 1 | 97,0% |
| | 1,00 | 5 | 41 | 89,1% |
| | Overall Percent | 46,8% | 53,2% | 92,4% |

Dependent Variable: Landslide


Independent Variable Importance

| | Importance | Normalized Importance |
|-------------|------------|-----------------------|
| Lithology | ,163 | 54,9% |
| Landuse | ,120 | 40,7% |
| Toposhape | ,185 | 62,4% |
| Slope | ,102 | 34,5% |
| Aspect | ,049 | 16,7% |
| Curvature | ,296 | 100,0% |
| Disttoroad | ,045 | 15,2% |
| Disttoriver | ,040 | 13,6% |

ANNEX 6. Landslide susceptibility maps

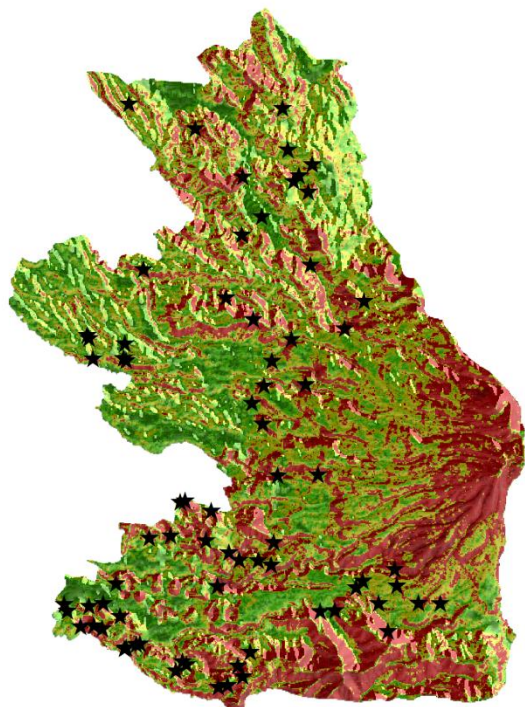

Heuristic

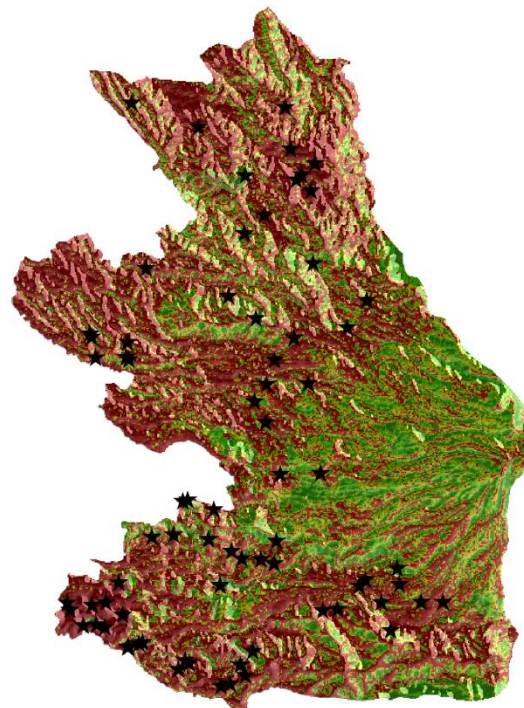

Statistical logistic regression

LANDSLIDE SUSCEPTIBILITY MAP


of heuristic, statistical logistic regression
and ANN method

Location:
Tawangmangu, Jenawi and Ngargoyoso Subdistrict
Karanganyar Regency - Indonesia


DATUM WGS 84
PROJECTION UTM 49S

Susceptibility

- Very low
- Low
- Moderate
- High
- Very high
- ★ Landslide



Background of the maps:
Aspect and elevation from SRTM 30m
Periode of landslide events: 2002 - 2010

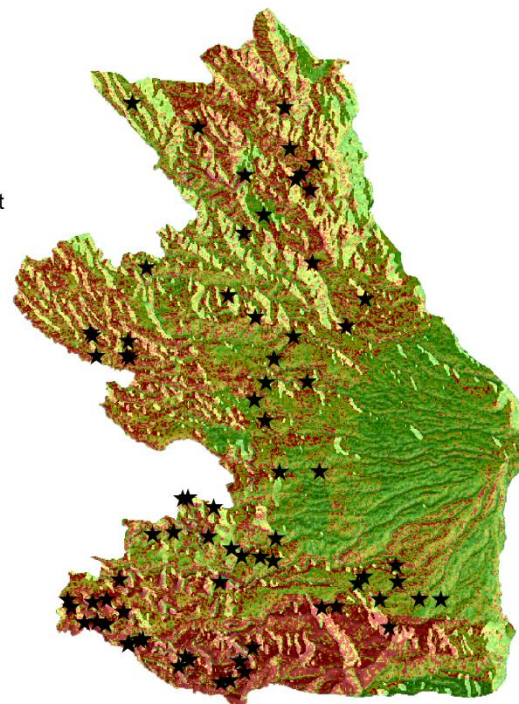

ANN



Masters Program in **Geospatial Technologies**



Supported by:



Education and Culture

ERASMUS MUNDUS