

Multilayer shallow water models with locally variable number of layers and semi-implicit time discretization

Luca Bonaventura ⁽¹⁾, Enrique D. Fernández-Nieto ⁽²⁾,
José Garres-Díaz ⁽²⁾ and Gladys Narbona-Reina ⁽²⁾

March 12, 2018

⁽¹⁾ MOX – Modelling and Scientific Computing,
Dipartimento di Matematica, Politecnico di Milano
Via Bonardi 9, 20133 Milano, Italy
`luca.bonaventura@polimi.it`

⁽²⁾ Departamento de Matemática Aplicada I & IMUS,
ETS Arquitectura, Universidad de Sevilla
Avda. Reina Mercedes 2, 41012, Sevilla, Spain
`edofer@us.es`, `jgarres@us.es`, `gnarbona@us.es`

Keywords: Semi-implicit method, multilayer approach, depth-averaged model, mass exchange, sediment transport.

AMS Subject Classification: 35F31, 35L04, 65M06, 65N08, 76D33

Abstract

We propose an extension of the discretization approaches for multilayer shallow water models, aimed at making them more flexible and efficient for realistic applications to coastal flows. A novel discretization approach is proposed, in which the number of vertical layers and their distribution are allowed to change in different regions of the computational domain. Furthermore, semi-implicit schemes are employed for the time discretization, leading to a significant efficiency improvement for subcritical regimes. We show that, in the typical regimes in which the application of multilayer shallow water models is justified, the resulting discretization does not introduce any major spurious feature and allows again to reduce substantially the computational cost in areas with complex bathymetry. As an example of the potential of the proposed technique, an application to a sediment transport problem is presented, showing a remarkable improvement with respect to standard discretization approaches.

1 Introduction

Multilayer shallow water models have been first proposed in [2] to account for the vertical structure in the simulation of large scale geophysical flows. They have been later extended and applied in [5, 4, 6]. This multilayer model was applied in [3] to study movable beds by adding an Exner equation. A different formulation, to which we will refer in this paper, was proposed in [26], which has several peculiarities with respect to previous multilayer models. The model proposed in [26] is derived from the weak form of the full Navier-Stokes system, by assuming a discontinuous profile of velocity, and the solution is obtained as a particular weak solution of the full Navier-Stokes system. The vertical velocity is computed in a postprocessing step based on the incompressibility condition, but accounting also for the mass transfer terms between the internal layers. In [25], this multilayer approach is applied to dry granular flows, for which an accurate approximation of the vertical flow structure is essential to approximate the velocity-pressure dependent viscosity.

Multilayer shallow water models can be seen as an alternative to more standard approaches for vertical discretizations, such as natural height coordinates, (also known as z -coordinates in the literature on numerical modelling of atmospheric and oceanic flows), employed e.g. in [11, 16, 19], terrain following coordinates (also known as σ -coordinates in the literature), see e.g. [31], and isopycnal coordinates, see e.g. [9, 18]. Each technique has its own advantages and shortcomings, as highlighted in the discussions and reviews

in [1, 11, 12, 32]. Multilayer approaches are appealing, because they share some of the advantages of z -coordinates, such as the absence of metric terms in the model equations, while not requiring special treatment of the lower boundary. On the other hand, multilayer approaches share one of the main disadvantages of σ -coordinates, since they require, at least in the formulations employed so far, to use the same number of layers independently of the fluid depth. Furthermore, an implicit regularity assumption on the lower boundary is required, in order to avoid that too steeply inclined layers arise, which would contradict the fundamental hydrostatic assumption underlying the model.

In this work, we propose two strategies acting at the same time to make multilayer models more efficient and fully competitive with their z - and σ -coordinates counterparts. On one hand, we propose a novel discretization approach, in which the number of vertical layers can vary over the computational domain. We show that, in the typical regimes in which the application of multilayer shallow water models is justified, the resulting discretization does not introduce significant errors and allows to reduce substantially the computational cost in areas with complex bathymetry. In this way, multilayer approaches become fully competitive with z -coordinate discretizations for large scale, hydrostatic flows. Furthermore, efficient semi-implicit discretizations are applied for the first time to the discretization of the free surface gradients and the flow divergence in multilayer models. Notice that a semi-implicit approach for the discretization of vertical viscosity and friction terms has instead been introduced in [4, 26]. In order to further simplify the presentation, we only introduce the discretization for an $x - z$ vertical slice, even though both, the multilayer approach (see [26]) and any of the methods presented, can be generalized to the full three dimensional case. In this paper, again for simplicity, we have restricted our attention to constant density flows. An extension to variable density problems in the Boussinesq regime will be presented in a forthcoming paper. However, as a first step, we present in Appendix A a detailed description of the coupled discretization of a tracer equation. Not only it is the basis for the variable density extension, but, as shown in [30], the coupling of this equation to the discretized continuity equation is not a trivial issue and it is very important to verify compatibility conditions between the discrete continuity equation and the discrete tracer equations.

In section 2, the equations defining the multilayer shallow water models of interest will be reviewed. In section 3, the spatial discretization is introduced in a simplified framework, showing how the number of layers can be allowed to vary over the computational domain. In section 4, some semi-implicit time discretizations are introduced for the model with a variable number

of layers. Results of a number of numerical experiments are reported in section 5, showing the significant efficiency gains that can be achieved by combination of these two techniques. Some conclusions and perspectives for future work are presented in section 6.

2 Multilayer shallow water models

We consider the multilayer shallow water model described pictorially in figure 1. In this approach, N subdivisions Ω_α , $\alpha = 1, \dots, N$ of the domain Ω are introduced in the vertical direction. We denote by h_α the height of the layer α and by $h = \sum_{\alpha=1}^N h_\alpha$ the total height. Note that $\Omega = \bigcup_{\alpha=1}^N \Omega_\alpha$ and that each subdomain Ω_α is delimited by time dependent interfaces $\Gamma_{\alpha \pm \frac{1}{2}}(t)$, that are assumed to be represented by the one valued functions $z = z_{\alpha \pm \frac{1}{2}}(t, x)$. These interfaces can be written as $z_{\alpha+1/2} = z_{1/2} + \sum_{\beta=1}^{\alpha} h_\beta$, depending on the thicknesses h_α , where $z_{1/2} = b(x)$ is a function describing the bottom.

Given a function f we also define as in [26], for $\alpha = 0, 1, \dots, N$,

$$f_{\alpha+\frac{1}{2}}^- := (f|_{\Omega_\alpha(t)})|_{\Gamma_{\alpha+\frac{1}{2}}(t)} \quad \text{and} \quad f_{\alpha+\frac{1}{2}}^+ := (f|_{\Omega_{\alpha+1}(t)})|_{\Gamma_{\alpha+\frac{1}{2}}(t)}.$$

Obviously, if the function f is continuous,

$$f_{\alpha+\frac{1}{2}} := f|_{\Gamma_{\alpha+\frac{1}{2}}(t)} = f_{\alpha+\frac{1}{2}}^+ = f_{\alpha+\frac{1}{2}}^-.$$

Note that this subdivision corresponds to the vertical discretization of the domain, which, a priori, is not related to the characteristics neither of the flow nor of the domain.

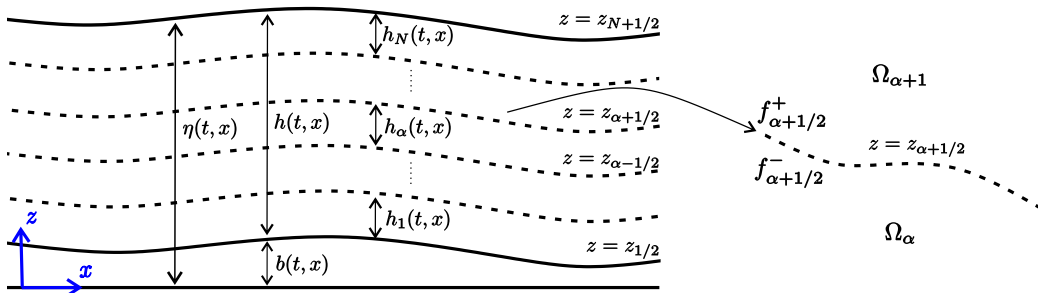


Figure 1: Sketch of the domain and of its subdivision in a constant number of layers.

Following [25, 26], the equations describing this multilayer approach can be written for $\alpha = 1, \dots, N$ as

$$\left\{ \begin{array}{l} \partial_t h_\alpha + \partial_x (h_\alpha u_\alpha) = G_{\alpha+\frac{1}{2}} - G_{\alpha-\frac{1}{2}}, \\ \partial_t (h_\alpha u_\alpha) + \partial_x (h_\alpha u_\alpha^2) \\ \quad + gh_\alpha \partial_x (b+h) = K_{\alpha-\frac{1}{2}} - K_{\alpha+\frac{1}{2}} \\ \quad + \frac{1}{2} G_{\alpha+\frac{1}{2}} (u_{\alpha+1} + u_\alpha) - \frac{1}{2} G_{\alpha-\frac{1}{2}} (u_\alpha + u_{\alpha-1}). \end{array} \right. \quad (1)$$

Here, we consider a fluid with constant density, where $(u_\alpha, w_\alpha) \in \mathbb{R}^2$ is the velocity in the layer α , and the terms $K_{\alpha+\frac{1}{2}}$ model the shear stresses between the layers. Notice that the atmospheric pressure is assumed to be zero. The vertical velocity profile is recovered from both the integrated incompressibility and the mass jump condition, obtaining for $\alpha = 1, \dots, N$ and $z \in (z_{\alpha-\frac{1}{2}}, z_{\alpha+\frac{1}{2}})$,

$$w_\alpha(t, x, z) = w_{\alpha-\frac{1}{2}}^+(t, x) - \left(z - z_{\alpha-\frac{1}{2}}(t, x) \right) \partial_x u_\alpha(t, x), \quad (2a)$$

$$w_{\alpha+\frac{1}{2}}^+(t, x) = \left(u_{\alpha+1}(t, x) - u_\alpha(t, x) \right) \partial_x z_{\alpha+\frac{1}{2}}(t, x) + w_{\alpha+\frac{1}{2}}^-(t, x), \quad (2b)$$

$$w_{\alpha+\frac{1}{2}}^-(t, x) = w_{\alpha-\frac{1}{2}}^+(t, x) - h_\alpha(x) \partial_x u_\alpha(t, x), \quad (2c)$$

where $w_{\frac{1}{2}}^+ = u_1 \partial_x b - G_{\frac{1}{2}}$, at the bottom. Since we are focusing in this work mostly on subcritical flows, there is no special reason to choose discharge rather than velocity as a model variable. Therefore, we rewrite the previous system as

$$\left\{ \begin{array}{l} \partial_t h_\alpha + \partial_x (h_\alpha u_\alpha) = G_{\alpha+\frac{1}{2}} - G_{\alpha-\frac{1}{2}}, \\ h_\alpha \partial_t u_\alpha + h_\alpha u_\alpha \partial_x u_\alpha + gh_\alpha \partial_x (b+h) \\ \quad = K_{\alpha-\frac{1}{2}} - K_{\alpha+\frac{1}{2}} + G_{\alpha+\frac{1}{2}} \Delta \tilde{u}_{\alpha+\frac{1}{2}} + G_{\alpha-\frac{1}{2}} \Delta \tilde{u}_{\alpha-\frac{1}{2}}, \end{array} \right. \quad (3)$$

where $\Delta \tilde{u}_{\alpha+\frac{1}{2}} = (u_{\alpha+1} - u_\alpha)/2$. From the derivation in [26], it follows that

$$G_{\alpha+\frac{1}{2}} = \partial_t z_{\alpha+\frac{1}{2}} + u_{\alpha+\frac{1}{2}}^\pm \partial_x z_{\alpha+\frac{1}{2}} - w_{\alpha+\frac{1}{2}}^\pm, \quad (4a)$$

$$K_{\alpha+\frac{1}{2}} = -\nu_{\alpha+\frac{1}{2}} \mathcal{U}_{\mathcal{Z}}^H \alpha+\frac{1}{2}, \quad (4b)$$

where ν denotes the kinematic viscosity and $\mathcal{U}_{\mathcal{Z}}^H \alpha+\frac{1}{2}$ is an approximation of $\partial_z u_\alpha$ at $\Gamma_{\alpha+\frac{1}{2}}$. We then define the vertical partition of the domain, setting

$h_\alpha = l_\alpha h$ where, for $\alpha = 1, \dots, N$, l_α are positive coefficients such that

$$\sum_{\alpha=1}^N l_\alpha = 1.$$

Note that these coefficients, whose choice is completely free, determine the thickness of the vertical layers h_α . Since these are not material layers, mass can flow through them. Usually, the l_α coefficients have been taken to be constants, while in this paper we consider them as a function of space, as detailed in section 3.

Note that model (1) consists of $2N$ equations in the unknowns

$$h, \{u_\alpha\}_{\alpha=1, \dots, N}, \quad \{G_{\alpha+\frac{1}{2}}\}_{\alpha=1, \dots, N-1}.$$

However, the mass transfer terms can be rewritten as

$$G_{\alpha+\frac{1}{2}} = \partial_t z_{\alpha+\frac{1}{2}} + \frac{u_\alpha + u_{\alpha+1}}{2} \partial_x z_{\alpha+\frac{1}{2}} - w_{\alpha+\frac{1}{2}}, \quad \text{where} \quad w_{\alpha+\frac{1}{2}} = \frac{w_{\alpha+\frac{1}{2}}^+ + w_{\alpha+\frac{1}{2}}^-}{2}.$$

As a consequence, the system has $2N$ unknowns, now corresponding to the total height h , the horizontal velocity $\{u_\alpha\}_{\alpha=1, \dots, N}$ in each layer and the averaged vertical velocity at each internal interface $\{w_{\alpha+\frac{1}{2}}\}_{\alpha=1, \dots, N-1}$. Nevertheless, the system can be rewritten with $N+1$ equations and unknowns as we explain in the following. By summing the continuity equations from 1 to α , $G_{\alpha+\frac{1}{2}}$ can be written as

$$G_{\alpha+\frac{1}{2}} = G_{\frac{1}{2}} + \sum_{\beta=1}^{\alpha} \left(\partial_t h_\beta + \partial_x (h_\beta u_\beta) \right). \quad (5)$$

Moreover, we assume that $G_{1/2} = G_{N+\frac{1}{2}} = 0$, as boundary conditions at the bottom and the free surface, respectively. This represents the fact that there is no transference of mass at the bottom nor the free surface level. Then, for the special case $\alpha = N$, the above equation leads to

$$\partial_t h + \partial_x \left(h \sum_{\beta=1}^N l_\beta u_\beta \right) = 0.$$

Then, making use of the above equation in (5), we obtain

$$G_{\alpha+\frac{1}{2}} = \sum_{\beta=1}^{\alpha} \left(\partial_x (h l_\beta u_\beta) - l_\beta \sum_{\gamma=1}^N \partial_x (l_\gamma h u_\gamma) \right). \quad (6)$$

As conclusion, $G_{\alpha+\frac{1}{2}}$ is written in terms of the the total height (h) and the horizontal velocities (u_α), then the system is rewritten with $N + 1$ equations and unknowns.

Assuming also $\partial_t b = 0$, system (3)-(4) is finally re-written as

$$\begin{cases} \partial_t \eta + \partial_x \left(h \sum_{\beta=1}^N l_\beta u_\beta \right) = 0, \\ \partial_t u_\alpha + u_\alpha \partial_x u_\alpha + g \partial_x \eta \\ = \frac{K_{\alpha-\frac{1}{2}} - K_{\alpha+\frac{1}{2}}}{h_\alpha} + \frac{G_{\alpha+\frac{1}{2}} \Delta \tilde{u}_{\alpha+\frac{1}{2}} + G_{\alpha-\frac{1}{2}} \Delta \tilde{u}_{\alpha-\frac{1}{2}}}{h_\alpha}, \end{cases} \quad (7)$$

for $\alpha = 1, \dots, N$. Here, we have set as customary in the literature

$$\eta = b + h. \quad (8)$$

In principle, any appropriate turbulence and friction model can be considered to define the turbulent fluxes $K_{\alpha+\frac{1}{2}}$, $\alpha = 0, \dots, N$. Here, we have employed a parabolic turbulent viscosity profile and friction coefficients derived from a logarithmic wall law:

$$\nu = \kappa \hat{u} (z - b) \left(1 - \frac{z - b}{h} \right),$$

where $\kappa = 0.41$ is the von Karman constant, $\hat{u} = \sqrt{\tau_b / \rho_0}$ is the friction velocity and τ_b denotes the shear stress. In order to approximate this turbulence model we set for $\alpha = 1, \dots, N - 1$:

$$K_{\alpha+\frac{1}{2}} = -\nu_{\alpha+\frac{1}{2}} \frac{u_{\alpha+1} - u_\alpha}{(h_\alpha + h_{\alpha+1})/2}, \quad \text{with } \nu_{\alpha+\frac{1}{2}} = \kappa \hat{u}_{\alpha+\frac{1}{2}} \left(\sum_{\beta=1}^{\alpha} l_\beta h \right) \left(\sum_{\gamma=\alpha+1}^N l_\gamma \right).$$

For $\alpha = 0$ and $\alpha = N$, standard quadratic models for bottom and wind stress are considered. We then set

$$K_{1/2} = -C_f |u_1| u_1, \quad K_{N+1/2} = -C_w |u_w - u_N| (u_w - u_N),$$

where u_w denotes the wind velocity and C_w the friction coefficient at the free surface. The friction coefficient C_f is defined, according to the derivation in [23], as:

$$C_f = \kappa^2 \frac{\left(1 - \frac{\Delta z_r}{h} \right)}{\left(\ln \left(\frac{\Delta z_r}{\Delta z_0} \right) \right)^2}, \quad (9)$$

where Δz_0 is the roughness length and Δz_r is the length scale for the bottom layer. Under the assumption that $\Delta z_0 \ll \Delta z_r$ it can be seen that

$$\frac{u_t}{\widehat{u}} \approx \frac{1}{\kappa} \ln \left(\frac{z - b}{\Delta z_0} \right)$$

where u_t is the tangential velocity. In practice, we identify u_t with u_1 , the horizontal velocity of the layer closest to the bottom, in the multilayer model. The definition of C_f given by equation (9) is deduced by using previous relation of the ratio between u_1 and \widehat{u} (see [23]). Then, we set

$$\widehat{u}_{\alpha+\frac{1}{2}} = \frac{u_1 \kappa}{\alpha \ln \left(\sum_{\beta=1}^{\alpha} l_{\beta} h / \Delta z_0 \right)},$$

in the definition of $K_{\alpha+\frac{1}{2}}$.

3 Spatial discretization with variable number of layers

The multilayer shallow water model (7) can be discretized in principle with any spatial discretization approach. For simplicity, we present the proposed discretization approach in the framework of simple finite volume/finite difference discretization on a staggered Cartesian mesh with C-grid staggering. A discussion of the advantages of this approach for large scale geophysical models can be found in [24]. The C-grid staggering also has the side benefit of providing a more compact structure for the system of equations that is obtained when a semi-implicit method is applied for time discretization. Generalization to structured and unstructured meshes can be obtained e.g. by the approaches proposed in [19] and [13, 21, 22], respectively, but higher order methods such as those of [38, 39] could also be applied. It is to be remarked that the choice of a staggered mesh is by no means necessary and that the approach proposed below to handle a variable number of layers can be easily extended to collocated meshes as well.

On the other hand, the vertical number of layers employed, in the approach proposed in [26], is a discretization parameter whose choice depends on the desired accuracy in the approximation of the vertical structure of the flow. In order to make this type of model more flexible and more efficient, we propose to allow for a number of vertical layers that is not constant throughout the domain. This is one of the main contributions of the paper. Our motivation is twofold: firstly, the use of this technique in order to adapt the

vertical subdivision to the characteristic of the bathymetry. This is the case when both shallow and deep regions are present in the same computational domain. Secondly, in the case we are interested in a detailed vertical profile of velocity in a specific region, but not somewhere else. Then we could use multilayer only in that region, while maintaining a coarser resolution elsewhere.

The solution domain will coincide with an interval $[0, L]$, that is assumed to be subdivided into control volumes $V_i = (x_{i-1/2}, x_{i+1/2})$, with centers $x_i = (x_{i+1/2} + x_{i-1/2})/2$, for $i = 1, \dots, M$. Let us also denote $\Delta x_i = x_{i+1/2} - x_{i-1/2}$ and $\Delta x_{i+1/2} = x_{i+1} - x_i$. The discrete free surface variables η_i are defined at the centers of the control volumes, x_i , while the discrete velocities $u_{\alpha, i+1/2}$ are defined at the interfaces, $x_{i+1/2}$.

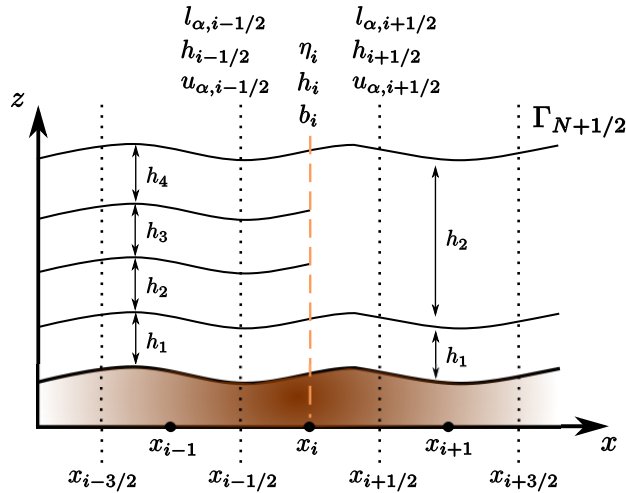


Figure 2: Sketch of the domain and of its subdivision in a variable number of layers.

The transition between regions with different numbers of layers is assumed to take place at the center of a control volume V_i , so that one may have different $N_{i+1/2}$ for $i = 0, \dots, M$ and as a consequence, the discrete layer thickness coefficients $l_{\alpha, i+1/2}$ are also defined at the half-integer locations $i + 1/2$. The number of layers considered at the cell center for the purpose of the discretization of the tracer equation are defined as $N_i = \max \{N_{i-1/2}, N_{i+1/2}\}$ and the discrete layer thickness coefficients at integer locations $l_{\alpha, i}$ are taken to be equal to those at the neighbouring half-integer location with larger number of layers. We will also assume that, whenever for some $i + 1/2$ one has, without loss of generality, $N_{i-1/2} > N_{i+1/2}$, then for any $\beta = 1, \dots, N_{i+1/2}$ there

exist

$$1 \leq \alpha_{i-\frac{1}{2}}^-(\beta) \leq \alpha_{i-\frac{1}{2}}^+(\beta) \leq N_{i-\frac{1}{2}} \quad \text{such that} \quad l_{\beta, i+\frac{1}{2}} = \sum_{\alpha=\alpha_{i-\frac{1}{2}}^-(\beta)}^{\alpha_{i-\frac{1}{2}}^+(\beta)} l_{\alpha, i-\frac{1}{2}}. \quad (10)$$

Note that the above formula means that the vertical mesh is assumed to be conforming. This allows a more straightforward implementation of the numerical approximation of horizontal advection in the velocity and in the tracer equation, which are the only ones involving a horizontal stencil. Finally, again for simplicity of the implementation and without great loss of generality, it is assumed that just a single transition between cells with different number of vertical layers is possible in a 3-point stencil, that is, two consecutive transitions are not allowed. In terms of the number of layers, it means that if $N_{i+1/2} \neq N_{i-1/2}$ one has $N_{i-3/2} = N_{i-1/2}$ and $N_{i+3/2} = N_{i+1/2}$.

A sample configuration of this kind is depicted in figure 2. Notice that a dependence of the number of layers on time could also be introduced, in order to adapt the global maximum number of layers to the flow conditions, but this has not been done in the present implementation. Note also that the expression of the model would change in this case, namely a new term would appear in equation (6) where we use $\partial_t h_\beta = l_\beta \partial_t h$.

4 Semi-implicit time discretizations

The previous definitions yield a space discretization that can be easily coupled to any time discretization that yields a stable fully discrete space time scheme. For example, a time discretization by a third order Runge Kutta scheme has been employed as a reference in the numerical tests presented in section 5. This explicit method requires a stability restriction (*CFL* condition) for the time step Δt , given by the well-known Courant number associated to the celerity, hereafter denoted C_{cel} . However, we will focus here on semi-implicit time discretization approaches aimed at reducing the computational cost in subcritical regime simulations. By using these semi-implicit discretizations, a less restrictive *CFL* condition is to be complied with, since the term associated to the celerity is removed. In that case, we consider the Courant number associated to the velocity, hereafter denoted

C_{vel} . We define the maximum Courant numbers as

$$C_{vel} = \max_{1 \leq i \leq M} \max_{1 \leq \alpha \leq N} \left| u_{\alpha, i+\frac{1}{2}} \right| \frac{\Delta t}{\Delta x_i}; \quad (11a)$$

$$C_{cel} = \max_{1 \leq i \leq M} \max_{1 \leq \alpha \leq N} \left(\left| u_{\alpha, i+\frac{1}{2}} \right| + \sqrt{g h_i} \right) \frac{\Delta t}{\Delta x_i}. \quad (11b)$$

With the goal of reducing the computational cost, it is immediate to notice that the formal structure of system (7) is entirely analogous to that of the three dimensional hydrostatic system considered in [19, 20], so that we can build semi-implicit time discretizations along the same lines, i.e. by treating implicitly the velocity in the continuity equation and the free surface gradient in the momentum equation. It should be stressed that our aim is not to propose new or optimal time discretizations, but rather to show that some semi-implicit approaches, which have been widely applied to model coastal flows and other environmental flows for standard vertical discretizations or for one layer models, can also be naturally extended to multilayer approaches, even when the number of layers changes in space. For this purpose, firstly we focus on a more conventional time discretization based on the off-centered trapezoidal rule (or θ -method, see e.g. [35]). Secondly, we present an alternative approach based on a potentially more accurate (and equally robust) Implicit-Explicit Additive Runge Kutta method (IMEX-ARK). Other second and third order semi-implicit methods that could be employed are described e.g. in [15]. Notice also that, in the semi-implicit methods that are more standard for these applications, simplifications are usually introduced in the standard time discretization methods employed, that amount to linearizing in time at each time step. This is done in order to avoid solving a large nonlinear system at each time step, which would increase significantly the computational cost. Even though this entails a potential loss of accuracy, we have employed these simplifications in this work, consistently with our goal of coupling multilayer approaches to widely used semi-implicit techniques for environmental flows.

Transport equations for passive scalars coupled to system (7) can be discretized in time consistently with these semi-implicit approaches. However, this coupling is not straightforward, since some compatibility conditions discussed e.g. in [30] must be considered (see Appendix A for details).

Remark 4.1 *Notice that, in general, time discretizations do not guarantee positivity without additional CFL-like restrictions, see the discussion and literature review in [14]. On the other hand, for the semi-implicit approaches considered in this paper, the CFL restrictions based on the flow velocity that*

are required by the explicit part of the scheme are usually sufficient to guarantee positivity. In particular, following [30], the positivity of the θ -method can be proved under the condition

$$c_{i+1/2}^+ + c_{i-1/2}^- \leq 1,$$

where c^+ (c^-) denotes the positive (negative) part

$$\begin{aligned} c^+ &= \max(0, c); \\ c^- &= \max(0, -c), \end{aligned} \quad \text{and} \quad c_{i+1/2} = \frac{\Delta t}{\Delta x_{i+1/2}} \sum_{\alpha=1}^{N_{i+1/2}} l_{\alpha, i+1/2} u_{\alpha, i+1/2}^{n+\theta},$$

with $u^{n+\theta} = \theta u^{n+1} + (1 - \theta)u^n$. A similar condition can be derived for the IMEX-ARK2.

4.1 A θ -method time discretization

Following [19], we first consider a semi-implicit discretization based on the θ -method, which can be defined for a generic ODE system $\mathbf{y}' = \mathbf{f}(\mathbf{y}, t)$ as

$$\mathbf{y}_{n+1} = \mathbf{y}_n + \Delta t [\theta \mathbf{f}(\mathbf{y}_{n+1}, t_{n+1}) + (1 - \theta) \mathbf{f}(\mathbf{y}_n, t_n)],$$

where Δt denotes the time step and $\theta \in [0, 1]$ is a implicitness parameter. If $\theta \geq 1/2$ the method is unconditionally stable and the numerical diffusion introduced by the method increases when increasing θ . For $\theta = 1/2$ the second order Crank-Nicolson method is obtained. In practical applications, θ is usually chosen just slightly larger than $1/2$, in order to allow for some damping of the fastest linear modes and nonlinear effects. We then proceed to describe the time discretization of system (7) based on the θ -method.

For control volume i , the continuity equation in (7) is then discretized as

$$\begin{aligned} \eta_i^{n+1} + \theta \frac{\Delta t}{\Delta x_i} & \left(\sum_{\beta=1}^{N_{i+\frac{1}{2}}} l_{\beta, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n u_{\beta, i+\frac{1}{2}}^{n+1} - \sum_{\beta=1}^{N_{i-\frac{1}{2}}} l_{\beta, i-\frac{1}{2}} h_{i-\frac{1}{2}}^n u_{\beta, i-\frac{1}{2}}^{n+1} \right) = \eta_i^n \\ & - (1 - \theta) \frac{\Delta t}{\Delta x_i} \left(\sum_{\beta=1}^{N_{i+\frac{1}{2}}} l_{\beta, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n u_{\beta, i+\frac{1}{2}}^n - \sum_{\beta=1}^{N_{i-\frac{1}{2}}} l_{\beta, i-\frac{1}{2}} h_{i-\frac{1}{2}}^n u_{\beta, i-\frac{1}{2}}^n \right). \end{aligned} \quad (12)$$

It can be noticed that the dependency on h has been frozen at time level n in order to avoid solving a nonlinear system at each timestep. As shown in [19, 38], this does not degrade the accuracy of the method, even in the case of a full second order discretization is employed. In addition, as suggested

in [30], the value of $h_{i+\frac{1}{2}}$ is taken to be that of the control volume located upwind of the volume edge. For nodes $i + \frac{1}{2}$, the momentum equations for $\alpha = 2, \dots, N_{i+\frac{1}{2}} - 1$ in (7) are then discretized as

$$\begin{aligned}
& u_{\alpha, i+\frac{1}{2}}^{n+1} + g\theta \frac{\Delta t}{\Delta x_{i+\frac{1}{2}}} (\eta_{i+1}^{n+1} - \eta_i^{n+1}) \\
& - \frac{\Delta t\theta}{l_{\alpha, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \left(\nu_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^n \frac{u_{\alpha+1, i+\frac{1}{2}}^{n+1} - u_{\alpha, i+\frac{1}{2}}^{n+1}}{l_{\alpha+\frac{1}{2}, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} - \nu_{\alpha-\frac{1}{2}, i+\frac{1}{2}}^n \frac{u_{\alpha, i+\frac{1}{2}}^{n+1} - u_{\alpha-1, i+\frac{1}{2}}^{n+1}}{l_{\alpha-\frac{1}{2}, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \right) \\
& = u_{\alpha, i+\frac{1}{2}}^n + \Delta t \mathcal{A}_{\alpha, i+\frac{1}{2}}^{u, n} - g(1-\theta) \frac{\Delta t}{\Delta x_{i+\frac{1}{2}}} (\eta_{i+1}^n - \eta_i^n) \\
& + \frac{\Delta t(1-\theta)}{l_{\alpha, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \left(\nu_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^n \frac{u_{\alpha+1, i+\frac{1}{2}}^n - u_{\alpha, i+\frac{1}{2}}^n}{l_{\alpha+\frac{1}{2}, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} - \nu_{\alpha-\frac{1}{2}, i+\frac{1}{2}}^n \frac{u_{\alpha, i+\frac{1}{2}}^n - u_{\alpha-1, i+\frac{1}{2}}^n}{l_{\alpha-\frac{1}{2}, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \right) \\
& + \frac{\Delta t}{\Delta x_{i+\frac{1}{2}} l_{\alpha, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \left(\Delta \tilde{u}_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^n \mathcal{G}_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^n + \Delta \tilde{u}_{\alpha-\frac{1}{2}, i+\frac{1}{2}}^n \mathcal{G}_{\alpha-\frac{1}{2}, i+\frac{1}{2}}^n \right), \tag{13}
\end{aligned}$$

where $\Delta \tilde{u}_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^n = (u_{\alpha+1, i+\frac{1}{2}}^n - u_{\alpha, i+\frac{1}{2}}^n)/2$, $\mathcal{G}_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^n / \Delta x_{i+\frac{1}{2}}$ denotes a discretization of the mass transfer term and $\mathcal{A}_{\alpha, i+\frac{1}{2}}^{u, n}$ denotes some spatial discretization of the velocity advection term. In the present implementation, we employ the following upstream based second order finite difference approximation:

$$\left(u_{\alpha} \partial_x u_{\alpha} \right) \Big|_{i+1/2} = u_{\alpha, i+1/2} \partial_x u_{\alpha} \Big|_{i+1/2}$$

with

$$\partial_x u_{\alpha} \Big|_{i+1/2} = \begin{cases} \frac{u_{\alpha, i-\frac{3}{2}} - 4u_{\alpha, i-\frac{1}{2}} + 3u_{\alpha, i+\frac{1}{2}}}{2\Delta x_{i+\frac{1}{2}}} & \text{if } u_{\alpha, i+\frac{1}{2}} > 0, \\ -\frac{u_{\alpha, i+\frac{5}{2}} - 4u_{\alpha, i+\frac{3}{2}} + 3u_{\alpha, i+\frac{1}{2}}}{2\Delta x_{i+\frac{1}{2}}} & \text{if } u_{\alpha, i+\frac{1}{2}} < 0. \end{cases}$$

It is important to remark that, if the θ -scheme is also applied to the advection and mass transfer terms, we would obtain a fully implicit method, for which we would have to solve a global nonlinear problem. This entails a much larger computational cost and is usually avoided in the most numerical models for this kind of applications. Notice that, to define this advection term, velocity values from different layers may have to be employed, if some of the neighbouring volumes has a number of layers different from that at $i + \frac{1}{2}$. For example, assuming again without loss of generality $N_{i-\frac{1}{2}} > N_{i+\frac{1}{2}}$ and

$u_{\beta, i+\frac{1}{2}}^n > 0$ and using the notation in (10), values

$$u_{\beta, i-\frac{1}{2}}^* = \frac{1}{l_{\beta, i+\frac{1}{2}}} \sum_{\alpha=\alpha_{i-\frac{1}{2}}^-(\beta)}^{\alpha_{i-\frac{1}{2}}^+(\beta)} l_{\alpha, i-\frac{1}{2}} u_{\alpha, i-\frac{1}{2}}^n,$$

which are the averaged velocities computed with the velocities of the involved layers, will be used to compute the approximation of the velocity gradient at $x_{i+\frac{1}{2}}$. Clearly, this may result in a local loss of accuracy, but the numerical results reported show that this has limited impact on the overall accuracy of the proposed method.

The discretization of the mass transfer term is defined as

$$\mathcal{G}_{\alpha+\frac{1}{2}, i+\frac{1}{2}} = \sum_{\beta=1}^{\alpha} l_{\beta, i+\frac{1}{2}} \left(\left(hu_{\beta} - \sum_{\gamma=1}^N l_{\gamma} hu_{\gamma} \right) \Big|_{i+1} - \left(hu_{\beta} - \sum_{\gamma=1}^N l_{\gamma} hu_{\gamma} \right) \Big|_i \right),$$

where $\left(hu_{\beta} - \sum_{\gamma=1}^N l_{\gamma} hu_{\gamma} \right) \Big|_i$ denotes the upwind value depending on the averaged velocity $u_{\beta, i} = (u_{\beta, i-\frac{1}{2}} + u_{\beta, i+\frac{1}{2}})/2$, i.e.,

$$\left(hu_{\beta} - \sum_{\gamma=1}^N l_{\gamma} hu_{\gamma} \right) \Big|_i = \begin{cases} h_{i-\frac{1}{2}} u_{\beta, i-\frac{1}{2}} - \sum_{\gamma=1}^N l_{\gamma, i-\frac{1}{2}} h_{i-\frac{1}{2}} u_{\gamma, i-\frac{1}{2}} & \text{if } u_{\beta, i} > 0, \\ h_{i+\frac{1}{2}} u_{\beta, i+\frac{1}{2}} - \sum_{\gamma=1}^N l_{\gamma, i+\frac{1}{2}} h_{i+\frac{1}{2}} u_{\gamma, i+\frac{1}{2}} & \text{if } u_{\beta, i} < 0. \end{cases}$$

Here we have used the fact that l_{β} is a piecewise constant function where the transitions between regions with a different number of layers are located in the center of a control volume. Therefore $l_{\beta, i+\frac{1}{2}}$ is constant in (x_i, x_{i+1}) . The above formula is modified appropriately for cells in which $N_{i-\frac{1}{2}} \neq N_{i+\frac{1}{2}}$, by summing all the contributions on the cell boundary with more layers that correspond to a given term $l_{\beta, i\pm\frac{1}{2}} h_{i\pm\frac{1}{2}}^n u_{\beta, i\pm\frac{1}{2}}^n$ on the cell boundary with fewer layers, according to the definitions in the previous section.

Remark 4.2 *The time discretization of the mass transfer terms could be*

easily turned into an implicit one, by taking instead

$$\begin{aligned}
& u_{\alpha, i+\frac{1}{2}}^{n+1} + g\theta \frac{\Delta t}{\Delta x_{i+\frac{1}{2}}} (\eta_{i+1}^{n+1} - \eta_i^{n+1}) \\
& - \frac{\Delta t\theta}{l_{\alpha, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \left(\gamma_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^n \left(u_{\alpha+1, i+\frac{1}{2}}^{n+1} - u_{\alpha, i+\frac{1}{2}}^{n+1} \right) - \delta_{\alpha-\frac{1}{2}, i+\frac{1}{2}}^n \left(u_{\alpha, i+\frac{1}{2}}^{n+1} - u_{\alpha-1, i+\frac{1}{2}}^{n+1} \right) \right) \\
& = u_{\alpha, i+\frac{1}{2}}^n + \Delta t \mathcal{A}_{\alpha, i+\frac{1}{2}}^{u, n} - g(1-\theta) \frac{\Delta t}{\Delta x_{i+\frac{1}{2}}} (\eta_{i+1}^n - \eta_i^n) \\
& + \frac{\Delta t(1-\theta)}{l_{\alpha, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \left(\gamma_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^n \left(u_{\alpha+1, i+\frac{1}{2}}^n - u_{\alpha, i+\frac{1}{2}}^n \right) - \delta_{\alpha-\frac{1}{2}, i+\frac{1}{2}}^n \left(u_{\alpha, i+\frac{1}{2}}^n - u_{\alpha-1, i+\frac{1}{2}}^n \right) \right),
\end{aligned}$$

where now

$$\gamma_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^n = \frac{\nu_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^n}{l_{\alpha+\frac{1}{2}, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} + \frac{\mathcal{G}_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^n}{2\Delta x_{i+\frac{1}{2}}} \quad \delta_{\alpha-\frac{1}{2}, i+\frac{1}{2}}^n = \frac{\nu_{\alpha-\frac{1}{2}, i+\frac{1}{2}}^n}{l_{\alpha-\frac{1}{2}, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} - \frac{\mathcal{G}_{\alpha-\frac{1}{2}, i+\frac{1}{2}}^n}{2\Delta x_{i+\frac{1}{2}}}.$$

This approach might be helpful to relax stability restrictions if large values of $\mathcal{G}_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^n$ arise. In the implementation employed to obtain the numerical results of section 5, however, only the discretization (13) was applied so far.

At the bottom ($\alpha = 1$) and at the free surface ($\alpha = N_{i+\frac{1}{2}}$) layers, the viscous terms are modified by the friction and drag terms at $\Gamma_{1/2}$ and $\Gamma_{N_{i+\frac{1}{2}}+1/2}$, respectively. We have then

$$\begin{aligned}
& u_{1, i+\frac{1}{2}}^{n+1} + g\theta \frac{\Delta t}{\Delta x_{i+\frac{1}{2}}} (\eta_{i+1}^{n+1} - \eta_i^{n+1}) \\
& - \frac{\Delta t\theta}{l_{1, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \left(\nu_{1+\frac{1}{2}, i+\frac{1}{2}}^n \frac{u_{2, i+\frac{1}{2}}^{n+1} - u_{1, i+\frac{1}{2}}^{n+1}}{l_{1+\frac{1}{2}, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} - C_{f, i+\frac{1}{2}}^n \left| u_{1, i+\frac{1}{2}}^n \right| u_{1, i+\frac{1}{2}}^{n+1} \right) \\
& = u_{1, i+\frac{1}{2}}^n + \Delta t \mathcal{A}_{1, i+\frac{1}{2}}^{u, n} - g(1-\theta) \frac{\Delta t}{\Delta x_{i+\frac{1}{2}}} (\eta_{i+1}^n - \eta_i^n) \\
& + \frac{\Delta t}{\Delta x_{i+\frac{1}{2}} l_{1, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \Delta \tilde{u}_{\frac{3}{2}, i+\frac{1}{2}}^n \mathcal{G}_{\frac{3}{2}, i+\frac{1}{2}}^n \\
& + \frac{\Delta t(1-\theta)}{l_{1, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \left(\nu_{1+\frac{1}{2}, i+\frac{1}{2}}^n \frac{u_{2, i+\frac{1}{2}}^n - u_{1, i+\frac{1}{2}}^n}{l_{1+\frac{1}{2}, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} - C_{f, i+\frac{1}{2}}^n \left| u_{1, i+\frac{1}{2}}^n \right| u_{1, i+\frac{1}{2}}^n \right),
\end{aligned} \tag{14}$$

and

$$\begin{aligned}
& u_{N_{i+\frac{1}{2}},i+\frac{1}{2}}^{n+1} + g\theta \frac{\Delta t}{\Delta x_{i+\frac{1}{2}}} (\eta_{i+1}^{n+1} - \eta_i^{n+1}) + \frac{\Delta t\theta}{l_{N_{i+\frac{1}{2}},i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \widetilde{C}_{w,i+\frac{1}{2}}^n u_{N_{i+\frac{1}{2}},i+\frac{1}{2}}^{n+1} \\
& + \frac{\Delta t\theta}{l_{N_{i+\frac{1}{2}},i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \left(\nu_{N_{i+\frac{1}{2}}-\frac{1}{2},i+\frac{1}{2}}^n \frac{u_{N_{i+\frac{1}{2}},i+\frac{1}{2}}^{n+1} - u_{N_{i+\frac{1}{2}}-1,i+\frac{1}{2}}^{n+1}}{l_{N_{i+\frac{1}{2}}-\frac{1}{2},i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \right) \\
& = u_{N_{i+\frac{1}{2}},i+\frac{1}{2}}^n + \Delta t \mathcal{A}_{N_{i+\frac{1}{2}},i+\frac{1}{2}}^{u,n} - g(1-\theta) \frac{\Delta t}{\Delta x_{i+\frac{1}{2}}} (\eta_{i+1}^n - \eta_i^n) \\
& + \frac{\Delta t \widetilde{C}_{w,i+\frac{1}{2}}^n}{l_{N_{i+\frac{1}{2}},i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \left(\theta u_{w,i+\frac{1}{2}}^{n+1} + (1-\theta) \left(u_{w,i+\frac{1}{2}}^n - u_{N_{i+\frac{1}{2}},i+\frac{1}{2}}^n \right) \right) \\
& - \frac{(1-\theta)\Delta t}{l_{N_{i+\frac{1}{2}},i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \nu_{N_{i+\frac{1}{2}}-\frac{1}{2},i+\frac{1}{2}}^n \frac{u_{N_{i+\frac{1}{2}},i+\frac{1}{2}}^n - u_{N_{i+\frac{1}{2}}-1,i+\frac{1}{2}}^n}{l_{N_{i+\frac{1}{2}}-\frac{1}{2},i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \\
& + \frac{\Delta t}{\Delta x_{i+\frac{1}{2}} l_{N_{i+\frac{1}{2}},i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \Delta \widetilde{u}_{N_{i+\frac{1}{2}}-\frac{1}{2},i+\frac{1}{2}}^n \mathcal{G}_{N_{i+\frac{1}{2}}-\frac{1}{2},i+\frac{1}{2}}^n.
\end{aligned} \tag{15}$$

Notice that, in previous equation, we define $\widetilde{C}_w^n = C_w |u_{w,i+\frac{1}{2}}^n - u_{N_{i+\frac{1}{2}},i+\frac{1}{2}}^n|$.

Replacing the expressions for the velocities at time step $n+1$ into the continuity equation yields a linear system whose unknowns are the values of the free surface η_i^{n+1} . This can be done rewriting the discrete momentum equations in matrix notation as in [19], after rescaling both sides of the equations by $l_{\alpha,i+\frac{1}{2}} h_{i+\frac{1}{2}}^n$. We denote by $\mathbf{F}_{i+\frac{1}{2}}^n$ the collection of all the explicit terms and by $\mathbf{A}_{i+\frac{1}{2}}^n$ the matrix resulting from the discretization of the vertical diffusion terms. Since it is a tridiagonal, positive definite, diagonally dominant matrix, it is an M-matrix and its inverse matrix exists and is also an M-matrix (see e.g. [8]). We also define

$$\mathbf{U}_{i+\frac{1}{2}} = \begin{pmatrix} u_{1,i+\frac{1}{2}} \\ \vdots \\ u_{\alpha,i+\frac{1}{2}} \\ \vdots \\ u_{N_{i+\frac{1}{2}},i+\frac{1}{2}} \end{pmatrix}; \quad \mathbf{H}_{i+\frac{1}{2}} = \begin{pmatrix} l_{1,i+\frac{1}{2}} h_{i+\frac{1}{2}} \\ \vdots \\ l_{\alpha,i+\frac{1}{2}} h_{i+\frac{1}{2}} \\ \vdots \\ l_{N_{i+\frac{1}{2}},i+\frac{1}{2}} h_{i+\frac{1}{2}} \end{pmatrix}.$$

As a result, one can reformulate equations (13), (14) and (15) as

$$\begin{aligned}
\mathbf{U}_{i+\frac{1}{2}}^{n+1} &= \left(\mathbf{A}_{i+\frac{1}{2}}^n\right)^{-1} \mathbf{F}_{i+\frac{1}{2}}^n \\
&\quad - g\theta \frac{\Delta t}{\Delta x_{i+\frac{1}{2}}} (\eta_{i+1}^{n+1} - \eta_i^{n+1}) \left(\mathbf{A}_{i+\frac{1}{2}}^n\right)^{-1} \mathbf{H}_{i+\frac{1}{2}}^n.
\end{aligned} \tag{16}$$

The discrete continuity equation is rewritten in this matrix notation as

$$\begin{aligned}
\eta_i^{n+1} &= \eta_i^n - \theta \frac{\Delta t}{\Delta x_i} \left((\mathbf{H}_{i+\frac{1}{2}}^n)^T \mathbf{U}_{i+\frac{1}{2}}^{n+1} - (\mathbf{H}_{i-\frac{1}{2}}^n)^T \mathbf{U}_{i-\frac{1}{2}}^{n+1} \right) \\
&\quad - (1 - \theta) \frac{\Delta t}{\Delta x_i} \left((\mathbf{H}_{i+\frac{1}{2}}^n)^T \mathbf{U}_{i+\frac{1}{2}}^n - (\mathbf{H}_{i-\frac{1}{2}}^n)^T \mathbf{U}_{i-\frac{1}{2}}^n \right).
\end{aligned}$$

Substituting formally equation (16) in the continuity equation yields the tridiagonal system

$$\begin{aligned}
\eta_i^{n+1} &\quad - g\theta^2 \frac{\Delta t^2}{\Delta x_i} \left([\mathbf{H}^T \mathbf{A}^{-1} \mathbf{H}]_{i+\frac{1}{2}}^n \frac{\eta_{i+1}^{n+1} - \eta_i^{n+1}}{\Delta x_{i+\frac{1}{2}}} \right. \\
&\quad \left. - [\mathbf{H}^T \mathbf{A}^{-1} \mathbf{H}]_{i-\frac{1}{2}}^n \frac{\eta_i^{n+1} - \eta_{i-1}^{n+1}}{\Delta x_{i-\frac{1}{2}}} \right) \\
&= \eta_i^n - \theta \frac{\Delta t}{\Delta x_i} \left([\mathbf{H}^T \mathbf{A}^{-1} \mathbf{F}]_{i+\frac{1}{2}}^n - [\mathbf{H}^T \mathbf{A}^{-1} \mathbf{F}]_{i-\frac{1}{2}}^n \right) \\
&\quad - (1 - \theta) \frac{\Delta t}{\Delta x_i} \left((\mathbf{H}_{i+\frac{1}{2}}^n)^T \mathbf{U}_{i+\frac{1}{2}}^n - (\mathbf{H}_{i-\frac{1}{2}}^n)^T \mathbf{U}_{i-\frac{1}{2}}^n \right).
\end{aligned}$$

The new values of the free surface η_i^{n+1} are computed by solving this system, and the values h_i are updated to time t^{n+1} using the definition of η (8). The values η_i^{n+1} are then replaced in (16) to obtain $u_{\alpha, i+\frac{1}{2}}^{n+1}$.

4.2 A more accurate IMEX-ARK discretization

A more accurate time discretization can be achieved employing an IMplicit EXplicit (IMEX) Additive Runge Kutta method (ARK) [34]. These techniques address the discretization of ODE systems that can be written as $\mathbf{y}' = \mathbf{f}_s(\mathbf{y}, t) + \mathbf{f}_{ns}(\mathbf{y}, t)$, where the s and ns subscripts denote the stiff and non stiff components of the system, respectively. In the case of system (7), the non stiff term would include the momentum advection and mass exchange terms, while the stiff term would include free surface gradients and vertical viscosity terms. Concretely, we have $\mathbf{f}_k = (\mathbf{f}_k^0, \mathbf{f}_k^1, \dots, \mathbf{f}_k^N)'$, for $k = s, ns$,

where

$$\begin{aligned}\mathbf{f}_s^0 &= -\frac{1}{\Delta x_i} \sum_{\beta=1}^N \left(l_{\beta, i+\frac{1}{2}} h_{i+\frac{1}{2}} u_{\beta, i+\frac{1}{2}} - l_{\beta, i-\frac{1}{2}} h_{i-\frac{1}{2}} u_{\beta, i-\frac{1}{2}} \right); \\ \mathbf{f}_s^\alpha &= -\frac{1}{\Delta x_{i+\frac{1}{2}}} l_{\alpha, i+\frac{1}{2}} h_{i+\frac{1}{2}} g(\eta_{i+1} - \eta_i) \\ &\quad + \left(\nu_{\alpha+\frac{1}{2}, i+\frac{1}{2}} \frac{u_{\alpha+1, i+\frac{1}{2}} - u_{\alpha, i+\frac{1}{2}}}{l_{\alpha+\frac{1}{2}, i+\frac{1}{2}} h_{i+\frac{1}{2}}} - \nu_{\alpha-\frac{1}{2}, i+\frac{1}{2}} \frac{u_{\alpha, i+\frac{1}{2}} - u_{\alpha-1, i+\frac{1}{2}}}{l_{\alpha-\frac{1}{2}, i+\frac{1}{2}} h_{i+\frac{1}{2}}} \right),\end{aligned}$$

and

$$\mathbf{f}_{ns}^0 = 0;$$

$$\mathbf{f}_{ns}^\alpha = l_{\alpha, i+\frac{1}{2}} h_{i+\frac{1}{2}} \mathcal{A}_{\alpha, i+\frac{1}{2}}^u + \frac{1}{\Delta x_{i+\frac{1}{2}}} \left(\Delta \tilde{u}_{\alpha+\frac{1}{2}, i+\frac{1}{2}} \mathcal{G}_{\alpha+\frac{1}{2}, i+\frac{1}{2}} + \Delta \tilde{u}_{\alpha-\frac{1}{2}, i+\frac{1}{2}} \mathcal{G}_{\alpha-\frac{1}{2}, i+\frac{1}{2}} \right),$$

for $\alpha = 1, \dots, N$.

A generic s -stage IMEX-ARK method can be defined as follows. If l_{\max} is the number of intermediate states of the method, then for $l = 1, \dots, l_{\max}$:

$$\begin{aligned}\mathbf{u}^{(l)} = \mathbf{u}^n &+ \Delta t \sum_{m=1}^{l-1} \left(a_{lm} \mathbf{f}_{ns}(\mathbf{u}^{(m)}, t + c_m \Delta t) \right. \\ &\left. + \tilde{a}_{lm} \mathbf{f}_s(\mathbf{u}^{(m)}, t + c_m \Delta t) \right) + \Delta t \tilde{a}_{ll} \mathbf{f}_s(\mathbf{u}^{(l)}, t + c_l \Delta t),\end{aligned}\tag{17}$$

Finally, \mathbf{u}^{n+1} is computed:

$$\mathbf{u}^{n+1} = \mathbf{u}^n + \Delta t \sum_{l=1}^{l_{\max}} b_l (\mathbf{f}_{ns}(\mathbf{u}^{(l)}, t + c_l \Delta t) + \mathbf{f}_s(\mathbf{u}^{(l)}, t + c_l \Delta t)).$$

Coefficients a_{lm} , \tilde{a}_{lm} , c_l and b_l are determined so that the method is consistent of a given order. In addition to the order conditions specific to each sub-method, the coefficients should respect coupling conditions. Here we use the IMEX method proposed in [29], whose coefficients are presented in the Butcher tableaux. The method is composed of an implicit method that is L -stable, since it coincides with the TR-BDF2 scheme described in [33] and of an explicit method that is stable under a standard CFL restriction, based however, due to the IMEX approach, on the velocity of the flow rather than on the celerity. See tables 1 and 2 for the explicit and implicit method, respectively. The coefficients of the explicit method were proposed in [29],

0				0	
$2 \mp \sqrt{2}$	$2 \mp \sqrt{2}$	0			
1	$1 - (3 + 2\sqrt{2})/6$	$(3 + 2\sqrt{2})/6$	0		a_{lm}
	$\pm \frac{1}{2\sqrt{2}}$	$\pm \frac{1}{2\sqrt{2}}$	$1 \mp \frac{1}{\sqrt{2}}$		b_l

Table 1: *Butcher tableaux of the explicit ARK2 method*

0					
$2 \mp \sqrt{2}$	$1 \mp \frac{1}{\sqrt{2}}$	$1 \mp \frac{1}{\sqrt{2}}$			
1	$\pm \frac{1}{2\sqrt{2}}$	$\pm \frac{1}{2\sqrt{2}}$	$1 \mp \frac{1}{2\sqrt{2}}$		
	$\pm \frac{1}{2\sqrt{2}}$	$\pm \frac{1}{2\sqrt{2}}$	$1 \mp \frac{1}{\sqrt{2}}$		\tilde{a}_{lm}
					b_l

Table 2: *Butcher tableaux of the implicit ARK2 method*

while the implicit method, also employed in the same paper, coincides indeed with the TR-BDF2 method proposed in [7, 33] and applied to the shallow water and Euler equations in [38].

While a straightforward application of (17) is certainly possible, we will outline here a more efficient way to implement this method to the discretization of equations (7), that mimics what done above for the simpler θ -method. For the first stage, we define $\eta_i^{n,1} = \eta_i^n$, and $u_{\alpha,i+\frac{1}{2}}^{n,1} = u_{\alpha,i+\frac{1}{2}}^n$, respectively. For the second stage, we get for the continuity equation

$$\begin{aligned}
\eta_i^{n,2} &+ \tilde{a}_{22} \frac{\Delta t}{\Delta x_i} \left(\sum_{\beta=1}^{N_{i+\frac{1}{2}}} l_{\beta,i+\frac{1}{2}} h_{i+\frac{1}{2}}^n u_{\beta,i+\frac{1}{2}}^{n,2} - \sum_{\beta=1}^{N_{i-\frac{1}{2}}} l_{\beta,i-\frac{1}{2}} h_{i-\frac{1}{2}}^n u_{\beta,i-\frac{1}{2}}^{n,2} \right) \\
&= \eta_i^n - \tilde{a}_{21} \frac{\Delta t}{\Delta x_i} \left(\sum_{\beta=1}^{N_{i+\frac{1}{2}}} l_{\beta,i+\frac{1}{2}} h_{i+\frac{1}{2}}^n u_{\beta,i+\frac{1}{2}}^{n,1} - \sum_{\beta=1}^{N_{i-\frac{1}{2}}} l_{\beta,i-\frac{1}{2}} h_{i-\frac{1}{2}}^n u_{\beta,i-\frac{1}{2}}^{n,1} \right)
\end{aligned}$$

and for the momentum equations

$$\begin{aligned}
u_{\alpha,i+\frac{1}{2}}^{n,2} &+ g\tilde{a}_{22} \frac{\Delta t}{\Delta x_{i+\frac{1}{2}}} (\eta_{i+1}^{n,2} - \eta_i^{n,2}) \\
&- \frac{\Delta t \tilde{a}_{22}}{l_{\alpha,i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \left(\nu_{\alpha+\frac{1}{2},i+\frac{1}{2}}^n \frac{u_{\alpha+1,i+\frac{1}{2}}^{n,2} - u_{\alpha,i+\frac{1}{2}}^{n,2}}{l_{\alpha+\frac{1}{2}} h_{i+\frac{1}{2}}^n} - \nu_{\alpha-\frac{1}{2},i+\frac{1}{2}}^n \frac{u_{\alpha,i+\frac{1}{2}}^{n,2} - u_{\alpha-1,i+\frac{1}{2}}^{n,2}}{l_{\alpha-\frac{1}{2}} h_{i+\frac{1}{2}}^n} \right) \\
&= u_{\alpha,i+\frac{1}{2}}^n + \Delta t a_{21} \mathcal{F}_{\alpha,i+\frac{1}{2}}^{n,1} + \Delta t \tilde{a}_{21} \mathcal{I}_{\alpha,i+\frac{1}{2}}^{n,1}
\end{aligned}$$

for $\alpha = 1, \dots, N$, with the appropriate corrections for the top and bottom layers, respectively. Here we define

$$\mathcal{F}_{\alpha, i+\frac{1}{2}}^{n,j} = \mathcal{A}_{\alpha, i+\frac{1}{2}}^{u,n,j} + \frac{1}{\Delta x_{i+\frac{1}{2}} l_{\alpha, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \left(\Delta \tilde{u}_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^{n,j} \mathcal{G}_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^{n,j} + \Delta \tilde{u}_{\alpha-\frac{1}{2}, i+\frac{1}{2}}^{n,j} \mathcal{G}_{\alpha-\frac{1}{2}, i+\frac{1}{2}}^{n,j} \right)$$

and

$$\begin{aligned} \mathcal{I}_{\alpha, i+\frac{1}{2}}^{n,j} = & -\frac{g}{\Delta x_{i+\frac{1}{2}}} (\eta_{i+1}^{n,j} - \eta_i^{n,j}) \\ & + \frac{1}{l_{\alpha, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n} \left(\nu_{\alpha+\frac{1}{2}, i+\frac{1}{2}}^n \frac{u_{\alpha+1, i+\frac{1}{2}}^{n,j} - u_{\alpha, i+\frac{1}{2}}^{n,j}}{l_{\alpha+\frac{1}{2}} h_{i+\frac{1}{2}}^n} - \nu_{\alpha-\frac{1}{2}, i+\frac{1}{2}}^n \frac{u_{\alpha, i+\frac{1}{2}}^{n,j} - u_{\alpha-1, i+\frac{1}{2}}^{n,j}}{l_{\alpha-\frac{1}{2}} h_{i+\frac{1}{2}}^n} \right), \end{aligned}$$

and all the other symbols have the same interpretation as in the presentation of the θ - method. It can be noticed that, again, the dependency on h has been frozen at time level n in order to avoid solving a nonlinear system at each timestep. As shown in [10, 19, 38], this does not degrade the accuracy of the method. Also the dependency on time of the vertical viscosity is frozen at time level n . The same will be done for both kinds of coefficients also in the third stage of the method. As in the previous discussion, the above discrete equations can be rewritten in vector notation as

$$\mathbf{U}_{i+\frac{1}{2}}^{n,2} = \left(\mathbf{A}_{i+\frac{1}{2}}^n \right)^{-1} \mathbf{F}_{i+\frac{1}{2}}^{n,1} - g \tilde{a}_{22} \frac{\Delta t}{\Delta x_{i+\frac{1}{2}}} (\eta_{i+1}^{n,2} - \eta_i^{n,2}) \left(\mathbf{A}_{i+\frac{1}{2}}^n \right)^{-1} \mathbf{H}_{i+\frac{1}{2}}^n, \quad (18)$$

where now $\mathbf{F}_{i+\frac{1}{2}}^1$ has components given by

$$l_{\alpha, i+\frac{1}{2}} h_{i+\frac{1}{2}}^n \left(u_{\alpha, i+\frac{1}{2}}^n + \Delta t a_{21} \mathcal{F}_{\alpha, i+\frac{1}{2}}^{n,1} + \Delta t \tilde{a}_{21} \mathcal{I}_{\alpha, i+\frac{1}{2}}^{n,1} \right).$$

The discrete continuity equation is rewritten in this matrix notation as

$$\begin{aligned} \eta_i^{n,2} = & \eta_i^{n,2} - \tilde{a}_{22} \frac{\Delta t}{\Delta x_i} \left((\mathbf{H}_{i+\frac{1}{2}}^n)^T \mathbf{U}_{i+\frac{1}{2}}^{n,2} - (\mathbf{H}_{i-\frac{1}{2}}^n)^T \mathbf{U}_{i-\frac{1}{2}}^{n,2} \right) \\ & - \tilde{a}_{21} \frac{\Delta t}{\Delta x_i} \left((\mathbf{H}_{i+\frac{1}{2}}^n)^T \mathbf{U}_{i+\frac{1}{2}}^n - (\mathbf{H}_{i-\frac{1}{2}}^n)^T \mathbf{U}_{i-\frac{1}{2}}^n \right). \end{aligned}$$

Substituting formally equation (18) in the momentum equation yields the tridiagonal system

$$\begin{aligned} \eta_i^{n,2} - & g \tilde{a}_{22} \frac{\Delta t^2}{\Delta x_i} \left([\mathbf{H}^T \mathbf{A}^{-1} \mathbf{H}]_{i+\frac{1}{2}}^n \frac{\eta_{i+1}^{n,2} - \eta_i^{n,2}}{\Delta x_{i+\frac{1}{2}}} - [\mathbf{H}^T \mathbf{A}^{-1} \mathbf{H}]_{i-\frac{1}{2}}^n \frac{\eta_i^{n,2} - \eta_{i-1}^{n,2}}{\Delta x_{i-\frac{1}{2}}} \right) \\ = & \eta_i^n - \tilde{a}_{22} \frac{\Delta t}{\Delta x_i} \left([\mathbf{H}^T \mathbf{A}^{-1} \mathbf{F}^1]_{i+\frac{1}{2}}^n - [\mathbf{H}^T \mathbf{A}^{-1} \mathbf{F}^1]_{i-\frac{1}{2}}^n \right) \\ - & \tilde{a}_{21} \frac{\Delta t}{\Delta x_i} \left((\mathbf{H}_{i+\frac{1}{2}}^n)^T \mathbf{U}_{i+\frac{1}{2}}^n - (\mathbf{H}_{i-\frac{1}{2}}^n)^T \mathbf{U}_{i-\frac{1}{2}}^n \right). \end{aligned}$$

The new values of the free surface $\eta_i^{n,2}$ are computed by solving this system and they are replaced in (18) to find $u_{\alpha,i+\frac{1}{2}}^{n,2}$.

The last stage of the IMEX-ARK2 method can then be written in vector notation as

$$\begin{aligned} \mathbf{U}_{i+\frac{1}{2}}^{n,3} &= \left(\mathbf{A}_{i+\frac{1}{2}}^n\right)^{-1} \mathbf{F}_{i+\frac{1}{2}}^{n,2} \\ &- g \tilde{a}_{33} \frac{\Delta t}{\Delta x_{i+\frac{1}{2}}} (\eta_{i+1}^{n,3} - \eta_i^{n,3}) \left(\mathbf{A}_{i+\frac{1}{2}}^n\right)^{-1} \mathbf{H}_{i+\frac{1}{2}}^n, \end{aligned} \quad (19)$$

where now $\mathbf{F}_{i+\frac{1}{2}}^{n,2}$ has components given by

$$l_{\alpha,i+\frac{1}{2}} h_{i+\frac{1}{2}}^n \left(u_{\alpha,i+\frac{1}{2}}^n + \Delta t a_{31} \mathcal{F}_{\alpha,i+\frac{1}{2}}^{n,1} + \Delta t a_{32} \mathcal{F}_{\alpha,i+\frac{1}{2}}^{n,2} + \Delta t \tilde{a}_{31} \mathcal{I}_{\alpha,i+\frac{1}{2}}^{n,1} + \Delta t \tilde{a}_{32} \mathcal{I}_{\alpha,i+\frac{1}{2}}^{n,2} \right).$$

The discrete continuity equation is rewritten in this matrix notation as

$$\begin{aligned} \eta_i^{n,3} &= \eta_i^{n,3} - \tilde{a}_{33} \frac{\Delta t}{\Delta x_i} \left((\mathbf{H}_{i+\frac{1}{2}}^n)^T \mathbf{U}_{i+\frac{1}{2}}^{n,3} - (\mathbf{H}_{i-\frac{1}{2}}^n)^T \mathbf{U}_{i-\frac{1}{2}}^{n,3} \right) \\ &- \tilde{a}_{31} \frac{\Delta t}{\Delta x_i} \left((\mathbf{H}_{i+\frac{1}{2}}^n)^T \mathbf{U}_{i+\frac{1}{2}}^1 - (\mathbf{H}_{i-\frac{1}{2}}^n)^T \mathbf{U}_{i-\frac{1}{2}}^1 \right) \\ &- \tilde{a}_{32} \frac{\Delta t}{\Delta x_i} \left((\mathbf{H}_{i+\frac{1}{2}}^n)^T \mathbf{U}_{i+\frac{1}{2}}^2 - (\mathbf{H}_{i-\frac{1}{2}}^n)^T \mathbf{U}_{i-\frac{1}{2}}^2 \right). \end{aligned}$$

As a result, substitution of (19) into the third stage of the continuity equation yields the tridiagonal system

$$\eta_i^{n,3} - g \tilde{a}_{33}^2 \frac{\Delta t^2}{\Delta x_i} \left([\mathbf{H}^T \mathbf{A}^{-1} \mathbf{H}]_{i+\frac{1}{2}}^n \frac{\eta_{i+1}^{n,3} - \eta_i^{n,3}}{\Delta x_{i+\frac{1}{2}}} - [\mathbf{H}^T \mathbf{A}^{-1} \mathbf{H}]_{i-\frac{1}{2}}^n \frac{\eta_i^{n,3} - \eta_{i-1}^{n,3}}{\Delta x_{i-\frac{1}{2}}} \right) = \mathcal{E}_i,$$

where now all the explicit terms have been collected in \mathcal{E}_i . The new values of the free surface $\eta_i^{n,3}$ are computed by solving this system and they are replaced in (19) to find $u_{\alpha,i+\frac{1}{2}}^{n,3}$.

The final assembly of the solution at time level $n+1$ has then the form

$$\begin{aligned} \eta_i^{n+1} &= \eta_i^n \\ &- \frac{\Delta t}{\Delta x_i} \sum_{j=1}^3 \tilde{b}_j \left(\sum_{\beta=1}^{N_{i+\frac{1}{2}}} l_{\beta,i+\frac{1}{2}} h_{i+\frac{1}{2}}^n u_{\beta,i+\frac{1}{2}}^{n,j} - \sum_{\beta=1}^{N_{i-\frac{1}{2}}} l_{\beta,i-\frac{1}{2}} h_{i-\frac{1}{2}}^n u_{\beta,i-\frac{1}{2}}^{n,j} \right) \end{aligned} \quad (20)$$

for the continuity equation, and

$$u_{\alpha, i+\frac{1}{2}}^{n+1} = u_{\alpha, i+\frac{1}{2}}^n + \Delta t \sum_{j=1}^3 \left(\tilde{b}_j \mathcal{I}_{\alpha, i+\frac{1}{2}}^{n,j} + b_j \mathcal{F}_{\alpha, i+\frac{1}{2}}^{n,j} \right) \quad (21)$$

for the momentum equations for $\alpha = 1, \dots, N_{i+\frac{1}{2}}$, with the appropriate corrections for the top and bottom layers, respectively.

Notice that the two linear systems that must be solved for each time step have identical structure and matrices that only differ by a constant factor, thanks to the freezing of their coefficients at time level n . This implies that, recomputing their entries does not entail a major overhead. It was shown in [38] that, while apparently more costly than the simpler θ -method, this procedure leads indeed to an increase in efficiency by significantly increasing the accuracy that can be achieved with a given time step.

5 Numerical results

In this section, we describe the results of several numerical experiments that were performed in order to investigate the accuracy and efficiency of the proposed methods. In particular, the potential loss of accuracy when reducing the number of vertical layers is investigated in each test, as well as the reduction of the number of degrees of freedom of the system achieved by simplifying the vertical discretization in certain areas of the domain.

Regarding the use of a variable number of layers, the presented tests are related with the motivations explained in section 3. In sections 5.1 and 5.2 we look for an accurate approximation of the vertical profile of velocity in a specific region only. In particular, we study the extreme case in which the multilayer configuration is completely removed in a half of the domain. A more complex application for this motivation is shown in section 5.4, for a sediment transport problem. The objective of adapting the vertical discretization to a domain with complex bathymetry is investigated in section 5.3. In that test, we deal with a shallow region at the beginning of the domain and we simplify the vertical discretization there, whereas the full multilayer approach is kept elsewhere. In all these tests we show that this configuration is indeed effective, that is, there is no significant loss of accuracy in the regions in which a higher vertical resolution is maintained.

In order to evaluate the accuracy of the semi-implicit schemes, we compute the relative errors between the computed solution and a reference solution. We denote by $Err_\eta[l_2]$ and $Err_\eta[l_\infty]$ the relative error for the free

surface when considering the usual l_2 and l_∞ norm, respectively. For the velocity we define

$$Err_u[l_2] = \left(\frac{\sum_{\alpha=1}^N \sum_{i=1}^M \left| u_{\alpha,i+\frac{1}{2}} - u_{\alpha,i+\frac{1}{2}}^{ref} \right|^2 \Delta x_i h_{\alpha,i}}{\sum_{\alpha=1}^N \sum_{i=1}^M \left| u_{\alpha,i+\frac{1}{2}}^{ref} \right|^2 \Delta x_i h_{\alpha,i}} \right)^{1/2}; \quad (22a)$$

$$Err_u[l_\infty] = \frac{\max_{\alpha} \max_i \left| u_{\alpha,i+\frac{1}{2}} - u_{\alpha,i+\frac{1}{2}}^{ref} \right|}{\max_{\alpha} \max_i \left| u_{\alpha,i+\frac{1}{2}}^{ref} \right|}, \quad (22b)$$

where u^{ref} denotes the reference solution. We consider as a reference solution the one computed by using an explicit third order Runge Kutta method with a maximum value for the celerity Courant number of 0.1. Therefore, for the explicit scheme the Courant number is fixed and we consider an adaptive time step for the explicit scheme the Courant number is fixed and we consider an adaptive time step $\Delta t = \min_{1 \leq i \leq M} (\Delta x_i / \lambda_i) C_{cel}$, where λ_i is an upper bound on the eigenvalues of the multilayer system. Following [36], we deduce the following bound of the associated eigenvalues of the multilayer system (7) :

$$\lambda_i = |\bar{u}_i| + \sqrt{gh_i + 2 \sum_{\alpha=1}^N (\bar{u}_i - u_{\alpha,i})^2}, \quad \text{with} \quad \bar{u}_i = \sum_{\alpha=1}^N l_{\alpha,i} u_{\alpha,i}.$$

In practice, since we only consider subcritical regimes, it is sufficient to consider the approximation $\lambda_i = |\bar{u}_i| + \sqrt{g \bar{h}_i}$.

In all these tests, we use the viscosity defined by the chosen turbulence model in section 2, and 10 layers in the multilayer code, unless specified different.

5.1 Free oscillations in a closed basin

We consider here a subcritical flow in a closed domain of length $L = 10$ km. The bottom topography is given by the Gaussian function

$$b(x) = 4 e^{-(x-x_0)^2/\sigma^2},$$

where $x_0 = 5$ km and $\sigma = 0.1 L$ (see figure 3). At the initial time the flow is at rest and we take as initial free surface profile $\eta(0, x) = 10 + ax$ m, where a is chosen so that the water height is $h = 10$ m at $x = 0$ and $h = 11$ m at $x = 10$ km. We simulate the resulting oscillations until $t = 10800$ s (3 h).

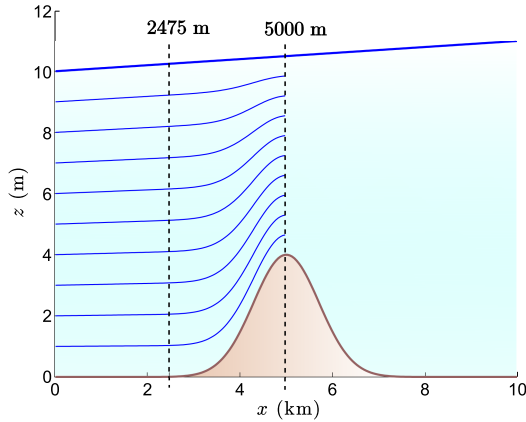


Figure 3: *Sketch of the multilayer configuration with the variable number of layers for the free oscillations test.*

All the simulations are performed by using a uniform space discretization step $\Delta x = 50$ m. The friction coefficient C_f is defined by (9) with $\Delta z_r = h_1$ ($h_1 = l_1 h$), $\Delta z_0 = 3.3 \times 10^{-5}$ and $\kappa = 0.41$. The wind drag is defined by the coefficient value $C_w = 1.2 \times 10^{-6}$ and we set a constant wind velocity $u_w = -1$ m/s.

In figure 4 we show free surface profiles at different times until the final time, as computed with the semi implicit methods described in section 4. The θ -method and the IMEX-ARK2 are very close to the reference solution. However, the IMEX-ARK2 captures the shape of the free surface slightly better than the θ -method when considering the same time step. By using the implicitness parameter $\theta = 0.55$ and the IMEX-ARK2 with $\Delta t = 12.5$ or 25 s, we get a difference in the free surface of approximately 3 cm at the final time. In table 3 we report the corresponding relative errors and the maximum Courant number achieved by (22)-(11), at time $t = 10000$ s. We see that the IMEX-ARK2 method slightly improves the results with respect to the θ -method.

Even though it is hard to make a rigorous efficiency comparison in the framework of our preliminary implementation, for the subcritical regime the semi-implicit methods turn out to be more efficient than the explicit one. Actually, the computational time required to get the 3 hours of simulation (on a Mac Mini with Intel®Core™ i7-4578U and 16 GB of RAM) is approximately 12 s for the explicit scheme using the Courant number $C_{cel} = 0.9$ (103 s for the reference solution), while it is approximately 1.64 s (3.83 s) for the θ -method (IMEX-ARK2) with $\Delta t = 12.5$ s. This time is 0.82 s (1.92 s) with $\Delta t = 25$ s and 0.4 s (0.97 s) when considering the time step $\Delta t = 50$ s.

We then compare results obtained with a fixed and variable number of

SI-method	Δt (s)	C_{vel}	C_{cel}	$Err_\eta [l_2/l_\infty]$ ($\times 10^{-3}$)	$Err_u [l_2/l_\infty]$ ($\times 10^{-1}$)
$\theta = 0.55$	12.5	0.18	2.62	1.6/3.2	0.9/1.5
IMEX-ARK2	12.5	0.18	2.62	0.6/2.0	0.4/0.6
$\theta = 0.55$	25	0.34	5.24	2.6/5.4	1.3/1.7
IMEX-ARK2	25	0.34	5.24	0.9/2.2	1.2/1.7
$\theta = 0.52$	50	0.7	10.48	3.1/6.3	1.6/1.5
$\theta = 0.55$	50	0.68	10.47	3.9/7.7	2.2/2.0
IMEX-ARK2	50	0.69	10.48	2.4/5.2	1.4/1.7

Table 3: *Relative errors and Courant numbers achieved by using semi-implicit methods in the free oscillations test at $t = 10000$ s.*

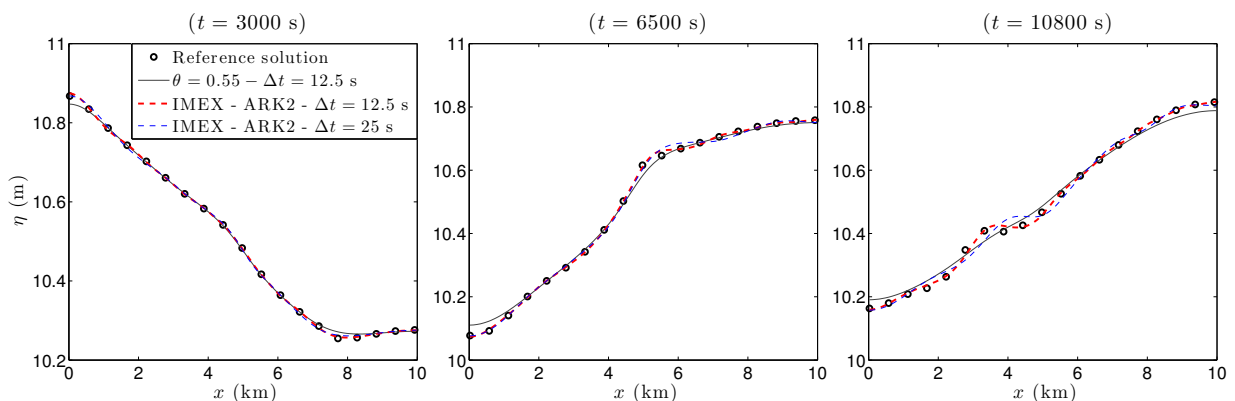


Figure 4: *Free surface profile at different times by using the semi-implicit methods (color lines) and the reference solution (black circles) computed with the explicit scheme in the free oscillations test.*

vertical layers. Figure 5 shows the absolute error for the free surface by using the θ -method with $\theta = 0.55$ and $\Delta t = 25$ s, as computed using either $N = 10$ layers throughout the domain or considering (see figure 3)

$$N = \begin{cases} 10 & \text{if } x \leq 5000, \\ 1 & \text{otherwise.} \end{cases} \quad (23)$$

Similar results are obtained if the time step is $\Delta t = 12.5$ s. We see that usually the difference between the constant and variable layer cases computed by the semi-implicit method is of the order of 0.1% of the solution values (absolute error 1 cm), while the number of degrees of freedom of the multilayer system is significantly reduced (from 2210 to 1310).

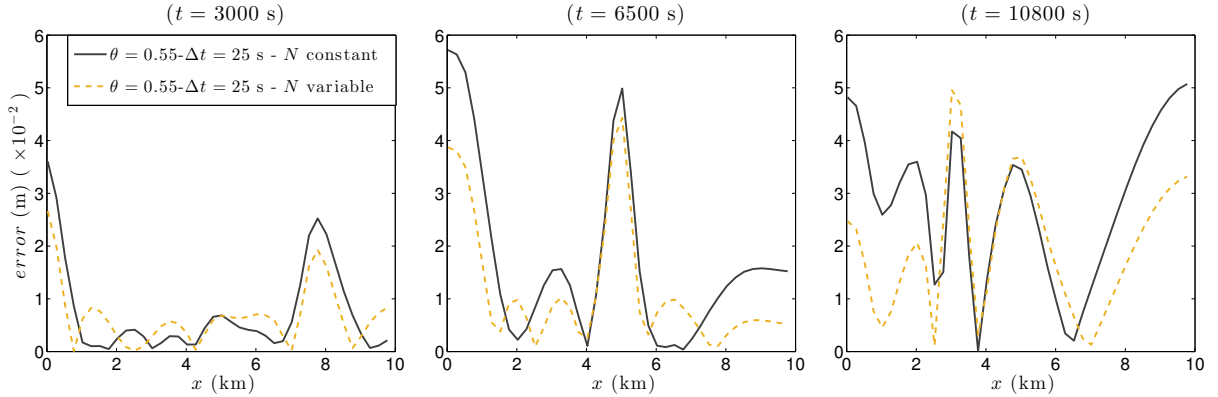


Figure 5: Absolute errors for the free surface at different times in the free oscillations test, obtained with the θ -method ($\theta = 0.55$ and $\Delta t = 25$ s) and either 10 layers in the whole domain (solid black line) or a single layer in the first half of the domain only (dashed yellow line).

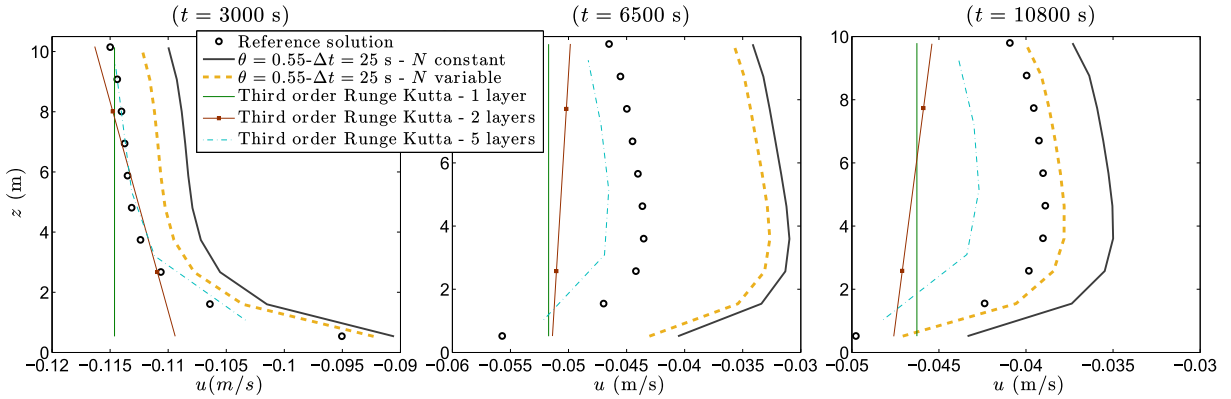


Figure 6: Vertical profiles of horizontal velocity in the free oscillations test, obtained with the reference solution (black circles), the θ -method ($\theta = 0.55$ and $\Delta t = 25$ s) and either 10 layers in the whole domain (solid black line) or a single layer in the first half of the domain only (dashed yellow line), and with the third order Runge-Kutta method with constant number of layers 1, 2 and 5. Profiles are taken at the point $x = 2475$ m and times $t = 3000, 6500, 10800$ s.

Moreover, figure 6 shows the vertical profiles of horizontal velocity at the point $x = 2475$ m (see figure 3), as computed by the semi-implicit method with a constant and variable number of layers (see (23)) and with the reference Runge-Kutta method for constant number of layers 1, 2 and 5, respectively. The advantage of using a variable number of layers is apparent. We see that a good approximation of the velocity profiles is obtained even when removing the multilayer configuration in a half of the domain. Actually, these vertical profiles are more accurate than the ones obtained by using 1

and 2 layers in the whole domain. As a conclusion, the vertical effects, which are induced by both the turbulence viscosity and the friction at the bottom and increased by the obstacle, are relevant enough to consider a multilayer approach for this test.

5.2 Steady subcritical flow over a peak with friction

The proposed semi-implicit schemes are exactly well-balanced for water at rest solutions. Indeed, if $u_\alpha^n = 0$ for $\alpha = 1, \dots, N$ is imposed in the equations of section 4, $\eta_i^{n+1} = \eta_i^n$ and $u_{\alpha, i+\frac{1}{2}}^{n+1} = 0$, $\forall n \geq 0, \forall \alpha, \forall i$ results. In this test, we consider a steady flow in the subcritical regime, as done for example in [37]. The length of the domain is $L = 50$ m, and the bottom bathymetry is given by the function

$$b(x) = 0.05 - 0.001x + \begin{cases} 2 \cos^2\left(\frac{\pi x}{10}\right), & \text{if } |x| < 5; \\ 0 & \text{otherwise.} \end{cases} \quad (24)$$

The initial conditions are given by $\eta(0, x) = 5$ m and $q(0, x) = 4.42 \text{ m}^2 \text{ s}^{-1}$ and subcritical boundary conditions are considered, (see e.g. [37]). The same values of discharge and free surface are used for the upstream condition $q(t, -25)$, and the downstream one $\eta(t, L)$. We take a uniform space discretization step $\Delta x = 0.25$ m and the same values for the turbulent viscosity and bottom friction as in the previous test, while the wind stress is not taken into account in this case.

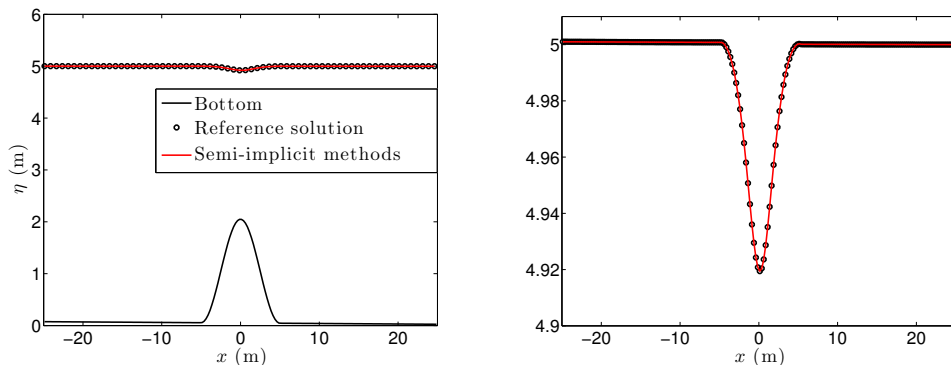


Figure 7: Free surface profile at steady state, as computed in the steady subcritical flow test by the semi-implicit methods (solid red line) and reference solution (black circles) computed with the explicit scheme. The inset figure is a zoom of the free surface profile.

In figure 7 we see the free surface at the steady state, as computed with the semi-implicit θ -method and IMEX-ARK2, along with the reference solution.

SI-method	Δt (s)	C_{vel}	C_{cel}	$Err_\eta [l_2/l_\infty]$ ($\times 10^{-6}$)	$Err_u [l_2/l_\infty]$ ($\times 10^{-5}$)
$\theta = 0.55$	0.11	0.71	3.58	1.58/1.8	1.84/7.11
$\theta = 0.7$	0.11	0.70	3.58	1.58/1.8	1.84/7.11
IMEX-ARK2	0.11	0.72	3.5	1.58/1.8	1.84/7.11

Table 4: Relative errors and Courant numbers achieved by using semi-implicit methods in the steady subcritical flow test.

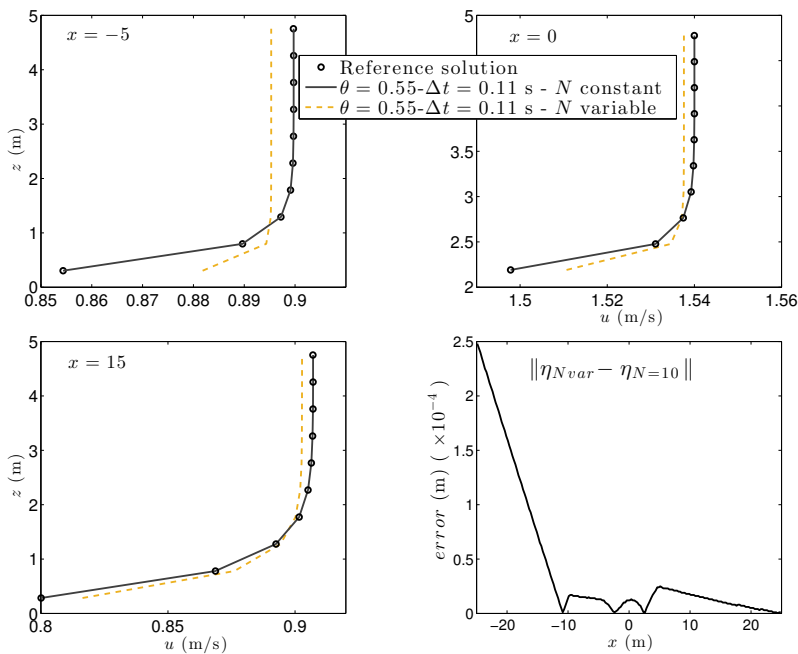


Figure 8: Vertical profiles of horizontal velocity in the steady subcritical flow test, obtained with the reference solution (black circles), and the θ -method ($\theta = 0.55$) with either 10 layers in the whole domain (solid black line) or a single layer in the first half of the domain only (dashed yellow line). Profiles are taken at steady state at the points $x = -5, 0, 15$ m. The solid black line denotes the absolute difference between the free surface computed with 10 layers in the whole domain or a single layer in the first half of the domain only.

In table 4 we show the relative errors and the maximum Courant numbers achieved. The results computed with the semi-implicit methods are identical in this steady state case. Figure 8 shows the absolute difference on the free surface by using a semi-implicit method with either a constant number of

layers or considering

$$N = \begin{cases} 10 & \text{if } x > -10, \\ 1 & \text{otherwise.} \end{cases} \quad (25)$$

The order of this difference is 10^{-4} , with larger values where only one layer is employed. We also show the vertical profiles of horizontal velocity at three different points $x = -5, 0, 15$ m. These results show that we can reduce the number of degrees of freedom of our system from 2210 to 1661, without a significant loss of accuracy where the multilayer configuration is kept.

5.3 Tidal forcing over variable bathymetry

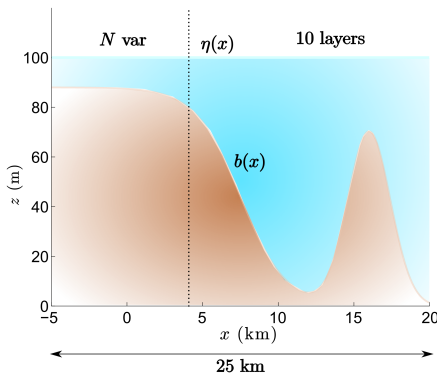


Figure 9: *Sketch of the bottom topography.*

In this test we try to simulate a more realistic situation for coastal flow simulations. We consider a domain of length $L = 25$ km. The bottom bathymetry is taken as in figure 9, such that the bathymetry is much shallower in one part of the computational domain than in the other. We define

$$b(x) = z_0 - z_1 \tanh(\lambda(x - x_0)) + 70 e^{-(x-x_1)^2/\sigma^2},$$

with $z_0 = -z_1 = 44$, $x_0 = 7500$, $x_1 = 16000$, $\lambda = -1/3000$ and $\sigma = 2000$. We consider water at rest and constant free surface $\eta(0, x) = 100$ m at initial time. Subcritical boundary conditions are imposed, namely the upstream condition is $q(t, -5000) = 1 \text{ m}^2 \text{ s}^{-1}$, and the tidal downstream condition is $\eta(t, L) = 100 + 3 \sin(\omega t)$ m, where $\omega = 2\pi/43200$. We simulate three 12-hours periods of tide, i.e., 36 hours. The friction parameters are taken as in previous tests with the exception of $\Delta z_0 = 3.3 \times 10^{-3}$, which increases the bottom friction in order to obtain a more complex velocity field. In this case,

a wind stress is included with a wind velocity of 1 m s^{-1} . As in previous tests, we use 10 vertical layers in the multilayer system and a uniform space discretization step $\Delta x = 50 \text{ m}$.

Figure 10 shows the obtained velocity field, where we can see some recirculations. Moreover, regarding the deepest area we realise that the upper and lower velocities have opposite direction.

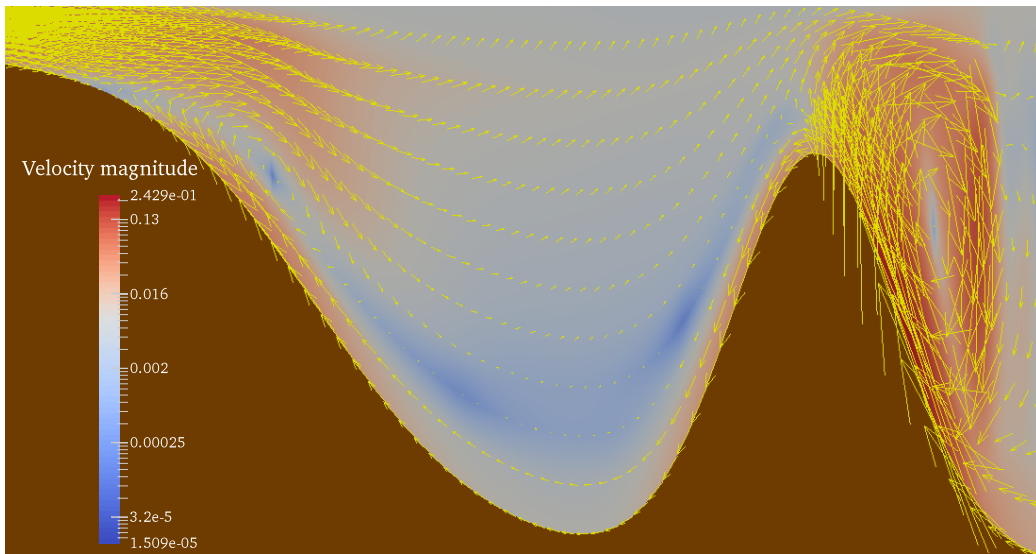


Figure 10: *Vector map of the whole velocity field $\mathbf{u} = (u, w)$ at time $t = 33 \text{ h}$. Colors represent the magnitude of the velocity in logarithmic scale.*

Figure 11 shows the free surface position at different times. We see that both the θ -method and the IMEX-ARK2 method are close of the reference solution. As in the free oscillation test, the IMEX-ARK2 approximates better the shape of the free surface. In particular, looking at table 5, where we report the relative errors at final time ($t = 36 \text{ h}$), we see that this method notably improves the results of the θ -method. Note also that, in this typical coastal subcritical regime, large values of the Courant number can be achieved, the maximum value being $C_{cel} = 34.8$, without sensibly degrading the accuracy of the results.

In table 6 we report the computational times and speed-up achieved. With the explicit code about 16 minutes of computation are required (2.5 hours for the reference solution), while the semi-implicit methods can reduce this time to seconds. Note also that the IMEX-ARK2 is sensibly more efficient than the θ -method in this case, since it is about 2.3 times more expensive than the θ -method, whereas the errors decrease by a much bigger factor.

We also investigate the influence of simplifying the vertical discretization in the shallowest part of the domain (see figure 9). We consider three different

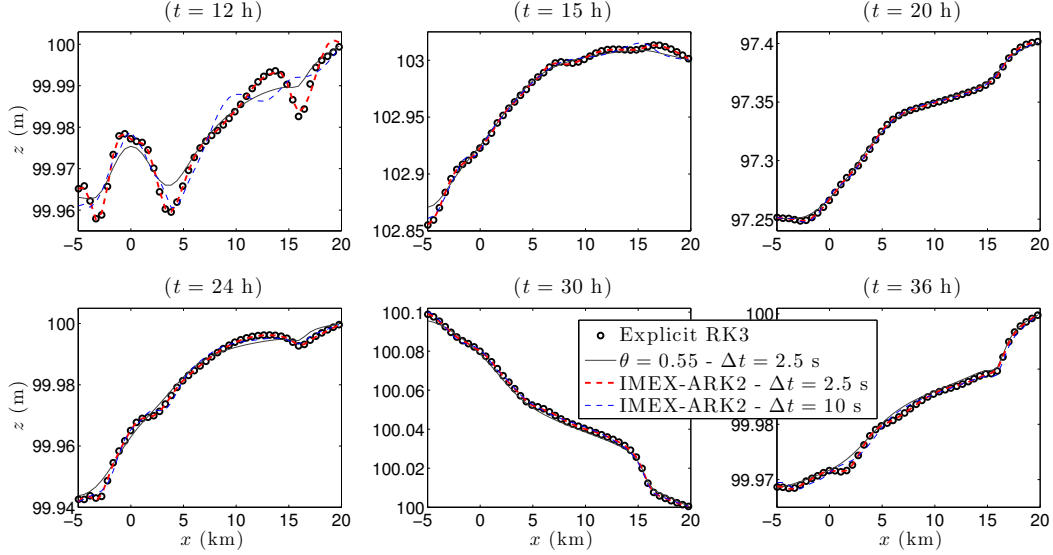


Figure 11: Free surface profile at different times by using the semi-implicit methods (color lines) and the reference solution (black circles) computed with the explicit scheme in the tidal forcing test.

SI-method	Δt (s)	C_{vel}	C_{cel}	$Err_{\eta} [l_2/l_{\infty}]$ ($\times 10^{-5}$)	$Err_u [l_2/l_{\infty}]$ ($\times 10^{-2}$)
$\theta = 0.55$	2.5	0.03	1.6	0.77/2.08	0.55/1.01
IMEX-ARK2	2.5	0.03	1.6	0.10/0.26	0.05/0.06
$\theta = 0.55$	5	0.05	3.2	1.32/2.95	0.89/1.35
IMEX-ARK2	5	0.05	3.2	0.24/0.75	0.16/0.19
$\theta = 0.55$	10	0.1	6.3	2.41/4.45	1.51/1.86
IMEX-ARK2	10	0.1	6.3	0.69/1.42	0.32/0.65
$\theta = 0.55$	25	0.24	15.8	5.34/8.36	3.08/3.53
IMEX-ARK2	25	0.25	15.8	1.02/2.31	0.44/0.90
$\theta = 0.55$	55	0.52	34.8	10.2/14.7	5.26/5.81
IMEX-ARK2	55	0.55	34.8	1.43/3.29	0.67/0.89

Table 5: Relative errors and Courant numbers achieved by using semi-implicit methods at $t = 36$ h in the tidal forcing test.

Method	Δt (s)	C_{cel}	Comput. time (s)	Speed-up
Runge-Kutta 3	-	0.1 (ref. sol.)	9040 (150.6 m)	-
Runge-Kutta 3	-	0.88	1014 (16.9 m)	1
$\theta = 0.55$	2.5	1.6	230 (3.8 m)	4.4
IMEX-ARK2	2.5	1.6	544 (9.1 m)	1.9
$\theta = 0.55$	5	3.2	116 (1.9 m)	8.7
IMEX-ARK2	5	3.2	271 (4.5 m)	3.74
$\theta = 0.55$	10	6.3	58	17.5
IMEX-ARK2	10	6.3	136 (2.3 m)	7.5
$\theta = 0.55$	25	15.8	23	44.1
IMEX-ARK2	25	15.8	54	18.7
$\theta = 0.55$	55	34.8	10	101.4
IMEX-ARK2	55	34.8	24	42.3

Table 6: *Computational times and speed-up in the tidal forcing test case for the simulation up to $t = 36$ h.*

configurations, which we denote hereinafter as (NVAR1)-(NVAR3). Firstly, we totally remove the vertical discretization by considering a single layer in the first part of the domain:

$$N = \begin{cases} 1, & l_1 = 1, & \text{if } x \leq 4000; \\ 10, & l_i = 1/10, i = 1, \dots, N, & \text{otherwise.} \end{cases} \quad (\text{NVAR1})$$

Secondly, we keep a thin layer close to the bottom in order to improve the approximation of the friction term:

$$N = \begin{cases} 2, & l_1 = 0.1, l_2 = 0.9, & \text{if } x \leq 4000; \\ 10, & l_i = 1/10, i = 1, \dots, N, & \text{otherwise.} \end{cases} \quad (\text{NVAR2})$$

Finally, we improve again the vertical discretization close to the bottom by adding another thin layer:

$$N = \begin{cases} 3, & l_1 = l_2 = 0.1, l_3 = 0.8, & \text{if } x \leq 4000; \\ 10, & l_i = 1/10, i = 1, \dots, N, & \text{otherwise.} \end{cases} \quad (\text{NVAR3})$$

In this way, the number of degrees of freedom of the multilayer system is reduced from 5510 to 3890 (NVAR1), 4070 (NVAR2), or 4250 (NVAR3). Note that configurations (NVAR2) and (NVAR3) employ a non-uniform distribution of the vertical layers. Figure 12 shows the absolute errors with

the θ -method with $\Delta t = 5$ s ($C_{cel} = 3.2$) using 10 layers in the whole domain and with configurations (NVAR1)-(NVAR3). We see that the simplest configuration (NVAR1) leads to the largest error. However, by using configurations (NVAR2) and (NVAR3) these errors are much more similar to the case in which a constant number of layer is employed in the whole domain. As expected, the smallest error is achieved with the configuration (NVAR3). Figure 13 shows the vertical profile of horizontal velocity at point $x = 16025$ m (the top of the peak) at different times. The conclusions are similar, i.e., the differences are larger with configuration (NVAR1), whereas (NVAR2) and (NVAR3) give accurate approximations of the vertical profile obtained with a constant number of layers.

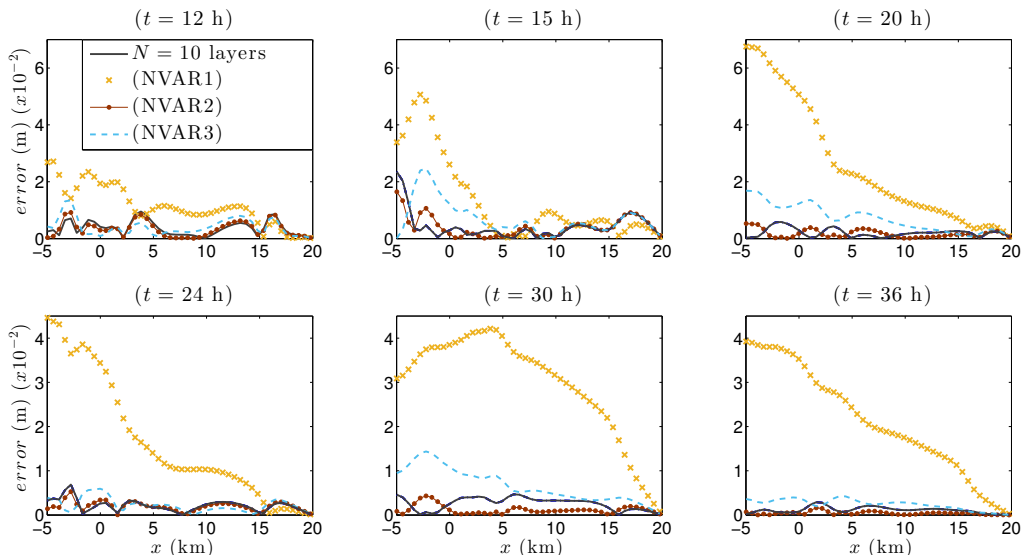


Figure 12: Absolute errors for the free surface at different times obtained in the tidal forcing test with the θ -method ($\theta = 0.55$ and $\Delta t = 5$ s) and either 10 layers in the whole domain (solid black line) or configurations (NVAR1)-(NVAR3) in the first part of the domain.

5.4 An application to sediment transport problems

In order to emphasize the usefulness of the proposed method and the potential advantages of its application to more realistic problems, we consider the extension of equations (7) to the movable bed case. For simplicity, we work with a decoupled, essentially monophasic model, according to the classification in [27], [28], which is appropriate in the limit of small sediment concentration. Quantity b in (7) is then assumed to be dependent on time

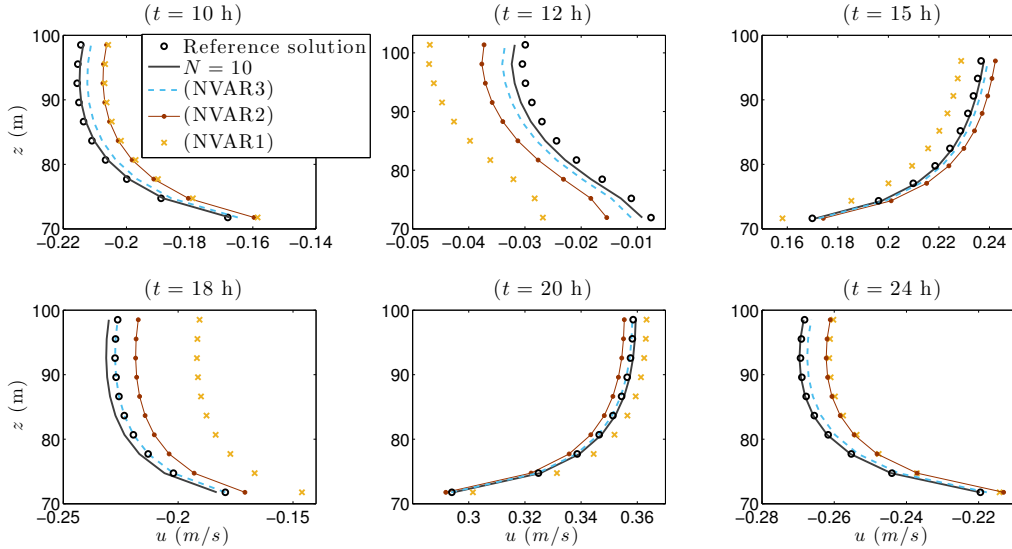


Figure 13: Vertical profiles of horizontal velocity obtained in the tidal forcing test with the reference solution (black circles), the θ -method ($\theta = 0.55$ and $\Delta t = 5$ s) and either 10 layers in the whole domain (solid black line) or configurations (NVAR1)-(NVAR3) in the first part of the domain. Profiles are taken at the point $x = 16025$ m and times $t = 12, 15, 20, 24, 30, 36$ h.

and an Exner equation for the bed evolution is also considered

$$\frac{\partial b}{\partial t} + \xi \frac{\partial Q_b}{\partial x} = 0, \quad (26)$$

where $\xi = 1/(1 - \psi_0)$ with ψ_0 the porosity of the sediment bed, and the solid transport discharge is defined by an appropriate formula, see e.g. [17]. Here we consider a simple definition of the solid transport discharge given by the Grass equation

$$Q_b = A_g |u|^2 u,$$

where A_g (s^2/m) $\in (0, 1)$ is an experimental constant depending on the grain diameter and the kinematic viscosity. For control volume i , equation (26) is easily discretized along the lines of section 4. For the θ -method, the discrete equation reads

$$\begin{aligned} b_i^{n+1} = b_i^n &+ \theta \xi A_g \frac{\Delta t}{\Delta x} \left(|u_{1,i-\frac{1}{2}}^{n+1}|^2 u_{1,i-\frac{1}{2}}^{n+1} - |u_{1,i+\frac{1}{2}}^{n+1}|^2 u_{1,i+\frac{1}{2}}^{n+1} \right) \\ &+ (1 - \theta) \xi A_g \frac{\Delta t}{\Delta x} \left(|u_{1,i-\frac{1}{2}}^n|^2 u_{1,i-\frac{1}{2}}^n - |u_{1,i+\frac{1}{2}}^n|^2 u_{1,i+\frac{1}{2}}^n \right). \end{aligned} \quad (27)$$

On the other hand, the IMEX-ARK2 discretization of equation (26) consists of a simple updating of the values of the movable bed, since the values

$u_\alpha^{n,j}$ are known when $b^{n,j}$ is computed. For the first stage we have $b_i^{n,1} = b_i^n$. Next, $b_i^{n,2}$ and $b_i^{n,3}$ are computed by the formula

$$b_i^{n,j} = b_i^n + \xi A_g \frac{\Delta t}{\Delta x} \sum_{k=1}^j \tilde{a}_{jk} \left(|u_{1,i-\frac{1}{2}}^{n,k}|^2 u_{1,i-\frac{1}{2}}^{n,k} - |u_{1,i+\frac{1}{2}}^{n,k}|^2 u_{1,i+\frac{1}{2}}^{n,k} \right).$$

Finally, the solution at time $n + 1$ is

$$b_i^{n+1} = b_i^n + \xi A_g \frac{\Delta t}{\Delta x} \sum_{j=1}^3 \tilde{b}_j \left(|u_{1,i-\frac{1}{2}}^{n,j}|^2 u_{1,i-\frac{1}{2}}^{n,j} - |u_{1,i+\frac{1}{2}}^{n,j}|^2 u_{1,i+\frac{1}{2}}^{n,j} \right).$$

We consider a simple test in which a parabolic dune is displaced by the flow (see [17]). The computational domain has length 1000 m and 150 nodes are used in the spatial discretization. We set the constant A_g in the Grass formula to 0.001 and we take the porosity value $\psi_0 = 0.4$. We consider viscosity effects with the same parameters as in the previous tests, disregarding wind stress. Subcritical boundary conditions are imposed, namely the upstream condition is $q(t, 0) = q(0, 0)$ and the downstream one is $\eta(t, L) = 15$ m. The initial condition for the bottom profile is given by

$$b(0, x) = \begin{cases} 0.1 + \sin^2 \left(\frac{\pi(x - 300)}{200} \right) & \text{if } 300 \leq x \leq 500; \\ 0.1 & \text{otherwise,} \end{cases} \quad (28)$$

and the initial height is $h(0, x) = 15 - b(0, x)$. For the discharge, we take into account the vertical structure of the flow in order to have a single dune moving along the domain. With this purpose, we run a first simulation of the movement of the dune (28), where the initial discharge is $q_i = 15 \text{ m}^2 \text{ s}^{-1}$, for $i = 1, \dots, N$, until it reaches a steady structure at the outlet. These values of the discharge are used as initial and upstream boundary condition in the final simulation. If a constant discharge were used, this would sweep along the sediment in the initial part of the domain and create another dune within the computational domain. While this is physically correct, we prefer in this test to study a simpler configuration.

We use 10 layers in the multilayer code and simulate until $t = 691200$ s (8 days). Figure 14 shows the evolution of the dune and figure 15 shows zooms of evolution of the free surface and of the movable bed, as computed with either the explicit third order Runge-Kutta or the semi-implicit (θ -method and IMEX-ARK2). The results are essentially indistinguishable. This is confirmed looking at table 7, where we report the relative errors and the Courant number achieved. We see that there are not significant differences

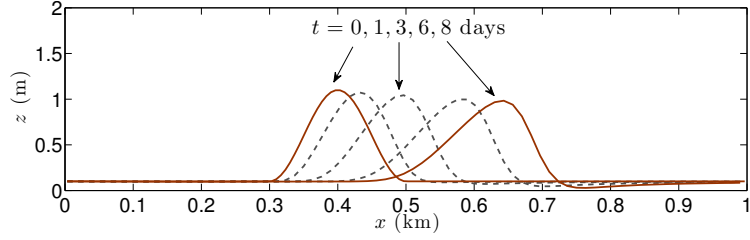


Figure 14: Profile of the dune at different times in the sediment transport test case, including the initial condition and the final position.

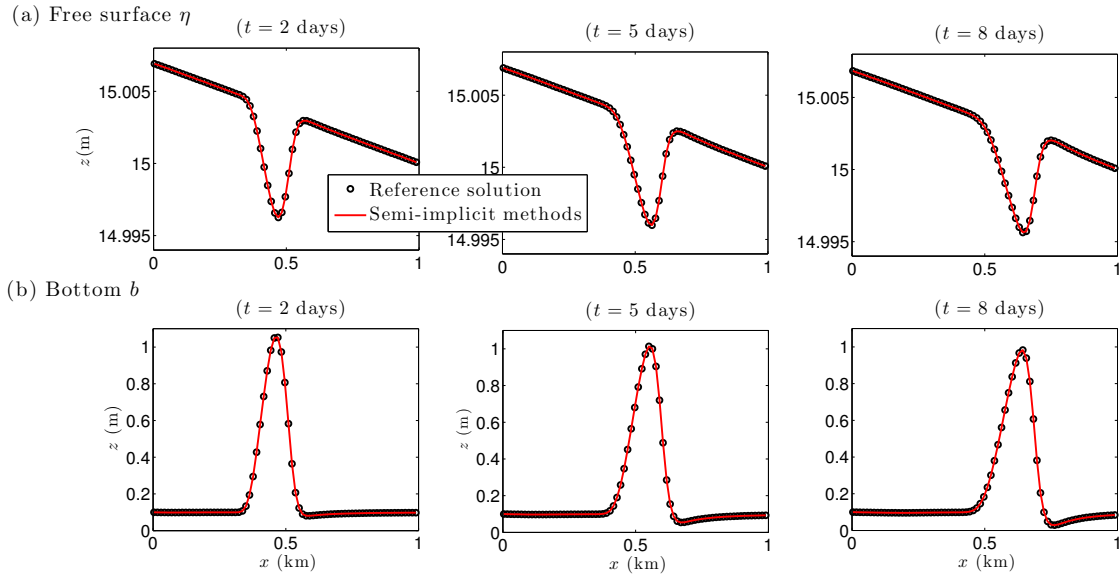


Figure 15: Free surface and bottom profile at different times in the sediment transport test case, as computed by the semi-implicit methods (solid red line) and by the reference explicit scheme (black circles).

between the semi-implicit methods, due to the fact that the flow is essentially a steady one and the bed evolution is very slow.

As remarked before, a rigorous comparison of the efficiency of the proposed methods is not possible in our preliminary implementation. However, a preliminary assessment is reported in Table 8, showing the computational time and the speed-up obtained for the simulation of 192 hours (8 days). For the reference solution with the explicit scheme approximately 13 hours are necessary (78 minutes with maximum C_{cel}), whereas 8 minutes (respectively, 19 minutes) are needed with the θ -method and IMEX-ARK2 method when considering a time step $\Delta t = 2$ s. This gives a speed up of 9 (4 for the IMEX-ARK2). Even taking a small time step ($\Delta t = 1$ s) the computational

SI-method	Δt (s)	C_{vel}	C_{cel}	Err $_{\eta}$ [l_2/l_{∞}] ($\times 10^{-7}$)	Err $_u$ [l_2/l_{∞}] ($\times 10^{-6}$)	Err $_b$ [l_2/l_{∞}] ($\times 10^{-5}$)
$\theta = 0.55$	1	0.17	1.98	1.4/5.35	0.29/1.41	1.09/1.52
IMEX-ARK2	1	0.16	1.97	1.29/5.39	0.27/1.41	1.03/1.40
$\theta = 0.55$	2	0.34	3.94	1.69/6.13	0.55/2.90	2.25/3.13
$\theta = 0.6$	2	0.34	3.94	1.69/6.13	0.55/2.90	2.25/3.13
IMEX-ARK2	2	0.33	3.93	1.68/6.47	0.50/2.33	2.11/2.87

Table 7: *Relative errors and Courant numbers achieved in the sediment transport test case by semi-implicit methods at $t = 192$ hours (eight days).*

Method	Δt (s)	C_{cel}	Comput. time (s)	Speed-up
Runge-Kutta 3	-	0.1 (ref. sol.)	45978 (12.7 h)	-
Runge-Kutta 3	-	0.99	4700 (78.33 m)	1
θ -method	1	1.98	1048 (17.5 m)	4.5
IMEX-ARK2	1	1.97	2368 (39.4 m)	1.99
θ -method	2	3.94	509 (8.5 m)	9.2
IMEX-ARK2	2	3.93	1164 (19.4 m)	4.04

Table 8: *Computational times and speed-up in the sediment transport test case for the simulation up to $t = 192$ h (eight days).*

time required is notably reduced to 17 min (39 min for the IMEX).

Finally, we can further reduce the computational time by reducing locally the number of layers employed. In this test, the vertical structure cannot be completely removed without causing a major loss of accuracy, since the dynamics of the movable bed depends on the velocity of the layer closest to the bottom. For this reason, we consider the following configuration (see also figure 16):

$$N = \begin{cases} 10, & l_i = 1/10, i = 1, \dots, N, & \text{if } 200 \leq x \leq 700; \\ 6, & l_i = 1/10, i = 1, \dots, 5; l_6 = 0.5, & \text{otherwise.} \end{cases} \quad (29)$$

Note that, in this way, both a variable number of vertical layers and a non-uniform distribution of these layers are tested. Figure 17 shows the absolute differences on the free surface and on the movable bed profiles at

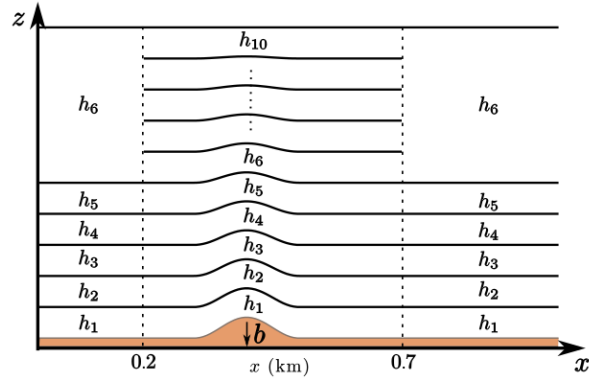


Figure 16: Sketch of the multilayer configuration with the variable number of layers for the sediment transport test case.

different times when we use either a constant number of layers ($N = 10$) or the configuration (29). The difference between both configurations for the bottom is lower than the 2% of its thickness, whereas the number of degrees of freedom of the problem is reduced from 1660 to 1352.

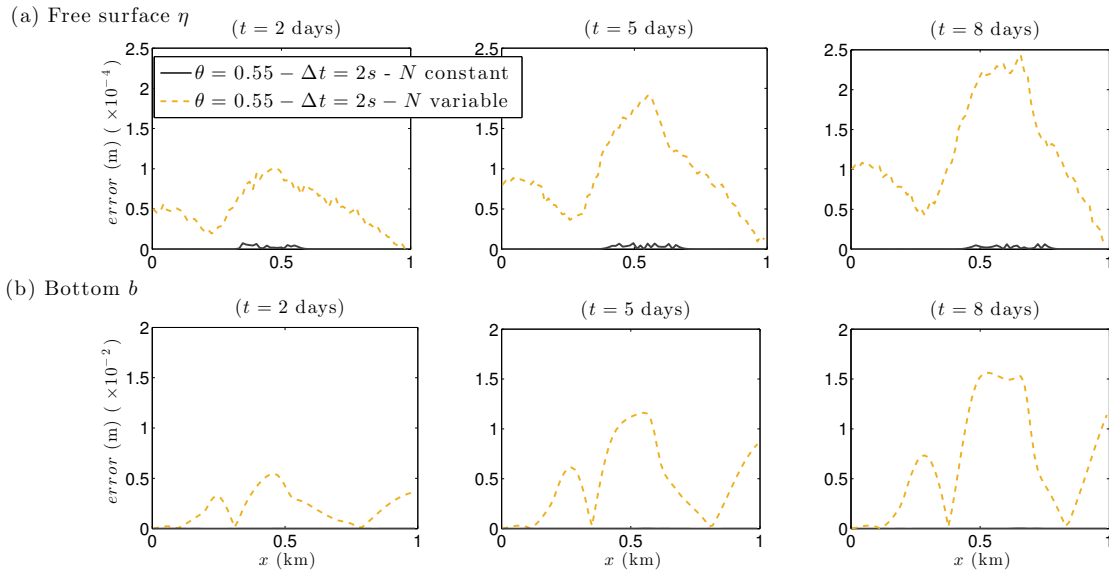


Figure 17: Absolute differences for the free surface (η) and bottom (b) at different times in the sediment transport test case, by using the θ -method ($\theta = 0.55$ and $\Delta t = 2$ s). We compare the results with 10 layers in the whole domain (solid black line) with those obtained with the variable number of layers (see (29), dashed yellow line).

6 Conclusions

We have proposed two strategies, which can act simultaneously, to make multilayer models more efficient and fully competitive with their z - and σ -coordinates counterparts. On one hand, we have shown how the number of vertical layers that are employed can be allowed to vary over the computational domain. Numerical experiments show that, in the typical regimes in which the application of multilayer shallow water models is justified, the resulting discretization does not introduce any major spurious feature and allows to reduce substantially the computational cost in areas with complex bathymetry. Furthermore, efficient semi-implicit discretizations have been applied for the first time to this kind of models, allowing to achieve significant computational gains in subcritical regimes. This makes multilayer discretizations fully competitive with z -coordinate discretizations for large scale, hydrostatic flows. In addition, a more efficient way to implement an IMEX-ARK method to discretize the multilayer system, which mimics what is done for the simpler θ -method, has been proposed. In particular, in the applications to tidally forced flow and to a sediment transport problem, we have shown that the computational time required is significantly reduced and that the vertical number of layers, as well as their distribution, can be adapted to the local features of the problem.

In future work, we will be interested in the design of optimal strategies for adapting the layer subdivision, as well as the application of this approach to more realistic simulations. In particular, we will extend the proposed approach to variable density flows in the Boussinesq regime. Furthermore, we plan to couple multilayer vertical discretizations to the adaptive, high order horizontal discretizations proposed in [38, 39], in order to achieve maximum accuracy for the envisaged application regimes.

Acknowledgements

We would like to thank the two anonymous reviewers for their very detailed and constructive comments, which greatly helped in improving the clarity of this work. This work was partially supported by the Spanish Government and FEDER through the research projects MTM2012-38383-C02-02 and MTM2015-70490-C2-2-R. Part of this work was carried out during visits by J. Garres-Díaz at MOX Milano and L. Bonaventura at IMUS Sevilla.

A Semi-implicit method for a tracer equation

The transport equation for a passive scalar can be coupled to the continuity and momentum equation of system (7), in such a way as to guarantee compatibility with the continuity equation in the sense of [30]. If ρ_α denotes the average density of the passive scalar in Ω_α , it verifies the following tracer equation:

$$\partial_t (\rho_\alpha h_\alpha) + \nabla_x \cdot (\rho_\alpha h_\alpha u_\alpha) = \rho_{\alpha+1/2} G_{\alpha+1/2} - \rho_{\alpha-1/2} G_{\alpha-1/2}, \quad (30)$$

where

$$\rho_{\alpha+1/2} = \frac{\rho_\alpha + \rho_{\alpha+1}}{2} + \frac{1}{2} \text{sgn}(G_{\alpha+1/2})(\rho_{\alpha+1} - \rho_\alpha).$$

In previous equation the mass transference term must be discretized at the center of the control volume, in contrast with the case of the momentum equation, so that we set instead

$$\begin{aligned} G_{\alpha+1/2,i}^n &= \frac{1}{\Delta x_i} \sum_{\beta=1}^{\alpha} \left(l_{\beta,i+\frac{1}{2}} h_{i+\frac{1}{2}}^n u_{\beta,i+\frac{1}{2}}^n - l_{\beta,i-\frac{1}{2}} h_{i-\frac{1}{2}}^n u_{\beta,i-\frac{1}{2}}^n \right. \\ &\quad \left. - l_{\beta,i} \sum_{\gamma=1}^{N_i} \left(l_{\gamma,i+\frac{1}{2}} h_{i+\frac{1}{2}}^n u_{\gamma,i+\frac{1}{2}}^n - l_{\gamma,i-\frac{1}{2}} h_{i-\frac{1}{2}}^n u_{\gamma,i-\frac{1}{2}}^n \right) \right). \end{aligned} \quad (31)$$

In the following, we detail the discretization of the tracer equations using the time discretizations presented in section 4.

A.1 The θ -method time discretization

By using the θ -method, the evolution equation for ρ_α is discretized as

$$\begin{aligned} l_{\alpha,i} h_i^{n+1} \rho_{\alpha,i}^{n+1} &= l_{\alpha,i} h_i^n \rho_{\alpha,i}^n \\ &\quad - \frac{\Delta t}{\Delta x_i} \left(l_{\alpha,i+\frac{1}{2}} h_{i+\frac{1}{2}}^n \rho_{\alpha,i+\frac{1}{2}}^n u_{\alpha,i+\frac{1}{2}}^{n+\theta} - l_{\alpha,i-\frac{1}{2}} h_{i-\frac{1}{2}}^n \rho_{\alpha,i-\frac{1}{2}}^n u_{\alpha,i-\frac{1}{2}}^{n+\theta} \right) \\ &\quad + \Delta t \left(\rho_{\alpha+1/2,i}^n G_{\alpha+1/2,i}^n - \rho_{\alpha-1/2,i}^n G_{\alpha-1/2,i}^n \right), \end{aligned} \quad (32)$$

where $u_\alpha^{n+\theta} = \theta u_\alpha^{n+1} + (1-\theta)u_\alpha^n$. The values $\rho_{\alpha,i\pm\frac{1}{2}}^n, \rho_{\alpha\pm\frac{1}{2},i}^n$ can be defined by appropriate numerical fluxes. Also the discretization of the tracer equation could be easily turned into an implicit one in the vertical if required for

stability reasons, by setting

$$\begin{aligned}
& l_{\alpha,i} h_i^{n+1} \rho_{\alpha,i}^{n+1} - \theta \Delta t \left(\rho_{\alpha+\frac{1}{2},i}^{n+1} G_{\alpha+\frac{1}{2},i}^n - \rho_{\alpha-\frac{1}{2},i}^{n+1} G_{\alpha-\frac{1}{2},i}^n \right) = l_{\alpha,i} h_i^n \rho_{\alpha,i}^n \\
& - \frac{\Delta t}{\Delta x_i} \left(l_{\alpha,i+\frac{1}{2}} h_{i+\frac{1}{2}}^n \rho_{\alpha,i+\frac{1}{2}}^n u_{\alpha,i+\frac{1}{2}}^{n+\theta} - l_{\alpha,i-\frac{1}{2}} h_{i-\frac{1}{2}}^n \rho_{\alpha,i-\frac{1}{2}}^n u_{\alpha,i-\frac{1}{2}}^{n+\theta} \right) \\
& + (1 - \theta) \Delta t \left(\rho_{\alpha+\frac{1}{2},i}^n G_{\alpha+\frac{1}{2},i}^n - \rho_{\alpha-\frac{1}{2},i}^n G_{\alpha-\frac{1}{2},i}^n \right).
\end{aligned} \tag{33}$$

Notice that, as in formula (31), the previous definitions have to be modified appropriately for cells in which $N_{i-\frac{1}{2}} \neq N_{i+\frac{1}{2}}$, by summing all the contributions on the cell boundary with more layers that correspond to a given term $l_{\alpha,i\pm\frac{1}{2}} h_{i\pm\frac{1}{2}}^n \rho_{\alpha,i\pm\frac{1}{2}}^n u_{\alpha,i\pm\frac{1}{2}}^{n+\theta}$ on the cell boundary with fewer layers, according to the definitions in the previous sections.

It is also important to remark that, if $\rho_{\alpha,i}^{n+1} = \rho_{\alpha,i}^n = 1$ is assumed in either (32), (33), as long as a consistent flux is employed for the definition of $\rho_{\alpha,i\pm\frac{1}{2}}^n, \rho_{\alpha\pm\frac{1}{2},i}^n$, discretizations of the first equation in (1) are obtained, which then summed over the whole set of layers $\alpha = 1, \dots, N_i$ yield exactly formula (12). This implies that complete consistency with the discretization of the continuity equation is guaranteed. The importance of this property for the numerical approximation of free surface problems has been discussed extensively in [30].

A.2 The IMEX-ARK2 time discretization

In this subsection we detail the discretization of the tracer equation (30) following the lines in section 4.2. For the first stage we trivially have $\rho_{\alpha,i}^{n,1} = \rho_{\alpha,i}^n$. Next, the evolution equation for ρ_α is discretized in the second stage as

$$\begin{aligned}
& l_{\alpha,i} h_i^{n,2} \rho_{\alpha,i}^{n,2} = l_{\alpha,i} h_i^n \rho_{\alpha,i}^{n,1} \\
& - \frac{\Delta t}{\Delta x_i} \left(l_{\alpha,i+\frac{1}{2}} h_{i+\frac{1}{2}}^n \rho_{\alpha,i+\frac{1}{2}}^{n,1} u_{\alpha,i+\frac{1}{2}}^{*,2} - l_{\alpha,i-\frac{1}{2}} h_{i-\frac{1}{2}}^n \rho_{\alpha,i-\frac{1}{2}}^{n,1} u_{\alpha,i-\frac{1}{2}}^{*,2} \right) \\
& + a_{21} \Delta t \left(\rho_{\alpha+\frac{1}{2},i}^{n,1} G_{\alpha+\frac{1}{2},i}^{n,1} - \rho_{\alpha-\frac{1}{2},i}^{n,1} G_{\alpha-\frac{1}{2},i}^{n,1} \right),
\end{aligned}$$

where now $u_\alpha^{*,2} = \tilde{a}_{22}u_\alpha^{n,2} + \tilde{a}_{21}u_\alpha^{n,1}$. For the last stage, the tracer density is then updated as

$$\begin{aligned}
l_{\alpha,i}h_i^{n,3}\rho_{\alpha,i}^{n,3} &= l_{\alpha,i}h_i^{n,2}\rho_{\alpha,i}^{n,2} \\
&- \frac{\Delta t}{\Delta x_i} \left(l_{\alpha,i+\frac{1}{2}}h_{i+\frac{1}{2}}^n\rho_{\alpha,i+\frac{1}{2}}^n u_{\alpha,i+\frac{1}{2}}^{*,3} - l_{\alpha,i-\frac{1}{2}}h_{i-\frac{1}{2}}^n\rho_{\alpha,i-\frac{1}{2}}^{n,2} u_{\alpha,i-\frac{1}{2}}^{*,3} \right) \\
&+ a_{32}\Delta t \left(\rho_{\alpha+\frac{1}{2},i}^{n,2} G_{\alpha+\frac{1}{2},i}^{n,2} - \rho_{\alpha-\frac{1}{2},i}^{n,1} G_{\alpha-\frac{1}{2},i}^{n,2} \right) \\
&- \frac{\Delta t}{\Delta x_i} \left(l_{\alpha,i+\frac{1}{2}}h_{i+\frac{1}{2}}^n\rho_{\alpha,i+\frac{1}{2}}^{n,1} u_{\alpha,i+\frac{1}{2}}^{*,2} - l_{\alpha,i-\frac{1}{2}}h_{i-\frac{1}{2}}^n\rho_{\alpha,i-\frac{1}{2}}^{n,1} u_{\alpha,i-\frac{1}{2}}^{*,2} \right) \\
&+ a_{31}\Delta t \left(\rho_{\alpha+\frac{1}{2},i}^{n,1} G_{\alpha+\frac{1}{2},i}^{n,1} - \rho_{\alpha-\frac{1}{2},i}^{n,1} G_{\alpha-\frac{1}{2},i}^{n,1} \right),
\end{aligned}$$

where now $u_\alpha^{*,3} = \tilde{a}_{32}u_\alpha^{n,3} + \tilde{a}_{31}u_\alpha^{n,2}$. Finally, the assembly of the solution at time level $n+1$ is

$$\begin{aligned}
l_{\alpha,i}h_i^{n+1}\rho_{\alpha,i}^{n+1} &= l_{\alpha,i}h_i^n\rho_{\alpha,i}^n \\
&- \frac{\Delta t}{\Delta x_i} \sum_{j=1}^3 b_j \left(l_{\alpha,i+\frac{1}{2}}h_{i+\frac{1}{2}}^n\rho_{\alpha,i+\frac{1}{2}}^{n,j} u_{\alpha,i+\frac{1}{2}}^{n,j} - l_{\alpha,i-\frac{1}{2}}h_{i-\frac{1}{2}}^n\rho_{\alpha,i-\frac{1}{2}}^{n,j} u_{\alpha,i-\frac{1}{2}}^{n,j} \right) \quad (34) \\
&+ \Delta t \sum_{j=1}^3 b_j \left(\rho_{\alpha+\frac{1}{2},i}^{n,j} G_{\alpha+\frac{1}{2},i}^{n,j} - \rho_{\alpha-\frac{1}{2},i}^{n,j} G_{\alpha-\frac{1}{2},i}^{n,j} \right).
\end{aligned}$$

Notice that, also in this case, consistency with the discrete continuity equation in the sense of [30] is guaranteed and an implicit treatment of the vertical advection term would be feasible with the same procedure outlined above for the θ -method.

References

- [1] A.J. Adcroft, C.N. Hill, and J.C. Marshall. Representation of topography by shaved cells in a height coordinate ocean model. *Monthly Weather Review*, 125:2293–2315, 1997.
- [2] E. Audusse. A multilayer Saint-Venant model: derivation and numerical validation. *Discrete and Continuous Dynamical Systems Series B*, 5(2):189–214, 2005.
- [3] E. Audusse, F. Benkhaldoun, J. Sainte-Marie, and M. Seaid. Multilayer saint-venant equations over movable beds. *Discrete and Continuous Dynamical Systems - Series B*, 15(4):917–934, 2011.

- [4] E. Audusse, M. Bristeau, B. Perthame, and J. Sainte-Marie. A multilayer Saint-Venant system with mass exchanges for shallow water flows. derivation and numerical validation. *ESAIM: Mathematical Modelling and Numerical Analysis*, 45:169–200, 2011.
- [5] E. Audusse, M-O. Bristeau, and A. Decoene. Numerical simulations of 3D free surface flows by a multilayer Saint-Venant model. *International Journal of Numerical Methods in Fluids*, 56(3):331–350, 2008.
- [6] E. Audusse, M-O. Bristeau, M. Pelanti, and J. Sainte-Marie. Approximation of the hydrostatic Navier-Stokes system for density stratified flows by a multilayer model: kinetic interpretation and numerical solution. *Journal of Computational Physics*, 230(9):3453–3478, 2011.
- [7] R.E. Bank, W.M. Coughran, W. Fichtner, E.H. Grosse, D.J. Rose, and R.K. Smith. Transient Simulation of Silicon Devices and Circuits. *IEEE Transactions on Electron Devices.*, 32:1992–2007, 1985.
- [8] A. Berman and R. Plemmons. *Nonnegative Matrices in the Mathematical Sciences*. Society for Industrial and Applied Mathematics, 1994.
- [9] R. Bleck and D. Boudra. Wind-driven spin-up in eddy-resolving ocean models formulated in isopycnic and isobaric coordinates. *Journal of Geophysical Research (Oceans)*, 91:7611–7621, 1986.
- [10] L. Boittin. Assessment of numerical methods for uncertainty quantification in river hydraulics modelling. Master’s thesis, Politecnico di Milano, 2015.
- [11] L. Bonaventura. A semi-implicit, semi-lagrangian scheme using the height coordinate for a nonhydrostatic and fully elastic model of atmospheric flows. *Journal of Computational Physics*, 158:186–213, 2000.
- [12] L. Bonaventura, R. Redler, and R. Budich. *Earth System Modelling 2: Algorithms, Code Infrastructure and Optimisation*. Springer Verlag, New York, 2012.
- [13] L. Bonaventura and T. Ringler. Analysis of discrete shallow water models on geodesic Delaunay grids with C-type staggering. *Monthly Weather Review*, 133:2351–2373, 2005.
- [14] L. Bonaventura and A. Della Rocca. Unconditionally strong stability preserving extensions of the TR-BDF2 method. *Journal of Scientific Computing*, 70(2):859–895, 2017.

- [15] S. Boscarino, F. Filbet, and G. Russo. High order semi-implicit schemes for time dependent partial differential equations. *Journal of Scientific Computing*, 68(3):975–1001, Sep 2016.
- [16] K. Bryan. A numerical method for the study of the circulation of the world ocean. *Journal of Computational Physics*, 4:347–376, 1969.
- [17] M.J. Castro Díaz, E.D. Fernández-Nieto, and A.M. Ferreiro. Sediment transport models in Shallow Water equations and numerical approach by high order finite volume methods. *Computers & Fluids*, 37(3):299 – 316, 2008.
- [18] V. Casulli. Numerical simulation of three-dimensional free surface flow in isopycnal coordinates. *International Journal of Numerical Methods in Fluids*, 25:645 – 658, 1997.
- [19] V. Casulli and E. Cattani. Stability, accuracy and efficiency of a semi-implicit method for three-dimensional shallow water flow. *Computers & Mathematics with Applications*, 27(4):99 – 112, 1994.
- [20] V. Casulli and R. T. Cheng. Semi-implicit finite difference methods for three-dimensional shallow water flow. *International Journal for Numerical Methods in Fluids*, 15(6):629–648, 1992.
- [21] V. Casulli and R.A. Walters. An unstructured grid, three-dimensional model based on the shallow water equations. *International Journal of Numerical Methods in Fluids*, 32:331–348, 2000.
- [22] V. Casulli and P. Zanolli. Semi-implicit numerical modelling of non-hydrostatic free-surface flows for environmental problems. *Mathematical and Computer Modelling*, 36:1131–1149, 2002.
- [23] A. Decoene, L. Bonaventura, E. Miglio, and F. Saleri. Asymptotic derivation of the section-averaged shallow water equations for natural river hydraulics. *Mathematical Models and Methods in Applied Sciences*, 19(03):387–417, 2009.
- [24] D.R. Durran. *Numerical methods for wave equations in geophysical fluid dynamics*. Springer Science & Business Media, 2013.
- [25] E.D. Fernández-Nieto, J. Garres-Díaz, A. Mangeney, and G. Narbona-Reina. A multilayer shallow model for dry granular flows with the $\mu(I)$ -rheology: application to granular collapse on erodible beds. *Journal of Fluid Mechanics*, 798:643–681, 2016.

- [26] E.D. Fernández-Nieto, E.H. Koné, and T. Rebollo Chacón. A Multi-layer Method for the Hydrostatic Navier-Stokes Equations: A Particular Weak Solution. *Journal of Scientific Computing*, 60(2):408–437, 2014.
- [27] G. Garegnani, G. Rosatti, and L. Bonaventura. Free surface flows over mobile bed: mathematical analysis and numerical modeling of coupled and decoupled approaches. *Communications in Applied and Industrial Mathematics*, 1(3), 2011.
- [28] G. Garegnani, G. Rosatti, and L. Bonaventura. On the range of validity of the Exner-based models for mobile-bed river flow simulations. *Journal of Hydraulic Research*, 51:380–391, 2013.
- [29] F.X. Giraldo, J.F. Kelly, and E.M. Constantinescu. Implicit-explicit formulations of a three-dimensional nonhydrostatic unified model of the atmosphere (NUMA). *SIAM Journal on Scientific Computing*, 35, 2013.
- [30] E.S. Gross, L. Bonaventura, and G. Rosatti. Consistency with continuity in conservative advection schemes for free-surface models. *International Journal of Numerical Methods in Fluids*, 38:307–327, 2002.
- [31] D. Haidvogel, J. Wilkin, and R. Young. A semi-spectral primitive equation ocean circulation model using sigma and orthogonal curvilinear coordinates. *Journal of Computational Physics*, 94:151 – 185, 1991.
- [32] R.L. Haney. On the pressure gradient force over steep topography in sigma coordinate ocean models. *Journal of Physical Oceanography*, 21:610 – 619, 1991.
- [33] M.E. Hosea and L.F. Shampine. Analysis and implementation of TR-BDF2. *Applied Numerical Mathematics*, 20:21–37, 1996.
- [34] C. A. Kennedy and M. H. Carpenter. Additive Runge-Kutta schemes for convection-diffusion-reaction equations. *Applied Numerical Mathematics*, 44:139–181, 2003.
- [35] J.D. Lambert. *Numerical methods for ordinary differential systems*. Wiley, 1991.
- [36] R. W. D. Nickalls. 95.60 a new bound for polynomials when all the roots are real. *The Mathematical Gazette*, 95(534):520–526, 2011.
- [37] G. Rosatti, L. Bonaventura, A. Deponti, and G. Garegnani. An accurate and efficient semi-implicit method for section-averaged free-surface

- flow modelling. *International Journal of Numerical Methods in Fluids*, 65:448–473, 2011.
- [38] G. Tumolo and L. Bonaventura. A semi-implicit, semi-Lagrangian, DG framework for adaptive numerical weather prediction. *Quarterly Journal of the Royal Meteorological Society*, 141:2582–2601, 2015.
- [39] G. Tumolo, L. Bonaventura, and M. Restelli. A semi-implicit, semi-Lagrangian, p -adaptive discontinuous Galerkin method for the shallow water equations. *Journal of Computational Physics*, 232:46–67, 2013.